Standard Range Catalogue 6.1

Helios PIONAIRS SINCE 1923

Helios

Helios

PIONAIRS

SINCE 1923

Discover now: starting on page 6 →

Small room fans
Small room fans, wall fans, inline fans, window fans, ceiling fans and heater fans.

24

Domestic ventilation
Controlled domestic ventilation according to DIN 18017-3.
Mono tube ventilation systems and central ventilation systems.

44

Ventilation with heat recovery
Comfort ventilation with heat recovery.
System solutions from one source.

98

Axial and VAR fans
High performance axial fans. Medium pressure axial fans.
RADAX® VAR high pressure round duct fans.

188

Box fans
GigaBox centrifugal fans. MegaBox centrifugal fans.
Fresh air boxes.

283

Round duct fans
MultiVent®, flat and Acoustic Line centrifugal round duct fans.

360

Rectangular duct fans
Forward curved, backward curved, sound-insulated.

436

Air treatment
Filters. Heating. Sound insulation.

483

Roof fans
Vertical, horizontal and diagonal outlets.

499

Accessories
Shutters, wall and roof outlets.
Flow elements and valves. Fire protection systems.

563

Measure. Control. Regulate.
Sensors, speed controllers and control systems.

601

Type	Page
ABV AbluVent	580
AE Extract air elements	577 ff 90, 96
ALB Fresh air boxes and accessories	342 ff
ALEF Intake air elements	591 80, 90, 96
ALF Helioflex ventilation duct	97, 572
AMD / AMW Medium pressure axial fans	228 ff
AS Connectors	572
ASD / ASD-SGD Intake nozzles	279
AV External wall extract air fans	38 f
BAE / BAK Fire shutoff element, damper	594 f 90
BA-S End switch (accessories BAE/BAK/BTK)	594 ff
BLS Fire protection ventilation tiles	600
BM Pipe clamp connectors	387 ff
BSX Operating switch	607
BTV / BTK Fire prot. disc valve, damper	596 f
CO2 AP-A / AP / UP CO_2-Monitor	620 f
DDF Roof outlet	571
DDS Differential pressure switch	610
DFR Counterflange (for roof fans)	561 507 ff
DH Roof outlet	570 97
DIF Diffuser	281
DLV / DLVZ Design ventilation valves	582 f
DR Install. kit for double windows	41
DRVM / DRVS Shutter (for roof fans)	561 507 ff
DS Speed switch	605
DSEL Speed switch	604

Type	Page
DSTS / DSTS Ex Flexible connectors (for roof fans)	561 507 ff
DSZ Speed switch	604
DVAM / DVAW Ceiling fans	42
DV EC Roof fans with EC technology	508 ff 88 f
DVS Shutters (for roof fans)	561 507 ff
DVW Ceiling fans	42
EBR Mounting rings for disc valves	585 ff
EDR Elec. differential press. controller	616
EH Mounting sleeve	594 f
EHR-K / EHR-R TR Electric heating element	490, 487 f
EHS / EHSD Electronic temperature control system for EHR	489
EKLF Repl. air filter cartridges (for KLF)	485
ELF Replacement air filter mats (for LF und LFBR)	484, 486
ELF-ABV Repl. air filter mats for ABV	580
ELF-ALB Replacement air filters for ALB	345 ff
ELF-DLV Replacement air filters for DLV	583
ELF / ELS Perm. filter for ultraSilence® ELS	79
ELF-KWL Repl. air filter for KWL® units	104 ff
ELF-LEWT Repl. air filters for LEWT-A	187
ELF-SEWT Repl. air filters for SEWT-W	185
ELF-VFE Replacement air filters for VFE	580
ELF-ZS Repl. air filters for ELS-ZS	78
ELFZ / ELF-ZLE Repl. air filter for ZLA / ZLE	589 f

Type	Page
ELS / ..EC ultraSilence® Mono tube vent. system – ELS NFC – ELS-V.. AC – ELS 0-10 V – Casing flush-m. / surface-m. – Accessories	 44 ff 62 f 64 f 67 f 68 ff 78 f
ELS-D Fire protection ceiling seal	598 79, 91
ESA / ESU Electronic speed controller contin. variable, for 1~ fans	607
ESD Electronic speed controller contin. variable, for 3~ fans	618
ESE Built-in speed controller	607
ETR Electronic temp. controller	616
ETS Plug-in cross talk silencer	581
EUR 6 C / EUR EC Universal controller	614 f
EVK Electric shutters	564 f
F Flat duct system	178
FAP Flange connection plate	91
FDH Flat roof outlet	570
FDP Flat roof pan tile (for DH)	570
FDR Absolute humidity control	619
FDS Flat roof base (for roof fans)	562 507 ff, 91
FES Window mounting kit	33 f, 40 f
FF Flat flange	193 ff, 280
FK Flat duct system, galv. steel	178 f
FM / ..Ex / ..T120 Flexible connecting sleeve	280 383, 324 ff
FR Counterflange – for round duct fans – for roof fans	 195+259 ff, 280 561, 507 ff
FR Operating switch for window fans GX	604 41

Type	Page
FRS FlexPipe® *plus*	
– Flex. duct system, round+oval	162 ff
– Ceiling-integrated distribution element	167
– Silencer box	167
– Design grille	168
FRS FlexPipe®	
Flexible duct system, round	172 ff
FSD	
Flexible cross talk silencer	497
FSK	
Fittings, rectangular to round	441 ff
FU	
Frequency converter	612 f
G	
Ventilation grille, fixed	568
GBD / GBW / ..EC	
– GigaBox centrifugal fans	306 ff
– Types with EC technology	288 ff
GF	
Counterflange	482
GVK	
Weather protection grille with shutter (accessories HV)	35
GX	
Window fans up to 1600 m³/h	41
HDH	
Roof ventilation hoods	560
HQD / HQW / ..EC	
– High-performance axial fans, low pressure, with square plate and inlet nozzle	210 ff
– Types with EC technology	192 ff
HR	
HelioVent® mini fans with electric inner shutter	32 f
HRFD / HRFW / ..EC	
– High-performance axial fans, low pressure, with pipe sleeve and flanges on both ends	210 ff
– Types with EC technology	192 ff
HSD / HSW	
High-performance axial fans, low pressure, with cylindrical pipe sleeve and smooth ends	210 ff
HSDV	
Hood silencer (for roof fans)	560
HV	
HelioVent® wall fan 450, 840 m³/h	35
HVR	
HelioVent® flush-mounted wall and window fans	34 40
HWD / HWW / ..EC	
– High-performance axial fans, low pressure, with wall ring	210 ff
– Types with EC technology	192 ff
HY	
Hygrostat	610

Type	Page
IP IsoPipe®	
Insulated duct system	174 ff
JVK	
Multi-leaf dampers	482
KAK	
Cold smoke shutters	599
KLB	
Tape	175, 179 ff
KLF	
Duct air filter	485
KR	
Wall duct for wall installation	41
KRD / KRW / ..EC	
– InlineVent® rect. duct fans	470 ff
– Types with EC technology	454 ff
KSB	
Cold shrink tape	179
KSD	
Duct silencer	497
KTVA / KTVZ	
Plastic disc valves, extr./supp. air	585, 587
KVD / KVW	
InlineVent® rect. duct fans, forward curved	440 ff
KWL®	
Ventilation units with heat recovery and accessories	98 ff
KWL® Yoga	
Ventilatlion units with heat recovery and accessories	150 ff
LDF	
Air pressure difference sensor	614 f
LEWT	
Ground-to-air heat exchanger	186 f
LF / LFBR	
Air filter / air filter box	484, 486
LGF	
Air velocity sensor	614 f
LGK / LGM	
Ventilation grille, plastic/metal	569
LGR	
Ventilation grille, adjustable	568
LTA	
Outdoor temperature sensor	614 ff
LTGB / LTGW	
Door ventilation grilles	569
LTK / LTR	
Duct/room temperature sensor	614 ff
M1	
MiniVent® small room fans Connection Ø 100, 120, 150 mm	24 ff
M	
Motor protection circuit breaker	606
MBD / MBW / ..EC	
– MegaBox centrifugal fans	333 ff
– Types with EC technology	324 ff

Type	Page
MBR	
Mounting panel for M1/100, HR 90 KE	27, 33
MD / MW	
Motor protection circuit breaker	606
MF	
Mounting flange for M1/100, HR 90 K	27, 33
MK	
Mounting brackets	
– for centrif. round duct fans	383, 389 ff
– for axial, VAR fans	282
MRV	
Mounting ring	281
MSA	
Motor protection circuit breaker	606
MTVA / MTVZ	
Metal disc valves, extr./supp. air	584 586
MV / ..EC	
– MultiVent® round duct fans	370 ff
– Types with EC technology	366 ff
MVB	
Operating switch	27 ff 371 ff
MVS	
Protection grille	371 ff
MWS	
Transformer speed controlle	608
NG 24	
Mains adapter for EDR / ETR	616
PA / PU	
Speed potentiometer	617
PDA	
Pole changing switch for Dahlander winding	605
PGWA	
Pole changing switch for separate winding	605
PWDA / PWGW	
Reverser and pole ch. switch	605
QVK	
Ventilation grille, adjustable	568
RAG	
Rain-repellent grille	567
RDD / RDW / ..EC	
– Centrifugal roof fans, horizontal outlet	536 ff
– Types with EC technology	514 ff
RDS	
Transformer speed controller	609
REW	
Inline fans	36
RHS	
Isolator / main switch	605
RP RenoPipe	
Air distribution system	176 f

Type	Page
RR / RRK / ..EC	
– Centrifugal round duct fans made of steel or plastic	398 ff
– Types with EC technology	386 ff
RRK Ex	
Centrifugal round duct fans, explosion-proof	382 f
RS	
Isolator switch	560 , 604
RSD	
Duct silencer	498
RSK / RSKK	
Duct shutters	566
RVB / RVBD	
Duct connector / with seal	572
RVE	
Inline duct shutters	566
RVK	
Shutters, adjustable	564
RVM / RVS	
Duct shutters	566
RZ	
Reducers	572
SA / SU	
Three level switch	617
SB	
Screw fastenings (for GX)	41
SB / SBD / ..EC	
– SilentBox®, round duct fans	426 ff
– Types with EC technology	412 ff
SCH	
Hose clips	572
SDD / SDZ	
Vibration dampers	282
SDD-U	
Vibration damper base	282
SDE	
Silencer (for KWL® units)	175
SDH	
Gable roof outlet	571
SDS	
Pitched roof base	562
for roof fans	507 ff
SEWT	
Ground-to-brine heat exchanger	184 f
SG	
Protection grille	279
SGR	383
Protection grille for RRK Ex/RR	387 ff
SKRD / SKRW / ..EC	
– InlineVent® rect. duct fans, sound-insulated	474 ff
– Types with EC technology	458 ff
SSD	
Base silencer	562
(for roof fans)	507 ff

Type	Page
STH	
Electric heater fans	43
STM	
Damper servo motor, auxiliary switch (access. JVK)	482
STS / STS Ex	
Flanged flexible connector	
– for axial round duct fans	280, 193 ff
– for roof fans	561, 507 ff
STSSD / STSSW	
Five-step operating switch for TSSD / TSSW	608 f
STV	
Pipe joint (accessories DH)	570
SVV / SVR / ..EC	
– Centrifugal round duct fans	385, 398 ff
– Types with EC technology	386 ff
SVS / ..EC	
– Centrifugal round duct fans, sound-insulated	426 ff
– Types with EC technology	412 ff
SVE	
Sound insulation element	573
SWE / SWT	
Flow monitor	611
TFK / TFR	
Duct / room sensor (for EHS, EHR-R)	489 f
TFR-ALB	
Room temp. sensor for ALB	345 ff
TFR-ALB/KWL	
Room temp. sensor for KWL®	137 ff
and ALB	345 ff
TMK	
Telescopic wall kit	571
TS	
T-pieces	572
TSD / TSSD	
Transformer speed controller for 3~ fans	609
TSW / TSSW	
Transformer speed controller for 1~ fans	608
TWH	27 ff
Telescopic wall sleeves	34, 40
UDP	
Universal pan tile (for DH)	570
VARD / VARW	
High pressure round duct fans	254 ff
VDD / VDW / ..EC	
– Centrifugal roof fans, vertical outlet	536 ff
– Types with EC technology	514 ff
VFE	
Attachment filter element	580
VH	
Extension sleeves	211 ff

Type	Page
VK	
Shutters, automatic	564 f
VKH	
Volume flow stabiliser	574 f
VR	
Extension ducts	280
VS / VS Ex	
Connectors	482
WDS	562
Corrugat. roof base (for roof fans)	507
WER	
Feed duct for flush wall install. (accessories HV, GX)	35, 41
WES	
Wall mounting kit	27 ff
WHR	
Warm water heating element	491 f
WHST 300 T38 / T50	
Temp. control systems for warm	493
water heater element WHR	181
WHS HE / WHSH HE	
Temperature control system	494 f
WS	
Reverser	604
WSG	
Weather protection grille	567
WSUP / WSUP-S	
Weekly timer	603
ZNE / ZNI / ZV	
Turn-off delay timer	603
ZAV	
Supply air-extract air valves	180
ZEB EC	
Central extract ventilation box	92 ff
ZLA 125	
Automatic supply air element	82 f
ZLA / ZLE	
Auto. element/supp. air element	589 f
ZLA LE	
Soffit element	84 f
ZLS-DV EC	
Central ventilation system	86 ff, 500 ff
ZTV	
Thermostat disc valves, supp. air	588

Lower power axial fans
Series MiniVent® M1, HR 90 KE, HV, REW, GX

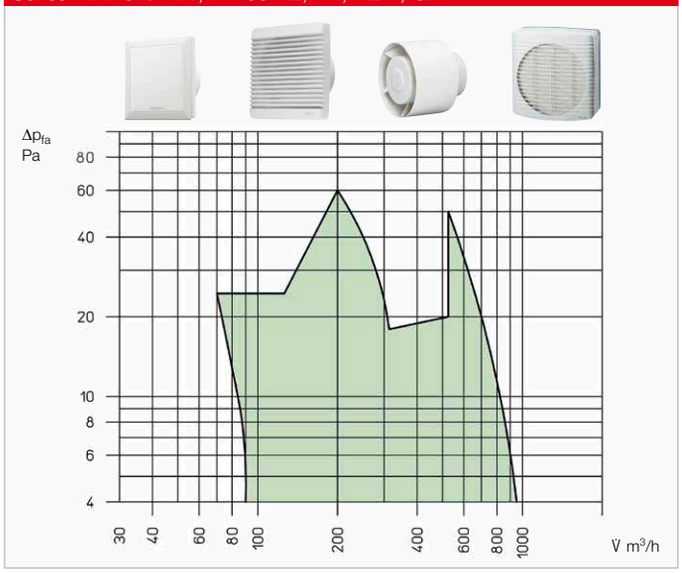

High performance axial fans
from Ø 200 – 1000 mm, Series HQ, HW, HS, HRF, AMD

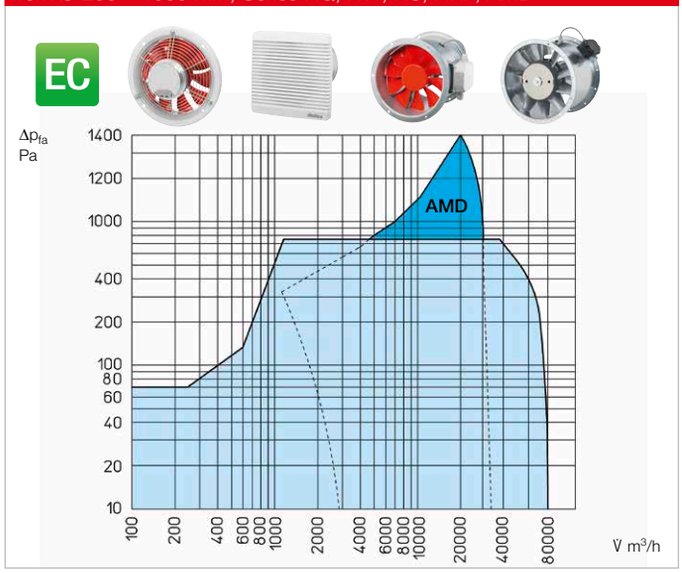

Centrifugal round and rectangular duct fans, fresh air boxes etc.
Series AV, DX, MV, RR, SB, SV, KV, KR, SKR, ALB EC

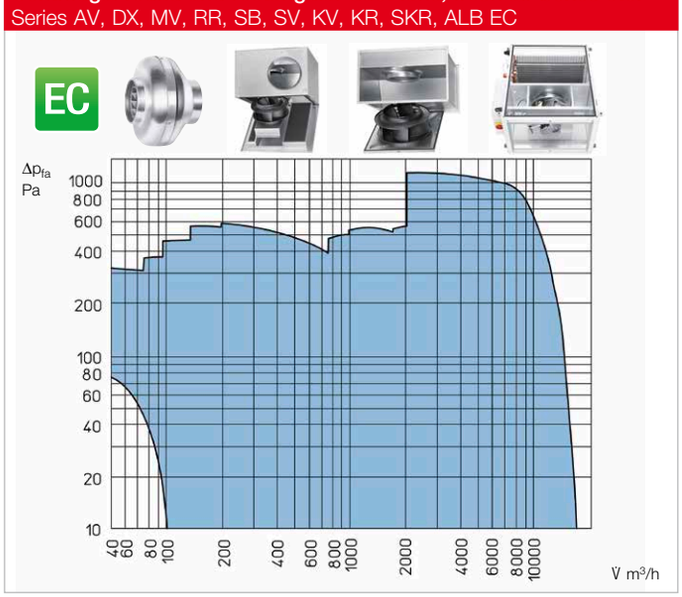

Centrifugal roof fans
Series DV EC, RD EC, VD EC

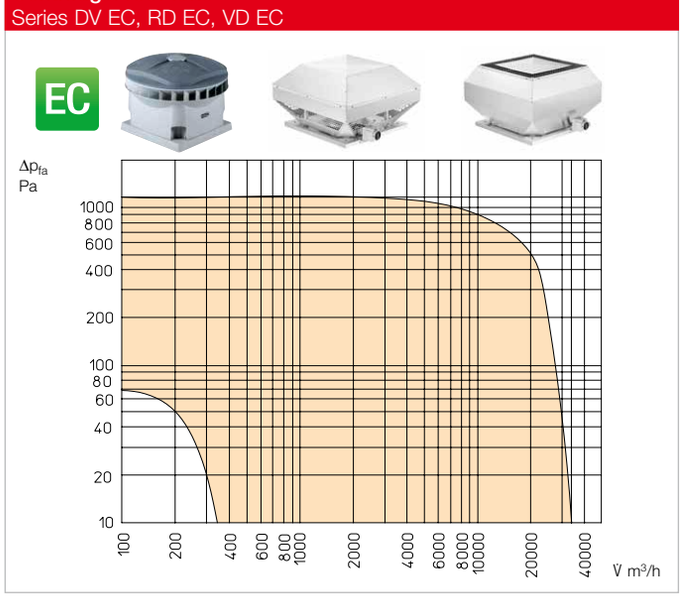

High pressure round duct and centrifugal fans
Series VAR, MB, GB

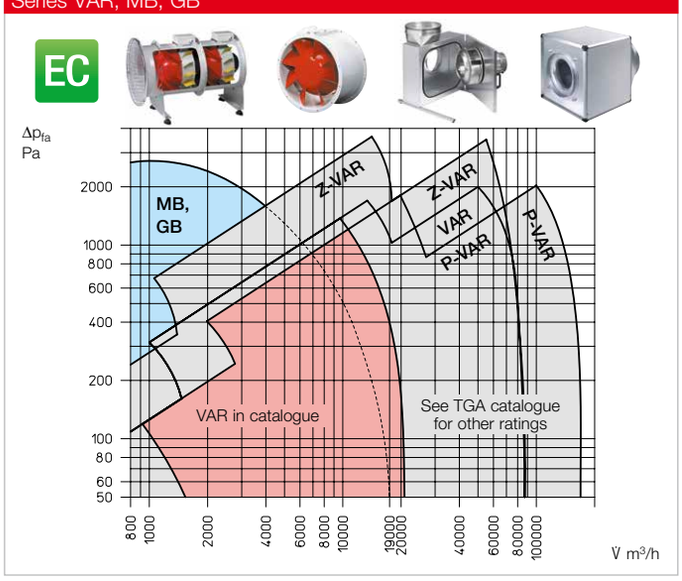

Large axial fans
from 1000 – 7100 mm impeller-Ø

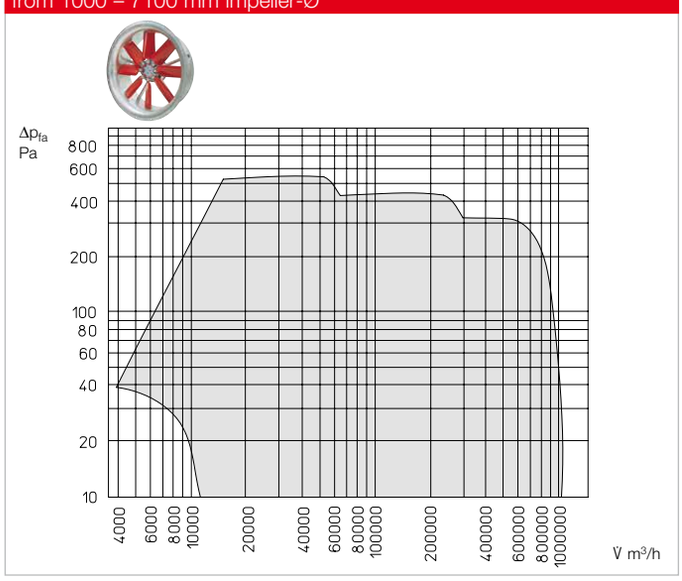

Pionairs since 1923

We are pioneers in ventilation technology – driven to provide you with comfortable, efficient and safe system solutions for your applications. But before we dedicated ourselves entirely to ventilation many decades ago, there were some interesting and extraordinary milestones in our history. On the following pages, we invite you to accompany Helios' journey "from light to air".

Stay up to date:

The journey through time begins →

1940

Since bicycle lighting is not classified as “essential to the war effort”, production has to be converted – to cutting and punching tools as well as production equipment.

1950er

In the midst of the economic miracle: Helios starts producing cash registers and fans, but initially table and ceiling fans.

1931

The bicycle comes into fashion and we bring light into the darkness: Dynamos and bicycle headlights are launched under the name of *Helios* – the Greek god of the sun.

1923

Let’s go: *Fernwellen-Apparatebau AG* sets the tone – with headphones, loudspeakers and detectors.

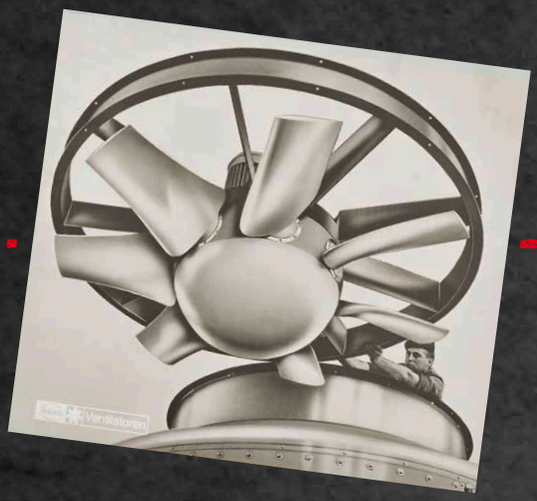

1963

The triumph of the fans:
Helios continues to focus on fans, resulting in one of the largest axial fan ranges on the market.

1980er

The Helios advertising bus hits the road:
Across Germany, it introduces installers and dealers to the ever-growing product range from domestic ventilation to smoke exhaust fans.

1984

The birth of the ELS mono tube ventilation system, which to this day provides state of the art innovations with each new generation.

1993

Premiere:
Helios launches mechanical ventilation with heat recovery in Germany.

1997

Big ideas need space. The new logistics centre and modern production facilities make Helios fit for the future.

Helios PIONAIRS SINCE 1923

2023

The ISH in Frankfurt will mark the start of an exciting anniversary year – stay tuned.

2018

Helios in a new dimension!
A new era begins with the Helios AIR1 air handling units.

2004

Let‘s make pionairs:
The new training center opens to develop ventilation professionals.

2012

Certainly a big year for us:
Helios is taking a completely new approach to smoke spill fans and systems.

Our newcomers at a glance:

Helios AIR1® compact ventilation units

Whether for ceiling or floor-mounted installation, with highly efficient cross-counterflow or rotary heat exchangers and for use inside or outside. With 4 series and over 28 unit types, Helios AIR1 offers you numerous options for practically all areas of application and performance classes.

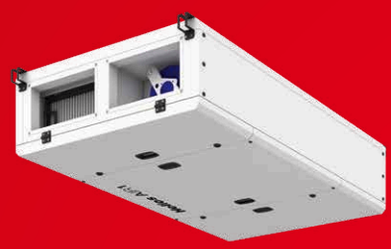

More at:
HeliosAIR1.com

KWL® easyControls 3.0

With easyControls 3.0, you can not only expect our brand new control generation, but also a new range of units with optimal flow rate capacity for all living situations.
All central Helios KWL units can be operated intuitively and flexibly and can be adapted to any need with easyControls 3.0: whether with the new touch control element or smartphone, from home or on the move.

112ff

The new ceiling-integrated distribution element

The ceiling-integrated distribution element significantly simplifies the installation of KWL systems: without complicated pipe threading and unthreading, the ventilation pipes can be installed even faster and thus more cost-effectively in the concrete ceiling of single family houses and apartment buildings. And thanks to integrated height adjustment, not only in filigree ceilings of various thicknesses, but also in cast-in-situ concrete ceilings.

167ff

Decentralised ventilation units KWL® Yoga

High energy efficiency, extremely low operating noises and flexible control options are convincing advantages for use in schools, offices and commercial facilities of any kind. The extremely compact design and simple installation without an air distribution system also make KWL Yoga perfect for renovation projects.

150ff

Roof fans T120

Commercial kitchens are a real challenge for ventilation systems because heat, odours and grease pollute the indoor air. With the new VD T120 roof fans, there is an optimal, German VDI 2052-compliant exhaust air solution for every commercial kitchen.

T120

499ff

By inventors for discoverers. **Welcome to the Heliosphere.**

We invite you:
heliosventilatoren.com/heliosphere

You can find all **new products and innovations as well as practical applications** relating to ventilation in the Heliosphere. Let us show you various application areas in a hands-on way and dive deep into the specific requirements, for which we will show you suitable system solutions.

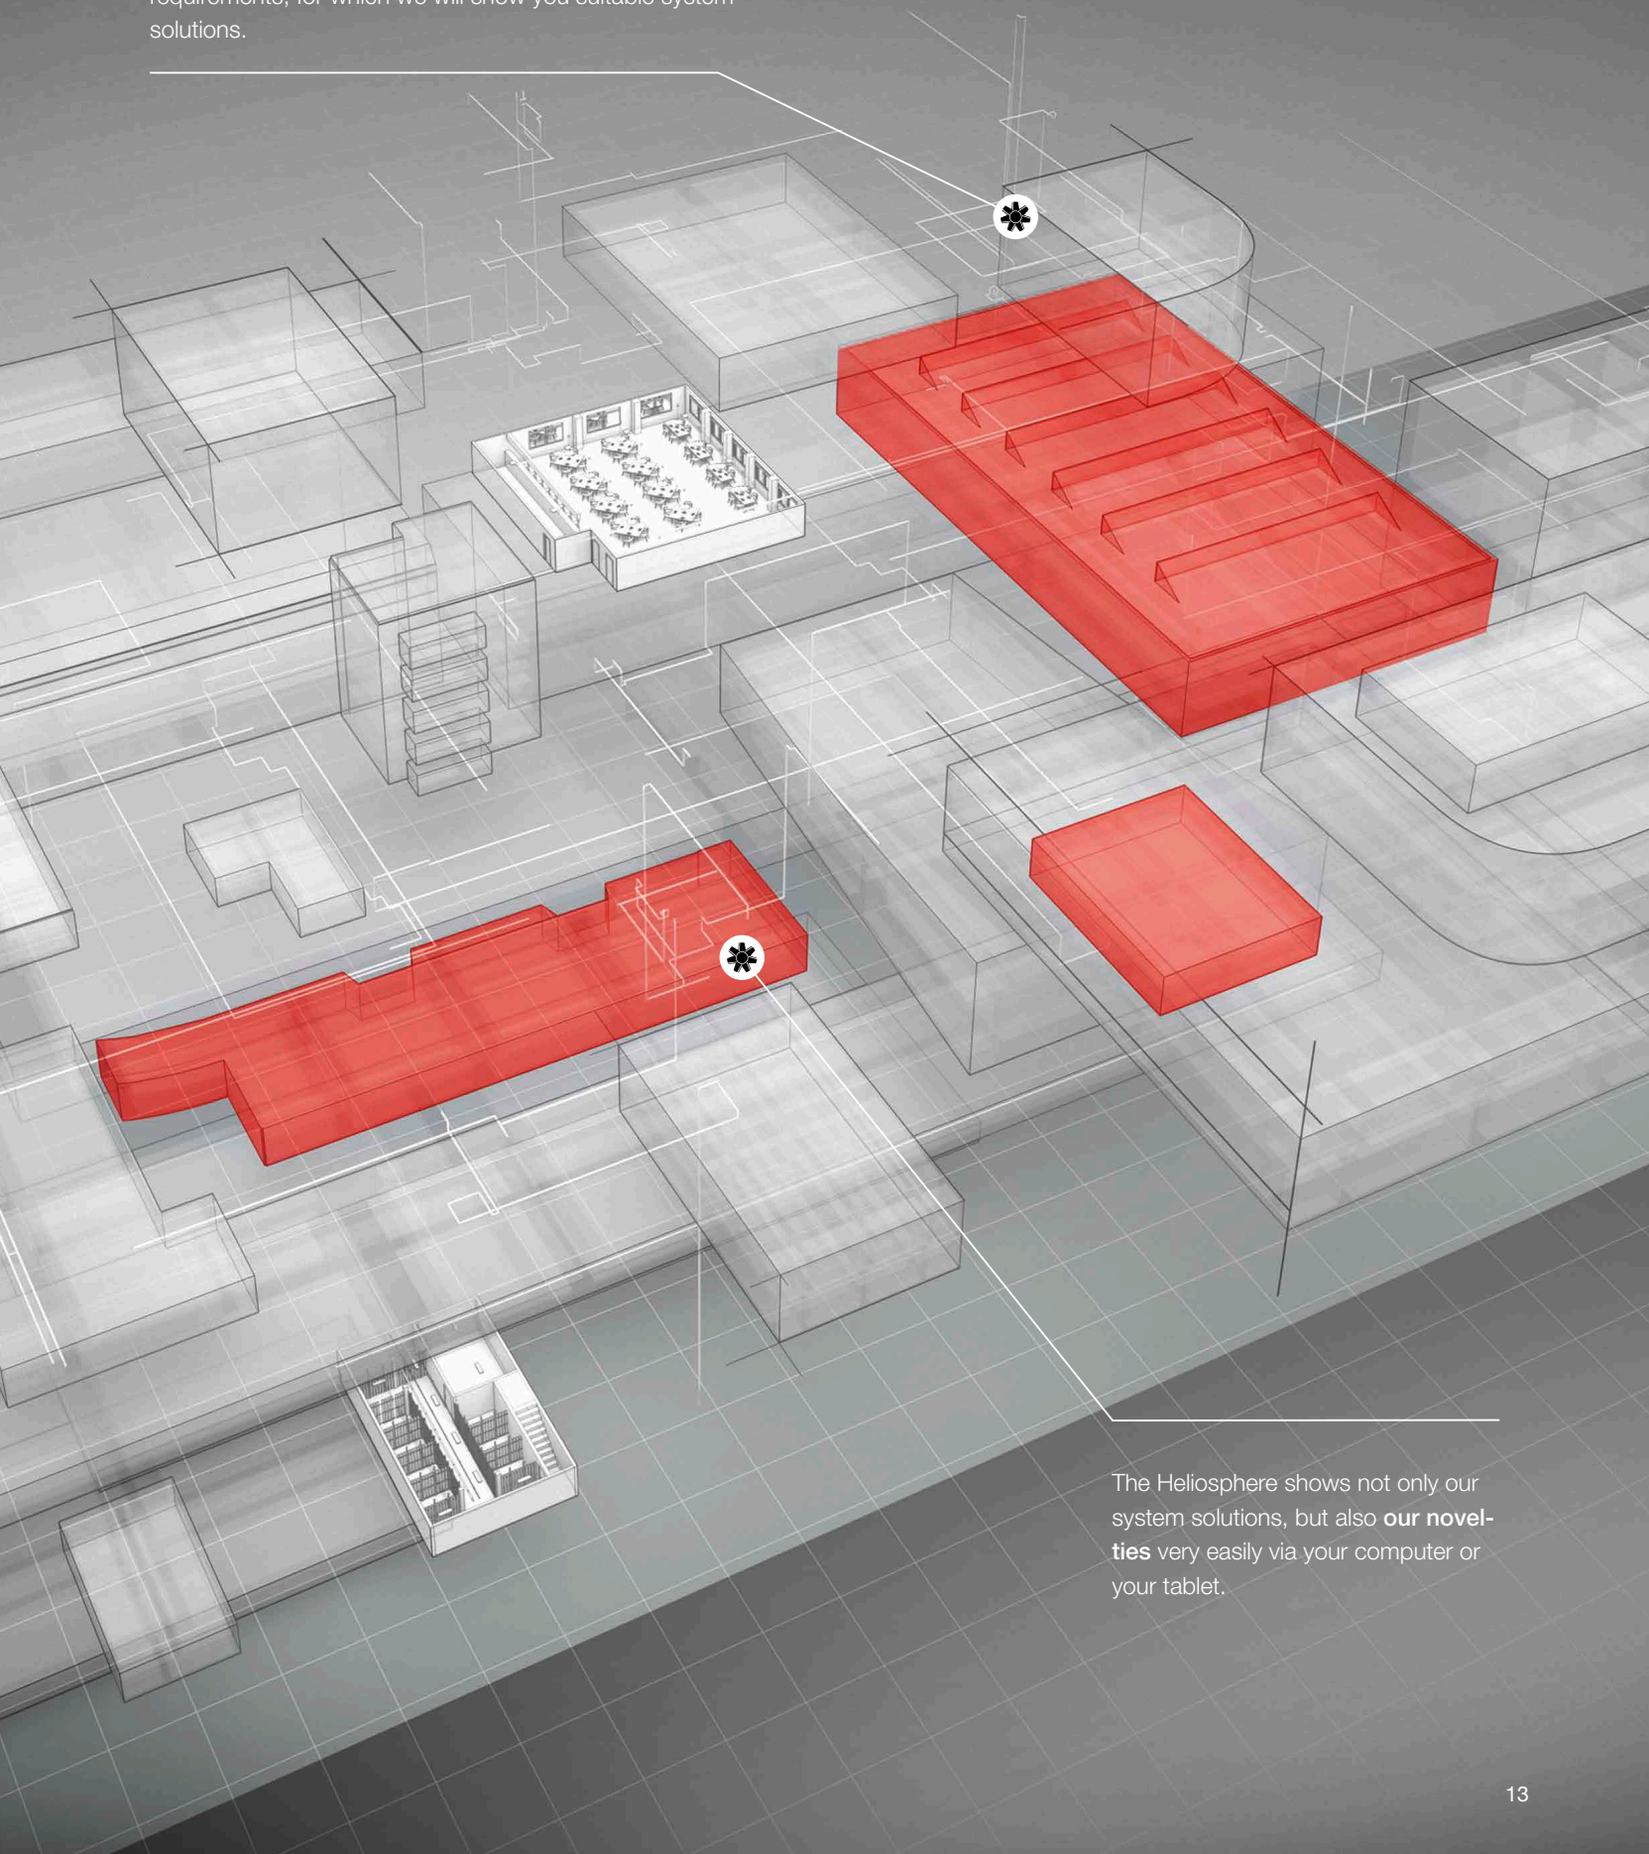

The Heliosphere shows not only our system solutions, but also **our novelties** very easily via your computer or your tablet.

The volume of air to be supplied or extracted from a room largely depends on the room usage and pollution or odour levels. The air volume requirement in industrial and commercial facilities can also be determined by the generated process heat.

The volume flow can be determined according to various criteria using the following formulas and tables. If multiple criteria can be used for the calculation, the most unfavourable assumption must be made.

Determination of volume flow using the air exchange rate
Air exchange rates (see table 1) are empirical values without particular loads due to pollutants and contaminants.

$$\dot{V} = V_R \cdot LW/h \; [m^3/h]$$

V_R: Room volume m^3
LW: Air exchange 1/h from table 1

Determination of volume flow using the number of persons
(DIN EN 16798-3)
The values per person should be increased by 20 m^3/h in rooms with additional loads (e.g. tobacco smoke).

$$\dot{V} = P \cdot A_{RP} \; [m^3/h]$$

P: Number of persons
A_{RP}: Intake air rate per person from table 2

Determination of volume flow using AGW values

$$\dot{V} = \frac{M}{k_{AGW} - k_a} \; [m^3/h]$$

M: Accumulating pollutant load per hour mg/h
k_{AGW}: Max. permissible pollutant concentration mg/m^3 (from AGW table 3)
k_a: Pollutant content in supply air mg/m^3 (AGW table by C. Hermanns Verlag, Cologne)

Determination of volume flow for moisture removal

$$\dot{V} = \frac{G}{(x_2 - x_1) \cdot \rho} \; [m^3/h]$$

G: Water volume g/h
x_2: Water content in extract air g water / kg air
x_1: Water content in supply air g water / kg air
ρ: Air density kg/m^3 (air 20 °C, 1013 mbar = 1.2 kg/m^3)

Determination of volume flow for heat dissipation

$$\dot{V} = \frac{\dot{Q} \cdot 3600}{\rho \cdot c_p \cdot \Delta T} \; [m^3/h]$$

$\dot{Q}$: Heat output to be dissipated kW
c_p: Spec. air heat kJ/(kg · K) (air 20 °C: $c_p \approx 1$)
ΔT: Temperature difference between fresh air and heated air K
ρ: Air density kg/m^3 (air 20 °C, 1013 mbar = 1.2 kg/m^3 (1 kWh = 3600 kJ)

Determination of heat output for heating the intake air

$$\dot{Q}_L = \frac{\dot{V} \cdot \rho \cdot c_p \cdot \Delta T}{3600} \; [kW]$$

$\dot{Q}_L$: Ventilation heat/heat output kW
$\dot{V}$: Volume flow m^3/h
ρ: Air density 1.2 kg/m^3 (20 °C)
c_p: Spec. heat kJ/(kg · K)
ΔT: Temperature difference (K) between ϑ i room temperature and ϑ a outdoor temperature

$$\Delta T = \vartheta i - \vartheta a \; [K]$$

Table 1 Air exchange rate and sound pressure (rec. guide values)

Room type	LW/h	Max. sound press. level dB(A)	Remark
WCs in apartments commercial/public	4 – 5 5 – 15	40 50	Extract ventilation Extract ventilation
Battery rooms	5 – 10	70	"Ex" required
Bathrooms	5 – 7	45	Preheating Supply air
Pickling plants	5 – 15	70	Acid protection
Libraries	4 – 5	35 – 40	
Office rooms	4 – 8	45	
Shower rooms	15 – 25	65 – 70	Preheating Supply air
Dyeing facilities	5 – 15	70	"Ex" test, acid protection
Paint spray facilities	25 – 50	70	"Ex" required
Garages	aprx. 5	70	Extract ventilation
Cloakrooms	4 – 6	50	
Restaurants, casinos	8 – 12	40 – 55	Supply and extract ventilation
Foundries	8 – 15	80	Extr. vent. Create heat balance
Hardening plants	up to 80	80	Extr. vent. Create heat balance
Lecture halls	6 – 8	35 – 40	Supply and extract ventilation
Cinemas and theatres	5 – 8	35 / 25	Supply and extract ventilation
Classrooms	5 – 7	40	
Conference rooms	6 – 8	45	
Kitchens private Kitchens commercial	15 – 25 15 – 30	45 – 50 50 – 60	Extract ventilation Extract ventilation
Laboratories	8 – 15	60	Extract vent., Ex, acid protection
Paint shops	10 – 20	70	"Ex" required
Copyshops	10 – 15	60	Extract ventilation
Machine rooms	10 – 40	60 – 80	Create heat balance
Assembly halls	4 – 8	60 – 70	
Sheet metal works	8 – 12	60	Extr. vent. Create heat balance
Welding shops	20 – 30	70 – 80	Workstation extraction
Indoor swimming pools	3 – 4	50	Preheating Supply air
Meeting rooms	6 – 8	40	
Vaults	3 – 6	60	
Changing rooms	6 – 8	60	Extract ventilation
Gymnasiums	4 – 6	50	
Salesrooms	4 – 8	50 – 60	
Meeting facilities	5 – 10	45	
Waiting rooms	4 – 6	45	
Laundrettes	10 – 20	60 – 70	Create heat balance
Workshops with high air deterioration with low air deterioration	 10 – 20 3 – 6	 60 – 70 60 – 70	
Living rooms according to DIN 1946-6 and DIN 18017-3 (see also www.KWLeasyPlan.de).			

Table 2 Intake air rate per person by room type

Room type	m^3 / h x persons	Room type	m^3 / h x persons
Individual office	40	Reading room	20
Open-plan office	60	Classroom	30
Theatre, concert	20	Lecture hall	30
Canteen	30	Exhibition hall	30
Conference room	20	Salesroom	20
Cinema	30	Museum	30
Ballroom	30	Workshop	40
Rest room	30	Hotel room	40
Break room	30	Gymnasium and sports hall with spectators	30

Table 3 Extraction Occupational exposure limit values (AGW)*

Pollutants	cm^3/m^3	mg/m^3	Pollutants	cm^3/m^3	mg/m^3
Acetone	500	1200	Formaldehyde	0.3	0.37
Aniline	2	7.7	HCL	2	3
Ammonia	20	14	Methanol	100	130
Butane	1000	2400	Propane	1000	1800
Chlorine	0.5	1.5	Mercury	—	0.02
CO	30	35	Nitric acid	1	2.6
CO_2	5000	9100	SO_2 (H_2SO_4)	1 (–)	2.7 (0.1)

* TRGS 900 (see quarterly lists from the Institute for Occupational Safety and Health BGIA, Sankt Augustin).

The fan noise level must be taken into account when designing and planning a ventilation system. The noise impact of a noise source (fan) on the rooms to be ventilated and the vicinity can be roughly calculated using the following information. Noises are primarily generated by the fan, but possibly also by duct components, aggregates, ventilation grilles, etc. if the air flow velocity is too high. Therefore, a velocity of approx. 7 m/s should not be exceeded. The sound-insulated installation of components and fans should also be taken into account. The maximum permissible noise emission values are regulated in the relevant regulations and they must not be exceeded.
Noise reductions, i.e. sound power level reductions, are achieved through a greater distance to the noise source, ducts, fittings, ventilation grilles, etc, and above all by using silencers. As a matter of principle, the noises should be kept as low as possible at source, i.e. low-noise fans should be selected.

The fan sound power output at the air outlet must be converted to sound pressure for the sensitivity of the human ear. In relation to "free field" conditions, the reduction depending on distance can be seen in Figure 4. The room absorption capacity is of great importance for the calculation in a room.

Noise level in the vicinity of buildings (TA noise)
The industrial code defines the following maximum values:

Area	Emission value dB(A) Day	Night
Purely commercial area	70	70
Predominantly commercial area	65	50
Mixed area	60	45
Predominantly residential area	55	40
Purely residential area	50	35
Spa area Hospitals	45	35

Figure 4
Difference from sound power to sound pressure with distance



Example:
Sound power of fan = 70 dB(A)
Sound pressure at 1 m distance (free field) = 70 dB(A) minus 8 = 62 dB(A)

Figure 6
Addition of multiple noise sources with the same sound levels



Example: 10 noise sources à 60 dB(A)
Total volume:
60 dB(A) + 10 dB(A) = 70 dB(A)

Figure 5
Sound pressure reduction with distance



Example:
Sound pressure at 1 m distance = 60 dB(A)
Sound pressure at 5 m distance
w/o reflection (free field) minus 15 = 45 dB(A)
w/ partial reflection minus 5 = 55 dB(A)

Figure 7
Addition of multiple noise sources with different sound levels



Example: 2 noise sources 60 dB(A) and 64 dB(A)
Total volume:
64 dB(A) + 1.5 dB(A) = 65.5 dB(A)

Room absorption (Figure 8)
Every room has damping properties. These depend on the condition of its walls, flooring, ceiling, furniture and size.
The sound pressure level L_{PA} is different at every point in the room and it is lower than the sound power level L_{WA} of the existing noise source.
The average room absorption can be calculated in "m² sabin" from the volume and average absorption coefficients.

Direction factor Q
The direction factor depends on the location of the noise source and the location of the listener.
Sound incidence 45°,Q = 4
Sound incidence 0°,Q = 8

Room damping ΔL
Difference from sound power to sound pressure (VDI 2081 sheet 1)

Sound pressure in room
$L_{PA} = L_{WA} - \Delta L$ [dB]

Example Classroom
Volume: 72 m³
Average absorption coefficient: 0.1 α m
Average Room absorpt. area: Sabins 14 m²
Room point 1, Outlet in middle of room
Sound incidence 0°, Q = 8
Distance 1.8 m
ΔL = 2.5 (dB)
Room point 2, Outlet in corner of room
Sound outlet 45°, Q = 4
Distance 4 m
ΔL = 5 (dB)

Figure 8

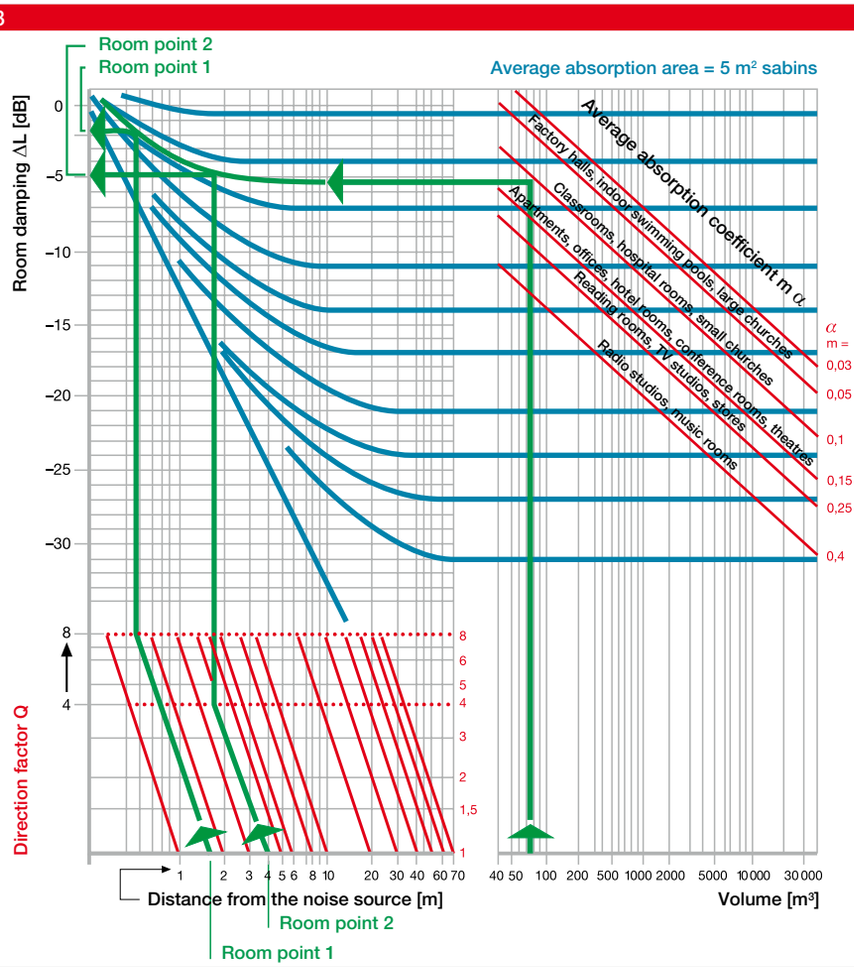

Pressure losses

Ventilation systems often consist of multiple components, such as: fan, deflectors, grilles, heat exchangers, filters, etc.
All these components cause pressure losses which are crucial for the selection of the right fan. The pressure loss Dpfa (static pressure difference) of the entire system is calculated by the addition of all individual resistances (see Figure 9).

Figure 9 Pressure losses in a ventilation system

– Pipe or duct sections Ⓐ
– Moulded parts (bends, branches) Ⓑ
– Aggregates Ⓒ

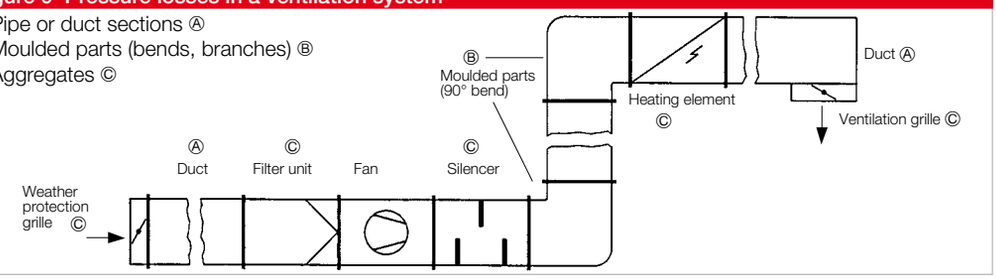

Pressure loss in pipe or duct sections

Ⓐ	$\Sigma\ \Delta p = \Delta p_1/L \cdot L_1 + \Delta p_2/L \cdot L_2 + ...$ [Pa]

$\Delta p/_{L1,2,...}$: From the diagram Figure 10 [Pa/m]
L: Duct length [m]
Auxiliary value d_h

Equivalent diameter d_h

$$d_h = \frac{2 \cdot b \cdot h}{b + h} \text{ [mm]}$$

b: Duct width [mm]
h: Duct height [mm]
Equivalent diameter d_h

d_h for duct fans

w x h [cm]	d_h [mm]
30 x 15	200
40 x 20	260
50 x 25	330
60 x 30	375
60 x 35	400
70 x 40	500
80 x 50	600
100 x 50	650

Correction factor for roughness ε

$$\Delta p_R = \Delta p_{\varepsilon=0} \cdot \text{Corr. factor}$$

Figure 10 Duct friction losses

Δp [Pa/m] (roughness ε = o), V̇ [m³/h], c [m/s], d [mm]

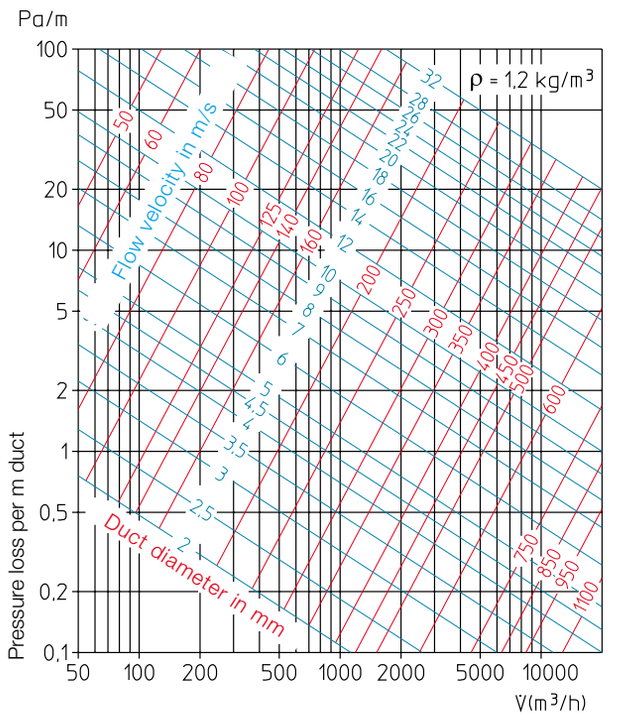

Correction factor for roughness ε of different pipes/ducts			
Folded sheet metal ducts	1.5	Wooden ducts	1.5
Flexible hoses	7.0	Concrete ducts	2.0
Fibre cement	1.5	Brick-lined ducts	3.0

Resistances of moulded parts









Pressure loss in moulded parts e.g. bends, branches, cross-section changes

Ⓑ	$\Sigma\ \Delta p_F = \Delta p_{F1} + \Delta p_{F2} + ...$ [Pa]

$$\Delta p_F = \zeta \cdot \frac{\rho}{2} c^2 \text{ [Pa]}$$

$\Delta p_{F1,2,...}$: From the diagrams Figures12-15 [Pa]
Equivalent diameter c: Flow velocity [m/s]
ζ: Pressure loss coefficient

Resistances of aggregates

Ⓒ	$\Sigma\ P_{Agg} = \Delta p_{Agg1} + \Delta p_{Agg2} + ...$ [Pa]

$\Delta p_{Agg1,2,...}$: From table 11 or diagram

Table 11 Resistances of aggregates
(for rough calculation)

Aggregate / Component	Flow resistance Δp Aggregate [PA]
Ventilation grilles, automatic shutters, weather protection grilles*	20 – 40
Helios VK shutters*	10 – 20
Heating elements, heat exchangers*	100 – 150
Filters clean* Filters contaminated*	40 – 60 250 – 300
Silencers*	40 – 80
Disc valves*	10 – 200
Cyclones	500 – 750

*See product page for exact values.

Dynamic pressure at outlet cross-section of ventilation system

Ⓓ	$p_{d,outlet} = \frac{\rho}{2} c^2_{d,outlet}$ [Pa]

ρ: Air density [kg/m³]
(air 20 °C, 1013 mbar = 1.2 kg/m³)
c: Flow velocity [m/s]

Dynamic pressure at fan outlet cross-section

Ⓔ	$p_d = \frac{\rho}{2} \cdot c_d^2$ [Pa]

ρ: Air density [kg/m³]
(air 20 °C, 1013 mbar = 1.2 kg/m³)
c: Flow velocity [m/s]

Total resistance calculation

$$\Delta p_{tot} = Ⓐ + Ⓑ + Ⓒ + Ⓓ - Ⓔ \text{ [Pa]}$$

Ⓔ: Amount Ⓔ is only taken into account for systems with pressure-side duct connection to the fan.

Auxiliary value Flow velocity

$$c = \frac{\dot{V}}{A \cdot 3600} \text{ [m/s]}$$

A: Flow cross-section [m²]
V: Volume flow [m³/h]

Fan parameters

Volume flow $\dot{V}$ [m³/h, m³/s]
Total pressure increase
$\Delta p_{tot} = \Delta p_{fa} + p_d$ [Pa]
Static pressure increase
$\Delta p_{fa} = \Delta p_{tot} - p_d$ [Pa]
Dynamic pressure $p_d = \rho/2 \cdot c^2$ [Pa]
Shaft power P_w [W, kW]
Elec. consum. power P [W, kW]
Sound power/pressure level
L_{WA}, L_{pA}, [dB(A)]

These values have been determined on an inlet-side chamber test rig according to DIN EN ISO 5801. The noise measurements in the reverberation chamber/free field correspond to DIN 45635-1 and DIN EN ISO 3741.

Fan performance curves

The operating characteristics of a fan are presented in the form of a performance curve. The volume flow depending on static pressure (Δp_{fa}) or total pressure (Δp_{tot}) is specified in the performance curve.

Please note for design:

$$\Delta p_{fa} = \Delta p_{tot} - p_d \text{ [Pa]}$$

System performance curve

The pressure loss of a system is proportional to the square of the volume flow.

$$\Delta p = k \cdot \dot{V}^2$$

Operating point

The operating point BP is the point where the system performance curve meets the fan performance curve (Δp_{fa}). The volume flow, which is adjusted in the system, can be seen on the horizontal axis.

Figure 16: The performances of 1~ fans (green) and 3~ fans (blue) are shown in the performance diagram for controllable high-performance axial fans and VAR types. The static pressure can be seen. The velocity line ⓐ is used to determine the flow velocity with corresponding volume flows. The operating point (BP) lies at the point of intersection between the fan performance curve and the system performance curve.
Figure 17: Performance diagram of a speed-controllable fan with volume flows and pressures according to the different voltages.
Figure 18: The volume flow and static pressure can be set to the calculated operating point by changing the angle of the impeller blades (adjustment of the individual blades at standstill) for AVD over Ø 710.
Figure 19: The performance-oriented performance curve graph for the AMD series allows the adjustment of the motor output to the respective project requirements.

Figure 16

VAR 400/4 — n = 1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	83	59	72	77	79	77	70	60
L_{PA} 4 m	Air noise	dB(A)	63	39	52	57	59	57	50	40

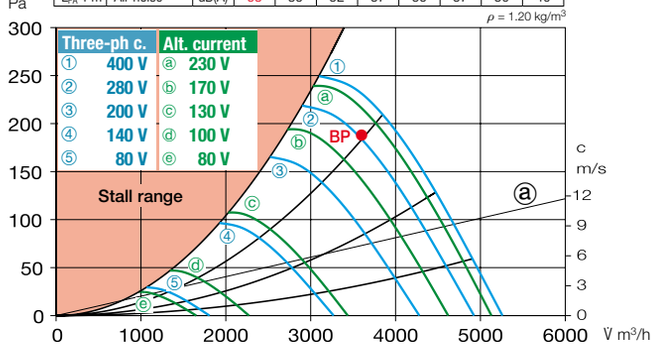

Figure 17

KVD 355/6/70/40

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	52	52	55	56	53	51	46
L_{WA}	Inlet-side	dB(A)	73	65	64	61	67	65	64	58
L_{WA}	Outlet-side	dB(A)	81	69	72	73	74	74	73	67

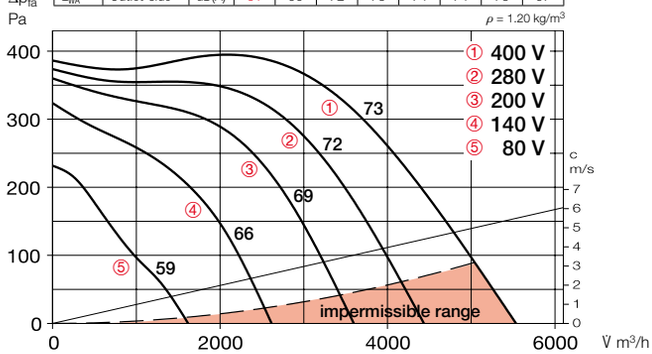

Figure 18

AVD 800/4 — n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	15°	dB(A)	91	75	76	82	86	86	83	7
L_{WA}	25°	dB(A)	93	77	78	84	88	88	85	78
L_{WA}	35°	dB(A)	95	79	80	86	90	90	87	80

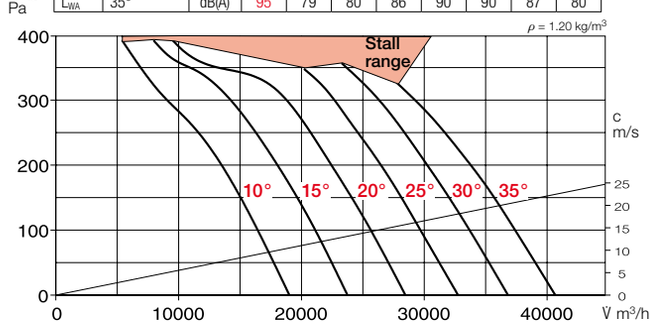

Figure 19

AMD 355/2 — n=2880 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	15°	dB(A)	92	71	83	89	91	90	88	78
L_{WA}	25°	dB(A)	94	72	84	90	93	91	89	80
L_{WA}	35°	dB(A)	95	74	86	89	94	90	91	82

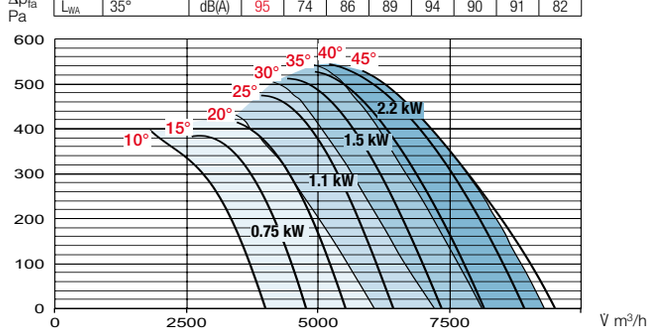

Drive output at the fan shaft

$$Pw_1 = \frac{\dot{V} \cdot \Delta p_{tot}}{1000 \cdot \eta} \text{ [kW]}$$

Δp_{tot} = Total pressure increase [Pa]
η = Fan efficiency
$\dot{V}$ = [m³/s]

Use of a pole-changeable motor

Pole no. n_1/n_2	Volume flow $\frac{\dot{V}_2}{\dot{V}_1}$	Pressure $\frac{\Delta p_2}{\Delta p_1}$	Output $\frac{Pw_2}{Pw_1}$
4/2 8/4 12/6	2	4	8
6/4	1.5	2.25	3.38
8/6	1.33	1.78	2.37

Conversions, affinity designations

The performance data for a geometrically similar fan series can be converted depending on speed, diameter and air density.

Speed change:

$$\dot{V}_2 = \dot{V}_1 \cdot \frac{n_2}{n_1}; \quad \Delta p_2 = \Delta p_1 \left(\frac{n_2}{n_1}\right)^2;$$

$$P_{w2} = P_{w1} \left(\frac{n_2}{n_1}\right)^3$$

Diameter change:

$$\dot{V}_2 = \dot{V}_1 \cdot \left(\frac{D_2}{D_1}\right)^3; \quad \Delta p_2 = \Delta p_1 \left(\frac{D_2}{D_1}\right)^2;$$

$$P_{w2} = P_{w1} \left(\frac{D_2}{D_1}\right)^5$$

Density, temperature change:

$\dot{V}_1 = \dot{V}_2$ = const.

$$\frac{\Delta p_2}{\Delta p_1} = \frac{\rho_2}{\rho_1} = \frac{T_1}{T_2}$$

$$\Delta p_2 = \Delta p_1 \frac{\rho_2}{\rho_1} = \Delta p_1 \frac{T_1}{T_2} \text{ [Pa]}$$

$$P_{w2} = P_{w1} \frac{\rho_2}{\rho_1} = P_{w1} \frac{T_1}{T_2} \text{ [kW]}$$

T: Absolute temperature (T = 273+t) [K]
t: Air flow temperature [°C]
Index 1: Initial state
Index 2: Changed state

Use of a fan at a greater geodetic height

Air density

$$\rho = \frac{p_a \text{ [hPa]} \cdot 100}{R_i \cdot T} \text{ [kg/m³]}$$

p_a: Air pressure [hPa, mbar]
R_i: Gas constant (Air: 287 J/(kgK))

Explosion protection according to Directive 2014/34/EU (ATEX)

- Helios explosion-proof fans for operation in potentially explosive atmospheres or for the transportation of potentially explosive gas, vapour and air mixtures in compliance with the requirements of Directive 2014/34/EU (ATEX).
- The fans obtain the markings according to ④.

Zoning, unit groups, categories ①

- **Zoning**
  Potentially explosive atmospheres are determined according to Directive 1999/92/EC, the Ordinance on Industrial Safety and Health (BetrSichV) and the Ordinance on Hazardous Substances (GefStoffV). The zones should be determined by the operator and it shall be their responsibility. In cases of doubt and special cases, the supervisory authority can also make the determination. Potentially explosive atmospheres are divided into zones according to the probability of the occurrence of hazardous explosive atmospheres as a basis for the assessment of the requirements to be met.
- **Unit groups**
  Unit group I: Use in underground operations and aboveground facilities, which can be endangered by firedamp and combustible dust.
  Unit group II: Use in all other areas which can be endangered by explosive atmospheres.
- **Unit categories**
  1 – Extremely high degree of safety.
  2 – High degree of safety.
  3 – Normal degree of safety.
  The categories in unit group II are followed by the letters G for gases and D for dust.
- The explosion-proof fans by Helios correspond to unit group II, category 2G or 3G (see product-specific info) for operation in zone 1 or 2 and they meet the essential health and safety requirements when professionally installed.
- All binding information can be found on the motor type plate. This also includes the tE time for the motor protection circuit breaker according to DIN EN 60079-0 / VDE 0170 / 0171 or DIN EN 60079-10-1 / VDE 0165-101.
- The relevant regulations must be observed for connection.
- Special designs, abnormal voltages, ignition protection types "d", "pressure-resistant enclosures" are possible on request.
- Vibration monitoring is required for certain types according to DIN EN 14986.

Ignition protection type ②

- Designation:
  "e" – Increased safety
  "d" – Press.-resist. enclosure
  "de" – Press.-resist. enclosure with subgroup "e"
  "c" – Constructional safety
  "h" – Constructional safety acc. DIN EN ISO 80079-36/-37
  Ignition protection type "e" or "de" is normally used for fan motors with connection boxes.
- **Explosion group ②**
  Additional subdivisions:
  I = firedamp protection or
  II = explosion protection.
  The explosion groups are divided into IIA, IIB and IIC. The hazard level of the gases increases from IIA to IIC. For example, operating equipment which is approved for IIB can also be used for explosion group IIA. In accordance with EN 14986, fans may only be operated with gases from explosion groups IIA and IIB (except hydrogen H2 from explosion group IIC, provided the fan type plate has the marking IIB+H2).

Ignition temp., surface temp. and temperature classes ②, ③

- The ignition temp. ③, i.e. the temperature at which heat ignition can occur, e.g. due to a hot equipment surface, depends on the type of occurring gases or vapours. The max. surface temp. of el. equipment must always be lower than the ignition temp. of the gas or vapour mixture in which it is used (DIN EN 60079-0 / DIN EN 60079-10-1).
- In order to easily identify and select electrical equipment in unit group II with regard to its max. surface temp., multiple temp. classes are distinguished. Accordingly, the gases can be allocated to these classes by their ignition temperature. Equipment in a higher temp. class (e.g. T5) is also permitted for applications in lower temp. classes (e.g. T2, T3).
- The temperature class, the maximum permissible surface temp, and ignition temp. can be found in the relevant tables ②, ③.
- The temperature class is marked on the respective catalogue page; binding information can be found on the motor type plate.

Operation

- Explosion-proof motors in ignition protection type "e" (increased safety) do not have thermal contacts. Explosion-proof duct fans, roof fans, high-performance axial fans and VAR fans with higher output are equipped with PTC thermistors.

① Zoning, unit groups and unit categories

Flamm. substance	Zone DIN EN 60079-10-1	Explanations	Unit group	Unit category
Gases, vapours, mist	Zone 0	Areas in which hazardous explosive atmospheres are present constantly or long term.	II	1G
	Zone 1	Areas in which it is expected that hazardous explosive atmospheres occur occasionally.	II	1G or 2G
	Zone 2	Areas in which it is expected that hazardous explosive atmospheres occur only rarely and then only briefly.	II	3G, 2G or 1G
Dust	Zone 20	Areas in which hazardous explosive atmospheres are present long-term or frequently	II	1D
	Zone 21	Areas in which it is expected that hazardous explosive atmospheres occur occasionally due to whirling up of deposited dust.	II	2D or 1D
	Zone 22	Areas in which hazardous explosive atmospheres do not normally occur in the form of flammable dust in the air, or only briefly.	II	3D

② Safety-related figures for flammable gases and vapours Ignition temperature, temperature class, explosion group

Substance name	Ignition temp. °C	Temperature class				Explosion group		
Acetaldehyde	155				T4	II A		
Acetone	535	T1				II A		
Acetylene	305		T2					II C
Ethane	515	T1				II A		
Ethyl acetate	470	T1				II A		
Ethyl ether	175				T4		II B	
Ethyl alcohol	400		T2				II B	
Ethyl chloride	510	T1				II A	II B	
Ethylene	440		T2				II B	
Ethylene oxide	435 auto-degrad.		T2				II B	
Ethyl glycol	235			T3			II B	
Ammonia	630	T1				II A		
i-Amyl acetate	380		T2			II A		
Benzine, petrol Initial boiling point < 135 °C	220 to 300			T3		II A		
Industrial spirit Initial boiling point > 135 °C	220 to 300			T3		II A		
Benzene (pure)	555	T1				II A		
Benzene (pure)	555	T1				II A		
n-Butane	365		T2			II A		
n-Butyl alcohol	325		T2				II B	
Cyclohexanone	430		T2			II A		
1.2-Dichlorethane	440		T2			II A		
Diesel DIN 51601/04.78	220 to 300			T3		II A		
Jet fuel	220 to 300			T3		II A		
Acetic acid	485	T1				II A		
Acetic anhydride	330		T2			II A		
Heating oil EL DIN 51603 part 1/12.81	220 to 300			T3		II A		
Heating oil L DIN 51603 part 2/10.76	220 to 300			T3		II A		
Heating oil M and S DIN 51603 part 2/10.76	220 to 300			T3		II A		
n-Hexane	230			T3		II A		
Carbon monoxide	605	T1				II A		
Methane	595	T1				II A		
Methanol	440		T2			II A		
Methyl chloride	625	T1				II A		
Naphthaline	540	T1				II A		
Oleic acid	250 auto-degrad.			T3			**	
Phenol	595	T1				II A		
Propane	470	T1				II A		
n-Propyl alcohol	385		T2				II B	
Carbon disulphide	95				T6			II C
Hydrogen sulphide	270			T3			II B	
City gas (illuminating gas)	560	T1					II B	
Tetralin (Tetrahydronaphthaline)	390		T2			**		
Toluene	535	T1				II A		
Hydrogen	560	T1						II C

* Extract from "Safety-related figures" tables, vol. 1: Flammable liquids and gases, Physikalisch-Technische Bundesanstalt, Brunswick, by E. Brandes/W. Möller. ISBN 3-89701-745-8.
** The explosion group for this substance has not yet been determined.

③ Temperature class, surface temp. and ignition temperature

Temperature class	Max. permissible surface temperature of equipment	Ignition temp. of flammable substances
T1	450 °C	> 450 °C
T2	300 °C	> 300 °C
T3	200 °C	> 200 °C
T4	135 °C	> 135 °C
T5	100 °C	> 100 °C
T6	85 °C	> 85 °C

④ Marking acc. to EN ISO 80079-36



- Technically perfect solutions are of the utmost importance for Helios. Experience and the consistent further development of ideas and processes mean that Helios products are appreciated around the globe.
  The company's continuous research and development is represented in its wide product range, which is the basis for advanced solutions. Helios is also your partner of choice for custom-made products.
  The combination of state-of-the-art technology with high quality requirements and exemplary design results in major product advantages, such as
- Economical operation due to the high degree of efficiency. Fans and motors are optimally coordinated with each other.
- Maximum reliability, under even the harshest conditions, due to bath impregnation, double-sealed bearings, multiple quality controls, etc.
- Easy performance adjustment through good control characteristics for transformer or electrical speed control.
- Exemplary, aerodynamic design of unit components.
- The Helios fans are among the "quiet runners" due to their low sound values.
- Easy installation and handling, maintenance-free operation, electrical and mechanical safety provide optimal benefits for installers and operators.

Use and operation of fans

This requires attention to operational influencing factors as well as serviceability and performance, because these have an influence on electrical and mechanical safety.
Before using a fan and accessories, the task and the resulting operating conditions must be aligned with the suitability of the fan. Improper use is not compatible with the specified performance features, safety-critical and therefore impermissible.

Motors

Fan motors occupy a special position. For this reason, Helios itself develops and manufactures a variety of AC motors and especially controllable motors. This guarantees optimal adaptation to special fan drive requirements. The consistent result is special drives which meet the respective requirements of the fan type.

For example, this guarantees:
- Excellent controllability.
- Low current consumption.
- Low maintenance.
- Trouble-free continuous operation, even under harsh conditions.
- Design according to the relevant standards, such as DIN EN 60034 / VDE 0530-1 and DIN EN 60335-1 / VDE 0700-1.

Helios motor design
- Casings made of aluminium or grey cast iron, completely enclosed, with cooling fins, Protection category: see info on type page.
- Bearings: Maintenance-free (due to sufficient lubricant supply for service life) and dust-tight due to lip seal. Lubrication for temperature range from –40 to +140 °C.
- Moisture-protected winding (tropicalised) as standard in at least insulation material class B.

- When using other motor brands, the design complies with the relevant standards and guidelines and depends on the manufacturer. Deviating specifications upon request.

Performance data

Technical information (power, noise, etc.) provided according to DIN 24166 Technical terms of delivery for fans Accuracy class 2 or 3, DIN 44974, pt.1-3 Electric household fans, DIN EN 60335-1 / VDE 0700-1.

Flow rate

The pressure increase and volume flow can be found in the performance curves on the product pages or the selection tables.

- The performance data is determined on chamber test rigs according to DIN EN ISO 5801. The **volume flow** $\dot{V}$, **pressure increase** Δp_{fa} in the installation type A (free intake, free discharge) are measured.
  The **total pressure increase** Δp_{tot} in the installation type A (free intake, free discharge) are measured p_d.

- Round duct fans and rectangular duct fans are measured with inlet nozzles and downstream pipe or duct pieces with the approximate length of the hydraulic diameter. In case of deviating installation conditions (barriers, bends, etc.), a reduction in performance must be expected.

- The presented **performance curves** refer to an air density ρ = 1.2 kg/m³ and the speed specified in the graph (rated speed). The actual speeds of individual fan types may vary and they can be found in the assigned tables. The specified flow velocity c and the dynamic pressure p_d refer to the respective outlet cross-section (pipe, duct cross-section).

Electrical performance data

The type tables show the voltage, frequency, power consumption, total input power or rated motor power, protection category and a reference to the necessary wiring diagram.
The information refers to standard operating conditions (Density ρ = 1.2 kg/m³, Temperature T = 20 °C, mains frequency 50 Hz).
The actual values may vary within the permissible tolerances due to operational or environmental factors. The information on the rating plate of the unit used is definitive for the electrical system design.
In case of deviating environmental conditions, especially low temperatures, increased current and power values must be expected. This must be taken into account when designing the electrical power supply (cables, contactors, protection devices).
In case of doubt, please contact us.

Noise data

Information on noise emissions is specified in the performance curves and type tables as A-weighted sound power levels and/or sound pressure levels at a specified distance (normally 1 m or 4 m). The sound pressure levels are valid for noise radiation under free field conditions and they are influenced by different radiation conditions. The values refer to the design described in the "Performance data" section and they comply with DIN 24166. Different installation conditions and disrupted inlet or outlet flows may result in considerable noise increases.

The **sound pressure level** perceived by the human ear at a certain distance from the noise source is always less than the sound power level and it depends on the distance from the noise source and the environmental conditions.

Electrical connection

The type table shows the wiring diagram to be used for the connection; it is included with every fan. Every fan must be connected according to the relevant provisions and local regulations and have all-pole protection against overloading, phase failure, etc. at all speeds with a motor protection circuit breaker or using built-in thermal contacts and a motor protection device.
The information on the rating plate is definitive for the selection of a motor protection circuit breaker.
Non-compliance with these provisions can result in malfunctions and release us from any warranty claims.

Classification of air filters – VDMA guideline

According to DIN EN 779	According to DIN EN ISO 16890			
	Coarse	ePM10	ePM2.5	ePM1
G1	—	—	—	—
G2	30 % – 50 %	—	—	—
G3	45 % – 65 %	—	—	—
G4	60 % – 85 %	—	—	—
M5	80 % – 95 %	40 % – 70 %	10 % – 45 %	5 % – 35 %
M6	> 90 %	45 % – 80 %	20 % – 50 %	10 % – 40 %
F7	> 95 %	80 % – 90 %	50 % – 75 %	40 % – 65 %
F8	> 95 %	90 % – 100 %	75 % – 95 %	65 % – 90 %
F9	> 95 %	90 % – 100 %	75 % – 95 %	65 % – 90 %

M5 to F9 based on Eurovent Recommendation 4/23 (2017).
DIN EN ISO 16890 has superseded standard EN 779:2012 in Germany and Europe.
Filter classes G (for coarse filters), M (for medium filters) and F (for fine filters) are affected.
The most important differences from EN 779 are the consideration of a broader particle spectrum, the division into groups with additional specification of filtration efficiency instead of classes, the consideration of the minimum filtration efficiency and the use of test aerosols instead of synthetic ASHRAE test dust.

Motor protection for AC motors

All **1~ motors** are equipped with thermal contacts as standard. These are partly wired in series to the winding and partly to the terminal block.
The majority of **controllable 3~ motors** (except explosion-proof versions) are also equipped with external thermal contacts.

- **Motors with thermal contacts whose connections are made to the terminal block**
  Motor protection circuit breakers (see accessories) or so-called triggering devices must be used for correct connection. These must be connected to the stranded wires marked with "TK" in accordance with the wiring diagram. In case of an impermissibly high winding temperature increase (e.g. caused by tight bearings, blocking of the impeller, insufficient cooling, excessively high air flow temperature, 2-phase operation), the circuit breaker will disconnect the motor from the mains power supply. The motor must be recommissioned through manual activation. In case of recurrence, the cause of the fault must be determined. This solution offers comprehensive motor protection, even in control mode. It requires the motor to be equipped with "external" thermal contacts. Most Helios 1~ and 3~ fans are equipped with these as standard (see type table information). It is usually possible at an extra charge for other types.
- **Motors with thermal contacts "connected in series"**
  The majority of low power Helios 1~ fans (see type table information) are equipped with thermal contacts which are internally wired to the winding. These react to impermissible temperature increases in the motor and break the circuit. They automatically reactivate after cooling down. The thermal contact response indicates the existence of a cause of a fault (sluggishness, contamination, excessive air flow temperature). This cause must be determined and eliminated before further operation.
- **Motors with built-in PTC thermistors**
  These motors are preferred for higher outputs with rapid temperature increases and difficult operating conditions. In order to guarantee comprehensive protection, every winding phase should be equipped with a PTC thermistor temperature sensor (upon order at an extra charge; comes as standard for higher power explosion-proof rectangular duct fans and roof fans as well as high-performance axial fans and VAR fans. See type table information). These sensors are temperature-dependent resistors. Their resistance increases sharply once the nominal response temperature is reached. A special triggering device (Type MSA, see accessories) must be used for their connection.
- **Motors without thermal overload protection**
  These motors can be protected by overcurrent motor protection circuit breakers with bimetal relays. These are installed in the mains supply line. However, this solution does not protect speed-controlled fans against impermissibly high air flow temperatures and insufficient motor cooling. Every speed must be adequately protected for pole-changing motors.

Air flow temperatures

The standard version can be used in the range from –30 °C to at least +40 °C, but also higher in the short term (except explosion-proof fans). Versions for higher continuous temperatures are specified in the type tables or possible in the area of custom production.

- **Control mode**
  Speed-controlled operating mode causes higher motor self-heating. The max. air flow temperature specified in the type table should be reduced by 10 °C, if necessary.

Flow medium

The standard version is designed to transport normally contaminated, non-aggressive and normally humid air. In case of different operating conditions, please contact us.

Contact protection

Some fans are equipped with protection grilles according to DIN EN 60335-1 / VDE 0700-1 or DIN EN ISO 13857. Additional protection devices may be necessary depending on the installation conditions. The installers and operators are responsible for complying with safety regulations.
The applicable occupational safety and accident protection guidelines as well as contact protection according to DIN EN ISO 13857 must be observed during installation. Contact with rotating parts must be prevented. It must be ensured that there are no loose substances in the intake area. Fans which are protected by their installation type (e.g. installation in ventilation duct or closed aggregates) do not require a protection grille if the system provides sufficient safety. Please note that the installer can be held liable for accidents as the result of the lack of protection devices. Suitable protection grilles are available as accessories.

Explosion protection according to Directive 2014/34/EU (ATEX)

- Helios explosion-proof fans are delivered in line with the requirements of Directive 2014/34/EU.
- Helios explosion-proof fans are suitable for:
  - operation in potentially explosive atmospheres.
  - transporting potentially explosive gas, vapour and air mixtures.
- The declaration of conformity enclosed with the explosion-proof products confirms compliance with the requirements according to ATEX Directive 2014/34/EU.
- The standard motors in our explosion-proof fans correspond to ignition protection type "e" (increased safety). Use in zone 1 and 2. Unit group II, category 2G and 3G.
- The mechanical parts of the explosion-proof fans meet the requirements of DIN EN 14986.
- The motor protection circuit breaker must be selected and configured according to VDE 0165, DIN EN 60079-0 or DIN EN 60079-10-1.
  The t_E time can be found on the motor type plate.
- Speed control is only permissible for specific types in connection with the triggering device MSA.
- Depending on the selected motor brand, the electrical data may vary from the catalogue information on the product page. The type plate data must be requested for designing potential control units.
- Special versions, abnormal voltages and ignition protection type "d" (pressure-resistant enclosure) are possible upon request.

IP protection categories

These categories determine the protection against the intrusion of solid objects (1st clause) or the ingress of water (2nd clause):

- IPX**4** – Protection against spray water from any direction.
- IPX**5** – Protection against jet water from a nozzle from any direction.
- IP**4**X – Protection against solid foreign objects > 1 mm.
- IP**5**X – Moderate protection against dust.

Test marks – Approvals

Helios units have a high quality standard and their designs comply with national and international standards. They also comply with the provisions of the German Machine Safety Law and those of the trade associations. Various products are subject to third-party production monitoring by the TÜV, VDE and the Research and Material Testing Institute of Baden-Württemberg, Otto Graf Institute. Accordingly, various unit series have the following marks:

	VDE approval from VDE test centre
	SEV mark of conformity, Switzerland
	Test mark of the Austrian Electrotechnical Association
	DEMKO safety mark of the Danmarks Elektriske Materielkontrol
	SEMKO safety mark of the Svenska Elektriska Materialkontrollanstalten
	NEMKO safety mark of the Norges Elektriske Materiellkontroll
	M.E.E.I. safety mark of the MAGYAR ELEKTROTECHNIKAI ELLENORZO INTEZET, Hungary
	Safety mark of the STAVEBNIHO INZENYRSTVI, Czech Republic
	Safety mark of the DRŽAVNI ZAVOD ZA NORMIZACIJU I MJERITELJSTVO Republic of Croatia
	Safety mark of the Instituts Ukrmetrteststandard, Ukraine
	Safety mark of the Federal Association for Agricultural Employer's Liability Insurance
	Production monitoring mark of the Material Testing Institute Stuttgart University and TÜV SÜD
	Technical approval from the German Institute for Structural Engineering
	Explosion protection according to ATEX Directive
	EU – Conformity mark
	Protection category IPX4
	Protection category IPX5
	Protection class II

Design

The innovation and functionality in relation to the product design of various Helios fans are confirmed by:

DESIGN AWARD 2021

reddot design award winner 2008

GERMAN DESIGN AWARD WINNER 2021

Power control by AC motor speed change
The demand for power control for ventilation systems and air conditioning systems is based on several factors.
- To meet comfort requirements.
- To guarantee an operating mode that adapts to changing requirements (change in room occupancy, air deterioration, temperature change, etc.).
- To perform economical operations.

Fan power control by speed control represents the best solution in terms of energy requirements and noise levels. The impeller power requirement reduces by the cube of the speed, i.e. when the speed is halved, the power requirement drops to one eighth of the value at full speed.

$$\frac{P_L}{P_{L,0}} = \left(\frac{n}{n_0}\right)^3$$

The power reduction amount left as energy cost savings is strongly dependent on the characteristics of the drive motor and the speed control unit.

Helios motor characteristics are specifically adapted to the power requirement of the impeller. This guarantees optimal efficiency levels in rated load operation and control mode.

Control units
One or more fans (until the max. rated current is reached) can be operated with the available speed control units. The maximum possible current for control (see type table information) must be taken as a basis when dimensioning instead of the rated motor current. In case of doubt, there should be 20 % reserve capacity.

Frequency inverter
There are four different frequency inverter series in the following versions "Basic", "Basic Sine", "Comfort" and "Comfort Sine" for controlling the speed of 3~ motors. All frequency inverters are specifically adapted to the properties of the Helios fans. When using different brands, specific fan versions are required (please contact us). The "Basic" frequency inverter types are designed for easy speed control in connection with speed potentiometers (accessories) or for speed control in connection with electronic control units (accessories). With regard to the "Comfort" series, the control parameters are set via a display and operating keys, or even more conveniently via the integrated Modbus. They are equipped with a full-featured controller for controlling temperature, pressure and air velocity, and the required sensors are available as accessories. The frequency inverter capability shall be specified when ordering the fan for product series without sine filters.
FU "Basic" and FU "Comfort" are suitable for the operation of an individual frequency inverter-capable fan, and the shielded cable length between the frequency inverter and fan should not exceed 10 metres.
"Basic Sine" and "Comfort Sine" are suitable for the parallel operation of multiple fans in series (up to max. current) and they do not require additional EMC measures in the customer-side wiring.
The use of third-party controller brands can lead to functional problems and motor/controller defects.
When using such units (not approved by Helios), any warranty and liability claims shall be void.

Electronic speed control units, which function on the basis of the phase control principle, can generate motor humming noises which may be perceived as disturbing in the lower speed/voltage range. Transformer control units which do not generate noise should therefore be used in noise-critical applications.

Comparison of different control concepts
1. Speed control
2. Throttling or bypass
3. Activation/deactivation
4. Guide/rotor blade adjustm.

The adjacent diagram shows the major advantages of controlling the speed in comparison to other solutions commonly used in practice.
Helios fans are power-controllable through voltage reduction, frequency conversion or pole-changeable motors with two speeds. The suitable unit ranges are offered as accessories on the "MCR Measure – Control – Regulate" pages.

Fan parameter behaviour during speed control
Another advantage of speed control lies in the distinct noise reduction. The noise level reduction can be up to

$$\Delta L \approx 50 \text{ Lg} \left(\frac{n}{n_0}\right) \text{dB}$$

(n0: rated speed)

and it is thus particularly suitable for the night operation of ventilation and air conditioning units.

Example: When the speed is halved, the noise level reduces by up to 15 dB.
The diagram schematically shows how the volume flow, pressure loss, power requirement and noise level parameters behave during speed control.

Speed-controllable types are marked as such on the product pages. Suitable speed control units can be found in the type table. Models which are not approved for control mode may only be operated at rated speed.

Warranty conditions, delivery conditions, guarantee
The warranty period is 12 months from the delivery date. The scope of the warranty is defined in the Helios delivery conditions. Changes made to the units, interference or non-compliance with the relevant Installation and connection provisions shall release Helios from any warranty obligations.
All information in this catalogue is entirely non-binding and can be changed without prior notice.

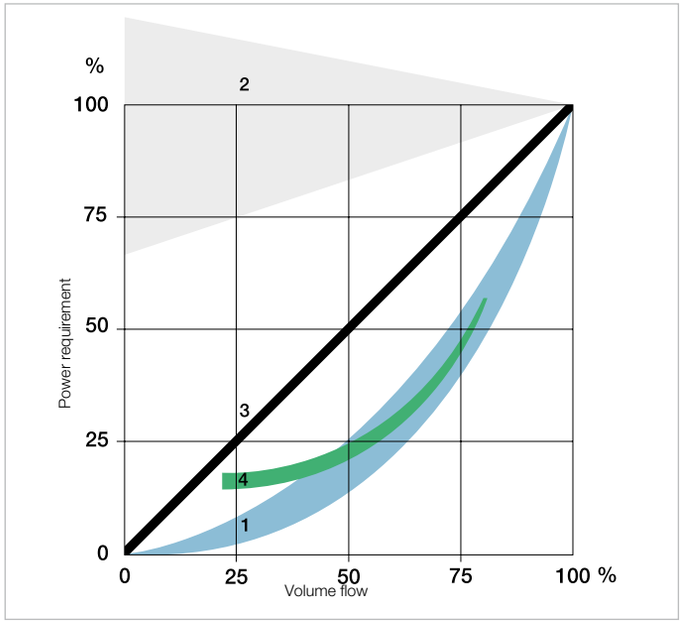

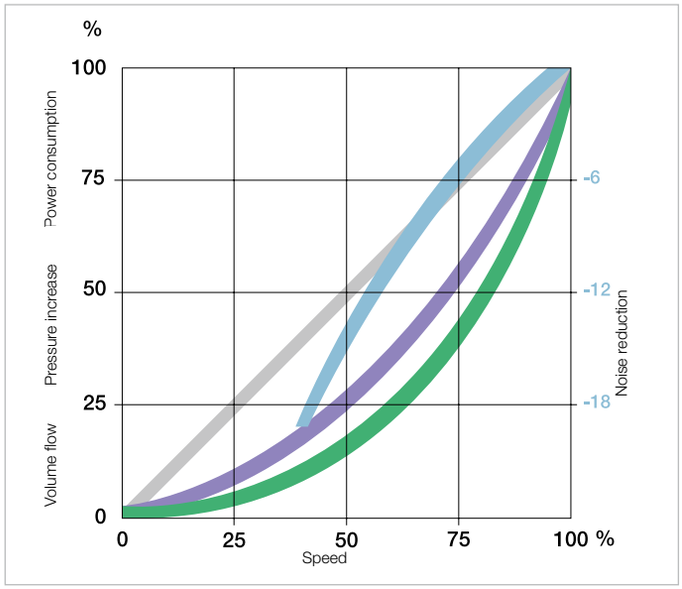

EC technology

EC technology

EC drive technology is increasingly used in fan technology, since EC motors (EC = electronically commutated) offer significant advantages in comparison to AC drives (AC = alternating current).
An AC motor runs according to its number of pole pairs and mains frequency (normally 50 Hz) and the resulting static rotating field depending on slip.

Example for a 2-pole motor, 50 Hz:
50 Hz x 60 sec. / pole pair
– 5 % slip
= 2850 revolutions / min.

- In contrast, the EC drive is a brushless direct current motor, designed as an external rotor motor. With regard to this motor type, the magnetic field is generated by a ring-shaped permanent magnet in the rotor. The laminated stator core with the coils is (unlike conventional collector motors) fixed to the motor bearing cover and does not rotate. The angular position of the permanent magnet in the rotor is detected by three hall sensors and evaluated by electronics integrated in the motor. Based on the angular position of the rotor and the desired direction of rotation, the corresponding coils are energised by the electronics to generate the required torque. The entire process takes place without wear and tear and spark formation. Thanks to the commutation, there is no wear on the motor and the ball bearing is the only remaining wear part. Permanent magnets form the magnetic poles and the mains frequency is of no importance in this respect. Depending on the desired maximum speed, the motor winding is alternately powered with a defined switching frequency.
- This means that continuously variable, almost linear control is possible over the entire speed range (see Figure 1).

Figure 1
Speed control



Figure 2
Efficiency



Figure 3
Energy consump. in control mode



- The use of modern, energy-efficient EC drive technology results in significantly higher fan efficiencies (see Fig. 2), since there are almost no losses due to iron, copper and slip in EC motors.
- EC fans are also wear-free and maintenance-free and they are characterised by low-noise operation.
  EC motors make no brush noises whatsoever and they are virtually silent (except for low air flow noises). The disrupting magnetisation humming made by AC motors is eliminated. The end result is that EC motors are always quieter than comparable collector motors.

Energy conservation

Ventilation technology fans are usually designed for the "worst case" scenario. I.e. the fans are designed for the maximum expected flow rate. However, this operating condition is very rare in practice.
Ventilation and air conditioning systems are normally demand-oriented. The ventilation requirement is determined based on various parameters (e.g. air temperature, humidity, CO_2 content, etc.) and the required supply air volume flow is derived from these parameters. In concrete terms, the fans must therefore be reduced to partial load operation using control or regulating devices.

- Due to its significantly higher motor efficiency, the EC fan has considerable energy-related benefits in full-load operation in comparison to its AC counterpart. These are even more obvious in partial load operation. While the EC motor losses remain almost the same even at reduced speeds, the AC motor losses increase considerably at lower speeds.
- With regard to specific applications, EC motors have considerable energy-saving potential and thus the potential for operating cost-savings due to their improved partial load performance.
- Thanks to the energy-efficient EC technology, energy savings of more than 50 % are achieved in speed-controlled operation in comparison to conventional AC technology (see Figure 3). Overall, it should be noted that the necessary control and regulating devices for EC technology have considerably lower investment costs.

Controllability / Partial load performance

- The advantages of EC technology are obvious, particularly in partial load operation. While standard AC motors can be controlled by step transformers or phase control in partial load, the control components for EC motors are already integrated in the commutation electronics. This means only one 0-10 V control signal (speed potentiometer) is required for speed control.
- The electronics integrated in the motor enables additional control variants such as pressure or volume flow stabilisation control. Cost-effective universal control units are available for this purpose. The EC motor is set apart by its almost proportional performance curve, % voltage = % speed, and conversely the AC motor is significantly less favourable.
  With regard to controllability, AC motors are improved by so-called "softening".
  A "soft AC motor" is a synonym for a motor with high slip (speed difference between stator and rotor). However, a simultaneous reduction in motor efficiency caused by the optimisation of controllability must be taken into account.

Advantages of EC technology

- Maximum efficiency levels, especially in control mode.
- Up to 30% energy savings in full-load operation and more than 50% in partial load operation.
- Short amortisation.
- Continuously variable, almost linear control behaviour.
- Simple and cost-effective control using speed potentiometer.
- Integrated control electronics (0–10 V signal) save on lossy, expensive solutions such as transformer or phase control.
- Integrated electronic temperature monitoring.
- Low-noise, smooth operation without magnetisation humming.
- Universally applicable for the mains voltage range 200–270 V or 380–480 V as well as in 50 Hz and 60 Hz mains networks.

Performance curve

EC fan control is continuously variable using a simple potentiometer or through continuously variable speed control with a universal control system. For example, the performance curve shows the performance levels depending on the control voltage (e.g. 2, 4, 6, 8, 10 V). Due to the continuously variable controllability, any operating point within the performance diagram is possible. With regard to the free blowing (without system resistances) operating state (except high-performance axial fans), the details for speed (n), (power consumption (P), current consumption (A), sound pressure level (Lp) and specific fan power (SFP) are specified for the respective control voltage below each EC performance curve in table form. With regard to high-performance axial fans, the max. current and max. power consumption are specified.

Cost-effectiveness analysis

In terms of investment costs, ventilation units with AC motors offer a cost advantage which refers exclusively to the fan. As soon as the normally required speed control is included in the analysis, the supposed advantage is quickly balanced out again:

- AC motors are often speed-controlled using more expensive transformer speed controllers or frequency inverters.
- On the other hand, with regard to EC fans, the mains voltage is connected directly to the motor on site and converted to a corresponding DC voltage by the electronics integrated in the motor. Only one control signal (0-10 V) from the setpoint adjuster is required to control the speed. Inexpensive potentiometers are therefore used as field devices.
- When comparing the total cost of all necessary ventilation investment components, not only do they balance each other out, the cost advantage very often lies with the EC technology.
- Due to its advantages in terms of efficiency in full-load operation and especially in partial load operation, the EC motor is primarily suitable for installation for long operating periods and changing operating states.
- The following example using the H.. series illustrates the operating cost advantage of EC technology (see table 1: Cost-effectiveness analysis).
  Figure 1 and figure 2 show the electrical power consumption for free blowing operation. Figure 1 represents full-load operation (1400 min-1), figure 2 represents partial load operation (700 min-1).
  Speed is shown on the X axis. The power consumption in Watts is shown on the Y axis on the left. The Y axis on the right shows the benefit of EC in comparison to AC in Euros/year with the corresponding partial load and the specified boundary conditions.

Table 1: Cost-effectiveness analysis

	AC Type H.. W 500/4	EC Type H.. EC 500 B	Saving
Operating mode 1	Full load 100 %	Full load 100 %	
Electrical power consumption W	525	424	
Operating hours p.a. (at 4h/day)	1460	1460	
Energy consumption kWh/a	767	619	148 kWh/a
Elec. costs p.a. (0.27 Euro/kWh)	207.09 Euros	167.13 Euros	39.96 Euros p.a.
Saving in % p.a.			**19.3 %**
Operating mode 2	Partial 50 % (140 V)	Partial 50 % (5 V)	
Electrical power consumption W	289	57	
Operating hours p.a. (at 8h/day)	2920	2920	
Energy consumption kWh/a	844	166	678 kWh/a
Elec. costs p.a. (0.27 Euro/kWh)	227.88 Euros	44.82 Euros	183.06 Euros p.a.
Saving in % p.a.			**80.3 %**
Mixed operation 1 + 2	Mixed operation	Mixed operation	
Energy consumption kWh/a	1611	785	826 kWh/a
Elec. costs p.a. (0.27 Euro/kWh)	434.97 Euros	211.95 Euros	223.02 Euros p.a.
Saving in % p.a.			**51.3 %**

Performance curve GBD EC 560

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	69	60	67	58	57	56	55	49
L_{WA}	Inlet-side	dB(A)	79	61	71	73	74	72	66	60
L_{WA}	Outlet-side	dB(A)	84	65	74	79	80	75	70	62

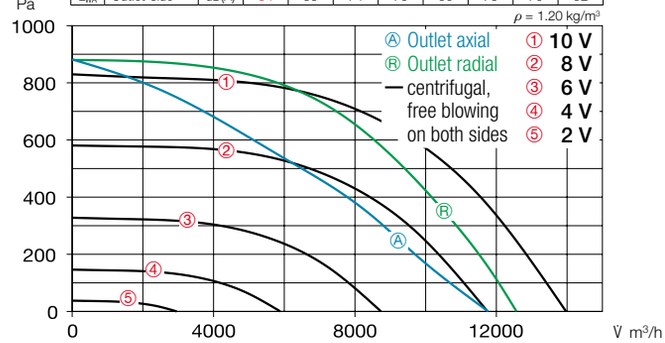

	Free blowing					
Voltage V	**n** min-1	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1400	13370	1847	2.90	49	0.49
8	1150	11030	1030	1.70	46	0.34
6	930	9030	578	1.00	43	0.23
4	710	6810	281	0.55	39	0.15

Figure 1: Full-load operation

Calculation based on the following boundary conditions:
Flow rate free blowing. Operation 4 h/day, 365 days/year = 1460 h/year
Electricity rate 0.27 Euros/kWh

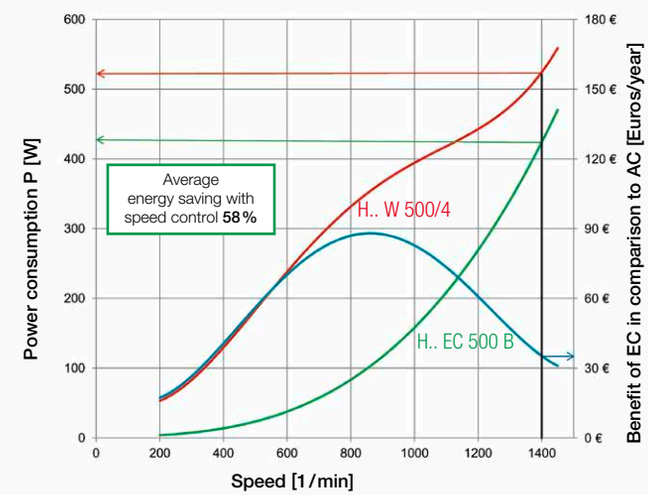

Figure 2: Partial load operation

Calculation based on the following boundary conditions:
Flow rate free blowing. Operation 8 h/day, 365 days/year = 2920 h/year
Electricity rate 0.27 Euros/kWh

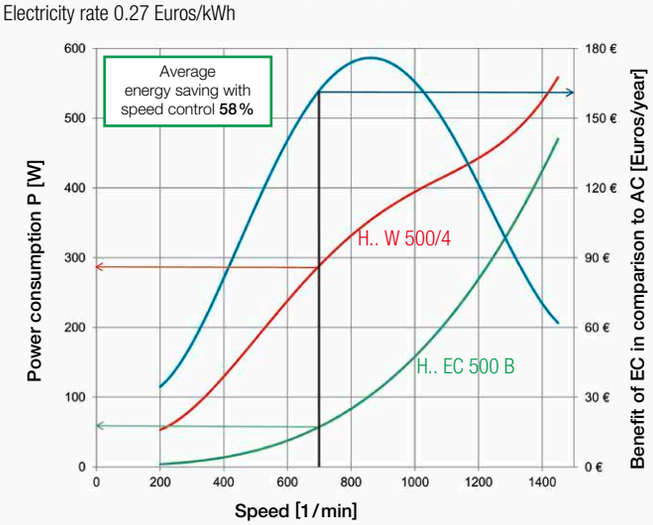

Small room fans.
Premium design with high energy efficiency.

MiniVent® M1 with ultraSilence® technology.

Watertight building envelopes and contaminating environmental influences make mechanical ventilation indispensable nowadays. The traditional ventilation of an apartment or workplace by opening the window is no longer an effective solution and it wastes valuable energy.

The MiniVent M1 small room fans offer high pressure performance, low noise levels and high energy efficiency. Two performance levels, jet water protection IPX5 and high-quality long-life ball bearings are standard equipment features with clear added value.

The minimalist premium design stands out in any room with understated elegance. Developed and manufactured in Germany, MiniVent stands for quality and reliability.

EC

In addition to MiniVent, Helios offers a wide range of fans for the supply and extract ventilation of living rooms and smaller commercial spaces. The units impress with innovative design and meet the highest technical requirements.

- **Fans for wall installation, ceiling installation and window installation**

Also available in version: EC

26ff

- **Centrifugal fans with outlet connectors Ø 100 mm**

32

- **Inline fans**

36

- **External wall extract air fans**

38f

- **Window fans**

Also available in version: EC

40f

- **Ceiling fans**

42

- **Heater fans**

43

- **Controlled domestic ventilation systems**

44ff

designed and made in germany

ultraSilence Technology by Helios

M1/100 and M1/100 black

Dim. M1/100 - M1/100 black



Fan curve M1/100 - M1/100 black



Premium class small room fans. The design and performance of the MiniVent M1/100 set new standards in the field of compact fans.

With its multi-award-winning design, MiniVent M1/100 blends in harmoniously in all environments. Even on the darkest tiles thanks to the deep black design version. The same applies to both models: The enclosed, well-designed facade completely prevents viewing of the fan clogging zone.

All M1/100 models come with 2 performance levels and tight-closing backdraught shutters as standard.

The noise level is extremely low thanks to Helios ultraSilence technology.

Available with turn-off delay mode and interval mode or barrier-free automatic functions, such as the presence detector or humidity control function. The humidity control function responds to the rate of humidity increase with intelligent electronics and effectively prevents mould formation.

Universally applicable for the ventilation of bathrooms, WCs and other small rooms.

Features

- Extremely low power consumption of just 5 Watts at V̇ = 75 m³/h.
- Ultra quiet thanks to ultraSilence technology; just 25 dB(A) at V̇ = 75 m³/h.
- Pressure performance: 60 m³/h volume flow at 31 Pa resistance. 90 m³/h free blowing, ΔP max. 45 Pa.
- In case of restricted space conditions, the M1/100 guide wheel can be easily removed. This reduces the installation depth from 96 to just 52 mm.
- Compact dimensions for universal flush-mounted installation in walls, shafts and ceilings with NW 100.
- All parts are made of high-quality plastic, colour: alpine white or deep black (RAL 9005).
- Ball bearings and motor are designed for continuous loads, constant output and lifelong functional reliability.
- Motor with thermal overload protection, maintenance-free and radio interference-free.
- Applicable in wet room zone 1 according to DIN VDE 0100-701.
- Electrical supply line can be surface or flush-mounted.
- Practical quick installation due to screwless connection terminals.

Type	M1/100	M1/100 black	M1/100 N/C	M1/100 N/C black	M1/100 F	M1/100 F black	M1/100 P	M1/100 P black
Ref. no.	06171	40770	06172	40771	06175	40772	06174	40773
Version	Standard model with two speed levels		Like M1/100, with codeable turn-off delay & interval model[1]		Like M1/100, with humidity control function[1) 4)]		Like M1/100, with presence detector[1)]	
Colour	alpine white	deep black	alpine white	deep black	alpine white	deep black	alpine white	deep black
Turn-off delay time, min. optional at high or low level	—		6, 10, 15, 21 adjustable		6, 12, 18, 24 adjustable[3)]		6	
Interval mode, hours optional at high or low level	—		0, 8, 12, 24 adjustable		—		—	
Start-up delay approx. sec.	—		0, 45, 90, 120		0 or 45[3)]		—	
Inner shutter, removable	Yes		Yes		Yes		Yes	
Flow rate free blowing m³/h	90 / 75		90 / 75		90 / 75		90 / 75	
Impeller Ø mm	92		92		92		92	
Speed min⁻¹	2650 / 2250		2650 / 2250		2650 / 2250		2650 / 2250	
Voltage / Frequency 50 Hz	230 V		230 V		230 V		230 V	
Power consumption W	9 / 5		9 / 5		9 / 5		9 / 5	
Rated current A	0.06 / 0.04		0.06 / 0.04		0.06 / 0.04		0.06 / 0.04	
Sound pressure level dB(A) at 3 m[2)]	30 / 25		30 / 25		30 / 25		30 / 25	
Wiring diagram no.	915		917		919		918	
Electrical supply line NYM-O in mm²	3 x 1.5		4 x 1.5		4 x 1.5		3 x 1.5	
Protection class II, protection category	IP45		IP45		IP45		IP45	
Max. air flow temperature	+40 °C		+40 °C		+40 °C		+40 °C	
Weight approx. kg	0.80		0.80		0.80		0.80	

1) All electronic functions optionally adjustable at high or low performance level. 2) Free field conditions. 3) For manual operation. 4) Limit value 60, 70, 80, 90 % adjustable.

Beautiful and clean

Air flows into the M1 from all sides. The front facade is completely closed and elegantly conceals the bothersome clogging zone in conventional compact fans.
The M1 blends in harmoniously in all environments. The smooth-surfaced front facade always remains easy to maintain and clean.

Wall mounting kit

WES 100 Ref. no. 00717

Two telescoping plastic ducts serve as the wall/feed duct; for flush-mounted installation.
External wall connection possible in two ways:
a) Frame with three blades as an automatic shutter.
b) Use of the frame with fixed grille. All parts made of high-quality plastic.



Intelligent humidity control function

The humidity control function of type M1/100 F.. automatically activates the fan depending on the humidity increase rate. The turn-off delay time depends on the room humidity reduction. In case of constantly high humidity, the fan will automatically switch to interval mode.

Telescopic wall sleeve

TWH 100 Ref. no. 06352

Like WES, but without shutter and grille.



Rapid connection

The electrical connection is enormously facilitated by a generously dimensioned, circumferential cable storage space on the back of the unit, the full rotatability of the casing and screwless terminals.
Long-life ball bearings for 40.000 operating hours allow installation in any position, even directly in the ceiling.

Operating and speed switch 0-1-2 for standard model

MVB Ref. no. 06091

With functions On/Off, low and high speed.

Load capacity	3 A (ind.)
Voltage	230 V, 1~, 50/60 Hz
Protection category	IP 30
Installation	in standard flush-mounted box
Dimensions mm	W 80 x H 80 x D 15
Weight approx.	0.1 kg

Mounting panel

MBR 90/160/300 Ref. no. 00281

Made of high-quality, impact-resistant plastic, colour: alpine white. Ideal for use in renovations.
All M1/100 models can be easily installed in existing, rectangular shaft openings with the mounting panel.
The panel can be fully painted or wallpapered in order to hide it.



Flexible installation depth

The removeable guide wheel reduces the installation depth from 96 to 52 mm. Installation possible with or without backdraught shutters.

Mounting flange

MF 100 Ref. no. 06188
MF 100 black Ref. no. 40817

For installation depth reduction in case of thin walls, narrow shafts and short bends. Also suitable for the installation of a drawcord switch (accessories). If required, multiple MF 100 can be connected to each other. Available in white and black.



Applicable in wet room zone 1

MiniVent M1/100.. complies with jet water protection IPX5, insulation protection class II and may be used in zone 1 according to DIN VDE 0100-701.

Installation possible in zone 1 (according to DIN VDE 0100-701).



Accessory details	Page
Flexible ventilation ducts, roof outlets and ventilation grilles	563 ff.
Intake air elements	588 ff.

M1/120

Dimensions M1/120



Performance curve M1/120



Premium class small room fans. The design and performance of the MiniVent M1/120 set new standards in the field of compact fans.

With its multi-award-winning design, the MiniVent M1/120 blends in harmoniously in all environments. The enclosed, well-designed facade completely prevents viewing of the fan clogging zone.

All M1/120 models come with 2 performance levels and tight-closing backdraught shutters as standard.

The noise level is extremely low thanks to Helios ultraSilence technology.

Available with turn-off delay mode and interval mode or barrier-free automatic functions, such as the presence detector or humidity control function. The humidity control function responds to the rate of humidity increase with intelligent electronics and effectively prevents mould formation.

Universally applicable for the ventilation of small to medium-sized rooms in private, commercial and industrial buildings.

Features

- Extremely low power consumption of just 10 Watts at V̇ = 150 m³/h.
- Ultra quiet thanks to ultraSilence technology; just 32 dB(A) at V̇ = 150 m³/h.
- Pressure performance: 120 m³/h volume flow at 31 Pa resistance. 170 m³/h free blowing, ΔP max. 53 Pa.
- In case of restricted space conditions, the M1/120 guide wheel can be easily removed. This reduces the installation depth from 116 to just 70 mm.
- Compact dimensions for universal flush-mounted installation in walls, shafts and ceilings with NW 120/125.
- All parts are made of high-quality plastic, colour: alpine white.
- Ball bearings and motor are designed for continuous loads, constant output and lifelong functional reliability.
- Motor with thermal overload protection, maintenance-free and radio interference-free.
- Applicable in wet room zone 1 according to DIN VDE 0100-701.
- Electrical supply line can be surface or flush-mounted.
- Practical quick installation due to screwless connection terminals.

Type	M1/120	M1/120 N/C	M1/120 F	M1/120 P
Ref. no.	06360	06361	06364	06363
Version	Standard model with two speed levels	Like M1/120, with codeable turn-off delay & interval model[1]	Like M1/120, with humidity control function[1] [4]	Like M1/120, with presence detector[1]
Turn-off delay time, min. optional at high or low level	—	6, 10, 15, 21 adjustable	6, 12, 18, 24 adjustable[3]	6
Interval mode, hours optional at high or low level	—	0, 8, 12, 24 adjustable	—	—
Start-up delay approx. sec.	—	0, 45, 90, 120	0 or 45[3]	—
Inner shutter, removable	Yes	Yes	Yes	Yes
Flow rate free blowing m³/h	170 / 150	170 / 150	170 / 150	170 / 150
Impeller Ø mm	111	111	111	111
Speed min⁻¹	2350 / 2050	2350 / 2050	2350 / 2050	2350 / 2050
Voltage / Frequency 50 Hz	230 V	230 V	230 V	230 V
Power consumption W	13 / 10	13 / 10	13 / 10	13 / 10
Rated current A	0.09 / 0.08	0.09 / 0.08	0.09 / 0.08	0.09 / 0.08
Sound pressure level dB(A) at 3 m[2]	36 / 32	36 / 32	36 / 32	36 / 32
Wiring diagram no.	915	917	919	918
Electrical supply line NYM-O in mm²	3 x 1.5	4 x 1.5	4 x 1.5	3 x 1.5
Protection class II, protection category	IP45	IP45	IP45	IP45
Max. air flow temperature	+40 °C	+40 °C	+40 °C	+40 °C
Weight approx. kg	1.05	1.05	1.05	1.05

[1] All electronic functions optionally adjustable at high or low performance level. [2] Free field conditions. [3] For manual operation.
[4] Limit value 60, 70, 80, 90 % adjustable.

Beautiful and clean

Air flows into the M1 from all sides. The front facade is completely closed and elegantly conceals the bothersome clogging zone in conventional compact fans.
The M1 blends in harmoniously in all environments. The smooth-surfaced front facade always remains easy to maintain and clean.

Intelligent humidity control function

The humidity control function of type M1/120 F automatically activates the fan depending on the humidity increase rate. The turn-off delay time depends on the room humidity reduction. In case of constantly high humidity, the fan will automatically switch to interval mode.

Rapid connection

The electrical connection is enormously facilitated by a generously dimensioned, circumferential cable storage space on the back of the unit, the full rotatability of the casing and screwless terminals.
Long-life ball bearings for 40.000 operating hours allow installation in any position, even directly in the ceiling.

Flexible installation depth

The removeable guide wheel reduces the installation depth from 116 to 70 mm. Installation possible with or without back-draught shutters.

Applicable in wet room zone 1

MiniVent M1/120 complies with jet water protection IPX5, insulation protection class II and may be used in zone 1 according to DIN VDE 0100-701.

Installation possible in zone 1 (according to DIN VDE 0100-701).

Wall mounting kit

WES 120 Ref. no. 00486

Two telescoping plastic ducts serve as the wall/feed duct. The external wall connection is carried out by using the frame with blades as an automatic shutter.



Telescopic wall sleeve

TWH 120 Ref. no. 06353

Like WES, but without shutter.



Operating and speed switch 0-1-2 for standard model

MVB Ref. no. 06091

With functions On/Off, low and high speed.

Load capacity	3 A (ind.)
Voltage	230 V, 1~, 50/60 Hz
Protection category	IP 30
Installation	in standard flush-mounted box
Dimensions mm	W 80 x H 80 x D 15
Weight approx.	0.1 kg



Accessory details	Page
Flexible ventilation ducts, roof outlets and ventilation grilles	563 ff.
Intake air elements	588 ff.

M1/150

Dimensions M1/150



Performance curve M1/150



* low level
--- Example performance levels of 0-10 V type with continuously variable control

Premium class small room fans. The design and performance of the MiniVent M1/150 set new standards in the field of compact fans. With its multi-award-winning design, the M1/150 blends in harmoniously in all environments. The enclosed, well-designed facade completely prevents viewing of the fan clogging zone. All M1/150 models come with high efficiency EC drive technology, with 2 performance levels or continuously variable and tight-closing backdraught shutters as standard. The noise level is extremely low thanks to Helios ultraSilence technology. Available with turn-off delay mode and interval mode, continuously variable speed control or barrier-free automatic functions, such as the humidity control function. The humidity control function responds to the rate of humidity increase with intelligent electronics and effectively prevents mould formation. Universally applicable for the ventilation of medium-sized rooms in private, commercial and industrial buildings.

Features

- Extremely low power consumption of just 6 Watts at V̇ = 220 m³/h.
- Ultra quiet thanks to ultraSilence technology; just 35 dB(A) at V̇ = 220 m³/h.
- Pressure performance: 180 m³/h volume flow at 31 Pa resistance. 260 m³/h free blowing, ΔP max. 33 Pa.
- In case of restricted space conditions, the M1/150 guide wheel can be easily removed. This reduces the installation depth from 142 to just 76 mm.
- Compact dimensions for universal flush-mounted installation in walls, shafts and ceilings with NW 150/160
- All parts are made of high-quality plastic, colour: alpine white.
- Ball bearings and motor are designed for continuous loads, constant output and lifelong functional reliability.
- Motor with thermal overload protection, maintenance-free and radio interference-free.
- Applicable in wet room zone 1 according to DIN VDE 0100-701.
- Electrical supply line can be surface or flush-mounted.
- Practical quick installation due to screwless connection terminals.
- The 0-10 V type offers a wide range of applications in combination with CO_2, VOC or temperature sensors. The min./max. speed is fully adjustable and continuously variable control via potentiometer is also possible. Control takes place via three level switches or continuously variably via universal control systems or electronic differential pressure/temperature controllers.
A potential-free relay outlet is available as standard for the connection of an electrical shutter.

Type	M1/150	M1/150 N/C	M1/150 F	M1/150 0-10 V
Ref. no.	06041	06042	06043	06044
Version	Standard model with two speed levels	Like M1/150, with codeable turn-off delay & interval model[1]	Like M1/150, with humidity control function[1) 4)]	Continuously variable control
Turn-off delay time, min., optional at high, low or both levels	—	6, 10, 15, 21 adjustable	6, 12, 18, 24 adjustable[3]	6
Interval mode, hours, optional at high, low or both levels	—	0, 8, 12, 24 adjustable	—	—
Start-up delay approx. sec.	—	0, 45, 90, 120	0, 45, 90, 120[3]	—
Inner shutter, removable	Yes	Yes	Yes	Yes
Flow rate free blowing m³/h	260 / 220	260 / 220	260 / 220	260-50
Impeller Ø mm	137	137	137	137
Speed min⁻¹	1900 / 1600	1900 / 1600	1900 / 1600	1900 -980
Voltage / Frequency 50 Hz	230 V	230 V	230 V	230 V
Power consumption W	8 / 4.5	8 / 5	9 / 6	9 / min. 3.5
Rated current A	0.08 / 0.06	0.10 / 0.09	0.08 / 0.06	0.08 / 0.035
Sound pressure level dB(A) at 3 m[2]	39 / 35	39 / 35	39 / 35	max. 39
Wiring diagram no.	1080	1081	1082	1083
Electrical supply line NYM-O in mm²	3 x 1.5	4 x 1.5	4 x 1.5	2 x 1.5[5]
Protection class II, protection category	IP45	IP45	IP45	IP45
Max. air flow temperature	+40 °C	+40 °C	+40 °C	+40 °C
Weight approx. kg	1.20	1.20	1.20	1.20

1) All codeable times and electronic functions optionally adjustable at high, low or both performance levels.
2) Free field conditions.
3) For manual operation.
4) Limit values from 40-90 % continuously variably adjustable.
5) Additional connection cable provided for relay output.

Beautiful and clean

Air flows into the M1 from all sides. The front facade is completely closed and elegantly conceals the bothersome clogging zone in conventional compact fans.
The M1 blends in harmoniously in all environments. The smooth-surfaced front facade always remains easy to maintain and clean.

Wall mounting kit

WES 150 Ref. no. 00537

Two telescoping plastic ducts serve as the wall/feed duct; for flush-mounted installation.
External wall connection possible in two ways:
a) Frame with three blades as an automatic shutter.
b) Use of the frame with fixed grille. All parts made of high-quality plastic.



Intelligent humidity control function

The humidity control function of type M1/150 F automatically activates the fan depending on the humidity increase rate. The turn-off delay time depends on the room humidity reduction. In case of constantly high humidity, the fan will automatically switch to interval mode.

Telescopic wall sleeve

TWH 150 Ref. no. 06354

Like WES, but without shutter and grille.



Rapid connection

The electrical connection is enormously facilitated by a generously dimensioned, circumferential cable storage space on the back of the unit, the full rotatability of the casing and screwless terminals.
Long-life ball bearings for 40.000 operating hours allow installation in any position, even directly in the ceiling.

Operating and speed switch 0-1-2 for standard model

MVB Ref. no. 06091

With functions On/Off, low and high speed.

Load capacity	3 A (ind.)
Voltage	230 V, 1~, 50/60 Hz
Protection category	IP 30
Installation	in standard flush-mounted box
Dimensions mm	W 80 x H 80 x D 15
Weight approx.	0.1 kg

Speed switch for M1/150 N/C and M1/150 F

DSEL 2 Ref. no. 01306

With functions On/Off, low and high speed.

Load capacity	3 A (ind.)
Voltage	230 V, 1~, 50/60 Hz
Protection category	IP 30
Installation	in standard flush-mounted box
Dimensions mm	W 80 x H 80 x D 15
Weight approx.	0.1 kg

Flexible installation depth

The removeable guide wheel reduces the installation depth from 142 to 76 mm. Installation possible with or without back-draught shutters.



Speed potentiometer for M1/150 0-10 V

With functions On/Off, continuously variable speed control.

PU 10 Ref. no. 01734

For flush-mounted installation.

Installation	in standard flush-mounted box
Dim. mm	W 80 x H 80 x D 21 protru.

PA 10 Ref. no. 01735

For surface-mounted installation.

Casing	Surface installation
Dimensions mm	W 80 x H 80 x D 65

Applicable in wet room zone 1

MiniVent M1/150 complies with jet water protection IPX5, insulation protection class II and may be used in zone 1 according to DIN VDE 0100-701.

Installation possible in zone 1 (according to DIN VDE 0100-701).



Accessory details	Page
Flexible ventilation ducts, roof outlets and ventilation grilles	563 ff.
Intake air elements	588 ff.
Universal control system, Speed potentiometer	615 ff.
Five-step speed switch	610

HR 90 KE

Dimensions HR 90 KE



Performance curve HR 90 KE



High-quality mini fans with electrical inner shutter.
The shutter blades behind the facade open and close completely silently and automatically when the fan is activated/deactivated. This ensures a rattle-free intake air connection when the fan is at a standstill. The design with long-life ball bearings ensures maintenance-free operation, low-noise running and it allows installation in any position.

Designed to be unobtrusive, the HR 90 KE fits in any room environment. The upward facing blades prevent viewing of the fan clogging zone. Universally applicable for the ventilation of bathrooms, WCs and other small rooms.

Highlights

- Smooth running and functionally reliable, even in continuous operation.
- Maintenance, relubrication and cleaning are unnecessary. The ball bearings have a lubricant supply which is adequate for their entire service life of approx. 30.000 operating hours.
- The noise-tested long-life ball bearings guarantee lifelong smooth running without any disturbing squeaking, even under the most difficult operating conditions.
- The ball bearings and motor are designed for continuous loads, constant output and lifelong functional reliability.
- Applicable in wet room zone 1 according to DIN VDE 0100-701.
- Flush-mounted installation in Rohre und Schächte mit NW 100.
- Applicable practically anywhere due to short installation depth and small dimensions.
- Attractive softline design in pleasant white.
- All casing parts made of high-quality plastic.
- Contact protection according to DIN EN ISO 13857.
- Motor with thermal overload protection, maintenance-free and radio interference-free, for continuous operation.
- Electrical supply line can be surface or flush-mounted.
- Practical quick installation due to screwless terminals for electrical connection.
- Plug claw connection for insertion in ducts 100 mm or screw fastening in larger openings.

Type	HR 90 KE	HR 90 KEZ
Ref. no.	00334	00335
Built-in turn-off delay switch[1], Turn-off delay time approx. 2-8 min.	—	Yes [2]
Electrical inner shutter	Yes	Yes
Flow rate free blowing m³/h [3]	95	95
Impeller Ø mm	93	93
Speed min⁻¹	2550	2550
Voltage / Frequency 50/60 Hz	230 V	230 V
Power consumption W	17	20
Rated current A	0.12	0.14
Sound pressure level dB(A) at 1 m	44	44
Wiring diagram no.	483	484
Protection class II, protection category	IP45	IP45
Max. air flow temperature	+40 °C	+40 °C
Weight approx. kg	0.60	0.62

[1] Initiates start-up delay of approx. 1 min. [2] NYM-O 3 x 1.5 mm² required. [3] Calculated with outlet side duct, length 2 x D.

Reference

HR 90 K 12 V –
with safety extra-low voltage
upon request

Mini fans HR 90 KE especially for ceiling installation

Ball bearing mounted fans are best suited for vertical installation in the ceiling.
The mounting flange MF 90 (accessories) prevents the ingress of condensate into the fans from vertical pipes.

Screwless installation

HR 90 KE have screwless terminals for electrical connection.
The facade can be quickly attached due to a snap-in mechanism. Side spring clips facilitate installation in ducts with NW 100.

Applicable in wet room zone 1

The HR 90 KE models comply with protection category IP X5 (jet water protection) and may be used in zone 1 according to DIN VDE 0100-701.



Installation possible in zone 1 (according to DIN VDE 0100-701).

Installation in any position

HR 90 KE is equipped with electrical inner shutter and high-quality long-life ball bearings as standard.
This allows wall and ceiling installation in any position – vertical, horizontal or diagonal.



Test marks



Wall mounting kit

WES 90 Ref. no. 00717

Two telescoping plastic ducts serve as the wall/feed duct; for flush-mounted installation.
External wall connection possible in two ways:
a) Frame with three blades as an automatic shutter.
b) Use of the frame with fixed grille. All parts made of high-quality plastic.



Telescopic wall sleeve

TWH 90 Ref. no. 06352

Like WES, but without shutter and grille.



Window mounting kit

FES 90 Ref. no. 00462

For the installation of HR 90 KE models in single and double glazed windows, thin walls and panels.
Possible pane / wall thickness 1 to 40 mm. External cover with flat rain-repellent grille just 29 mm thick.
Drawcord operation. Protection category IP20.



Mounting panel

MBR 90/160/300 Ref. no. 00281

Made of high-quality, impact-resistant plastic, colour: alpine white.
Ideal for use in renovations.
HR 90 KE models can be easily installed in existing, rectangular shaft openings with the mounting panel.
The panel can be fully painted or wallpapered in order to hide it.



Mounting flange

MF 90 Ref. no. 00819

Areas of application:
1. Required for ceiling installation. MF prevents the ingress of condensate into the fan from vertical extract air ducts.
2. For the simple installation of connection cables in case of an inconvenient wall outlet, because the fan is raised from the wall by 23 mm.
3. For the simple installation of the fan in narrow shafts. In case of 90° bend with a short duct connection, the MF reduces the installation depth of the fan.
4. In case of installation in thin walls, the installation depth of the fan can be reduced as follows: To 35 mm with 1 mounting flange.
   To 7 mm with 2 mounting flanges.
   Colour: Alpine white.



Accessory details	Page
Flexible ventilation ducts, roof outlets and ventilation grilles	563 ff.
Intake air elements	588 ff.
Speed controllers, controllers & turn-off delay switches	601 ff.

HVR 150

Dimensions HVR 150



Performance curve HVR 150



HelioVent wall and window fans are suitable for the ventilation of small to medium-sized rooms in private, commercial and industrial buildings.

The standard equipment with ball bearings guarantees:

- Installation in any position.
- Smooth running and functional reliability in continuous operation.
- Quiet and maintenance-free operation over the entire service life.

Features

- Ventilation grille can be removed without tools and easily cleaned in a water bath.
- Low installation depth prevents potential installation problems.
- Versatile installation in walls, ceilings or shafts in any position.
- Flow rate adjustment through continuously variable, electronic speed control.
- Motor protection through integrated thermal contacts.

Description

The unit blends in harmoniously in all room environments. All parts, including the fan casing and impeller, made of high-quality plastic. Facade: white. Visual operation indicator through built-in indicator lights. High pressure and volume performance due to 8-bladed high performance impeller and an additional inlet guide wheel.
Enclosed motor with low-noise ball bearings for continuous operation. Installation possible in any position. Maintenance-free and radio interference-free. Contact protection according to DIN EN ISO 13857.
Electrical supply line can be surface or flush-mounted.

Window mounting kit

FES 150 Ref. no. 00463

For the installation of all models, preferably types with electrical inner shutter. Installation in single and double glazed windows, thin walls and panels. Protection category IP20.
External cover with flat rain-repellent grille with fixed blades. Operation via supplied drawcord or remote on-site switch.

Wall mounting kit

WES 150 Ref. no. 00537

For flush-mounted wall installation; consisting of: Two wall telescoping plastic ducts and the external wall connection. This can be installed as an automatic shutter or with a rain-repellent grille for HVR E models. Both elements are included in delivery.

Telescopic wall sleeve

TWH 150 Ref. no. 06354

Like WES, but without shutter and grille.





Accessory details	Page
Roof outlets and ventilation grilles	563 ff.
Intake air elements	588 ff.
Speed controllers, controllers & turn-off delay switches	601 ff.

Type	HVR 150/4 E	HVR 150/2 E	HVR 150/2 RE
Ref. no.	00283	00285	00286
Electrical inner shutter	Yes	Yes	Yes
Reversible (supply and extract ventilation)	—	—	**DSEL 2**[1] Ref. no. 01306
Flow rate free blowing m³/h	180	260	360
Impeller Ø mm	140	140	140
Speed min⁻¹ ca.	1290	1800	2600
Voltage / Frequency	230 V~ / 50 Hz	230 V~ / 50 Hz	230 V~ / 50 Hz
Power consumption W	30	35	50
Rated current A	0.20	0.15	0.25
Sound pressure level dB(A) at 1 m	46	58	64
Wiring diagram no.	283	283	284.1
Protection class II, protection category	IP44	IP44	IP44
Max. air flow temperature	+40 °C	+40 °C	+40 °C
Weight approx. kg	1.2	1.4	1.5

[1] NYM-O 3 x 1.5 mm² required for reverse operation.

HelioVent® HV 200/250
Flush-mounted wall fan

HV 200 / HV 250

Drilling distance: HV 200 □239 mm / HV 250 □288 mm

Dimensions HV 200 / HV 250



Charac. curve HV 200 / HV 250



HelioVent wall fans fit in every room atmosphere thanks to their timeless design:
In living rooms and dining rooms, offices and conference rooms, restaurants or foyers.

Universally applicable. For supply and extract ventilation (reversible). Installation in walls or ceilings, even in an inclined position.

HelioVent at a glance

Compact, low-noise fan unit with clever design features:

- HelioVent fits in unobtrusively in all environments.
- No view of the contaminated fan openings.
- High performance and low air noise due to low flow resistances.
- Ideal for maintenance. Facade can be removed with one hand. Easy to clean in a water bath.

Installation – connection

Installation is very easy and completed in minutes. The electrical connection is convenient. Reliable plug-in terminals and large cable storage space simplify the process. The supply line can be flush-mounted or surface-mounted.

Speed control

Possible in the range from 0–100 % using voltage reduction via electronic or transformer control units.

Accessory details	Page
Roof outlets and ventilation grilles	563 ff.
Intake air elements	588 ff.
Speed controllers, controllers & turn-off delay switches	601 ff.

Description

- Room-side facade and fan casing made from high-quality and impact-resistant plastic in alpine white.
- Powerful capacitor motor with high level of efficiency. Fully enclosed. Corrosion-proof in die-cast aluminium casing, protected against dust and water (protection category IP54). Winding with humidity protection through bath impregnation in ISO class B.
- Protected against overloading by built-in thermal contact (automatically reactivating).
- Noise-tested ball bearings ensure quiet running.
- The large terminal box (protection category IP55) and huge cable storage space facilitate connection work.
- Profiled high-performance impeller with high efficiency ensures low-noise operation.
- Radio interference-free and maintenance-free.
- Contact protection according to DIN EN ISO 13857 guaranteed by room-side facade.
- Service and connection-friendly.

Installation in wall or ceiling



Installation in thin panels



Type	HV 200/4 R	HV 250/4 R
Ref. no.	00957	00958
Reversible (supply and extract ventilation)	Yes	Yes
Flow rate free blowing m³/h	450	840
Impeller Ø mm	200	250
Speed min⁻¹	1360	1380
Voltage / Frequency	230 V~ / 50 Hz	230 V~ / 50 Hz
Power consumption W	30	40
Rated current A	0.13	0.20
Sound pressure level dB(A) at 15 Pa at 1 m distance (free field conditions)	52	55
Sound power dB(A)	60	63
Wiring diagram no.	439	439
Protection category	IP54	IP54
Max. air flow temperature	+40 °C	+40 °C
Weight approx. kg	2.1	2.6

Accessories Description	Fan type	HV 200	HV 250
Feed duct for flush-mounted wall installation	Type Ref. no.	WER 200 00368	WER 250/225 00369
Shutter for extract air operation	Type Ref. no.	VK 200 00758	VK 250 00759
Shutter for supply and extract ventilation	Type Ref. no.	GVK 200 00370	GVK 250 00371
Reversing switch for supply and extract ventilation	Type Ref. no.	DSEL 2 [1] 01306	DSEL 2 [1] 01306
Reversing switch with speed controller continuously variable	Type Ref. no.	BSX 00240	BSX 00240
Speed controller flush-mounted	Type Ref. no.	ESU 1 00236	ESU 1 00236
Speed controller surface-mounted	Type Ref. no.	ESA 1 00238	ESA 1 00238

[1] NYM-J 4 x 1.5 mm² required for reverse operation.

REW 90 K

REW 150/2

REW 200

Dimensions REW 90 K



Dim. in mm

Dimensions REW 150/2



Dim. in mm

Dimensions REW 200



Dim. in mm

Performance curve REW 90 K



Performance curve REW 150/2



Performance curve REW 200



Description REW 90 K

Suitable for insertion in ducts with NW 100. Casing made of high-quality, impact-resistant plastic with integrated guide apparatus. Profiled high-performance impeller with 5 blades made of plastic. Motor with thermal overload protection for continuous operation with maintenance-free, lifetime lubricated ball bearings. Terminal box at rear of the motor for electrical connection.

Description REW 150/2

Suitable for insertion in ducts with NW 150. Casing made of high-quality, impact-resistant plastic with integrated guide apparatus. Profiled high-performance impeller with 8 blades made of plastic. Motor with thermal overload protection for continuous operation with maintenance-free, lifetime lubricated ball bearings, reversible, for continuous operation. Terminal box at rear of the motor for electrical connection.

Description REW 200

Suitable for insertion in ducts with NW 200. Casing with two outward-facing reinforcing beads made of galvanised steel sheet. Profiled impeller with 7 blades made of plastic. Enclosed motor with thermal overload protection for continuous operation and die-cast aluminium casing. Tropicalised winding with humidity protection. Ball bearing mounted, maintenance and radio interference-free; reversible. Term. box on motor.

Use options

Versatile axial fans for delivering small to medium volume flows against low resistances.
Unit can be used for room ventilation, air circulation, cooling, drying, etc.

Installation

Unit can be installed in any position. The flow direction depends on the installation position. Suitable for insertion or interpositioning in pipes.
In this context, note possible pressure performance and resistances.
In case of higher resistances, use centrifugal inline fans.
Electrical connection at rear of the motor. During installation makes sure that the fan remains accessible for inspection.

Type	REW 90 K	REW 150/2	REW 200/4	REW 200/2
Ref. no.	00441	00440	07504	07505
Reversible (supply and extract ventilation)	No	**DSEL 2** [1] No. 01306	**DSEL 2** [2] No. 01306	**DSEL 2** [2] No. 01306
Flow rate free blowing m³/h	105	330	550	930
Impeller Ø mm	93	140	200	200
Speed min⁻¹	2320	2100	1350	2280
Voltage / Frequency	230 V~ / 50 Hz	230 V~ / 50 Hz	230 V~ / 50 Hz	230 V~ / 50 Hz
Power consumption W	15	29	30	60
Rated current A	0.10	0.13	0.13	0.26
Sound pressure level dB(A) at 1 m	45	56	43	56
Wiring diagram no.	479	478	439	439
Protection category	IP55	IP44	IP54	IP54
Max. air flow temperature	+40 °C	+40 °C	+40 °C	+40 °C
Weight approx. kg	0.5	1.5	2.0	2.5

[1] NYM-O 3 x 1.5 mm² required for reverse operation. [2] NYM-J 4 x 1.5 mm² required for reverse operation.

Accessories
for REW 90, 150 and 200

Electronic turn-off delay timer
ZNE Ref. no. 00342
With continuously variable overrun times from 0 to 21 min. Startup delay (45 sec.), optional activation. Activation via on/off switch, e.g. together with light. Miniature construction with minimum dimensions. For installation in flush-mounted box behind switch. 230 V, I max. 0.8 A (ind.), I min. 0.05 A. IP40.

Electronic interval switch
ZNI Ref. no. 00343
with adjustable interval and turn-off delay periods
Automatic ventilation in adjustable time intervals (4, 8, 12 or 24 hrs.), provided there is no manual activation within the time phase. In case of manual activation (e.g. activation via light switch), there will be an overrun between 0 and 21 minutes, continuously variable. For installation in flush-mounted box behind switch. 230 V, I min. 0.05 A, I max 0.8 A (ind.). IP40.

Disc valve
For air extract at high and low flow velocities and resistances.
KTV, KTVA
Plastic disc valve for extract air
MTVA
Metal valve for extract air

Fixed grille
For covering of ventilation openings.
G 100, G 160, G 200
Made out of impact resistance plastic.

Shutter
Gravity operated shutter.
VK 100, VK 160, VK 200
Made from plastic.

Accessories
for REW 150 and 200

Electronic speed controller
ESU 1 Ref. no. 00236
For flush-mounted installation. Front and rotary knob made of white plastic. Installation in standard flush-mounted box. Operation indicator via light ring.

Max. load	1 A
Minimum load	0.15 A
Protection category (installed)	IP30
Wiring diagram no.	556.1
Dim. mm	W80 x H80 x D21 prot.

Electronic speed controller
ESA 1 Ref. no. 00238
For surface-mounted installation. White plastic casing, operation indicator via light ring in rotary knob.

Max. load	1 A
Minimum load	0.15 A
Protection category	IP40
Wiring diagram no.	556.1
Dim. mm	W 80 x H 80 x D 65

Speed controller with reverser
BSX Ref. no. 00240
Surface-mounted speed controller with reverser for reversible fans (supply and extract ventilation) in white plastic casing. Only for fans which are reversible using a changeover switch.

Max. load	1 A (T 40 E)
Minimum load	0.15 A
Protection category	IP40
Wiring diagram no.	480.2
Dim. mm	W 80 x H 80 x D 65

Speed switch
DSEL 2 Ref. no. 01306
With functions On/Off, low and high speed.

Load capacity	3 A (ind.)
Voltage	230 V, 1~, 50/60 Hz
Protection category	IP 30
Installation	in standard flush-mounted box
Dimensions mm	W 80 x H 80 x D 15
Weight approx.	0.1 kg

Accessory details	Page
Flexible ventilation ducts, roof outlets and ventilation grilles	563 ff.
Extract, supply, intake air elements and disc valves	576 ff.
Speed controllers, controllers & turn-off delay switches	601 ff.

AV

Dimensions AV 100 / AV 125



Dim. in mm

Dimensions AV 150 / AV 200



AV 150, *AV 200

Dim. in mm

Designed for external wall installation for the ventilation of all small and medium-sized rooms. Suitable for a number of applications in residential, commercial and industrial buildings.

Powerful, efficient centrifugal fans allow the connection of duct systems and overcome resistances from filters and system components. The unit is the ideal solution for the extract ventilation of domestic kitchens because the annoying noises from extraction hoods are minimised. This also applies for other applications and the connection of duct systems because the fan noise moves outside. Ideal for retrofitting in renovations and conversions.

Special features

- No disturbing fan noises inside the rooms due to external wall installation.
- Easy and cost-effective installation through anchoring of the operational unit.
- Weatherproof casing. Tight-closing shutter blades with spring return.
- Connectors according to standard duct Ø for connection to wall duct or duct system.
- Solid base plate made of plastic also allows installation on uneven surfaces.
- Electrical supply line can be flush-mounted from behind or surface-mounted from the side.

Casing

- Waterproof cover hood made of galvanised steel sheet, powder-coated, alpine white.
- Outlet-side bird protection grille and two shutter blades with spring return.

Power control

All models come with three power levels as standard. Continuously variable with electronic controllers or 5 step transformers.

Drive

Enclosed, ball bearing mounted motor with humidity protection, insulation class F, for continuous operation, maintenance-free and radio interference-free.

Motor protection

Motor protected by thermal overload protection in the winding.

Impeller

Energy-efficient centrifugal impeller with backward curved blading made of plastic, dynamically balanced.

Note

The fan may only be commissioned if impeller contact protection according to DIN EN ISO 13857 is provided.

Noise

The total level and range for the sound power level are specified above the performance diagram. The sound pressure at 3 m (free field conditions) is also specified in the type table.

Reference	Page
Speed controllers, controllers & turn-off delay switches	601 ff.

Type	Ref. no.	Connection Ø	Max. flow rate	Max. speed	Max. sound press. level case-radiated	Voltage 50 Hz	Max. power consumption	Max. current consumption	Wiring diagram	Max. air flow temperature	Weight net approx.	Transformer speed controller 5-step	
		mm	V̇ m³/h	min⁻¹	dB(A) at 3 m	Volt	W	A	No.	+ °C	kg	Type	Ref. no.
AV 100	02654	100	310/150/70	2710/2050/1190	46/38/26	230	55/28/13	0.24/0.13/0.05	1386	60	4.6	**TSW 1.5**	01495
AV 125	02655	125	360/170/80	2471/1510/930	45/38/25	230	54/26/13	0.24/0.12/0.06	1386	60	4.6	**TSW 1.5**	01495
AV 150	02656	150	620/330/210	2520/1520/1070	50/43/33	230	100/57/40	0.44/0.25/0.18	1386	55	8.3	**TSW 1.5**	01495
AV 200	02657	200	680/350/240	2530/1970/1450	51/37/35	230	100/53/40	0.44/0.23/0.18	1386	55	8.3	**TSW 1.5**	01495

Performance curve AV 100

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise Level ①	dB(A)	64	40	57	60	59	53	46	38
L_{WA}	Air noise Level ②	dB(A)	56	34	45	51	51	48	41	33
L_{WA}	Air noise Level ③	dB(A)	44	43	30	31	33	23	22	21

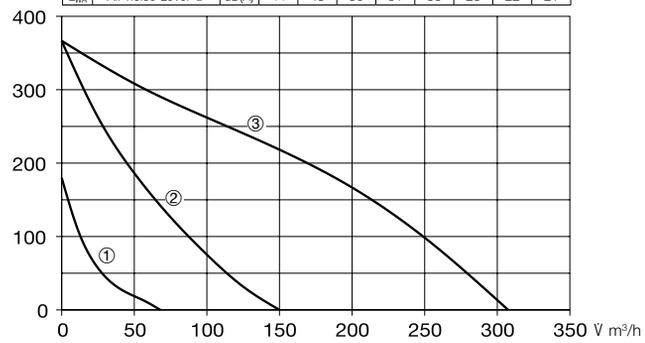

Performance curve AV 125

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise Level ①	dB(A)	63	40	59	58	56	55	47	40
L_{WA}	Air noise Level ②	dB(A)	56	34	46	50	51	49	40	37
L_{WA}	Air noise Level ③	dB(A)	43	40	32	37	30	23	21	20

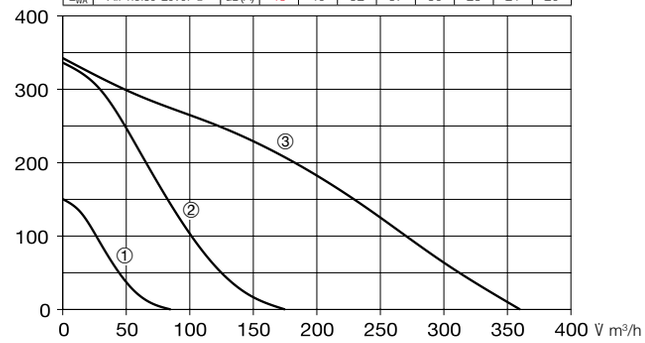

Performance curve AV 150

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise Level ①	dB(A)	68	54	60	63	61	59	51	40
L_{WA}	Air noise Level ②	dB(A)	61	41	51	58	54	54	44	35
L_{WA}	Air noise Level ③	dB(A)	51	47	41	47	39	28	26	25

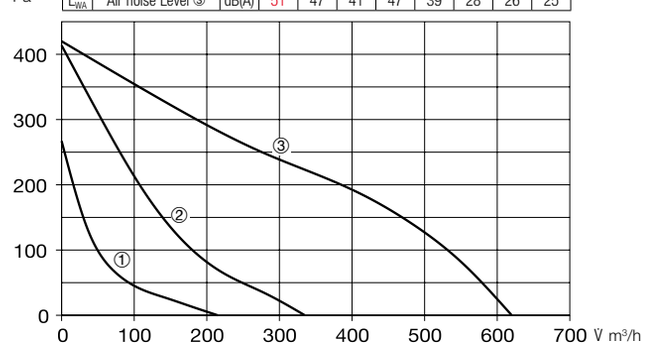

Performance curve AV 200

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise Level ①	dB(A)	69	55	60	64	62	62	53	42
L_{WA}	Air noise Level ②	dB(A)	55	38	46	52	49	47	37	29
L_{WA}	Air noise Level ③	dB(A)	53	51	36	47	40	34	25	24

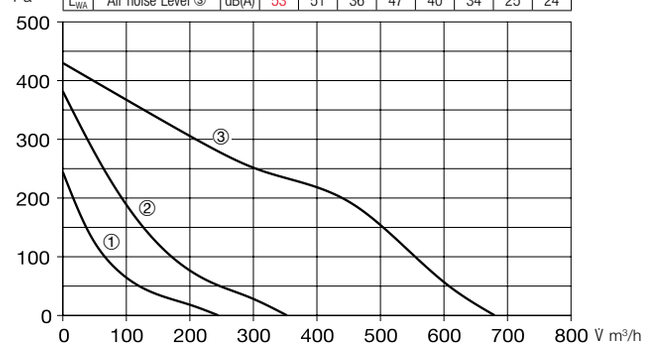

Accessories

Transformer speed controller
TSW 1.5 Ref. no. 01495

Five-step, for surface installation.
1~ alternating current, 230 V.

Max. load	1.5 A
Wiring diagram no.	1494
Dim. mm	W 115 x H 205 x D 100

Three-step speed and operating switch with 0 position
DSZ Ref. no. 01598

Convenient flush-mounted speed switch for fans with three performance levels. Room light cannot be switched in parallel. Can be used with central ventilation box ZEB EC.

Load capacity	AC 3 / 2.2 kW, AC 15 / 6 A
Protection category	IP 20
Install.	in flush-m. box w/ 55 mm depth
Wiring diagram no.	735
Dimensions mm	W 80 x H 80 x D 23

Electronic speed controller
ESU 1 Ref. no. 00236

For flush-mounted installation.
Front and rotary knob made of white plastic. Installation in standard flush-mounted box. Operation indicator via light ring.

Max. load	1 A.
Minimum load	0.15 A
Protection category (built-in)	IP30
Wiring diagram no.	556.1
Dim. mm	W 80 x H 80 x D 21 protr.

Electronic speed controller
ESA 1 Ref. no. 00238

For surface installation.
White plastic casing, operation indicator via light ring in rotary knob.

Max. load	1 A.
Minimum load	0.15 A
Protection category	IP40
Wiring diagram no.	556.1
Dimensions mm	W 80 x H 80 x D 65

Electronic speed controller, contin. variable flush / surface-mounted		Speed controller, 3-step flush-mounted	
Type	Ref. no.	**Type**	Ref. no.
ESU 1/ESA 1	00236/00238	**DSZ**	01598
ESU 1/ESA 1	00236/00238	**DSZ**	01598
ESU 1/ESA 1	00236/00238	**DSZ**	01598
ESU 1/ESA 1	00236/00238	**DSZ**	01598

HR 90 KE/FES

HVR 150/FES

Dimensions HR 90 KE/FES



Pane cutout Ø 103 mm

Dim. in mm

Dimensions HVR 150/FES



Pane cutout Ø 178 mm

Dim. in mm

Elegant compact window fans with flow rates of 80 – 360 m³/h.

- **Area of application**
  All rooms and windows in private buildings as well as small to medium-sized commercial spaces.

Special features and common features

- **Universal application**
  Prepared for installation in panels, single glazed windows, double glazed windows and composite windows (HR 90 KE/FES not for hinged composite window) as standard. Suitable for wall installation with anchoring using wall sleeve (accessories).

- **Electrical inner shutter**
  Tight-closing with silent operation; maintenance-free. Automatic operation with the fan circuit.

- **Casing**
  Casing made of high-quality, impact-resistant plastic. Fan casing and external grille in white.

- **Motor**
  Enclosed motor in splash-proof casing. Maintenance-free and radio interference-free. Maximum air flow temp. +40 °C.

- **Installation**
  The service-friendly and installation-friendly unit design allows quick installation with only a few steps.

Description HR 90 KE/FES

- Compact window fan for rooms of any kind. Upward facing blades prevent viewing of the fan clogging zone.
- Applicable in single and double glazed windowpanes with a thickness of 4–40 mm. The variable distance compensation is achieved by using or omitting the supplied spacer frames.
- External cover with flat rain-repellent grille.
- Operation via on-site On/Off switch or the built-in drawcord.
- Integrated operation indicator.

Description HVR 150/FES

- Powerful window fans for small to medium-sized private and commercial spaces.
- For installation in single and double glazed windows (composite window can be opened unhindered) as well as thin panels with a thickness of 4–40 mm. Variable distance compensation through installation or omission of the supplied spacer frames.
- External cover with flat rain-repellent grille.
- Operation via on-site On/Off switch or the built-in drawcord.
- Optical operation indicator.

Reference	Page
Speed controllers, controllers & turn-off delay switches	601 ff.

Product range			
Technical data	**HR 90 KE + FES**	**HVR 150/2 E + FES**	**HVR 150/2 RE + FES**
Ref. no.	00334 + 00462	00285 + 00463	00286 + 00463
Electrical inner shutter	Available	Available	Available
Reversible (supply and extract ventilation)	Extract ventilation	Extract ventilation	DSEL 2 [2] Ref. no. 01306
Pane cutout Ø mm	103 mm	178 mm	178 mm
Flow rate free blowing m³/h	95	260	360
Impeller Ø mm	93 mm	140 mm	140 mm
Voltage 230 V, 50 Hz, power consumption W	17	35	50
Rated current A	0.12	0.15	0.25
Speed min^{-1}	2550	1800	2600
Sound pressure[1]/power dB(A)	44/51	58/65	64/71
Weight approx. kg	1.0	1.9	2.0
Wiring diagram no.	483	283	284
Protection category	IP45	IP44	IP44
Accessories			
Double glazed window installation for hinged composite window	—	Available	Available
Wall installation, Telescopic wall sleeve 260 – 500 mm	TWH 90	TWH 150	TWH 150
Ref. no.	06352	06354	06354
Speed controller flush/surface-mounted	—	ESU 1 / ESA 1	ESU 1 / ESA 1
Ref. no.	—	00236 / 00238	00236 / 00238
Speed controller with reversing switch for switching from supply to extract ventilation	—	—	BSX
Ref. no.	—	—	00240

[1] Distance at 1 m free field conditions. [2] NYM-O 3 x 1.5 mm² required for reverse operation.

GX EC 150



GX 225

GX 300

Dimensions GX EC 150



Pane cutout Ø 184 mm

Dim. in mm

Dimensions GX 225



Pane cutout Ø 257 mm

Dim. in mm

Dimensions GX 300



Pane cutout Ø 324 mm

Dim. in mm

Low-noise window fans for use in private, commercial and industrial buildings. The series GX offers smooth running and functional reliability in continuous operation. The fan and external grille come in pleasant white. Attractive design, integrates unobtrusively in all rooms and any building facade.

- **Area of application**
  For the ventilation of medium and large rooms of any kind in the temperature range from −30 °C to +40 °C.

Special features

- **Universal application**
  Prepared for installation in single glazed windows, double glazed windows and panels as standard. Suitable accessories available for composite windows and wall installation.
- **Electrical connection**
  Concealed behind elegant inner facade. The shutter has a locked position which allows permanent opening when the fan is deactivated (static ventilation in summer). The automatic shutter function is forced and time-delayed with the fan circuit.
- **Casing**
  Attractive design made of high-quality, impact-resistant plastic. Colour: white. Inner facade can be removed with one hand and without tools for cleaning in a water bath (power supply is then automatically interrupted).
- **Motor**
  Enclosed, splash-proof motor (IP44) with thermal overload protection. GX EC 150 with energy-saving EC motor. Maintenance-free and radio interference-free. Maximum air flow temperature +40 °C. Power can be controlled via speed controller (accessories) depending on type.
- **Installation**
  The service-friendly and installation-friendly unit design allows quick installation with only a few steps.

Description GX EC 150

- Sophisticated fan in a lower performance class for extract ventilation.
- Installation in single glazed and double glazed windows as well as fixed and hinged composite windows using accessories.
- Flat, external rain-repellent grille does not obstruct venetian blinds or roller shutters.
- Service-friendly and installation-friendly. Room-side casing parts can be removed for cleaning without tools.
- Shutter function can be switched to static ventilation (without fan operation).
- Energy-saving EC-Motor in protection category IP54.

Description GX 225

- Fan in medium performance class offering high convenience and integrated function switch which enables the following operating modes without changing the wiring:
  - ☐ Extract ventilation
  - ☐ Supply ventilation or
  - ☐ Reversing operation by means of external operating switch/speed controller (accessories).
- Static ventilation possible (without fan operation) by locking the shutter.
- Control via on-site On/Off switch or operating switch/speed controller (accessories). Automatic shutter function with fan circuit.
- Flat rain grille does not obstruct venetian blinds or roller shutters.
- Installation-friendly design, all main parts can be removed for cleaning without tools.

Description GX 300

- Powerful fan in comfort class for the supply and extract ventilation of larger rooms in attractive softline design.
  Blends in harmoniously in all environments and building facades.
- Internal operating mode switch allows the following without changing the wiring:
  - ☐ Extract ventilation
  - ☐ Supply ventilation or
  - ☐ Reversing operation by means of external operating switch/speed controller (accessories).
- Control via on-site On/Off switch or operating switch/speed controller (accessories). Automatic shutter function with fan circuit.
- Static ventilation, installation and external cover see GX 225.
- Installation-friendly design, room-side casing parts can be removed for cleaning without tools.

Reference	Page
Speed controllers, controllers & turn-off delay switches	601 ff.

Product range

Technical data	EC GX EC 150	GX 225	GX 300
Ref. no.	09367	01484	01485
Electrical inner shutter	Available	Available	Available
Reversible (supply & extr. ventilation)	Not available	Available	Available
Pane cutout Ø mm	184 mm	257 mm	324 mm
Flow rate free blowing m³/h	230	670	1650
Impeller Ø mm	150	225	300
Power consumption Watts	10	45	125
Voltage, 50 Hz (GX EC 150 - 50/60 Hz)	230 V	230 V	230 V
Rated current A	0.06	0.3	0.7
Speed min⁻¹	1480	1250	1250
Sound pressure[1]/power dB(A)	44/52	54/61	61/68
Weight approx. kg	1.4	4.0	7.0
Wiring diagram no.	1385	538	538

[1] at 1 m free field conditions. [2] with reversing switch. [3] with two speeds and reversing switch.

Accessories Window fan

Type	EC GX EC 150	GX 225	GX 300
Double glazed window mounting kit			
for closed panes Ref. no.	DR 150[4] 05114	DR 225[4] 05115	DR 300[4] 05116
Wall installation			
with screw fastening, 50 cm long Ref. no.	SB 50/2 01385	SB 50/3 01386	SB 50/4 01387
with feed duct Ref. no.	KR 150[5] 05091	WER 225/250[6] 00369	WER 300[7] 00469
Elec. speed controller flush/surface Ref. no.	— —	ESU 1/ESA 1 00236/00238	ESU 1/ESA 1 00236/00238
Elec. speed controller[2] surface-m. Ref. no.	— —	BSX 00240	BSX 00240
Operating switch[2] flush-mounted Ref. no.	— —	DSEL 2 01306	DSEL 2 01306
Operating switch[3] surface-mounted Ref. no.	— —	FR 22/30 00998	FR 22/30 00998

[4] Spacer rings for underpinning from 2 – 35 mm (1 set = 10 pcs).
[5] 330 mm long. [6] 170 – 500 mm long. [7] 170 – 450 mm long.

DVW 90

DVAW 130

DVW 140

DVAM 130

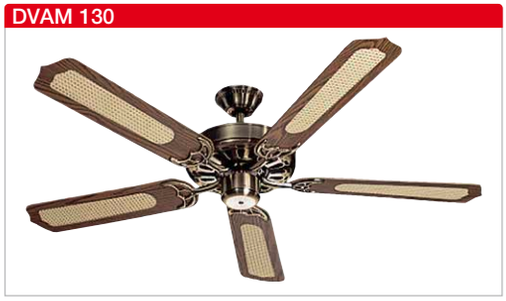

For supporting cooling in summer and making better use of available heat in winter.
For a wide range of applications, e.g. air circulation, cooling and energy conservation in medium and large rooms such as foyers and waiting halls, restaurants, clubs, boutiques and salesrooms, production halls, warehouses, tennis halls and sports halls as well as the acceleration of drying processes in industrial buildings.

Ceiling fans are traditionally used for cooling air in the summer. They also solve acute room air problems in sales rooms, restaurants and many other communal areas with conditions such as windowless room areas or high heat from lighting.
Decorative reproductions in the "Casablanca" design also make Helios ceiling fans an attractive design element for many rooms.

During the heating period, ceiling fans can support heat distribution in high-ceilinged spaces. In sports halls, tennis halls, industrial buildings and warehouses, slow-running ceiling fans help direct warm air from the ceiling area towards the floor and balance the temperature distribution throughout the room. This allows the available heat to be used more effectively. Pilot installations showed an average temperature increase of 4 K in the floor area. Operating temperature range from -10 to +40 °C.

Ceiling fans series DVW

Robust metal version in classic design.
- ❑ Enclosed motor, maintenance-free and radio interference-free.
- ❑ Vibration-damping suspension for low-vibration running.
- ❑ Fall protection with arrester cable according to DIN EN 60335-2-80.
- ❑ Simple installation with pre-assembled delivery. Only the impeller blades need to be screwed on.
- ❑ Variable suspension height through delivery of a short and a long pendent tube.
- ❑ Speed-controllable with 5-step speed controller TSW 0.3 (accessories).
- ❑ Reversible air flow direction. The flow direction can be set to the floor or to the ceiling by fixed connection or using a reversing switch (accessories DSEL 2). Minimum starting voltage of 100 V required for reverse operation (upward air flow direction).

Ceiling fan series DVA

Fan comes in typical "Casablanca" design for use for decorative purposes.
- ❑ Casing in antique brass or antique white finish. Five wooden blades with stained walnut or antique white cane work. Maintenance-free motor with covered cooling slots, ball bearing mounted, for continuous operation.
- ❑ Fall protection with arrester cable according to DIN EN 60335-2-80.
- ❑ Vibration-damping suspension for low-vibration running.
- ❑ Simple installation directly to the ceiling or short pendent tube (included in delivery).
- ❑ Pull switch for three performance levels and On/Off below the motor. A remote speed controller (accessories) can be connected.

Fan selection

The impeller diameter, positioning and suspension height of the ceiling fans are the parameters for even and extensive air flow in the room.
The room height minus the pendent length provides the suspension height. Based on this height and the impeller Ø, the adjacent diagram shows the area affected by the air flow in m².
The distance from the centre of the fan to the walls should be approx. 3 times the impeller Ø. The distance from the centre of a fan to the centre of another fan (when using multiple ceiling fans) should be approx. 6 times the impeller Ø. Operation at high speed is recommended in summer for cooling and operation at low speed is recommended in winter.

Important installation information

Accident prevention regulations (UVV) stipulate a minimum distance of 2.3 m from the floor to the lower wing edge.



Accessories for DVW and DVA

Speed controller
TSW 0.3 Ref. no. 03608
Five-step speed controller with On/Off switch for surface installation.

Technical data – Order data

Type	DVW 90	DVW 140	DVAW 130	DVAM 130
Ref. no.	08648	08649	08650	08651
Wing Ø mm	900	1400	1300	1300
Number of blades	3	3	5	5
Voltage / Frequency	1~, 230 V / 50 Hz	1~, 230 V / 50 Hz	1~, 230 V / 50 Hz	1~, 230 V / 50 Hz
Current consumption A	0.26	0.30	0.29	0.29
Power consumption W	50	75	66	66
Maximum speed min⁻¹	340	270	220	220
Suspension height min./max. mm	440/565	460/585	220/360/510	220/360/510
Sound pressure dB(A) at 4 m	35	44	29	29
Protection category	IP20	IP20	IP20	IP20
Max. air flow temperature	40 °C	40 °C	40 °C	40 °C
Weight approx. kg	4.8	6.8	6.7	6.7

STH

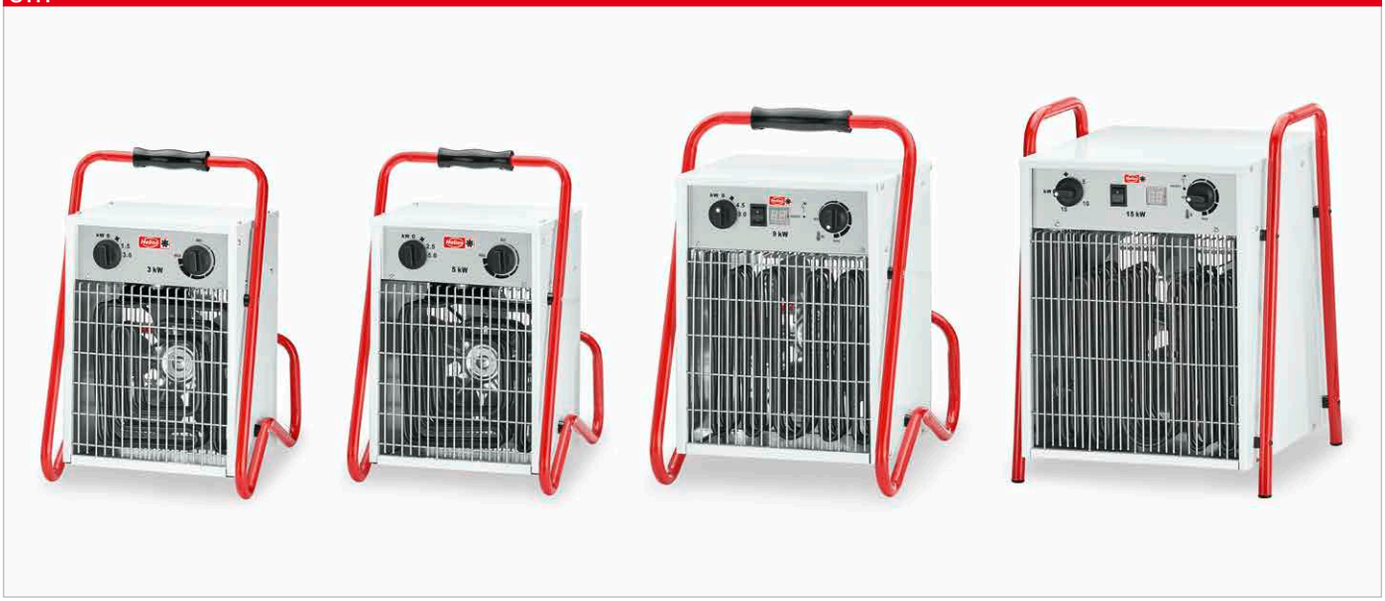

Dimensions STH 3



Dim. in mm

Dimensions STH 5



Dim. in mm

Dimensions STH 9 T



Dim. in mm

Dimensions STH 15 T



Dim. in mm

The compact, powerful STH heater fans are reliable, robust and convenient in terms of equipment. They are suitable for heating and drying. Use on construction sites, in production facilities, warehouses and workshops, churches, meeting rooms, etc.

- Series with heat output of 3 kW: 1~, 230 V as well as 5, 9 and 15 kW: 3~, 400 V.
- Practical operation due to compact dimensions.
- Attractive design.
- Easy to lift and transport due to ergonomically designed, solid transport hanger.

Quality in every detail

- Robust, hard-wearing and secure due to metal body. Suitable for use under hard conditions, even in wet rooms and for continuous operation.
- Corrosion-resistant casing, made entirely of galvanised steel sheet, powder-coated in pleasant white.
- Protective stand with powder coating in red.
- Robust front protection grille, powder-coated in hard-wearing grey.
- Clear control panel, protected against damage due to recessed mounting.
- Maintenance-free and radio interference-free.
- All models in protection category IPX4. Applicable in wet rooms.
- Contact protection according to DIN EN 60335.
- Enclosed sheathed heating element made of stainless steel with low surface temperature.
- Easily accessible, externally resettable protection against overheating for types STH 9 T and STH 15 T. Automatically reactivating after cooling for STH 3 and STH 5.

Individual time setting

All types from 9 kW are equipped with a timer for preprogrammed activation for up to 24 hours under specification of the room temperature as standard.

Control

Control via built-in operating switch.

- Heating for types with 3, 5 and 9 kW switchable in two levels; switchable in three levels for type with 15 kW.
- Heating operation can be controlled via built-in room air thermostat with setting range +5 °C to +35 °C. Fan remains in operation for better heat distribution in the room when the heating is deactivated.

Technical data

Type	STH 3	STH 5	STH 9 T	STH 15 T
Ref. no.	02520	02521	02522	02523
Heat output kW	3.0	5.0	9.0	15.0
Switchable heat output kW	0 – 1.5 – 3	0 – 2.5 – 5	0 – 4.5 – 9	0 – 5 – 10 – 15
Max. temperature increase K	25	37	38	35
Max. ambient temperature °C	40	40	40	40
Flow rate m^3/h	400	400	700	1300
Speed min^{-1}	1300	1300	1300	1300
Sound pressure dB(A) at 4 m (free field cond.)	40	40	43	58
Voltage V, 50 Hz	1~, 230	3~, 400	3~, 400	3~, 400
Rated current A	13.5	7.5	13.5	21.7
Req. socket / CEE coupling	[1]	16 A	16 A	32 A
Weight approx. kg	6.0	6.0	10.5	15.5
Timer function (pre-programming 24 h)	—	—	Yes	Yes

[1] with approx. 1.5 m long cable and Schuko plug.

Controlled domestic ventilation: System solutions for effective humidity protection.

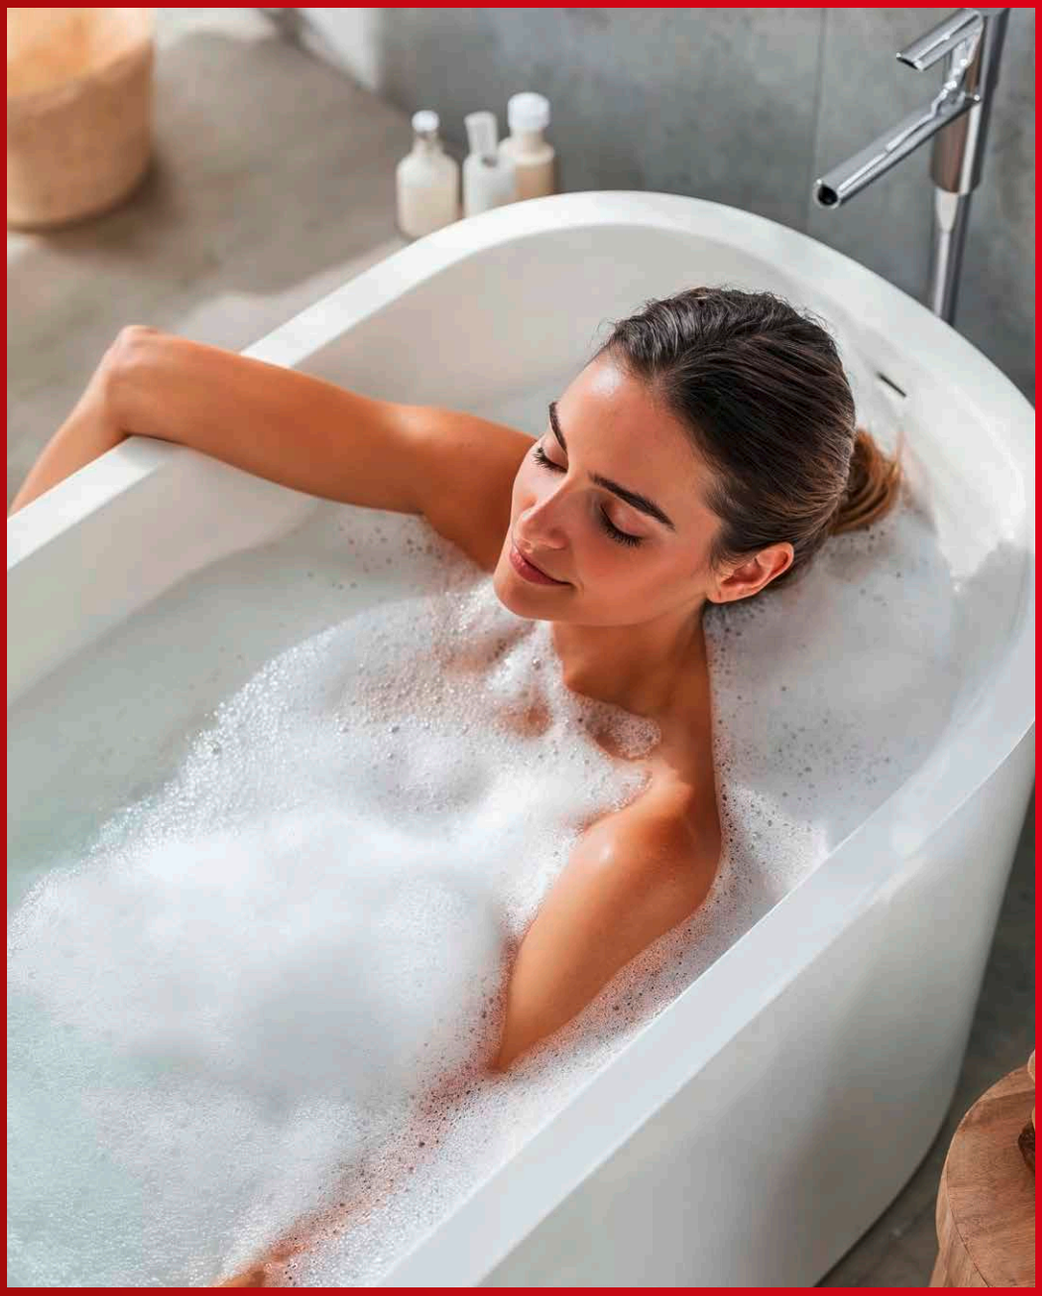

Say goodbye to inefficient window ventilation
Window ventilation is no longer effective. In 80% of cases, ventilation is insufficient, causing costly insulation measures to lose their effectiveness. Modern, well-insulated buildings require controlled mechanical ventilation systems.

A healthy and comfortable indoor climate
A pleasant living environment depends on the removal of kitchen and bathroom odours as well as indoor pollutants. Moisture from cooking, drying clothes, and showering - averaging 10-15 litres per day in a four-person household - must be discharged outdoors to prevent mould growth and damp walls.

Clean, healthy air – tailored to your needs
Helios offers precisely tailored solutions for every requirement – with or without heat recovery, for new builds or renovations, centralised or decentralised systems. All systems meet legal building requirements as well as fire and sound protection regulations.

Systems for multi-storey buildings

Mono tube ventilation system ELS (DIN 18017-3)

Available models:
- ELS NFC with EC technology
- ELS with AC technology
- ELS 0–10 V (building management systems)

AC EC 0–10 V

45ff

Central ventilation system ZLS (DIN 18017-3)

- With energy-saving EC roof fan

EC

45ff

Planning notes

Standards

- DIN 1946-6
- DIN 18017-3

45ff

Ideal for single-family homes and apartments

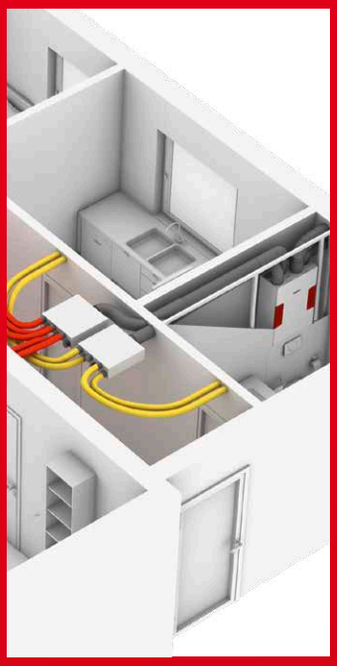

Central extract ventilation box ZEB

- Compact fan box with four connectors for attaching extract air ducts.
- Available in AC and EC versions.

EC

45ff

KWL ventilation systems

- With heat recovery
- Centralised and decentralised solutions

EC

45ff

KWL peripherals

- HygroBox
- Ground heat exchanger
- Air distribution systems
- Air inlets and outlets
- Wall/roof openings etc.

45ff

Ventilation concept in accordance with DIN 1946-6

- The ventilation concept includes determining whether ventilation measures are necessary and proposing a ventilation system that operates independently of user behaviour.

Procedure:

1. Calculation of the flow rate for humidity protection according to DIN 1946-6

$$q_{v,ges,NE,FL} = f_{WS} \cdot (-0{,}002 \cdot A_{NE}^2 + 1{,}15 \cdot A_{NE} + 11)$$

$q_{v,ges,NE,FL}$ = Flow rate for humidity protection in m³/h
A_{NE} = Floor area of the utilisation unit in m²
f_{WS} = Factor accounting for thermal insulation depending on the building's occupancy level

	Therm. insul. high*	Therm. insul. low**
Low occupancy	0.2	0.3
High occupancy	0.3	0.4

* New buildings after 1995 or fully modernised buildings with adequate thermal insulation
**Unmodernised or partially modernised buildings (e.g. window replacement only)

2. Calculation of the flow rate via infiltration according to 1946-6

$$q_{v,Inf,wirk} = e_z \cdot V_{NE} \cdot n_{50}$$

$q_{v,Inf,wirk}$ = Effective flow rate via infiltration in m³/h
e_z = Flow rate coefficient for fan-assisted ventilation as specified in DIN 1946-6 – see Table 9
V_{NE} = Air volume of the unit in m³/h (Floor area of the utilisation unit in m² x clear room height in m)
n_{50} = Air exchange at 50 Pa differential pressure. As specified in DIN 1946-6 – see Table 10 or based on measured values

3. Flow rate assessment

After calculating both flow rates $q_{v,Inf,wirk}$ and $q_{v,ges,NE,FL}$, compare the two values. If the infiltration flow rate is lower than the required humidity protection flow rate, a mechanical ventilation measure is required.

Ventilation modes/ operating levels (DIN 1946-6)

- **Ventilation for humidity protection (FL)** Required ventilation to ensure building protection (humidity control) during temporary absence of occupants.
- **Reduced ventilation (RL)** Required ventilation to meet minimum hygiene standards and maintain humidity protection during limited presence of occupants or when indoor air quality is lower.
- **Standard ventilation (NL)** Required ventilation to meet hygiene requirements and ensure humidity protection during normal occupancy (normal operation).
- **Intensive ventilation (IL)** Temporarily required ventilation with increased air volume to eliminate peak loads (load operation).

Sound insulation

DIN 4109 "Sound Insulation in Building Construction" has been adopted as a building regulation in many German federal states and defines the minimum sound insulation requirements. Its purpose is to protect occupants from unacceptable noise exposure and is thus part of public building law.
For construction projects governed by VOB/B (German Construction Contract Procedures) and in buildings with multiple residential units - such as terraced houses or duplexes - compliance with DIN 4109 is mandatory. In the case of detached single-family homes, the standard is generally not legally binding, as there are no adjacent units in need of protection. However, it can be contractually agreed upon—for instance, to ensure a defined level of acoustic comfort or to distinguish it from enhanced sound insulation requirements.

Table 9: Maximum permissible A-weighted sound pressure levels in adjacent noise-sensitive rooms, generated by building service installations and structurally connected facilities

Noise source		Maximum permitted A-weighted sound pressure level dB	
		Living and sleeping rooms	Classrooms and workspaces
Sanitary systems / plumbing installations (combined water supply and wastewater systems)		$L_{AF,max,n} \leq 30^{a,b,c}$	$L_{AF,max,n} \leq 35^{a,b,c}$
Other internal, fixed technical sound sources of building services, supply and disposal systems, and garage facilities		$L_{AF,max,n} \leq 30^{c}$	$L_{AF,max,n} \leq 35^{c}$
Restaurants including kitchens, shops, businesses, etc.	Daytime 6 to 22 hrs	$L_r \leq 35$ $L_{AF,max} \leq 45$	$L_r \leq 35$ $L_{AF,max} \leq 45$
	Nighttime (TALärm)	$L_r \leq 25$ $L_{AF,max} \leq 35$	$L_r \leq 35$ $L_{AF,max} \leq 45$

[a] Individual short-term noise peaks caused by operating taps and devices listed in Table 11 (e.g. opening, closing, switching, interrupting) are currently not taken into account.
[b] Conditions for compliance with permissible sound pressure levels:
- Execution documents must take into account the acoustic requirements. This means the relevant sound insulation certificates for the building components must be available.
- A responsible site manager must be appointed and involved in partial inspections before installations are enclosed or covered.

[c] Deviating from DIN EN ISO 10052:2010-10, 6.3.3, measurements in the loudest corner of the room are omitted (see also DIN 4109-4).

Table 10: $n_{50,Ausl}$ at 50 Pa differential pressure

Design air exchange $n_{50,Ausl}$ for new builds and renovations in h^{-1}		
Category [a]		
A Mechanical ventilation in single-family and multi-family houses	B Natural ventilation in buildings constructed after 2002 [d] in single/multi-family houses and in renovated multi-family houses [b,c]	C Natural ventilation in renovated single-family houses [b,c] constructed before 2002
1.0	1.5	2.0

[a] The average existing building stock is characterised by an $n_{50,Ausl}$ value of 4.5 h^{-1}.
[b] The renovation must include a permanently airtight building envelope in accordance with recognised technical standards.
[c] For partial renovations of the building envelope (e.g. window replacements not covering all openings), it is recommended to use the n_{50} values specified for complete renovations of the building envelope.
[d] According to EnEV 2002 and subsequent regulations.

(EFH) = Single-family houses / (MFH) = Multi-family houses

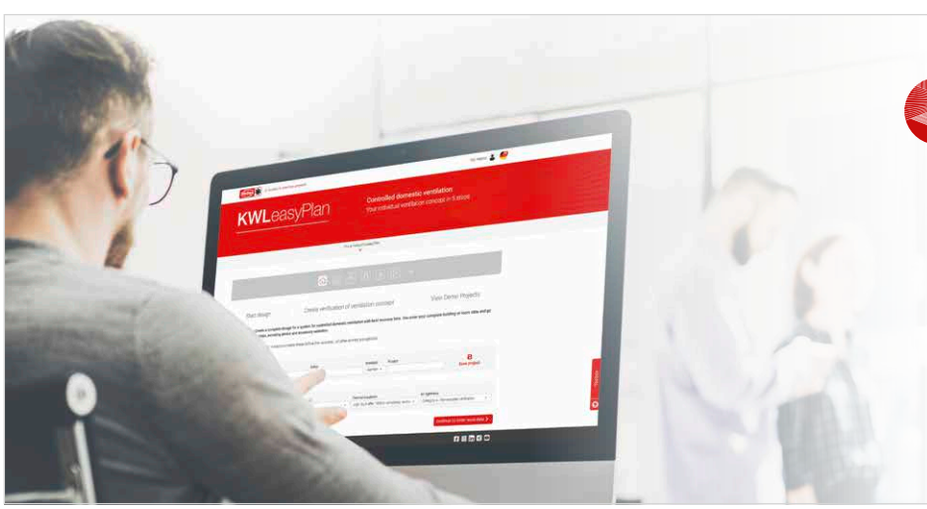

KWLeasyPlan

Quick, safe and standard-compliant creation of your ventilation concept in accordance with DIN 1946-6 - at the click of a button and free of charge.

→ www.KWLeasyPlan.de

DIN 18017-3 is legally binding under building regulations and applies to mechanical ventilation systems for interior bathrooms and toilet rooms without external windows in residential dwellings and comparable habitable spaces, such as hotel rooms.
Other rooms within residential units - such as kitchens, window-ventilated bathrooms, utility or storage rooms - may optionally also be ventilated using systems in accordance with this standard.

Procedure

Regardless of whether the project involves a single-family or multi-family home, or whether it concerns new construction or renovation, the starting point for any ventilation strategy is the ventilation concept required by DIN 1946-6. The user-independent and permanent assurance of ventilation for humidity protection has a direct impact on how the extract air system is designed.

- The extract air flow rate requirements as specified in DIN 18017-3 depend on whether the system is designed for continuous or demand-controlled ventilation. For demand-controlled systems, the flow rate can be reduced to 0 during periods of low ventilation demand. Continuous ventilation for humidity protection, as prescribed by DIN 1946-6, is not provided for. As a result, in residential buildings with extract air systems using individual room fans, two-stage ventilation units are typically installed. The base stage is connected to a permanent power supply and cannot be switched off by the user. This ensures compliance with the humidity protection requirement. The higher stage is activated as needed, either via appropriate indoor air sensors (e.g. humidity sensors) or presence-based controls, such as light switches or motion detectors.
- To ensure the proper functioning of an extract air system in modern, airtight buildings, the planning and installation of air inlets in the building envelope is essential. The extract air flow rate must be matched by an equal supply air flow rate entering the building through suitable external air inlets. The infiltration rate previously calculated in the ventilation concept is subtracted when sizing these outdoor air inlets (ALDs).
- In renovation projects, it is essential that all parties involved understand that the presence of a ventilation system in accordance with DIN 18017-3 does not exempt them from the requirement to develop and adhere to a ventilation concept as specified in DIN 1946-6. The flow rate required for humidity protection must always be ensured.

Planning guide for extract air systems

- Development of a ventilation concept in accordance with DIN 1946-6
- Design of the controlled supply and extract air system according to DIN 1946-6
- Installation of suitable extract air fans to ensure both humidity protection ventilation and the flow rates required by DIN 18017-3. Ensuring adequate incoming air supply by selecting appropriate air inlets in external building components.

System types

- The individual extract ventilation systems are subdivided into systems with their own dedicated extract air duct and systems with a shared extract air duct. Due to their many advantages (e.g. space savings by using only one duct), systems with shared extract air ducts are preferred in practice.
- Central extract ventilation systems are also divided into two subtypes. These are central extract ventilation systems with just one shared adjustable flow rate and central extract air systems with a dwelling-specific adjustable flow rate (e.g. DV EC in combination with AE extract air elements).
- DIN 18017-3 applies to the ventilation of individual rooms. If no further ventilation requirements are imposed under DIN 1946-6, the following standard flow rates apply:
  40 m^3/h for central extract ventilation systems.
  - This flow rate must be discharged continuously.
  - During periods of lower ventilation demand, mainly at night, the extract air flow rate may be reduced by up to 50%, but for no more than 12 hours per day.
  60 m^3/h for decentralised extract air systems.
  - This flow rate must be discharged during use for demand-controlled systems.
  - The ventilation unit may reduce its flow to 0 during periods of low demand, provided the building meets the thermal insulation standard of the 1995 Thermal Insulation Ordinance or better.
  - The same flow rates apply to kitchens.
  - For WC-only rooms, these flow rates may be halved.

Project planning notes

The main extract ventilation duct should be routed vertically and as straight as possible, with a consistent cross-section. If this is not feasible, a calculation-based verification in accordance with DIN 18017-3 is required. The main extract ventilation duct must be thermally insulated to prevent condensation damage. Alternatively, condensate drains may be installed.

- Bathrooms and WCs may be ventilated using a single fan. A secondary connection kit may be used for this purpose.
- Bathrooms and kitchens, however, must be ventilated via separate fans. The connection of cooker hoods to systems in accordance with DIN 18017-3 is not permitted. Separate ductwork must be planned for this purpose.
- All extract air ducts must be constructed to be permanently airtight and structurally stable. An adequate number of suitable cleaning openings must be provided. Threaded (screw-in) cleaning openings are not permitted.

Special considerations for central extract ventilation systems

- In central extract ventilation systems with just one shared adjustable flow rate, only extract air valves with identical performance characteristics (flow curves) may be used. Once the valves are balanced, they must not be adjustable. These systems must be operated continuously. Flow rate reductions during periods of low ventilation demand must be controlled automatically, e.g. via timer switches.
- Central ventilation systems with dwelling-specific adjustable flow rates must use adjustable extract air elements with variable performance curves. These extract air valves are either manually operated by the occupant or automatically controlled by indoor air sensors. Demand-based flow rate adjustments are therefore limited to the respective dwelling. The use of flow rate controllers integrated into the extract air elements ensures that changes in one dwelling do not affect others. The fan's performance automatically adjusts to the total required flow rate.

Fire protection

The fire protection requirements for extract air systems in accordance with DIN 18017-3 are defined in Section 7 ("Special Provisions for Ventilation Systems in accordance with DIN 18017-3") of the Model Ventilation Systems Directive (MLüAR). All products approved for this purpose are legally certified with the designation 18017-3 and may only be used in such systems. The use of these fire protection components in other types of systems (e.g. residential ventilation systems with heat recovery) is not permitted.

Now you can easily determine **the diameter of the main line.**

40 m³/h Bathroom or WC

With 40 m³/h planned flow rate and simultaneous operation of all units.

A up to 5 m/s

One unit per floor Number of floors		Two units per floor Number of floors
40	Ø 355	24
38	Ø 315	19
31	Ø 280	15
24	Ø 250	12
19	Ø 225	9
15	Ø 200	7
12	Ø 180	6
9	Ø 160	5
7	Ø 140	4
6	Ø 125	3
3	Ø 100	1

Riser pipe diameter

B up to 7 m/s

One unit per floor Number of floors		Two units per floor Number of floors
–	Ø 355	33
–	Ø 315	26
40	Ø 280	21
32	Ø 250	17
27	Ø 225	13
21	Ø 200	10
17	Ø 180	8
14	Ø 160	7
10	Ø 140	5
8	Ø 125	4
5	Ø 100	2

Riser pipe diameter

C up to 11 m/s

One unit per floor Number of floors		Two units per floor Number of floors
–	Ø 315	40
–	Ø 280	32
–	Ø 250	26
40	Ø 225	21
33	Ø 200	17
27	Ø 180	13
21	Ø 160	10
16	Ø 140	8
13	Ø 125	6
8	Ø 100	4

Riser pipe diameter

A Increased comfort zone up to 5 m/s in riser pipe

with simultaneous operation of all units. The increase in noise level due to the constant flow rate control is very low up to this operating point.

B Comfort zone up to 7 m/s in riser pipe

with simultaneous operation of all units. The increase in noise level due to the constant flow rate control is in the comfort zone up to this operating point.

C Max. permitted design pressure up to 11 m/s in riser pipe

with simultaneous operation of all units. The main line dimensioning pursuant to building approval is allowed up to this operating point.

Note: Building law examination and compliance with building law requirements required.
If additional pipe components or roof penetrations are used, there may be deviations from the number of floors shown.

60 m³/h Bathroom or WC

With 60 m³/h planned flow rate and simultaneous operation of all units.

A up to 5 m/s

One unit per floor: Number of floors	Riser pipe diameter	Two units per floor: Number of floors
31	Ø 355	15
25	Ø 315	12
20	Ø 280	10
16	Ø 250	8
13	Ø 225	6
10	Ø 200	5
8	Ø 180	4
6	Ø 160	3
5	Ø 140	2
4	Ø 125	2
1	Ø 100	1

B up to 7 m/s

One unit per floor: Number of floors	Riser pipe diameter	Two units per floor: Number of floors
40	Ø 355	21
34	Ø 315	17
27	Ø 280	14
22	Ø 250	11
18	Ø 225	9
14	Ø 200	7
11	Ø 180	5
9	Ø 160	4
7	Ø 140	3
5	Ø 125	2
3	Ø 100	1

C up to 11 m/s

One unit per floor: Number of floors	Riser pipe diameter	Two units per floor: Number of floors
–	Ø 355	34
–	Ø 315	27
40	Ø 280	22
35	Ø 250	17
27	Ø 225	14
21	Ø 200	11
18	Ø 180	9
14	Ø 160	7
11	Ø 140	6
9	Ø 125	4
5	Ø 100	3

A Increased comfort zone up to 5 m/s in riser pipe

with simultaneous operation of all units. The increase in noise level due to the constant flow rate control is very low up to this operating point.

B Comfort zone up to 7 m/s in riser pipe

with simultaneous operation of all units. The increase in noise level due to the constant flow rate control is in the comfort zone up to this operating point.

C Max. permitted design pressure up to 11 m/s in riser pipe

with simultaneous operation of all units. The main line dimensioning pursuant to building approval is allowed up to this operating point.

Note: Building law examination and compliance with building law requirements required.
If additional pipe components or roof penetrations are used, there may be deviations from the number of floors shown.

100 m³/h Bathroom or WC

With 100 m³/h planned flow rate and simultaneous operation of all units.
(Volume e.g. kitchen = 100 m³/h. With two-room ventilation via 1 unit = Bathroom 60 m³/h, WC 40 m³/h)

A up to 5 m/s

One unit per floor Number of floors	Riser pipe diameter	Two units per floor Number of floors
18	Ø 355	9
15	Ø 315	7
11	Ø 280	6
9	Ø 250	4
7	Ø 225	3
6	Ø 200	3
5	Ø 180	2
3	Ø 160	2
3	Ø 140	2
2	Ø 125	1
1	Ø 100	1

B up to 7 m/s

One unit per floor Number of floors	Riser pipe diameter	Two units per floor Number of floors
25	Ø 355	12
20	Ø 315	10
16	Ø 280	8
13	Ø 250	6
10	Ø 225	5
8	Ø 200	4
6	Ø 180	3
5	Ø 160	2
4	Ø 140	2
3	Ø 125	1
2	Ø 100	1

C up to 11 m/s

One unit per floor Number of floors	Riser pipe diameter	Two units per floor Number of floors
29	Ø 355	17
24	Ø 315	14
20	Ø 280	11
16	Ø 250	9
13	Ø 225	8
10	Ø 200	6
8	Ø 180	5
6	Ø 160	4
5	Ø 140	3
4	Ø 125	2
2	Ø 100	1

A Increased comfort zone up to 5 m/s in riser pipe

with simultaneous operation of all units. The increase in noise level due to the constant flow rate control is very low up to this operating point.

B Comfort zone up to 7 m/s in riser pipe

with simultaneous operation of all units. The increase in noise level due to the constant flow rate control is in the comfort zone up to this operating point.

C Max. permitted design pressure up to 11 m/s in riser pipe

with simultaneous operation of all units. The main line dimensioning pursuant to building approval is allowed up to this operating point.

Note: Building law examination and compliance with building law requirements required.
If additional pipe components or roof penetrations are used, there may be deviations from the number of floors shown.

The new ELS – welcome to the future of mono tube ventilation.

For the ventilation of internal bathrooms and WCs in residential units, hotels, and other buildings as required by DIN 18017-3, the Helios ELS range always offers the ideal solution:

EC ELS NFC with EC technology

With just five models with features such as timer, presence detector, automatic humidity control, as well as CO_2 and VOC sensors, ELS NFC meets a wide range of requirements. Thanks to NFC technology, flow rates, settings and parameters can be flexibly configured without power, either in the packaging or on-site after installation - intuitively via the Helios ELS App.

AC ELS with AC technology

Powerful, quiet, and convenient - the well-established ELS AC units deliver everything you value in ELS systems, and impress with a variety of options for demand-based ventilation. Choose from models with run-on timers, presence detectors, or automatic humidity control - each available with predefined flow rates in one-, two-, or three-stage operation.

0–10 V ELS 0–10 V for building management

Equipped with EC technology and a universal 0–10 V connection, the ELS 0–10 V variant provides an advanced solution for seamless integration into existing building management systems (BMS). Any number of fans can be operated in a coordinated manner and centrally controlled.

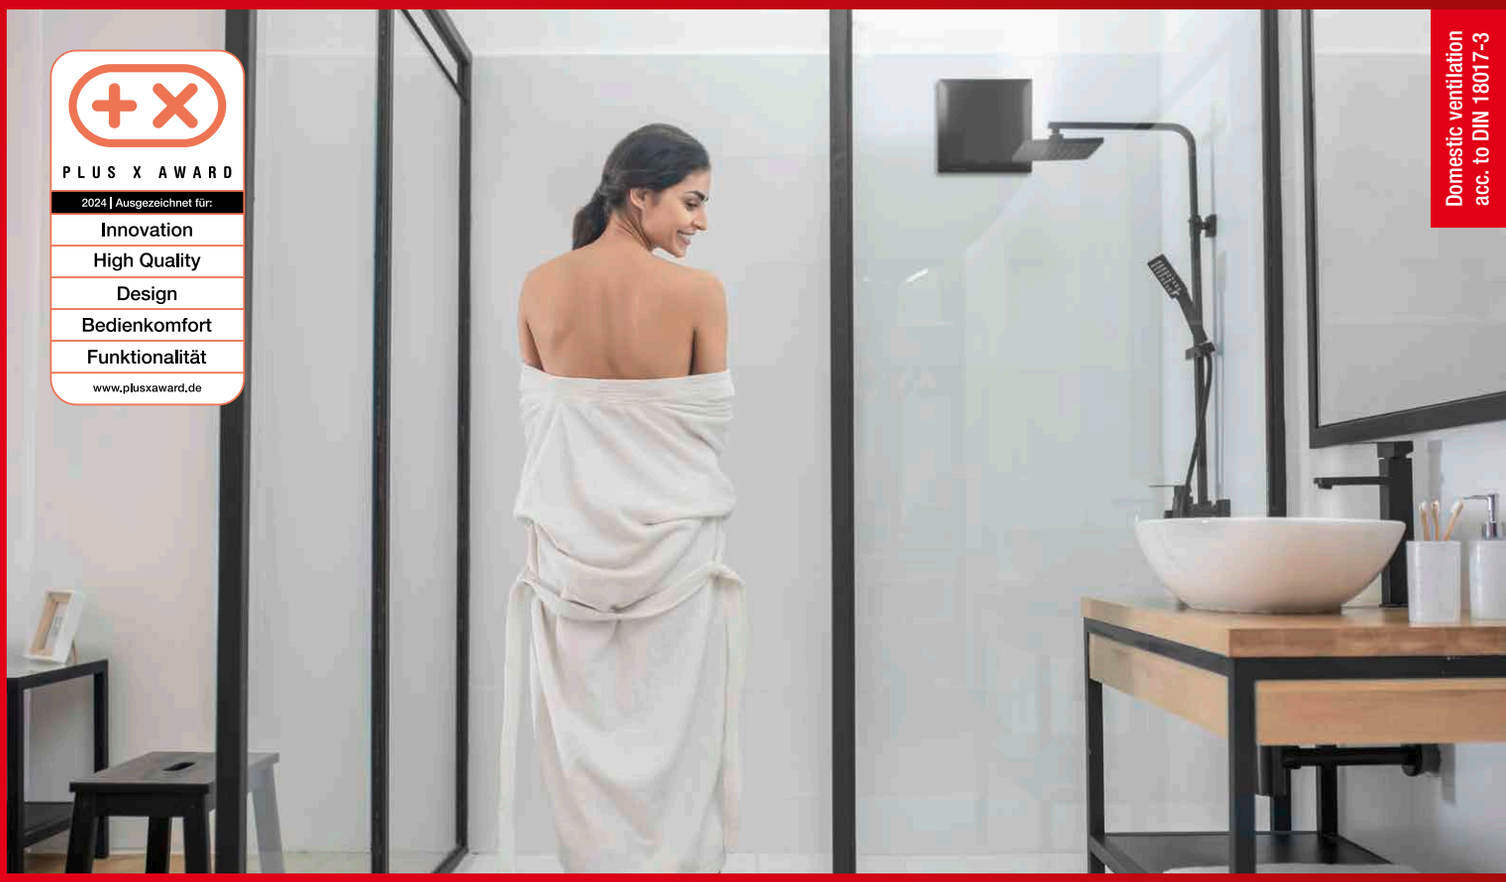

Fan units

The impressively quiet ELS units operate on demand, extracting stale air from kitchens, bathrooms, and WCs via a central main duct, to which over 20 floors or more than 40 individual units can be connected.

AC

EC 0–10 V

49ff

Housings

Every ELS fan unit is compatible with every ELS housing. And each ELS universal housing (GU) supports up to 12 different installation scenarios. This gives you maximum flexibility – from planning and storage to installation.



49ff

Fire protection

When designing and installing ventilation systems, the fire protection requirements set out in regional regulations must be observed. Helios offers optimised solutions for a wide range of structural situations, all fully compliant with legal standards.

49f

Supply air openings

For effective ventilation in well-insulated buildings, outdoor air inlets are essential. Helios provides tailored solutions for walls and windows - with options for manual or temperature-controlled regulation, automatic flow rate adjustment, and effective sound insulation.

49ff

The new ELS NFC – Appsolutely simple to configure.

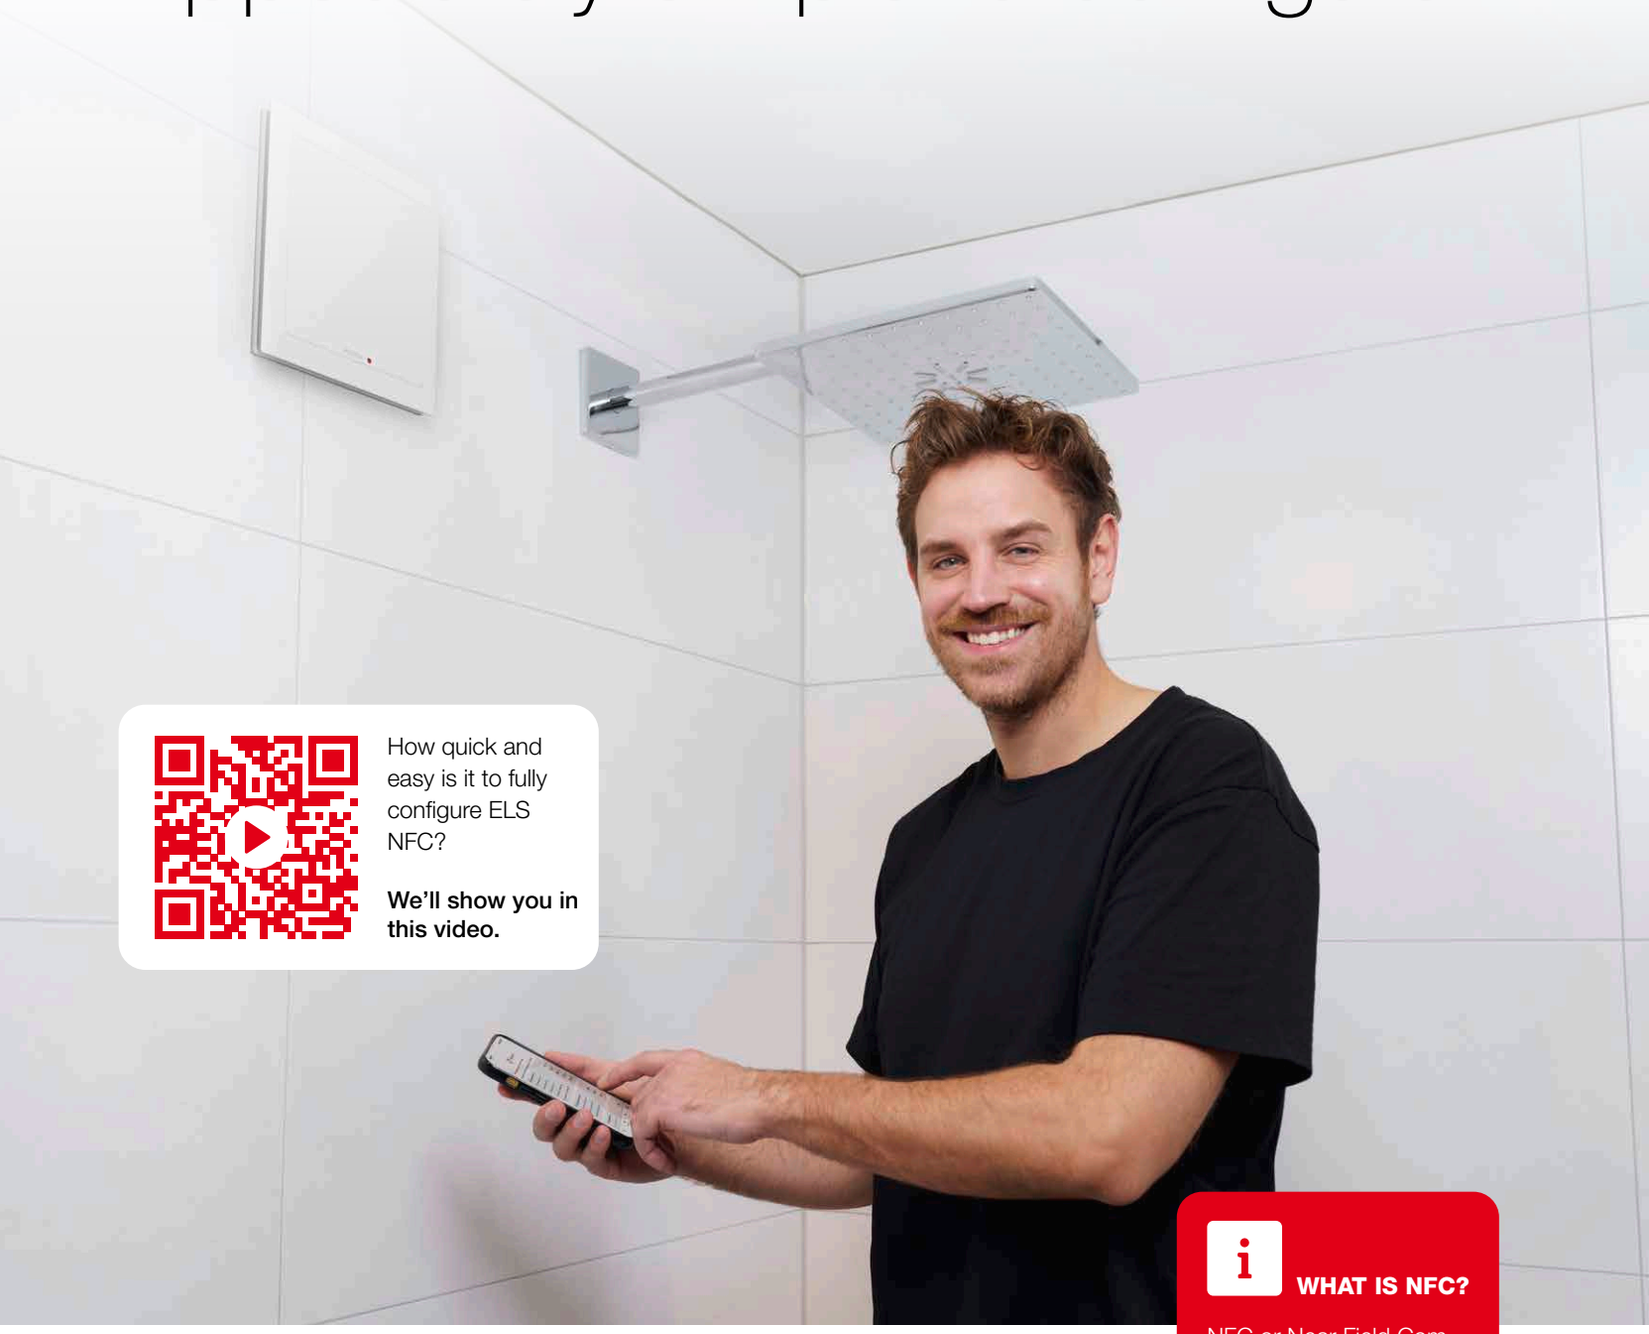

How quick and easy is it to fully configure ELS NFC?

We'll show you in this video.

With the ELS mono tube ventilation system, setup has never been easier: Specialist installers can configure it individually via smartphone - in seconds, and even without power, directly in the packaging. That means you're ready to go before work on site even begins.

One ELS for all levels!
With ELS NFC, parameter configuration becomes a breeze: You can adjust the flow rates in no time using your smartphone. It's even faster with the ELS library. Here you can save, share and endlessly reuse frequent settings.

Multiple units of the same type? Configure once, transfer via NFC - done!

WHAT IS NFC?

NFC or Near Field Communication allows your smartphone to communicate directly with other NFC-enabled devices. Pairing takes place automatically as soon as the devices are in close proximity to each other. A typical example is contactless payment.

Ready? Easy!

TAP TO CONNECT

You have everything you need to set up your ELS NFC on your smartphone.

Let‘s get started: Whether on the installed unit or still in the box. With or without a power connection, and always without the need for internet. On the spot at the construction site or before loading into the installer’s van.

MAKE IT YOURS

Tailor ELS NFC to the specific requirements of your building project.

The new principle: One ELS for every flow rate.
Simply choose one of five models with your preferred comfort option – everything else is configured in record time using the new ELS App.

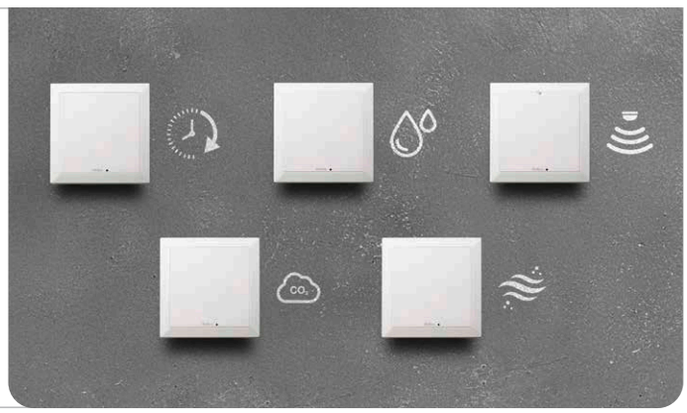

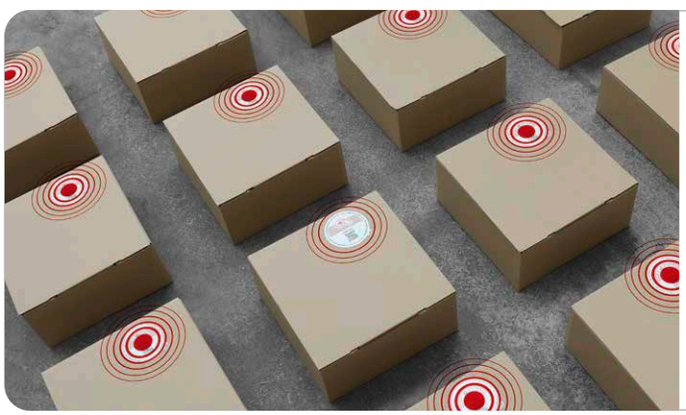

COPY & PASTE

Our pro tip for even faster results.

Do you need identical settings on multiple ELS units of the same type? With a simple touch of your smartphone, you can copy the configuration of one unit and then easily transfer it to others. And of course you can also save it for later!

Download the App now:
On the following pages, we’ll show you how to perfectly customise ELS NFC to your needs using your smartphone. Want to explore it for yourself?

Then download the App now and discover all the possibilities.

DOWNLOAD ON THE App Store

GET IT ON Google Play

One tap – everything sorted.

With ELS NFC, configuration is as simple as a tap. Adjust flow rates quickly and easily using your smartphone – contactless and flexible. Save your settings in the ELS library, share them with others, or reuse them whenever needed.

Even better: With just one tap, you can effortlessly transfer saved configurations to multiple devices. Set it up once, apply it everywhere – it doesn't get any smarter!

SIMPLY **CONTROL**

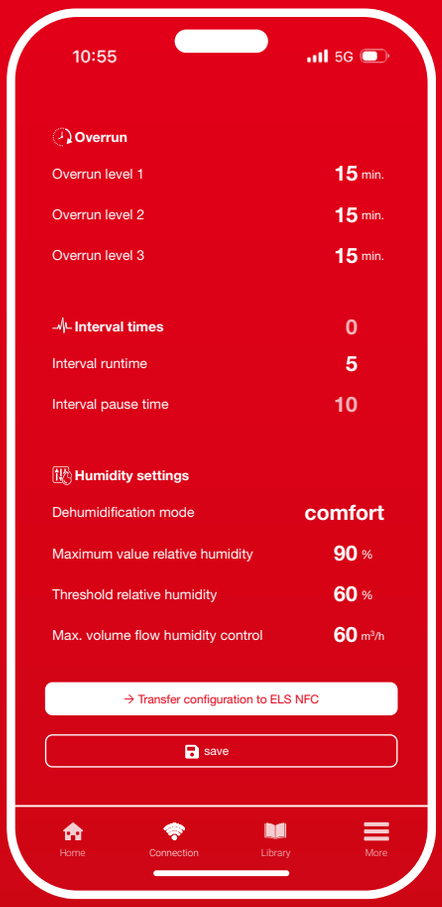

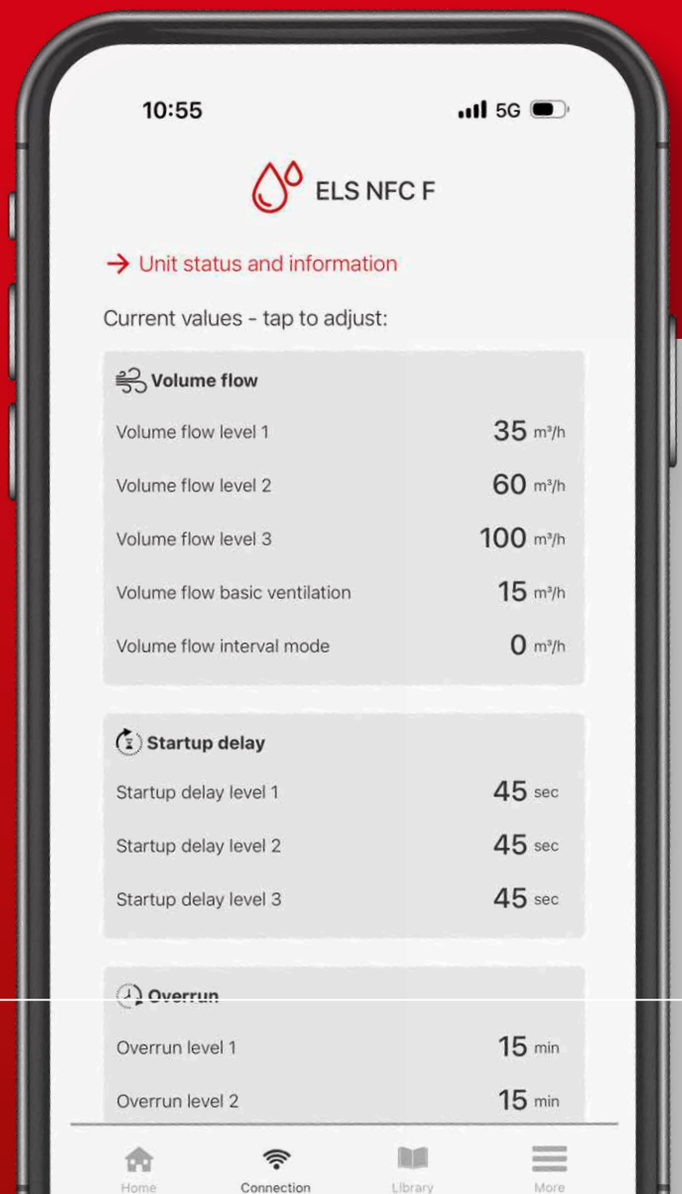

View all parameters at a glance and change them with a tap if needed. With just one touch, the adjusted parameters are updated on your ELS.

IT'S ALL ABOUT THE SETTINGS:

- Flow rates
- Startup delays
- Overrun times
- Intervals
- Sensor parameters

THE HALL **OF FAME**

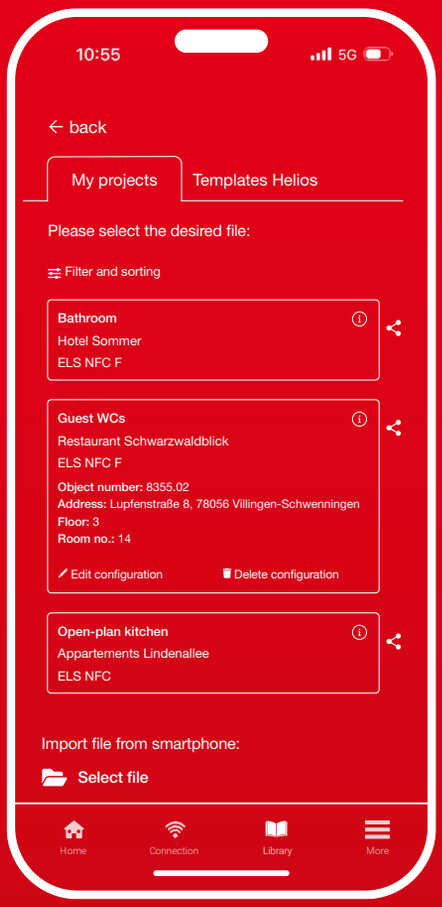

SEE WHAT'S HAPPENING

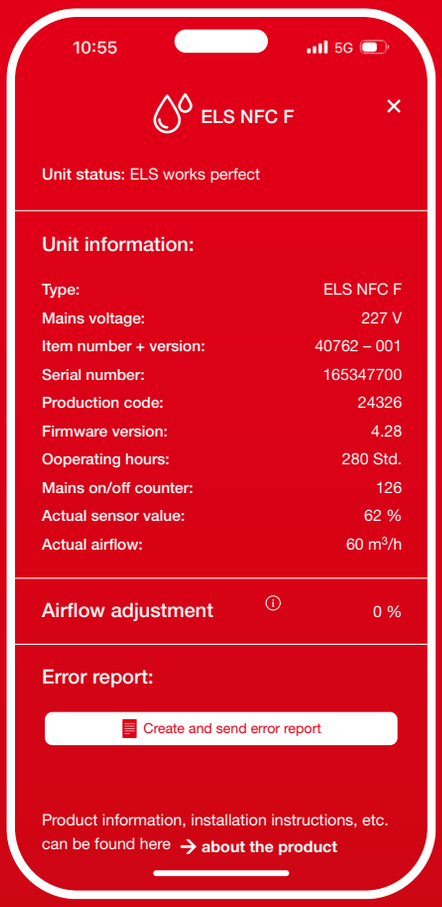

You can save, modify, share and transfer your frequently used configurations (as well as any others) to additional ELS units of the same type.

EVERYTHING IN ONE PLACE:

- Save your own parameter settings, including project-specific data
- Quick sharing function for easy collaboration on site
- Access and transfer factory settings for each ELS type at any time

The status overview provides all the details about your ELS. It also provides assistance if you encounter any issues with your device. Upon request, a fault description can be sent directly to Helios Service for swift resolution.

KEY INFO AT A GLANCE:

- Current operating status
- Useful unit information
- Practical flow rate adjustment
- Technical data and documents
- Contact Helios Support

Made in Germany.

Helios stands for the highest standards of quality and reliability. Our mono tube ventilation systems are entirely developed and manufactured in Germany – from motor winding to final assembly. For ventilation solutions that stand out with their durability, energy efficiency and reliability.

Sustainable.

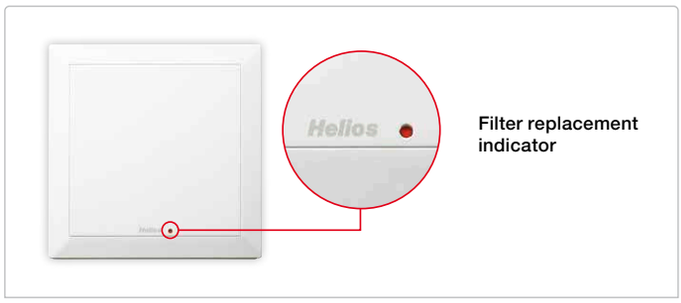

To ensure your ventilation system operates flawlessly over the long term, regular filter cleaning is essential. All ELS units are equipped with a sustainable permanent filter that can be easily cleaned in the dishwasher. This not only conserves resources but also saves money – costly disposable filters are a thing of the past.

Installation.

Fast

It doesn't get any easier – the electrical plug connection can be conveniently removed from the holder and connected. The cable entry and coupling connection are made during housing assembly.

Clever



The airtight backdraught shutter in the air outlet can be rotated in 90° increments. This allows for easy positioning of the housing with the outlet directed to the left, right, upwards, or backwards.

Flexible



With the housing types ELS-GU and ELS-GUBA, we offer maximum flexibility for every requirement. Whether for single-room or two-room solutions, with connections on the left, right, bottom, or a WC connection – the choice is yours.

■ **Technology.**

Compact

With its dimensions, ELS holds the record with an installation depth of just 89 mm.

Ultra-quiet



35 dB(A) at A = 60 m^3/h* is on the threshold of hearing and a value that no one can surpass. *(LPA at AL = 10 m^2)

Powerful

ELS generates real pressure: 260 Pa at 60 m^3/h. This enables the use of the smallest duct diameters and increases living space.

■ **Approved and tested.**

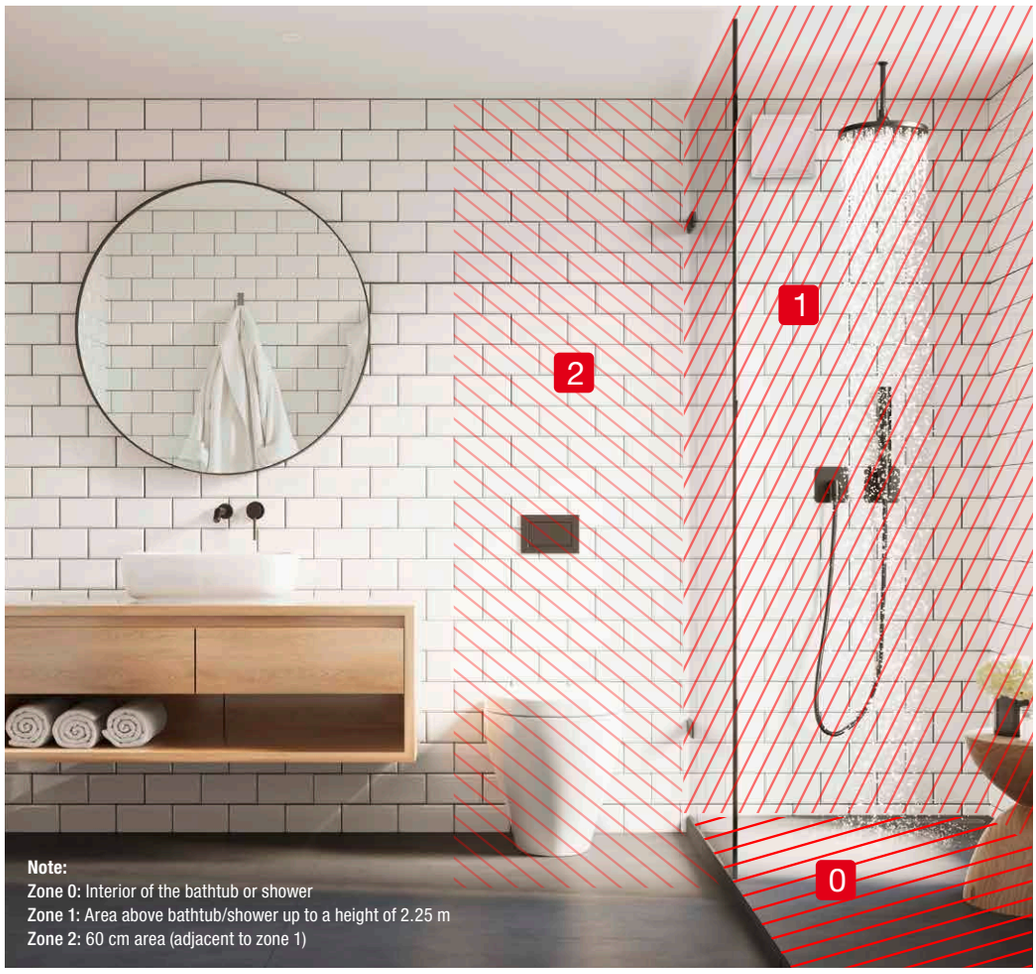

Better safe than sorry: Helios mono tube ventilation systems are optimally protected against moisture and are perfectly suited for installation in Zone 1 of wet rooms in accordance with DIN VDE 0100-701. Rely on certified safety!

The ELS range is approved by the German Institute for Construction Technology (DIBt, Z-51.1-193) and carries recognised international certification marks. It complies with all relevant standards and regulations. The following test certificates are also available:

- Performance curve tested and certified by TÜV.
- Sound insulation in building construction (DIN 4109), tested by the Institute for Acoustics and Building Physics (IAB), Oberursel.
- TÜV-certified backdraught shutter leakage rate.
- Third-party production monitoring by TÜV Bayern-Sachsen.
- Fire protection check valve and housing tested by the Materials Testing Institute of the Institute for Building Materials, Structural Engineering and Fire Protection (IBMB), Braunschweig, Swiss Fire Protection Register Z 5491.

ÖVE, SEV, ITB not valid for models with EC motors.

Type overview:
Find the perfect ELS for you.

ELS NFC
The economical basic model for bathrooms and WCs.

Premium performance as standard! 3+2 ventilation levels, as well as turn-on delay, overrun and interval operation, each individually configurable. For reliable room ventilation - even in your absence.

Ideal for: Rooms with normal or lower frequency of use.

ELS NFC F
Like basic model, but with added automatic humidity control.

ELS with automatic humidity control is equipped with an effective system for early moisture detection. Intelligent algorithms detect the intensity of moisture increase, allowing the fan to respond early and continuously.

Ideal for: Rooms with high moisture levels.

ELS NFC P
Like basic model, but with added presence function.

ELS with presence detector is the convenient option for controlling ventilation based on room occupancy. Automatic adjustments ensure demand-based and standard-compliant ventilation.

Ideal for: Rooms with high usage intensity.

ELS NFC VOC
Like basic model, but with added VOC sensor.

This fan puts an end to odours. ELS with integrated VOC sensor detects odours from various sources and continuously adjusts the fan›s output as required.

Ideal for: Rooms with increased odour levels.

ELS NFC CO2
Like basic model, but with added CO_2 sensor.

Thanks to variable CO_2 control, the ventilation intensity automatically adapts to the room air quality.

Ideal for: The simple implementation of ventilation in accordance with DIN 1946-6.

EC

→ More details p. 62

ELS with AC motor

Proven millions of times – preconfigured at the factory.

The established ELS AC models offer everything you would expect from an outstanding mono tube ventilation system. High pressure performance and good acoustics are combined with a multiple award-winning design.
Choose the ELS AC model that best suits your requirements from a wide range of options:

- Models with 1, 2 or 3 power levels.
- Available in various versions with predefined airflow rates – with manual control, automatic humidity control, presence detector or run-on function.
- Airflow options up to 100 m^3/h.

→ **More details p. 64**

ELS 0–10 V

Ideal for integration into building management systems (BMS).

The new ELS 0–10 V provides a modern, flexible solution for controlling your mono tube ventilation system. The central building management system (BMS) takes over the ventilation control – deciding if, when, for how long and at what intensity to ventilate. ELS can be integrated effortlessly and flexibly into the BMS.

- Universal 0–10 V connection.
- Compatible with external sensors.
- Integration into existing building management systems.
- High compatibility with a range of control strategies.

→ **More details p. 64**

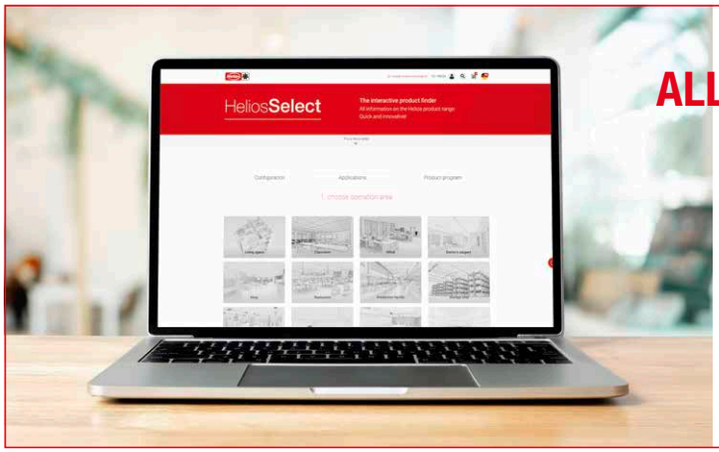

ALL DETAILS ON HELIOSSELECT

All information, technical data, performance curves, and accessories for your ELS unit, as well as various options for targeted configuration, can be found online:
www.HeliosSelect.de

ELS NFC and ELS NFC black

Dim. Inner panel ELS NFC and ELS NFC black

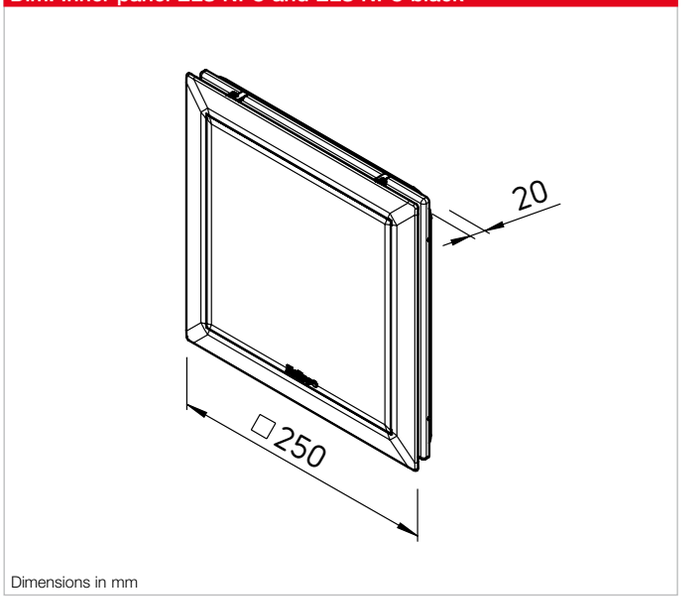

Dimensions in mm

ELS NFC is the innovative mono tube ventilation system for the ventilation of sanitary rooms, bathrooms and WCs. Five models with features such as timer, presence detector, automatic humidity control, as well as CO_2 and VOC sensors meet a wide range of requirements. Thanks to NFC technology, flow rates, settings and parameters can be flexibly configured without power, either in the packaging or on-site after installation – intuitively via the Helios ELS App.

Description for all types

- The ELS NFC with EC technology offers 5 programmable ventilation stages, including optional basic ventilation and configurable interval operation. The startup delay and overrun time can be conveniently adjusted via the App.
- Suitable for use in Zone 1 of wet rooms according to the German standard DIN VDE 0100-701.
- Design inner facade available in alpine white or deep black (RAL 9005).
- Standard with optical filter cleaning indicator and dishwasher-safe permanent filter.
- Tool-free insertion mounting with simultaneous electrical contact closure for easy and quick installation.

The models

- **ELS NFC**
  With overrun & interval
  Standard with 3 performance levels, plus 2 additional ventilation stages for basic ventilation and interval operation, including startup delay and overrun – individually configurable.

- **ELS NFC F**
  With automatic humidity control
  Like ELS NFC, but with automatic humidity control, configurable via the App. Intelligent algorithms detect the intensity of the humidity increase, allowing the fan to respond early and continuously.

- **ELS NFC P**
  With presence function
  Like ELS NFC, but with a presence detector. It automatically adjusts the ventilation operation to the room usage, ensuring demand-based, regulation-compliant ventilation. Parameters are adjustable via the App.

- **ELS NFC VOC**
  With VOC sensor
  Like ELS NFC, but with an integrated VOC sensor, configurable via the app. It detects odours from various sources and adjusts the fan's performance demand-based and continuously.

- **ELS NFC CO2**
  With CO_2 sensor
  Like ELS NFC, but with an integrated CO_2 sensor, configurable via the app. It automatically adjusts the ventilation intensity to the air quality in the room.

Technical data	With overrun and interval operation		With automatic humidity control		With presence detector		With VOC sensor		With CO_2 sensor	
	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Inner panel white	**ELS NFC**	40761	**ELS NFC F**	40762	**ELS NFC P**	40763	**ELS NFC VOC**	40764	**ELS NFC CO2**	40765
Inner panel black	**ELS NFC black**	40781	**ELS NFC F black**	40782	**ELS NFC P black**	40783	**ELS NFC VOC black**	40784	**ELS NFC CO2 black**	40785

	❶	❷	❸	❹	❺	❻	❼	❽	❾	❿	⓫	⓬	⓭
Configurable flow rates Level 1, 2 and 3 m^3/h	15	20	25	30	35	40	45	50	60	70	80	90	100
Power consumption W	3.5	3.6	3.7	3.8	4.0	4.4	4.9	5.4	6.0	7.3	9.6	12.0	15.0
Nominal current (unregulated) A	0.022	0.023	0.024	0.026	0.028	0.033	0.036	0.039	0.045	0.056	0.070	0.090	0.110
Nominal speed	560	600	660	720	780	840	900	980	1080	1260	1440	1620	1800
Sound pressure dB(A)* (flush-m.)	21	23	24	25	26	28	30	32	35	39	42	44	47
Sound power L_{WA} dB(A) (flush-m.)	25	27	28	29	30	32	34	36	39	43	46	48	51
Configurable flow rates Basic ventilation m^3/h	0 / 7,5 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 60 / 70 / 80 / 90 / 100												
Configurable flow rates Interval operation m^3/h	0 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 60 / 70 / 80 / 90 / 100												
Startup delay	0–120 sec. (individually adjustable for each stage)												
Overrun	0–90 min. (individually adjustable for each stage)												
Interval times	0–24 hrs												
Voltage/Frequency	1~, 230 V, 50/60 Hz												
Connection DN mm	78												
Protection type	IPX5												
Electrical connection	NYM-O, 5 x 1.5 mm^2												
Connection - wiring diagram no.	1543												
Weight approx. kg	1.69												

* at AL = 10 m^2 equivalent absorption area

Performance curves ELS NFC and ELS NFC black

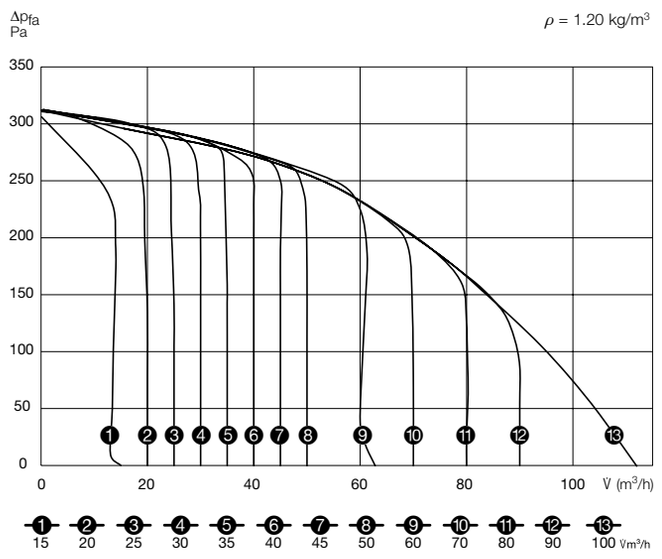

Ready? Easy!

ELS can be precisely tailored to individual requirements – anytime and anywhere. No need to unpack the unit or connect it to power or the internet: simply hold your smartphone near the unit, and everything is done in no time. The video demonstrates just how quick and easy it is.

Helios ELS APP

Flow rates, startup delay, overrun and interval times can be programmed in seconds using the App. Humidity and presence settings, as well as VOC and CO_2 parameters, can also be configured individually.

Everything at a glance

The App also features a time-saving ELS library, allowing frequently used settings to be saved, shared and quickly transferred to other devices. The status overview displays the current operating state, and if needed, Helios Support can be contacted directly.

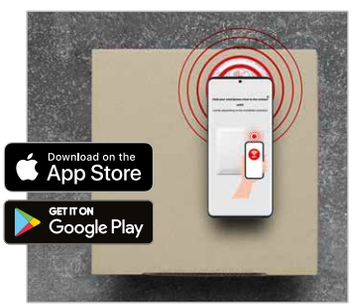

Switching without rethinking

ELS NFC is fully backward compatible and fits into all available housing variants. No changes are required for accessories either. This is great news for those who are familiar with and appreciate the flexible capabilities of the universal housing ELS-GU.

For all types	Factory settings and adjustable values of ELS NFC, ELS NFC F, ELS NFC P, ELS NFC CO2 and ELS NFC VOC
Flow rates	Adjustable: 15/20/25/30/35/40/45/50/60/70/80/90/100 m³/h and 7.5 m³/h as interval operation in 'basic ventilation' level
	Factory setting:
Flow rate Level 1	35 m³/h
Flow rate Level 2	60 m³/h
Flow rate Level 3	100 m³/h
Flow rate Basic ventilation	0 m³/h
Flow rate Interval operation	0 m³/h
Startup delay	Startup delay per level from 0 to 120 sec. adjustable in steps of 5
	Factory setting:
Startup delay Level 1	45 sec.
Startup delay Level 2	45 sec.
Startup delay Level 3	45 sec.
Overrun time	0 to 90 min. per level selectable to the minute
	Factory setting:
Overrun time Level 1	15 min.
Overrun time Level 2	15 min.
Overrun time Level 3	15 min.
Interval times	Interval runtime in minutes (steps of 5) and pause time per hour separately adjustable
	Factory setting:
Interval runtime	0 min.
Interval pause time	0 hrs

For sensors — Factory settings and adjustable sensor values

ELS NFC F with humidity control	Adjustable:	Factory setting:
Threshold value relative humidity	40 – 90 %	60 %
Maximum value relative humidity	40 – 90 %	90 %
Max. flow rate relative humidity	15 – 100 m³/h	60 m³/h
Mode	comfort / intensive	comfort

ELS NFC P with presence detector	Adjustable:	Factory setting:
Overrun time P-sensor	0 – 90 min.	15 min.
Max. flow rate P-sensor	15 – 100 m³/h	60 m³/h

ELS NFC CO2 with CO_2 sensor	Adjustable:	Factory setting:
Threshold value CO_2	400 – 3000 ppm	800 ppm
Maximum value CO_2	400 – 3000 ppm	1400 ppm
Max. flow rate CO_2	15 – 100 m³/h	60 m³/h

ELS NFC VOC with VOC sensor	Adjustable:	Factory setting:
Threshold value VOC	100 – 450 VOC	100 VOC
Maximum value VOC	100 – 450 VOC	250 VOC
Max. flow rate VOC	15 – 100 m³/h	60 m³/h
Mode	comfort / intensive	comfort

Accessory details	Page
Housing	68 ff.
Accessories	78 ff.

ELS-V..

AC

Dim. Inner panel ELS-V..

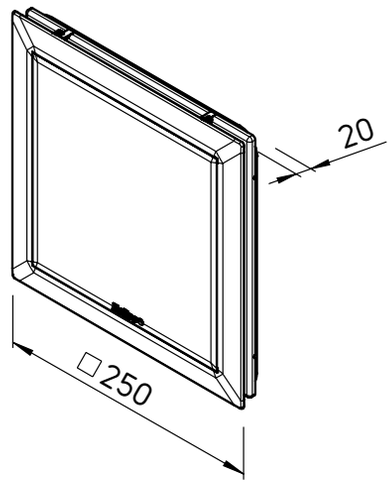

Dimensions in mm

Stronger. Quieter. More elegant. The classic ELS-V.. with AC technology still sets benchmarks and additionally impresses with a wide range of options for demand-based, barrier-free, and of course, regulation-compliant ventilation in bathrooms, WCs and other rooms.

Description for all types

- Predefined flow rates with single, double or three-stage operation.
- Suitable for use in Zone 1 of wet rooms according to the German standard DIN VDE 0100-701.
- Standard inner facade in alpine white, optional replacement panel in deep black (RAL 9005) available.
- Standard with optical filter cleaning indicator and dishwasher-safe permanent filter.
- Double insulated, class II, IP X5.
- Maintenance-free, ball-bearing AC energy-saving motor (230 V~, 50 Hz).
- Tool-free insertion mounting with simultaneous electrical contact closure for easy and fast installation.

The models

- **ELS-V..**
  Base model

Manual control via light switch. The required overrun time in windowless rooms must be ensured with a overrun switch (accessory).

- **ELS-VF..**
  With automatic humidity control

ELS with automatic humidity control is equipped with a highly effective and advanced system for early humidity detection. Intelligent algorithms also detect the intensity of the humidity increase and respond faster than traditional systems. The overrun time and interval operation are fully automated.

- **ELS-VN / VNC..**
  With overrun & interval

ELS-VN with overrun is designed for bathrooms and WCs in residential units with normal usage frequency. For rooms with sporadic low usage, ELS-VNC with programmable overrun and interval operation offers an economical and secure ventilation solution – even in the absence of occupants. Control is via an external switch, typically the light switch.

- **ELS-VP..**
  With presence function

ELS with presence detector is the convenient option for setting the ventilation operation depending on the room's occupancy. It automatically ensures demand-based and regulation-compliant ventilation at all times. Ideal for barrier-free toilets and sanitary rooms used privately or commercially, such as in hotels, restaurants, offices, care homes and more. The overrun time is approximately 15 minutes.

Type	Ref. no.	Area of application	Flow rate in m^3/h	Connection DN mm	Power consumption in Watt	Sound pressure level dB(A)*		Sound power level L_{WA} dB(A)		Weight approx. kg
						Flush-mounted	Surface-mount.	Flush-mounted	Surface-mount.	
ELS Standard										
ELS-V 60	08131	Bathroom or WC	60	78	18	35	39	39	43	1.69
ELS-V 60/35	08133	Bathroom or WC	60/35	78	18/9	35/26	39/30	39/30	43/34	1.69
ELS-V 100	08132	Bathroom+WC, kitchen	100	78	29	47	51	51	55	1.69
ELS-V 100/60/35	08136	Bathroom+WC, kitchen	100/60/35	78	29/18/9	47/35/26	51/39/30	51/39/30	55/43/34	1.69
ELS with automatic humidity control										
ELS-VF 60	08161	Bathroom or WC	60	78	18	35	39	39	43	1.69
ELS-VF 60/35	08163	Bathroom or WC	60/35	78	18/9	35/26	39/30	39/30	43/34	1.69
ELS-VF 100/60/35	08166	Bathroom+WC, kitchen	100/60/35	78	29/18/9	47/35/26	51/39/30	51/39/30	55/43/34	1.69
ELS with overrun / ELS with adjustable overrun										
ELS-VN 60	08137	Bathroom or WC	60	78	18	35	39	39	43	1.69
ELS-VN 60/35	08139	Bathroom or WC	60/35	78	18/9	35/26	39/30	39/30	43/34	1.69
ELS-VN 100	08138	Bathroom+WC, kitchen	100	78	29	47	51	51	55	1.69
ELS-VN 100/60	08141	Bathroom+WC, kitchen	100/60	78	29/18	47/35	51/39	51/39	55/43	1.69
ELS-VNC 60	08143	Bathroom or WC	60	78	18	35	39	39	43	1.69
ELS-VNC 100	08144	Bathroom+WC, kitchen	100	78	29	47	51	51	55	1.69
ELS with presence detector										
ELS-VP 60	08149	Bathroom or WC	60	78	18	35	39	39	43	1.69
ELS-VP 100	08150	Bathroom+WC, kitchen	100	78	29	47	51	51	55	1.69

* at AL = 10 m^2 equivalent absorption area ** for deactivating the automatic function (type ELS-VF..) or the interval function (type ELS-VNC)

Performance curves ELS-V..

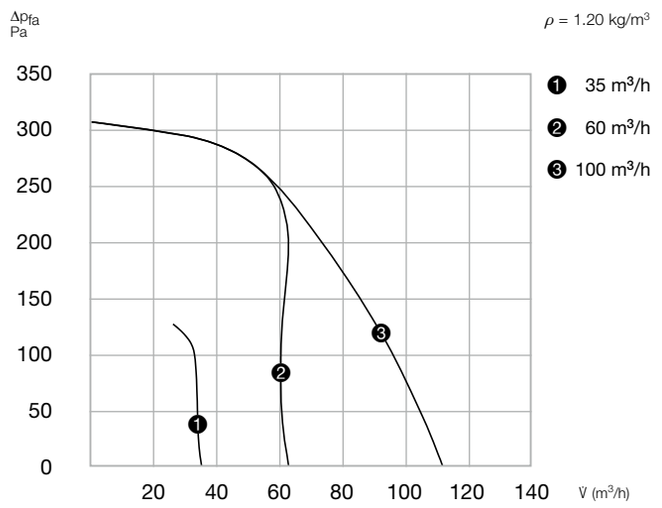

Factory settings and adjustable values

ELS-VN.. with overrun

	Adjustable:	Factory setting:
Startup delay	–	45 sec.
Overrun	6, 15 and 21 min.	15 min.

ELS-VNC.. with adjustable overrun

	Adjustable:	Factory setting:
Startup delay	0 and 45 sec.	45 sec.
Overrun	6, 10, 15 and 21 min.	6 min.
Interval	4, 8, 12 and 24 hrs	4 hrs

ELS-VF.. with automatic humidity control

	Adjustable:	Factory setting:
Startup delay	0 and 45 sec.	45 sec.
Overrun	6, 10, 15 and 21 min.	15 min.

ELS-VP.. with presence detector

	Adjustable:	Factory setting:
Overrun	–	15 min.

One Fan. One Word.

With 15 types, the ELS-V.. portfolio offers fully pre-configured models for all essential applications. Simple, clear, and unchangeable

Back in black

A new look for ELS-V.. – even if it's already installed. With +black, the ELS facade is now optionally available in a sleek black finish. Whether you order it right away or upgrade later is entirely up to you.

Barrier-free ventilation

With ELS-V.., advanced solutions for demand-based automatic operation are readily available. Choose the option that best suits your project.

Proven millions of times

Whether in terms of craftsmanship, technology or functionality – with ELS-V.., you are choosing durable, construction-tested premium quality. The same applies to the compatible housings, which can be installed in record time thanks to numerous clever details and well-designed accessories.

Universal genius

The flush-mounted housing ELS-GU is the perfect complement to the ELS-V.. fan units. Compact and highly versatile, it is ideal for single- and two-room ventilation or for WC connection above the flush pipe.

Accessory details	Page
Housing	68 ff.
Accessories	78 ff.

	Electrical connection	Connection - wiring diagram no.	Accessories: DSEL 2 no. 01306 Speed and operating switch, 2-speed	Accessories: DSEL 3 no. 01611 Speed and operating switch, 3-speed
	NYM-O, 2x1.5mm²	869		
	NYM-O, 3x1.5mm²	871	•	
	NYM-O, 2x1.5mm²	870		
	NYM-O, 4x1.5mm²	874	•	•
	NYM-O, 3x1.5mm² (4x1.5mm²**)	881		
	NYM-O,4x1.5mm² (5x1.5mm²**)	883	•	
	NYM-O, 5x1.5mm²	886	•	•
	NYM-O, 3x1.5mm²	875		
	NYM-O, 4x1.5mm²	877	•	
	NYM-O, 3x1.5mm²	876		
	NYM-O, 4x1.5mm²	879	•	
	NYM-O, 3x1.5mm² (4x1.5mm²**)	881		
	NYM-O, 3x1.5mm² (4x1.5mm²**)	882		
	NYM-O, 2x1.5mm²	887		
	NYM-O, 2x1.5mm²	887		

ELS NFC with automatic humidity control. Fast and efficient humidity reduction thanks to continuous, trend-based regulation.

- Ideal for shower and washrooms thanks to the configurable automatic humidity control.
- The early humidity detection system increases fan speed as soon as rising moisture is detected, adjusting continuously to different humidity levels.
  - Normal humidity rise: ELS activates at a defined threshold and runs until humidity levels are sufficiently reduced.
  - Rapid humidity rise: ELS activates before the threshold is reached, preventing excessive humidity early on.
- New App feature: choose between fast, intensive mode and quiet, comfort mode.

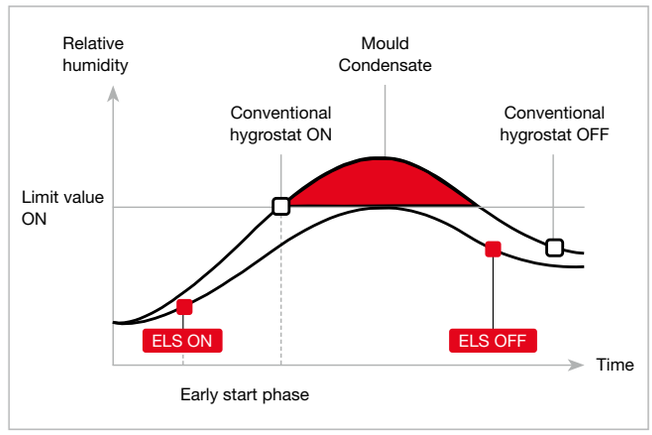

ELS NFC P with presence function.

- Switch-free operation makes the ELS NFC P the top choice for barrier-free installations in toilets and washrooms in care homes, hotels, and office buildings.
- The App allows precise configuration of the overrun time (0–90 minutes) and maximum airflow rate during presence-activated automatic operation.



The seamless presence function detects motion and automatically adjusts ventilation to actual room use – efficiently and as needed.

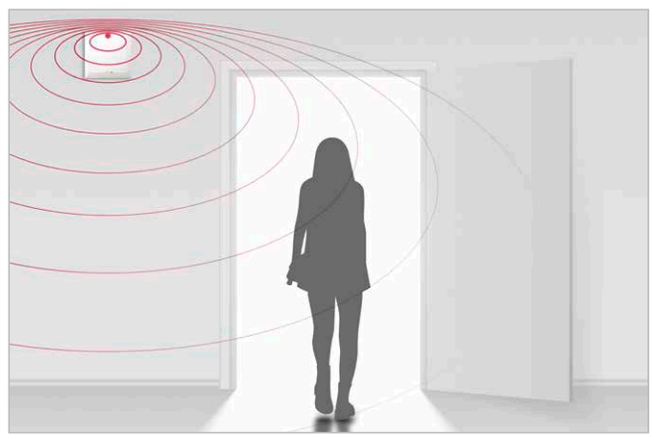

ELS with sensor operation. Seamless automatic operation based on indoor air quality. ELS now offers new options for fully automatic fan control based on air quality. When sensor mode is activated, the fan switches on automatically once the preset threshold is reached and adjusts airflow continuously according to measured values.

ELS NFC VOC

- Continuously measures the concentration of volatile organic compounds (VOCs) in the room air and responds to increases with seamless fan control.
- The ELS App allows users to define the maximum flow rate and critical VOC thresholds.
- Unpleasant odours are removed right at the source.

ELS NFC CO2

- Continuously monitors the CO_2 level in the room and activates ventilation when the user-defined threshold is reached.
- The fan operates continuously and adjusts in an energy-efficient manner to the actual air quality.
- Ideal for implementing ventilation systems compliant with DIN 1946-6.

ELS 0–10 V

0–10 V

EC

Performance curves ELS 0–10 V

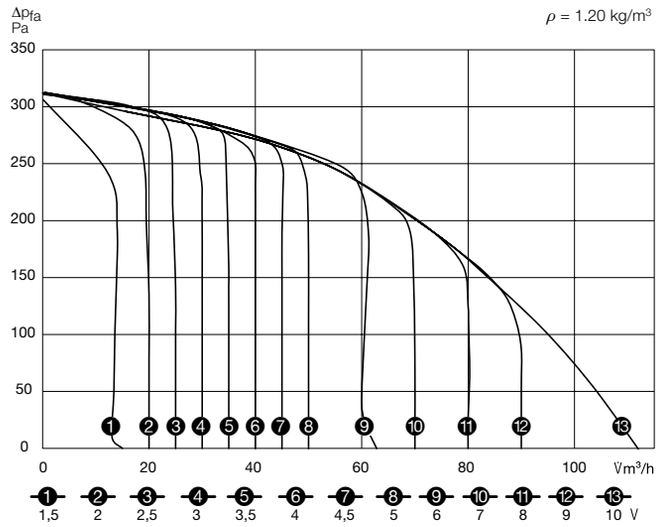

The illustrated performance curves are for reference only. The actual performance curve of the installed unit depends on the specified control voltage.

The ELS 0–10 V fan unit offers a modern and flexible control option via a 0–10 V input. This enables demand-based and automated ventilation control through a central building management system (BMS) – from activation and runtime to the desired intensity. With its seamless integration into building management systems, ELS 0–10 V is the ideal solution for use in hotels, care facilities and commercial properties.

Description / Delivery

- Ideal for integration with a building management system (BMS) or control via adjustable sensors with a 0–10 V output.
- High pressure performance ensures a constant flow rate while maintaining exceptionally quiet operation.
- Suitable for use in Zone 1 of wet rooms according to the German standard DIN VDE 0100-701.
- Standard alpine white inner facade, with an optional deep black (RAL 9005) cover available.
- Equipped with an optical filter cleaning indicator and a dishwasher-safe permanent filter.
- Double insulated, class II, IPX5.
- Energy-saving EC motor (230 V~, 50/60 Hz).
- Tool-free insertion mounting with simultaneous electrical contact closure for easy and fast installation.

Performance control

- The flow rate of the ELS 0–10 V fan unit can be continuously adjusted within a range of 15 – 100 m³/h via a 0–10 V control signal.
- Additionally, control via external potentiometers (e.g., Helios PU/PA) is possible. The required control voltage is provided directly by the motor electronics. The fan also transmits a status signal (On/Off) via an 'Open Collector' transistor output, ensuring easy feedback to higher-level systems.

Housing

- Suitable for universal installation in all ELS flush-mounted and surface-mounted housings.

Accessory details	Page
Housing	68 ff.
Accessories	78 ff.

Dim. Inner panel ELS 0–10 V

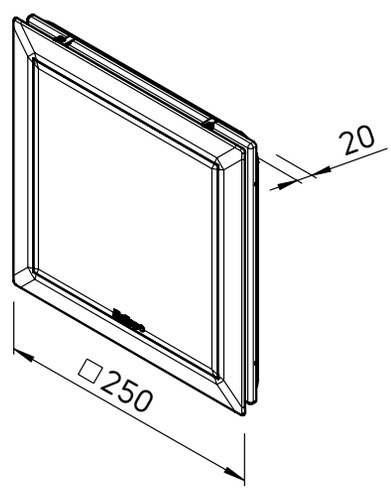

Dimensions in mm

Type Ref. no.	ELS 0–10 V 40766
Poti supply in V / mA	10 V / 10 mA
Control / Setpoint input in V / A (load)	0–10 V / 0.1 mA
Operating status indication	Open Collector fan On / Off
Voltage/Frequency	1~, 230 V, 50/60 Hz
Connection DN mm	78
Protection type	IP X5
Electrical connection	NYM-O, 6x1.5 mm²
Weight approx. kg	1.69
Connection to potentiometer according to SS	1544
Connection BMS according to SS	1545
Connection to PU/PA according to SS	1538

As clever as the entire system:
The housing assembly.

ELS-MB

For integration into pre-wall systems, the ELS-MB mounting bracket provides the ideal connection between ELS and the system components of the pre-wall system providers. The ELS-MB is easily attached using hexagon-head or square-head screws to the anti-rotation grooves on the rear housing of the ELS.

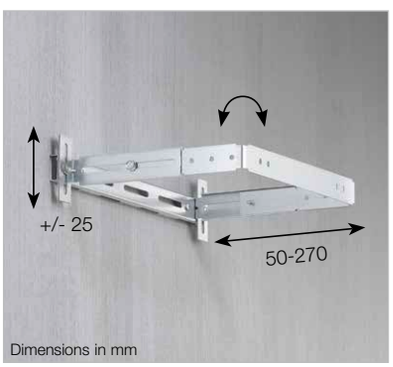

ELS-MHU

With regard to installation in shafts and suspended ceilings, the universal mounting bracket ELS-MHU provides the necessary flexibility. Practical for flush-mounted housing installation in installation shafts, primarily for housings with fire protection encasement. For mounting the housing to the ceiling or wall.

CLEVER PLUG-IN FIXING
FOR MOUNTING SCREWS

All flush-mounted housings can be correctly positioned in a few minutes as it is adjustable in height, depth and perpendicular. Anti-rotation grooves for hexagon-head or square-head screws are recessed on the back of housing types ELS-GU and -GUBA. They form the fixing points for the mounting bracket; alternatively, there are two predetermined breaking points for firm screwing to on-site elements.

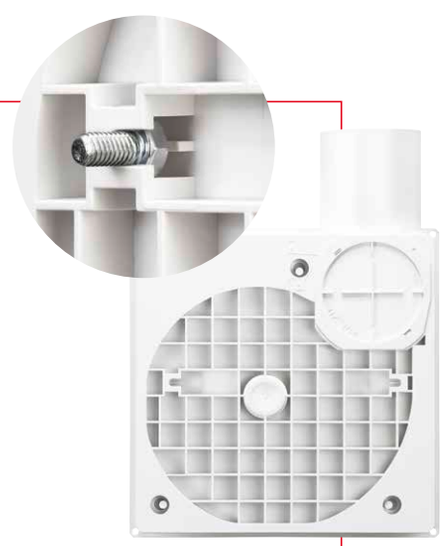

Tailored to the construction progress: Thanks to sophisticated mounting features and the clever pre-wall adapter ELS-VA, installation in common pre-wall systems becomes a quick and easy task. Everything in one go: If desired, the complete installation of ELS can also be carried out during the final installation phase. The entire installation is completed with just a few simple steps.

PREPARATION

1

The extract air duct and power connection are placed at the later installation position of the ELS unit.

2

The pre-wall cutout is precisely and easily made for installation using the markings on the ELS housing.

INSTALLATION VARIANT: IN CONSTRUCTION

3

The practical pre-wall adapter ELS-VA is now installed. The extract air duct and power supply are connected to the ELS housing. Then, the housing is simply slid into place. The included plaster cover protects against contamination.

4

The desired wall finishing is applied.

5

During the final work in the room, the fan unit is simply slid into place and clicks into position audibly.

6

With just a few steps, the facade cover can be mounted, and the included permanent filter can be inserted.

7

ELS is now ready for operation.

INSTALLATION VARIANT: BEFORE FINAL ACCEPTANCE

3

The desired wall finishing is applied.

4

The flush-mounted housing can now be easily connected to the power supply with the pre-assembled pre-wall adapter and fan unit. It is then slid into the finished wall.

5

The pre-wall adapter is screwed directly onto the wall, ensuring maximum stability.

6

Finally, the facade cover is mounted using the ELS-AGR spacer frame, and the permanent filter is inserted.

7

ELS is now ready for operation.

One housing.
All possibilities.

The flush-mounted housing **ELS-GU** is not only pleasantly compact but also incredibly flexible in its application. Whether used for single-room or two-room ventilation, or for WC connection above the drainage pipe – the ELS-GU fits perfectly in any situation. Installation is possible in walls, shafts, pre-walls, or ceilings, with the air outlet optionally positioned at the rear or on top. The housing can also be rotated 90° to the left or right – easily and without tools.

There is only one housing type for every installation method and ventilation requirement. This is not only practical on the construction site but also highly economical for inventory management.

Good to know: Even when fire protection is a consideration, you don't have to sacrifice flexibility. The **ELS-GUBA**, the smart flush-mounted housing with an integrated fire protection shut-off device, offers exactly the same possibilities.

1. SINGLE-ROOM VENTILATION

Air intake via front facade.

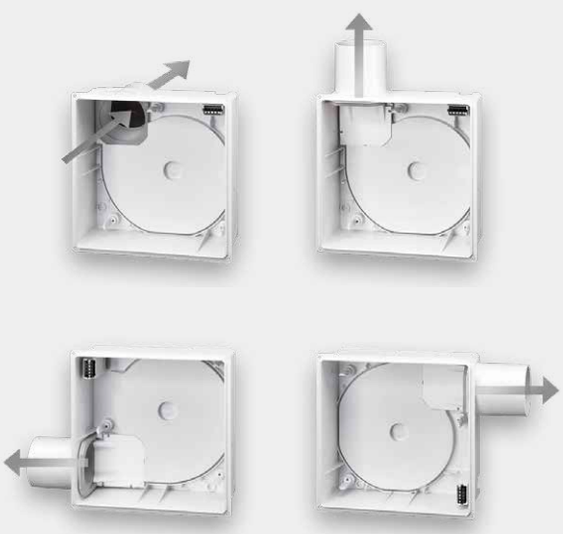

2. TWO-ROOM VENTILATION

Two-room ventilation with outlet to the top or back.

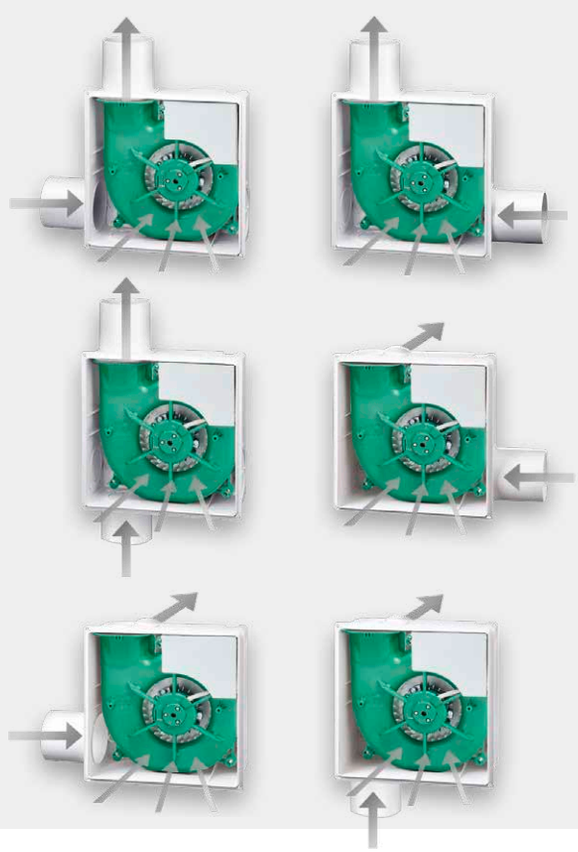

MULTITALENT

3. WC CONNECTION

WC connection via the flush pipe, air outlet to the top or back.

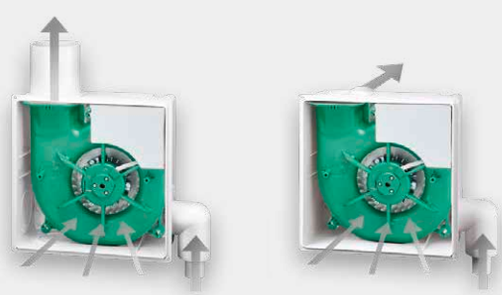

JUST AS CLEVER:
SURFACE-MOUNTED HOUSING

ELS-GAP and ELS-GAPB with fire protection shut-off device can be mounted by rotating the air outlet 360°, allowing the air outlet to be positioned at the top left, top right, bottom left, or bottom right.

The perfect housing solution
for all requirements.

Adapted to the installation location and fire protection requirements, the perfect housing solution is always at the ready. Determine the applicable installation situation using the illustrations and select the corresponding housing in the quick overview. All relevant housing details can be found on the following pages.

A INSIDE F90 SHAFT

Steel flex or steel pipe only to secondary room connection.



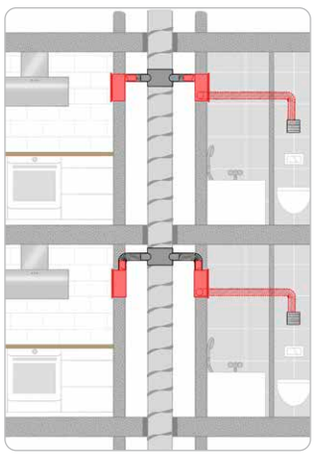

Installation, outlet	Type	Ref. no.
Single room ventilation of bathroom, WC or open-plan kitchens		
Flush-mounted, lateral outlet	ELS-GUB	08112
Flush-mounted, rear outlet	ELS-GUBR	08113
Surface-mounted, rear outlet	–	–
Surface-mounted, lateral outlet	–	–
Two room ventilation of bathroom and WC		
Flush-mounted, lateral outlet	ELS-GUBZL left ELS-GUBZR right	08115 08117
Flush-mounted, rear outlet	ELS-GUBRZL left ELS-GUBRZR right	08116 08118

B OUTSIDE F90 SHAFT

Steel flex or steel pipe to riser pipe.



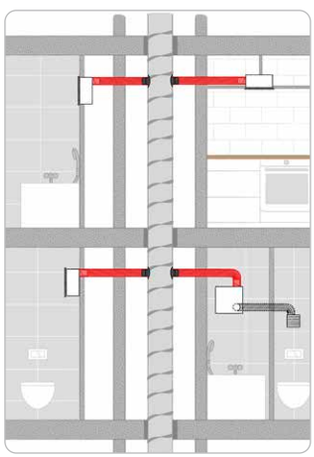

Installation, outlet	Type	Ref. no.
Single room ventilation of bathroom, WC or open-plan kitchens		
Flush-mounted, lateral outlet	ELS-GUBA	08114
Flush-mounted, rear outlet	ELS-GUBA + accessory ELS-ARS	08114 08185
Surface-mounted, rear outlet	ELS-GAPB	08128
Surface-mounted, lateral outlet	ELS-GUBA + accessory ELS-APASA	08114 07328
Two room ventilation of bathroom and WC		
Flush-mounted, lateral outlet	ELS-GUBA ELS-ZS	08114 08186
Flush-mounted, rear outlet	ELS-GUBA + accessory ELS-ARS + accessory ELS-ZS	08114 08185 08186

C ON F90 SHAFT



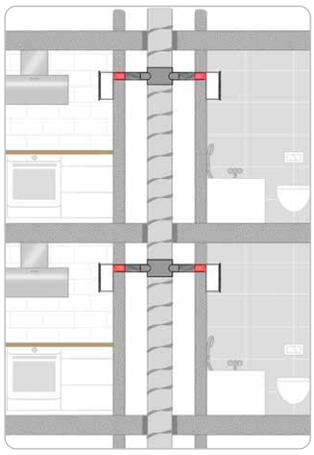

Installation, outlet	Type	Ref. no.
Single room ventilation of bathroom, WC or open-plan kitchens		
Flush-mounted, lateral outlet	–	–
Flush-mounted, rear outlet	–	–
Surface-mounted, rear outlet	ELS-GAPB	08128
Surface-mounted, lateral outlet	–	–
Two room ventilation of bathroom and WC		
Flush-mounted, lateral outlet	–	–
Flush-mounted, rear outlet	–	–

D WITH CEILING BARRIER



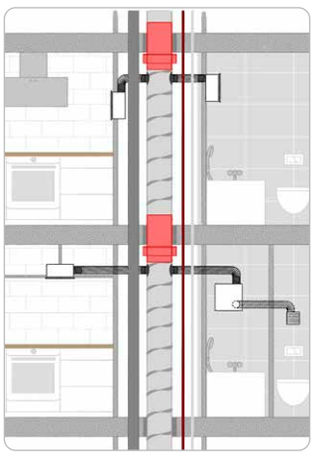

Installation, outlet	Type	Ref. no.
Single room ventilation of bathroom, WC or open-plan kitchens		
Flush-mounted, lateral outlet	ELS-GU	08111
Flush-mounted, rear outlet	ELS-GU + accessory ELS-ARS	08111 08185
Surface-mounted, rear outlet	ELS-GAP	08127
Surface-mounted, lateral outlet	ELS-GU + accessory ELS-APASA	08111 07328
Two room ventilation of bathroom and WC		
Flush-mounted, lateral outlet	ELS-GU + accessory ELS-ZS	08111 08186
Flush-mounted, rear outlet	ELS-GU + accessory ELS-ARS + accessory ELS-ZS	08111 08185 08186

E WITHOUT FIRE PROTECTION

For up to 2 full floors.



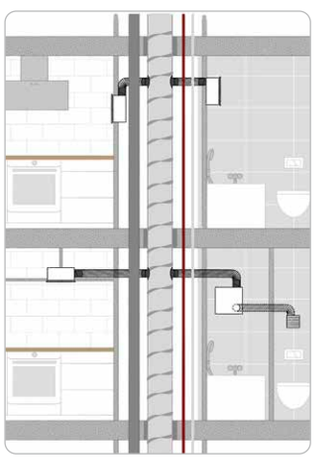

Installation, outlet	Type	Ref. no.
Single room ventilation of bathroom, WC or open-plan kitchens		
Flush-mounted, lateral outlet	ELS-GU	08111
Flush-mounted, rear outlet	ELS-GU + accessory ELS-ARS	08111 08185
Surface-mounted, rear outlet	ELS-GAP	08127
Surface-mounted, lateral outlet	ELS-GU + accessory ELS-APASA	08111 07328
Two room ventilation of bathroom and WC		
Flush-mounted, lateral outlet	ELS-GU + accessory ELS-ZS	08111 08186
Flush-mounted, rear outlet	ELS-GU + accessory ELS-ARS + accessory ELS-ZS	08111 08185 08186

Information on fire protection in multi-storey buildings

With regard to the planning and execution of ventilation systems, the State fire protection requirements must be complied with. Buildings with more than two full floors are normally subject to such requirements. In order to prevent the transmission of fire to other fire sections, the illustrated solutions are available according to the structural conditions for the installation of mono tube ventilation systems.

A Flush-mounted installations in wall, ceiling and fire-resistant shaft (F90) or L90 ventilation ducts.

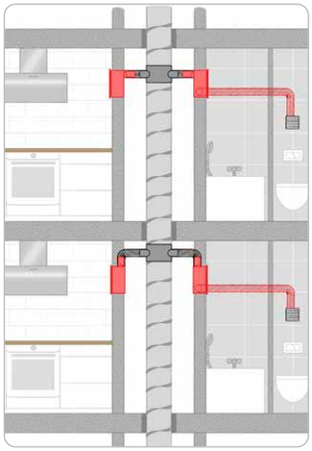

Connection of up to 3 housings per floor possible on more than 20 full floors. The second room connection must be carried out with steel flex pipe connection.

- Flush-mounted housing with fire protection encasement K90
- Metal outlet connections with automatic non-return valve and shut-off upon triggering of fusible link
- Removable plug connector for electrical connection
- Replaceable hinged plaster cover
- Connection DN 80 mm
- General technical approval, Z-51.1-193

Single room ventilation of bathroom, WC or open-plan kitchens



Type	ELS-GUB
Ref. no.	08112
Installation	Flush-mounted
Outlet	lateral, to top, can be turned to left or right



Type	ELS-GUBR
Ref. no.	08113
Installation	Flush-mounted
Outlet	rear, freely rotatable by 90°

Two room ventilation of bathroom and WC



Type	ELS-GUBZL
Ref. no.	08115
Installation	Flush-mounted
Outlet	lateral, to top, can be turned to left or right
Two room connection	left



Type	ELS-GUBZR
Ref. no.	08117
Installation	Flush-mounted
Outlet	lateral, to top, can be turned to left or right
Two room connection	right



Type	ELS-GUBRZL
Ref. no.	08116
Installation	Flush-mounted
Outlet	rear, freely rotatable by 90°
Two room connection	left

Two room ventilation of bathroom and WC



Type	ELS-GUBRZR
Ref. no.	08118
Installation	Flush-mounted
Outlet	rear, freely rotatable by 90°
Two room connection	right

B Flush or surface-mounted installations in wall or ceiling outside of fire-resistant shafts (F90) or L90 ventilation ducts.

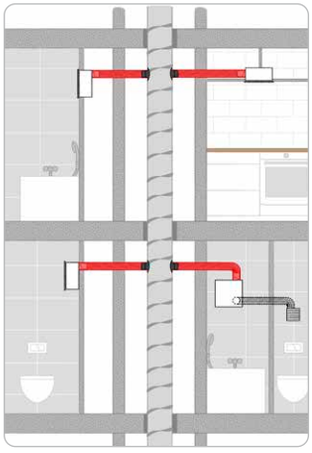

Connection of up to 3 housings per floor possible on more than 20 floors. Steel flex pipe connection to riser pipe.

- Plastic housing with fire protection element K90
- Metal outlet connections with automatic non-return valve and shut-off upon triggering of fusible link
- Made of plastic (white), in fire class B 2
- Replaceable hinged plaster cover
- Connection DN 80 mm
- General technical approval, Z-51.1-193

Single room ventilation of bathroom, WC or open-plan kitchens
Also for second room ventilation of bathroom and WC using accessory set*





Type	ELS-GUBA
Ref. no.	08114
Installation	Flush-mounted
Outlet	lateral, to top, can be turned to left or right
Outlet optional	rear, freely rotatable by 90° ELS-ARS, ref. no. 08185
*Two room ventilation optional left or right	using ELS-ZS, Ref. no. 08186



Type	ELS-APASA (+ ELS-GUBA)**
Ref. no.	07328
Installation	Surface-mounted
Outlet	lateral, to top, can be turned to left or right

**ELS-GUBA (Ref. no. 08114) is not included in the scope of delivery.





ELS surface-mounted unit

Type	ELS-GAPB
Ref. no.	08128
Installation	Surface-mounted
Outlet	rear, freely rotatable by 90°

C Surface-mounted installation in wall or ceiling on walls of fire-resistant shafts (F90) or ventilation ducts (L90).

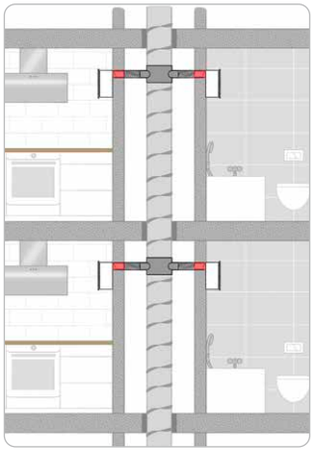

Connection of up to 3 housings per floor possible on more than 20 floors.

- Surface mounting housing with fire protection element K90
- Metal outlet connections with automatic non-return valve and shut-off upon triggering of fusible link
- Plug connector for electrical connection
- Made of plastic (white), in fire class B 2
- Connection Ø air outlet DN 80 mm
- General technical approval, Z-51.1-193

Single room ventilation of bathroom, WC or open-plan kitchens





ELS surface-mounted unit

Type	ELS-GAPB
Ref. no.	08128
Installation	Surface-mounted
Outlet	rear, freely rotatable by 90°

D Flush or surface-mounted installation in wall, ceiling or in installation shaft with fire protection solution ELS-D ceiling barrier.

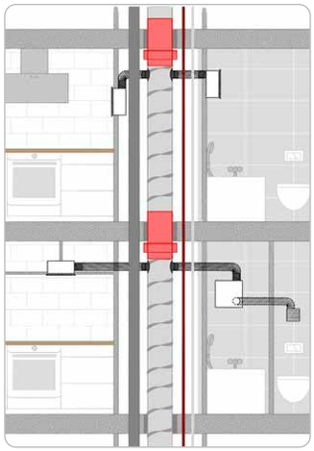

Connection of up to 3 housings per floor possible. For more than 20 floors when using fire protection ceiling barrier in the riser pipe.

- Applicable housings: Universal housing without fire protection ELS-GU for flush-mounting or ELS-GAP or ELS-APASA in connection with ELS-GU for surface-mounting
- Housing without fire protection, with airtight non-return valve
- Removable plug connector for electrical connection
- Made of plastic (white), in fire class B 2
- Connection DN 80 mm
- General technical approval, Z-51.1-193

Flush or surface-mounted installation. Single room ventilation of bathroom, WC or open-plan kitchens

Also for second room ventilation of bathroom and WC using accessory set*





Type	ELS-GU
Ref. no.	08111
Installation	Flush-mounted
Outlet	lateral, to top, can be turned to left or right
Outlet optional	rear, freely rotatable by 90° ELS-ARS, ref. no. 08185
*Two room ventilation optional left or right	using ELS-ZS, Ref. no. 08186



Type	ELS-APASA (+ ELS-GU)**
Ref. no.	07328
Installation	Surface-mounted
Outlet	lateral, to top, can be turned to left or right

**ELS-GU (Ref. no. 08111) is not included in the scope of delivery.

Surface-mounting. Single room ventilation of bathroom, WC or open-plan kitchens





ELS surface-mounted unit

Type	ELS-GAP
Ref. no.	08127
Installation	Surface-mounted
Outlet	rear, freely rotatable by 90°

E Flush or surface-mounted installations in wall, ceiling or in installation shaft without fire protection.

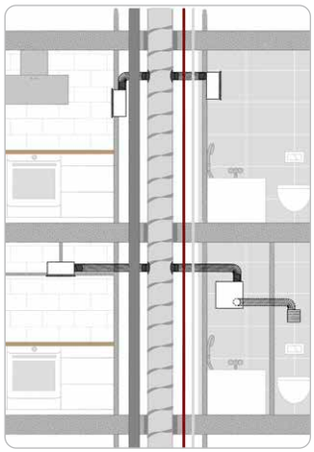

Connection of up to 3 housings per floor possible. For connection to shared riser pipe of up to two full floors.

- Applicable housings: Universal housing without fire protection ELS-GU for flush-mounting or ELS-GAP or ELS-APASA in connection with ELS-GU for surface-mounting
- Housing without fire protection, with airtight non-return valve
- Removable plug connector for electrical connection
- Made of plastic (white), in fire class B 2
- Connection DN 80 mm
- General technical approval, Z-51.1-193

Flush-mounting. Single room ventilation of bathroom, WC or open-plan kitchens
Also for second room ventilation of bathroom and WC using accessory set*





Type	ELS-GU
Ref. no.	08111
Installation	Flush-mounted
Outlet	lateral, to top, can be turned to left or right
Outlet optional	rear, freely rotatable by 90° ELS-ARS, ref. no. 08185
*Two room ventilation optional left or right	using ELS-ZS, Ref. no. 08186

Surface-mounting. Single room ventilation of bathroom, WC or open-plan kitchens





ELS surface-mounted unit

Type	ELS-GAP
Ref. no.	08127
Installation	Surface-mounted
Outlet	rear, freely rotatable by 90°



Type	ELS-APASA (+ ELS-GU)**
Ref. no.	07328
Installation	Surface-mounted
Outlet	lateral, to top, can be turned to left or right

**ELS-GU (Ref. no. 08111) is not included in the scope of delivery.

Adaptation kit Rear outlet
ELS-ARS Ref. no. 08185

The air outlet connections can be placed on the back of the unit for the flush-mounted housings ELS-GU and -GUBA without fire protection encasement.
The ARS diverter must simply be mounted on the outlet side in the fan for the correct air flow.

ELS-ARS

Dimensions in mm

Pre- wall adapter
ELS-VA Ref. no. 08189

Allows the front-side insertion and mounting of flush-mounted ELS housings in pre-walls. The adapter is screwed to the housing and its frame with Spax screws or pre-wall screws. Compatible with housing types ELS-GU and ELS-GUBA.

ELS-VA



Dimensions in mm

Second room kit
ELS-ZS Ref. no. 08186

Extract air unit for flush-mounted installation for connection to all housings for second room connection ELS-GU. Award-winning design facade in alpine white, with closed front and all-round air inflow. Integrated, easily accessible air filter. Includes second room connectors for fan housings ELS-GU and -GUBA.

ELS-ZS

Dimensions in mm

ELS-VA with housing

WC connection kit
ELS-WCS Ref. no. 08191

Kit for connecting WC extraction in combination with the room ventilation; for housing types ELS-GU, -GUBA. The fan housing and cistern pipe are connected with commercially available HT pipes. Scope of delivery: Connecting panel, 90° angle, 2 stepped connectors Ø 40 and 30 mm.

ELS-WCS

Dimensions in mm

Surface-mounted adapter with side inlet
ELS-APASA Ref. no. 07328

Made of steel sheet in alpine white. Insulated adapter with side inlet for surface mounted installation. Compatible with housing types ELS-GU and ELS-GUBA.

ELS-APASA

Dimensions in mm

Second room connectors
ELS-ZAS Ref. no. 08184

Connectors for housing types ELS-GU and -GUBA.
For the connection of second room extraction on site.
NW 75/80 mm.

ELS-ZAS

Dimensions in mm

Sunken frame
ELS-VSR Ref. no. 07322

Made of steel sheet in alpine white. Allows flush-mounted wall and ceiling installation of inner facade. Suitable for ELS-GU and ELS-GUBA.

ELS-VSR



Dimensions in mm

Universal mounting bracket
ELS-MHU Ref. no. 08187

Practical for flush-mounted housing installation in installation shafts,
primarily for housings with fire protection encasement.
For mounting the housing to the ceiling or wall. Adjustable in height, depth and perpendicular; fits with all flush-mounted housing types.

ELS-MHU



Dimensions in mm

Flush-mounted spacer frame
ELS-UPA Ref. no. 07332

Used when ELS-GU and ELS-GUBA are installed too deep. This closes the gap (max. 50 mm) between the housing and panelling.

ELS-UPA

Dimensions in mm

Mounting bracket
ELS-MB Ref. no. 08188

For mounting flush-mounted housings in pre-wall systems in connection with elements from the pre-wall supplier.
The mounting bracket is easily mounted to the back of the ELS housing using hexagon-head and square-head screws in the anti-rotation grooves.

ELS-MB

Dimensions in mm

Space frame
ELS-AGR Ref. no. 08193

Covers up to 15 mm of protruding flush-mounted housing, which has not been installed flush with the plaster or tiles.
The spacer frame is simply fixed between the wall/ceiling and ELS inner facade.

ELS-AGR



Dimensions in mm

Plaster cover

ELS-PB Ref. no. 08194

For covering gaps in case of housing cut-outs which have been uncleanly plastered, tiled or if they are too large, which cannot be completely covered by the ELS inner facade.
The plaster cover is simply fixed between the wall/ceiling and ELS inner facade.

ELS-PB



Dimensions in mm

Spare air filter made of renewable synthetic fibre

ELF-ELS Ref. no. 08190

Permanent filter for fan units, suitable for cleaning in dishwasher. Class ISO Coarse 50 % (G3).
Unit = 2 pcs.

ELF-ELS

ELF-DLV 100 Ref. no. 03042

For second room intake unit ELF-ZS. Class ISO Coarse 30 % (G2).
Unit = 5 pcs.

ELF-DLV 100

Speed and operating switch

DSEL 2 Ref. no. 01306

Reversible or speed control and on-off rocker switch, can be used to change the speed of fans with two performance levels. Front made of white plastic.
For installation in 55 flush-mounted box. Protection type IP30, 230 V, 50/60 Hz, I max. 3 A inductive.

DSEL 2



Dimensions in mm

Speed and operating switch

DSEL 3 Ref. no. 01611

Rotary switch with 0 position for controlling fans with 3 speeds. Room light cannot be switched in parallel. Front made of white plastic. For installation in 55 flush-mounted box. Protection type IP30, 230 V, 50/60 Hz, I max., 3 A inductive.

DSEL 3



Dimensions in mm

Speed potentiometer for ELS 0–10 V

With the functions On/Off, stepless speed control.

PU 10 Ref. no. 01734

For flush-mounted installation.
Installation in standard flush-mounted box
Dim. mm W 80 x H 80 x D 21 protrus.

PA 10 Ref. no. 01735

For surface-mounted installation.
Installation Surface-mounted installation
Dim. mm W 80 x H 80 x D 65

PU 10 / PA 10

Fire protection ceiling barrier

When using this shut-off device, no fire resistance classification is required for any other components. The universally applicable housing types ELS-GU (flush-mounted) and -GAP (surface-mounted) can be connected. Branch and connection lines are implemented cost-effectively and installation-friendly in aluminium flexible tubing.

Type	Ref. no.	Riser pipe
ELS-D 100	00270	**100 mm**
ELS-D 125	00185	**125 mm**
ELS-D 140	00186	**140 mm**
ELS-D 160	00187	**160 mm**
ELS-D 180	00188	**180 mm**
ELS-D 200	00271	**200 mm**

ELS-D

Z-41.3-368

ELS-D pre-wall installation



Replacement facade panel

Facade panel including frame and inner facade in deep black (RAL 9005). Filter and screws are not included.

Type	Version	Ref. no.
ELS-FB black	For standard types and ELS 0–10 V	40774
ELS-FB-F black	For types with automatic humidity control	40775
ELS-FB-P black	For types with presence detector	40776

ELS-FB.. black

Electronic overrun timer for ELS V..

ZV Ref. no. 01279

Overrun timer with continuously variable times and permanent mode setting. Parallel switching of light and fan possible via on/off switch or button. Protection type IP20, 230 V, 50/60 Hz, I max. 2.1 A (ind.) DIN rail mounting in distribution box (35 mm).
Dim. in mm: W 18 x H 83 x D 67

ZV

Overrun timer for ELS V..

ZNE Ref. no. 00342

With continuously variable overrun times from 0 to 21 min. Startup delay (45 sec.), optional activation. Activation via on/off switch, e.g. together with light. Miniature construction with minimum dimensions. For installation in flush-mounted box behind switch. 230 V, I max. 0.8 A (ind.), I min. 0.05 A. IP40.

ZNE

Overrun timer for ELS V..

ZNI Ref. no. 00343

Automatic ventilation in adjustable time intervals (4, 8, 12 or 24 hrs), provided there is no manual activation within the time phase. In case of manual activation (e.g. activation via light switch), there will be an overrun between 0 and 21 minutes, continuously variable. For installation in flush-mounted box behind switch. 230 V, I min. 0.05 A, I max 0.8 A (ind.). IP40.

ZNI



Outside air inflow elements – Installation in window frames

Outside air inflow element 30 m³/h
ALEF 30 Ref. no. 02100
Outside air inflow element 45 m³/h
ALEF 45 Ref. no. 02101
With flow rate control and limiter.

ALEF 30 / ALEF 45

Outside air inflow element 5/45 m³/h
ALEF 5/45 Hygro No. 02056
Humidity-controlled, with flow rate control and limiter.

ALEF 5/45 Hygro

Outside air inflow elements – Installation in window frames

Outside air inflow element 30 m³/h
ALEFS 30 Ref. no. 02102
Outside air inflow element 45 m³/h
ALEFS 45 Ref. no. 02103
With flow rate control and limiter. With integrated sound insulation.

ALEFS 30 / ALEFS 45

Outside air inflow element 5/45 m³/h
ALEFS 5/45 Hygro No. 02057
Humidity-controlled, with flow rate control and limiter. With integrated sound insulation.

ALEFS 5/45 Hygro

Overflow

Door ventilation grille white
LTGW Ref. no. 00246
Door ventilation grille brown
LTGB Ref. no. 00247
Discreet, sight-screening ventilation grille made of durable plastic for installation in in door panel.

LTGW / LTGB

Outside air inflow element – Installation in wall openings

Automatic supply air element

Type	Ref. no.	Ø
ZLA 80	00214	**Ø 80**
ZLA 100	00215	**Ø 100**
ZLA 160	00216	**Ø 160**

Automatically temperature-controlled including thermostat supply valve, sound insulation and external grille.

ZLA

Thermostat supply valve

Type	Ref. no.	Ø
ZTV 80	00078	**80**
ZTV 100	00073	**100**
ZTV 160	00074	**160**

For installation in existing ventilation openings.

ZTV

Outside air inflow element – Installation in wall openings

Auto. supply air element Ø 100
ZLE 100 Ref. no. 00079
Manual controllable in four levels including supply valve with draw-cord, sound insulation and external grille.

ZLE

ALL DETAILS ON HELIOSSELECT

For more information, technical specifications, performance curves, and a wide range of options for tailored design, please visit:

www.HeliosSelect.de

ZLA 125

Always fits perfectly – the quiet automatic supply air element

The ZLA 125 automatic supply air elements ensure perfect distribution of supply air, which flows into the interior filtered (ISO Coarse 30%) and sound-insulated. The ZLA 125 consists of an inner panel, the installation kit and the facade panel, and fits all types of walls without requiring an electrical connection. It is available with two airflow constant options (22 m³/h and 30 m³/h) as well as one humidity-controlled option (6 – 45 m³/h) for the inner panel.

- High sound insulation due to built-in sound-proofing elements (up to 56 dB standard sound pressure level difference)
- Humidity-controlled (with ZLA 125 IB HY) or constant supply airflow (with ZLA 125 IB 22 + 30)
- Particularly installation-friendly with retractable plastic telescopic tube for wall thicknesses from 260 to 500 mm
- No electrical connection required – no ongoing electricity costs.

→ **More details p. 82**

ZLA LE IN THE WINDOW SOFFIT

Practically invisible – the soffit element for ZLA

The soffit element ZLA LE diverts the supply air inside the thermal insulation system by 90° in the window soffit. The highlight: No components can be seen on the outer facade, apart from the grille in the window bar. ZLA LE can be used for duct diameters 100 and 125 mm and it can be individually configured: Select the wall grille that meets your requirements and the desired inner panel in addition to the installation kit.

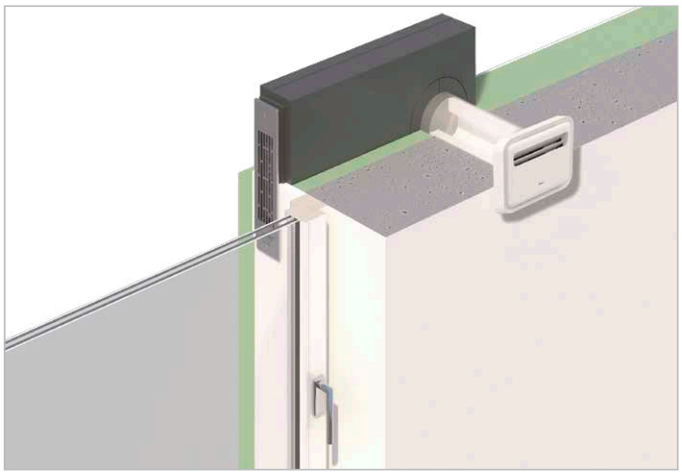

- The perfect complement for the ZLA 100 and ZLA 125 automatic supply air elements
- Various expansion options for individual comfort: sound insulation up to 65 dB standard sound pressure level difference, insect protection and airflow stabilisation

→ **More details p. 84**

ZLA 125

ZLA 125 – External view

The new supply air units ZLA from Helios easily provide fresh air – fully automatically. With these universally usable automatic units, the supply air flowing inside is perfectly distributed, filtered (class ISO Coarse 30 %) and optimally sound-insulated.

The ZLA 125 consists of an inner panel, installation kit and facade panel, it fits in all types of wall and comes without electrical connection. It is available with two constant volume inner panels (22 m³/h and 30 m³/h) as well as a humidity-controlled inner panel (6 – 45 m³/h).

Advantages

- High sound-insulation due to integrated sound-insulating element (up to 56 dB standard sound level difference)
- Humidity-controlled (with ZLA 125 IB HY) or constant supply air volume (with ZLA 125 IB 22 + 30)
- Universally useable in all wall types.
- Particularly installation-friendly due to removable plastic telescopic tube for wall thicknesses from 260 to 500 mm.
- Low maintenance costs.
- Easily replaceable filter.
- No electrical connection required – no ongoing electricity costs.
- No electrical connection necessary.
- Insect screen included in standard scope of delivery.

Function

- The humidity-controlled inner panel ZLA 125 IB HY 6 – 45 automatically reacts to varying room humidity levels and then adjust the flow rate in the range from 6 to 45 m³/h (at 20 Pa pressure level). See performance curve (humidity-controlled).
- The inner panels ZLA 125 IB 22 and 30 are self-regulating and keep the flow rate constant, even in case of varying differential pressure levels. See performance curve (constant supply air volume).
- All inner panel types also include ISO Coarse 30 % filters, which are easy to maintain.
- The additional components, such as the installation kit and facade panel, are easy to install and include sound-insulating elements for optimal sound insulation.
- A standard sound level difference of up to 59 dB can be achieved for a wall thickness of 500 mm using an additional sound-insulating element ZLA 125 SE.

Installation

- Installation in wall openings with a diameter of ≥ 130 mm.
- Insert telescopic tube, adjust to wall thickness, foam-seal at a slight angle and secure protective cover.
- Plaster tube into place and screw on the facade panel from outside.
- Optional:
  Insert insect screen in facade panel, insert ISO Coarse 30% filter in inner panel.

Technical data

Set ZLA 125	ZLA 125 IB 22 + ZLA 125 RS + ZLA 125 FB	ZLA 125 IB 30 + ZLA 125 RS + ZLA 125 FB	ZLA 125 IB HY 6-45 + ZLA 125 RS + ZLA 125 FB
Airflow (at 4 Pa differential pressure) in m³/h	11.3	14.3	2.2 – 20.1
Airflow (at 8 Pa differential pressure) in m³/h	16.2	20.5	3.2 – 28.5
Airflow (at 20 Pa differential pressure) in m³/h	22	30	6 – 45
Standard sound level diff. $D_{n,e,w}$ in dB	56	55	54
Standard sound level diff. $D_{n,e,w}$ in dB incl. ZLA 125 SE	59	58	57
Pipe DN Ø in mm	125	125	125
Core drilling Ø in mm	≥ 130	≥ 130	≥ 130
Weight appr. kg	1.15	1.15	1.13

Inner panel 22/30 m³/h

ZLA 125 IB 22 Ref. no. 04393
ZLA 125 IB 30 Ref. no. 04394

Inner panel constant volume 22 m³/h or 30 m³/h (at 20 Pa differential pressure). Made of white plastic, ISO Coarse 30 % filter.

ZLA 125 IB 22/30

Dimensions ZLA 125 IB 22/30



Dim. in mm

P-Curves ZLA 125 IB 22/30



const. supply air vol.

Inner panel humidity-controlled

ZLA 125 IB HY 6 – 45 No. 04395

Inner panel humidity-controlled between 6 - 45 m³/h (at 20 Pa differential pressure). Made of white plastic, ISO Coarse 30 % filter.

ZLA 125 IB HY 6-45

Dimensions ZLA 125 IB HY 6-45



Dim. in mm

P-Curves ZLA 125 IB HY 6-45



at 4 Pa, 8 Pa, 20 Pa – humidity-controlled

Installation kit

ZLA 125 RS Ref. no. 04396

Telescopic tube 260 – 500 mm made of white plastic, incl. sound-insulating element 200 mm made of melamine resin foam, incl. 2x protective covers.

ZLA 125 RS

Dimensions ZLA 125 RS



Dim. in mm

Sound-insulating element

ZLA 125 SE Ref. no. 04397

Sound-insulating element 200 mm made of melamine resin foam. Can also be used for wall thicknesses ≥ 300 mm.

ZLA 125 SE

Dimensions ZLA 125 SE



Dim. in mm

Facade panel

ZLA 125 FB Ref. no. 04398

Facade panel made of white plastic for external use, insect screen made of stainless steel.

ZLA 125 FB

Dimensions ZLA 125 FB



Dim. in mm

Spare air filter

ELF-DLV 125 Ref. no. 03058

5 spare filters ISO Coarse 30 % for inner panel.

ELF-DLV 125

Order info:

A complete supply air unit consists of an inner panel, an installation kit and a facade panel. Sound-insulating elements are used for wall thicknesses ≥ 300 mm.

ZLA LE – Installation example DN 100 mm

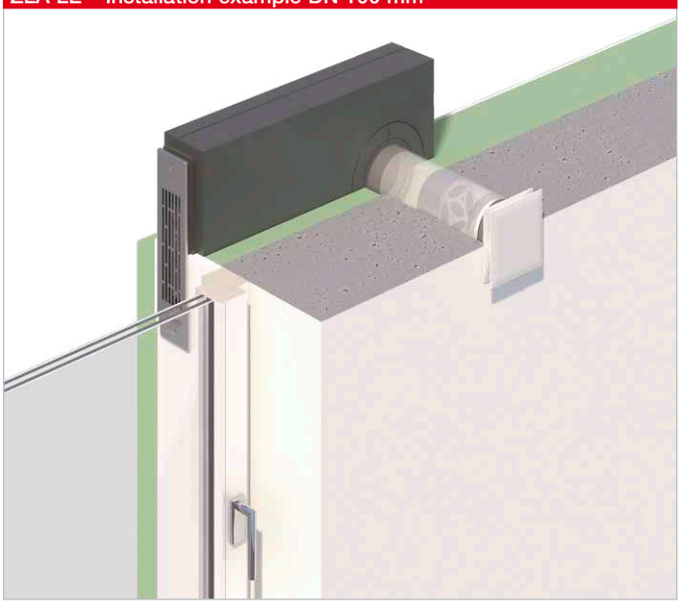

ZLA LE – Installation example DN 125 mm

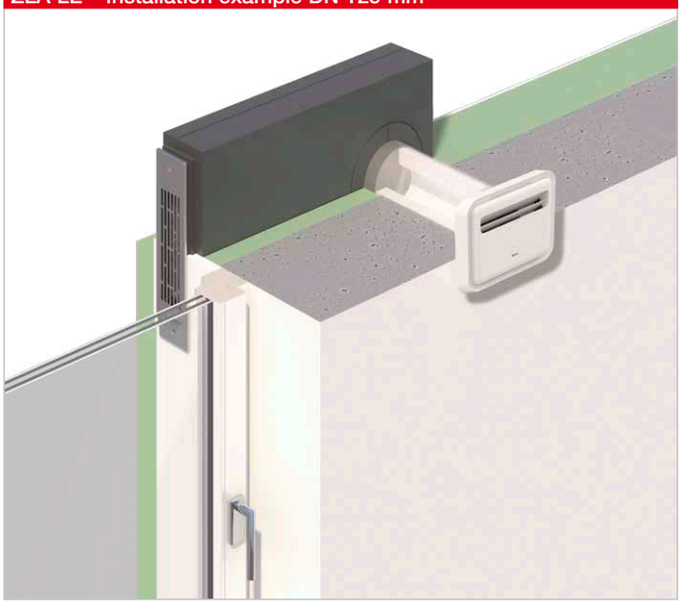

Invisible in the window soffit – ZLA LE.

The soffit element ZLA LE diverts the supply air inside the thermal insulation system by 90° in the window soffit. No components can be seen on the outer facade, apart from the grille in the window bar.

Advantages

ZLA LE can be used for pipe diameters 100 and 125 mm and it can be individually configured:

- Select the wall grille that meets your requirements and the desired inner panel in addition to the installation kit.
- Optional components, such as sound-insulating elements, insect screens and volume stabiliser are available for further adaptation to the field of application.

Description
Install. example DN 100 mm

- Installation kit soffit ZRL 100 with design ventilation valve DLV 100 and optional sound-insulating volume element SVE 100.
- The flow rate can be manually adjusted using the design ventilation valve.

Description
Install. example DN 125 mm

- Installation kit soffit ZRL 125 with inner panel ZLA 125 IB and optional sound-insulating element ZLA 125 SE.
- The inner panels regulate the flow rate or keep it constant depending on the humidity and design.

Technical data: Basic components

Set: ZLA LE basic systems		**ZRL 100 + KWL 45 LG + DLV 100**	**ZRL 125 + KWL 45 LG + DLV 125**	**ZRL 125 + KWL 45 LG + ZLA 125 IB 22**	**ZRL 125 + KWL 45 LG + ZLA 125 IB 30**	**ZRL 125 + KWL 45 LG + ZLA 125 IB HY 6-45**
Flow rate at 20 Pa	m^3/h	Adjustable 33–75	Adjustable 18-120	Constant volume 22	Constant volume 30	Humid.-control. 6–45
Standard sound level difference $D_{n,e,w}$	dB	41	40	49	48	47
Max. standard sound level diff. with optional sound-insulat. elements		54	63	65	64	63
Pipe DN	Ø in mm	100	125	125	125	125
Core drilling	Ø in mm	≥ 115	≥ 130	≥ 130	≥ 130	≥ 130

Technical data: Optional accessories

Add. components (optional)		**VKH 100/15-50**	**KWL 45 SEL**	**SVE 100**	**SVE 125**	**ZLA 125 SE**
Standard sound level difference $D_{n,e,w}$	dB	–	The exact values for each configuration can be found at heliosselect.de in the "Declaration of performance" document for reference numbers 07459 and 07462.			
Pipe DN	Ø in mm	100	–	100	125	125
Length	mm	70	94	50	50	200

Installation kit Soffit

ZRL 100 Ref. no. 07459
ZRL 125 Ref. no. 07462

Consisting of telescopic tube 260–500 mm (DN 100 / DN 125) and EPP soffit channel (fire protection class B1, Dim. in mm: W 600 x H 360 x D 100). Incl. 2 plaster covers for inside and outside, for protection against contamination in the shell construction phase. Flexible installation left or right of window possible.

ZRL 100 / ZRL 125



KWL 45 LG

Wall grille Soffit element

KWL 45 LG Ref. no. 04167
Stainless steel wall grille with integrated condensate drainage. Includes bonded seal.

KWL 45 LG-B Ref. no. 04168
Wall grille with additional coating for use in environments with heavy air contamination or high salt concentration in the air (coastal areas).

KWL 45 LG-W Ref. no. 04169
Wall grille with additional white coating.

Sound-insulating elem. Soffit

KWL 45 SEL Ref. no. 04170

Sound-insulating element for reducing the through sound. For installation in the soffit channel. Up to 3 sound-insulating elements can be used one complete soffit channel.

KWL 45 SEL

KWL 45 ISL

Insect screen

KWL 45 ISL Ref. no. 03004

Stainless steel insect screen for soffit element. Also suitable for retrofitting.

Flow rate stabiliser

VKH 100/15-50 Ref. no. 00002

Automatic flow rate stabiliser VKH (DN 100) for insertion in the telescopic tube. The flow rate can be set between 15 – 50 m³/h by simply moving the adjustment unit.

VKH 100/15-50

only for DN 100

ZLA 125 IB 22/30

only for DN 125

Inner panel 22/30 m³/h

ZLA 125 IB 22 Ref. no. 04393
ZLA 125 IB 30 Ref. no. 04394

Inner panel constant volume 22 m³/h or 30 m³/h (at 20 Pa differential pressure). Made of white plastic, ISO Coarse 30 % filter.

Sound insulation element

ZLA 125 SE Ref. no. 04397

Sound insulation element 200 mm made from melamine resin foam for installation in the telescopic tube. With the appropriate wall thickness, up to 2 sound insulation elements can be used.

ZLA 125 SE

only for DN 125

ZLA 125 IB HY 6-45

only for DN 125

Inner panel humidity-controlled

ZLA 125 IB HY 6 – 45 No. 04395

Inner panel humidity-controlled between 6 - 45 m³/h (at 20 Pa differential pressure). Made of white plastic, ISO Coarse 30 % filter.

Sound-insulating element

SVE 100 Ref. no. 08310
SVE 125 Ref. no. 08311

For simple and cost-effective volume control, pressure control and sound insulation in ventilation systems through insertion in the ducting. Up to 9 sound-insulating volume elements can be used with the corresponding wall thickness.

SVE 100 / SVE 125

Design ventilation valve

DLV 100 Ref. no. 03039
DLV 125 Ref. no. 03049
DLV 125 black Ref. no. 40786

Design ventilation valve for supply air operation, DN 100 / DN 125, adjustable. With closed front and integrated ISO Coarse 30 % filter.

DLV 100 / DLV 125

Performance curves DLV 100



without filter

Performance curves DLV 125



without filter

Central ventilation system ZLS-DV EC **according to the German standard DIN 18017-3.**

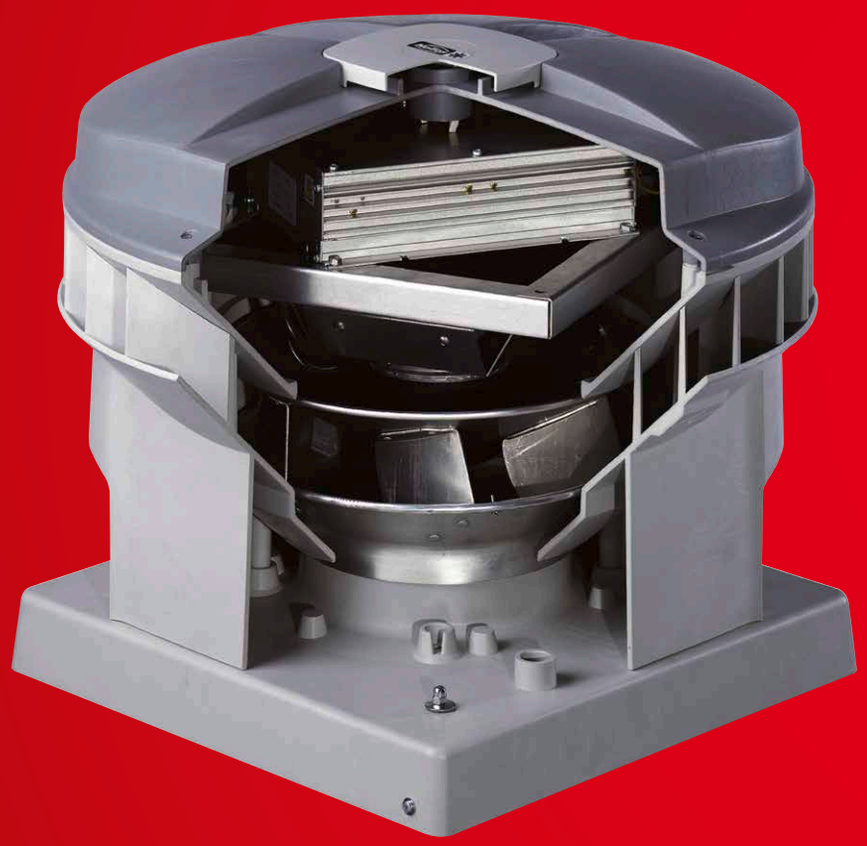

ZLS-DV EC is the ideal central ventilation system for multi-floor construction in accordance with DIN 18017-3.

Humid, contaminated air is extracted in line with requirements.
The integrated pressure-regulated control system in the fan simultaneously ensures that a predetermined underpressure is maintained.
The planned volume flow therefore always remains the same in all other rooms.

EC

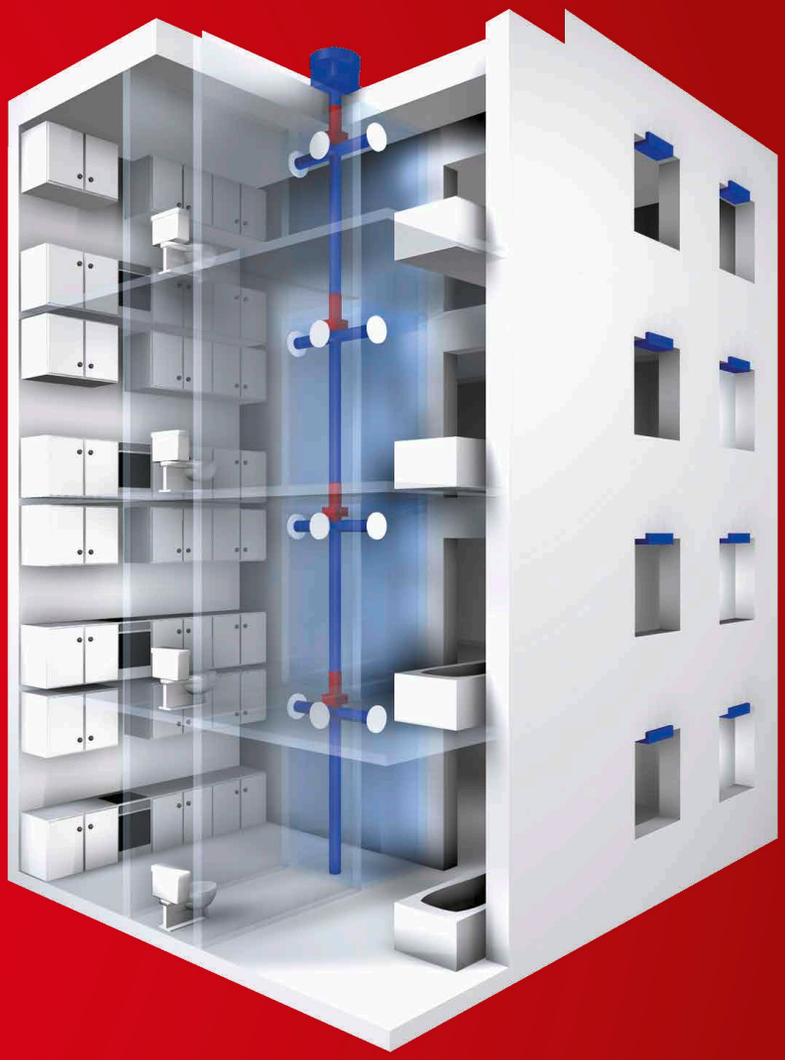

Extract air

The roof fan is connected to the central extract air shaft. The stale air from wet rooms and kitchens flows out of the extract air elements with usage-oriented functionality. The automatic, continuously variable power adjustment takes place via the integrated pressure sensor.

EC

88f

Intake air

Draught-free intake air is supplied to the living rooms and bedrooms via automatic elements for window or wall installation.

90f

Fire protection

The spread of fire to other floors is prevented according to the structural requirements in the classified or non-classified shaft.

91

DV EC

Dimensions DV EC

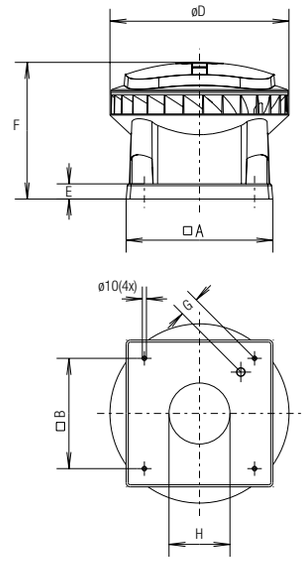

Dimensions in mm

Extremely weather-resistant EC roof fan in plastic design for an extensive range of applications, diagonal outlet.

Common features DV EC Pro und DV EC Eco

Casing
Aerodynamically designed plastic casing made of grey polypropylene with diagonal air outlet direction. Air flow temperatures from –30 to +60 °C.

Impeller
Diagonal impeller made of aluminium, the motor impeller unit is dynamically balanced for low-noise operation.

Drive
Energy-efficient EC external rotor motor in protection category IP54. Optimised efficiency even with speed control for low operating costs. Continuously variable speed control. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
Standard operating switch (protection category IP65) mounted on the outside of the casing. Connection voltage 1~, 230 V, 50 Hz.

Installation
Horizontal alignment on the roof. In case of sloping roofs, a corresponding base formation must be used to prevent water ingress. A range of accessories facilitates the installation of the fan in the building duct system.

Noise
The total level and range are specified above the performance diagram for:
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

PRO

Description DV EC Pro

Power control
- Ideal as a central extract air fan for multi-floor residential construction in accordance with DIN 18017-3.
- When combined with other components (accessories), a complete central ventilation system in accordance with DIN 18017-3 can be created with demand-driven ventilation.
- Integrated time control for weekly or daily programme.
- Integrated pressure sensor from 0 - 300 Pa for constant pressure maintenance in combined operation with other extract air fans, e.g. Helios ELS.
- Operating modes of the DV EC Pro can be easily set on site via a local web server.
- Integrated Ethernet interface (Modbus TCP) for connection to a building management system or for direct connection to the interface via PC/laptop (no accessories).

Dimensions in mm

Type	DV EC 200	DV EC 250	DV EC 400
□ A	460	580	665
□ B	330	450	535
Ø D	575	708	863
E	60	60	60
F	473	540	601
G	44	48	64
H	196	241	302

ECO

Description DV EC Eco

Power control
- Continuously variable speed control with speed potentiometer PU/PA 10 (accessories, see type table).
- When combined with the universal control system EUR EC or electronic pressure/tem-perature controllers EDR/ETR (accessories, see type table), the fan can be used for the continuously variable control of differential pressure, differential temperature or flow velocity.

Performance levels are shown in the performance curve as an example.

Type	Ref. no.	Maximum speed approx.	Flow rate free blowing	Noise sound pressure	Power consumption at maximum speed		Wiring diagram	max. air flow temperature	Weight net approx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		min $^{-1}$	V̇ m³/h	dB(A) at 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
PRO Type DV EC Pro, single phase alternating current, 230 V, 50/60 Hz, EC motor, IP54															
DV EC 200 Pro	08385	1800	2090	54	0.18	1.31	1529	60	15.5	–	–	–	–	–	–
DV EC 250 Pro	08386	1640	3580	60	0.39	1.7	1529	60	30.0	–	–	–	–	–	–
DV EC 400 A Pro	08387	1150	4550	53	0.39	1.70	1529	60	32.0	–	–	–	–	–	–
DV EC 400 B Pro	08389	1440	5550	64	0.73	3.15	1529	60	35.0	–	–	–	–	–	–
ECO Type DV EC Eco, single phase alternating current, 230 V, 50/60 Hz, EC motor, IP54															
DV EC 200 Eco	08320	1800	2090	54	0.18	1.31	1530	60	15.5	EUR EC [1)2)]	01347	PU 10 [3)]	01734	PA 10 [3)]	01735
DV EC 250 Eco	08322	1640	3580	60	0.39	1.7	1530	60	30.0	EUR EC [1)2)]	01347	PU 10 [3)]	01734	PA 10 [3)]	01735
DV EC 400 A Eco	08324	1150	4550	53	0.39	1.70	1530	60	32.0	EUR EC [1)2)]	01347	PU 10 [3)]	01734	PA 10 [3)]	01735
DV EC 400 B Eco	08326	1440	5550	64	0.73	3.15	1530	60	35.0	EUR EC [1)2)]	01347	PU 10 [3)]	01734	PA 10 [3)]	01735

[1)] Multiple EC fans can normally be connected. [2)] Alternative elec. pressure/temp. controller (EDR/ETR, no. 01437/01438) in combination with mains adapter NG 24, no. 01439, see accessories. [3)] Without LED power supply.

Performance curves DV EC 200

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	70	68	71	66	66	59	54	47
L_{WA}	Outlet side	dB(A)	74	69	71	70	71	66	58	49

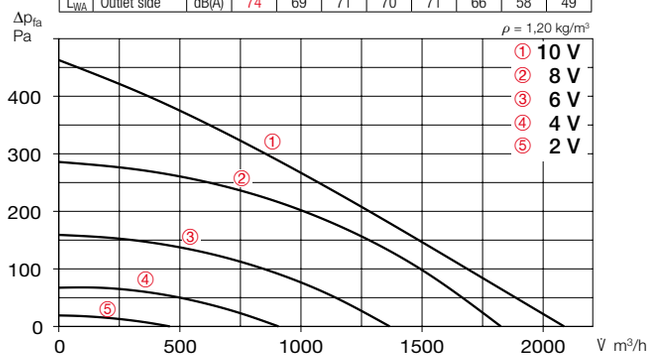

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1870	2100	175	1,28	54	0,30
8	1800	1650	120	0,95	49	0,25
6	1400	1400	55	0,46	43	0,14
4	830	900	20	0,20	33	0,08

Performance curves DV EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	76	72	70	71	72	69	63	56
L_{WA}	Outlet side	dB(A)	80	73	72	77	77	72	63	54

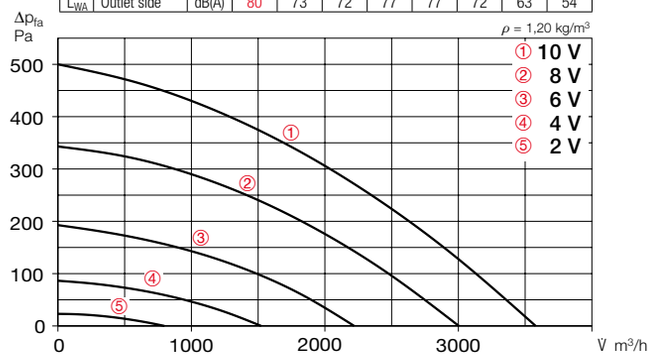

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1650	3600	346	1,54	60	0,35
8	1390	3000	207	0,96	55	0,26
6	1040	2250	95	0,46	49	0,15
4	700	1500	38	0,24	36	0,09

Performance curves DV EC 400 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	70	69	69	67	66	60	52	45
L_{WA}	Outlet side	dB(A)	73	70	68	72	69	62	53	44

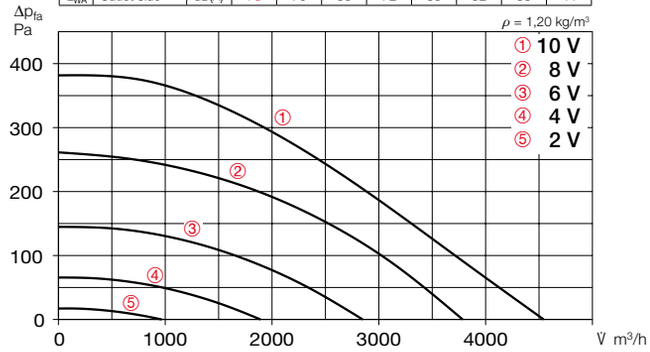

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1150	4550	386	1,71	52	0,31
8	990	3800	228	1,03	47	0,22
6	750	2800	105	0,50	41	0,14
4	500	2000	38	0,24	32	0,07

Performance curves DV EC 400 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	80	76	76	76	74	74	65	60
L_{WA}	Outlet side	dB(A)	84	79	78	84	80	74	65	58

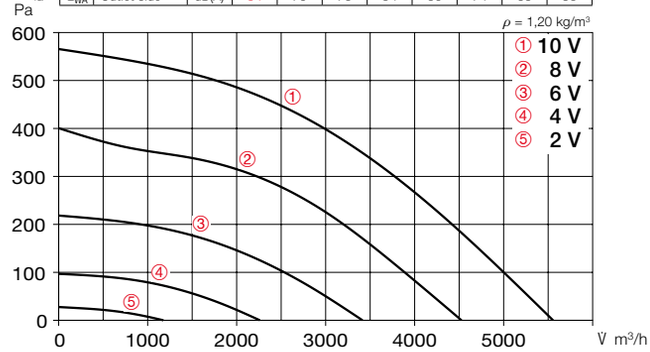

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1450	5500	680	2,91	64	0,45
8	1180	4700	380	1,70	59	0,34
6	895	3400	176	0,82	53	0,19
4	600	2200	65	0,40	42	0,11

Extract air elements

AE

Ready-to-install extract air elements with mounting ring made of plastic.
For insertion in ducts with ND 125. With demand-controlled and basic ventilation level, electric, humidity, motion and time-controlled for use according to the adjacent table. Types AE and AE GB come with self-regulating constant volume flow control. Humidity-controlled types AE Hygro or type AE FV with filter and volume adjustment are preferable in kitchens and bathrooms.
Attachment filter element VFE
For installation in front of AE in case of greasy, contaminated room air. Details on product page.

Bathroom		WC		Kitchen	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Extract air element, with self-regulating constant volume flow control					
AE 45*	02031	**AE 30***	02030	**AE 75***	02033
Like above, but with two volume flows (demand-controlled and basic ventilation)					
AE GB 20/75*	02036	**AE GB 15/30***	02035	**AE GB 45/120***	02038
Like AE GB, with additional electr. time control (without constant volume flow control)					
AE GBE 30/60*	02047	**AE GBE 15/30***	02044	**AE GBE 45/120***	02048
Like AE GBE, but with presence detector					
		AE B 15/30*	02055		
Humidity-controlled extract air element with variable, limited volume flow					
AE Hygro 10/45*	02049				
Like AE Hygro, with additional electrically controlled demand-controlled ventilation level					
AE Hygro GBE 5/40/75*	02053			**AE Hygro GBE 10/45/120***	02054
Extract air element AE FV, with filter and volume adjustment					
AE FV 125	09478			**AE FV 125**	09478
Attachment filter element VFE					
– for AE / AE GBE, AE Hygro, prevents contamination of the extract air element and duct system					
				VFE 70/VFE 90	02552/02553

*Volume flow in m^3/h

In-duct fire dampers for extract air elements AE

BAE / BAK

Cold smoke shutters KAK

KAK

Fire and smoke damper.
For insertion in spiral duct without additional wall frame or for wall installation using mounting sleeve EH (accessories).
Cold smoke shutter with automatic magnetic catch. Prevents the backflow of cold smoke etc. in central ventilation systems in other fire sections.

Type	Ref. no.
In-duct fire damper K 90-18017	
BAE 125*	02626
In-duct fire damper K 90-4102	
BAK 125*	02621
Mounting sleeve (accessory for both types)	
EH 125*	02640
Cold smoke shutter	
KAK 125*	04098

* ND 125, compatible with above AE. See product pages for other ND and detailed descriptions.

Sound insulation elements SVE (also suitable for supply air)

SVE

Overflow

LTG

Sound insulation elements for simple sound insulation and volume control in central ventilation systems through duct insertion. These elements can also be used for pressure control.
Door grilles
Unobtrusive, sight screening ventilation grille made of break-resistant plastic for installation in door leaf.

SVE 100 Ref. no. 08310
ND 100 mm

SVE 125* Ref. no. 08311
ND 125 mm

LTGW Ref. no. 00246
Made of plastic, white.

LTGB Ref. no. 00247
Made of plastic, white.

Intake air elements
Installation in wall openings

ZL / ZT

Universally applicable automatic supply air elements and thermostat disc valves for demand-based intake air volume control. See Intake air elements page for detailed description.

Ø 80		Ø 100		Ø 160	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Automatic supply air element – Automatically temperature-controlled incl. thermostat disc valve, sound insulation and external grille					
ZLA 80	00214	**ZLA 100**	00215	**ZLA 160**	00216
Supply air element – Manually controllable in four levels incl. disc valve with drawcord, sound insulation and external grille					
		ZLE 100	00079		
Thermostat disc valve – For installation in existing ventilation openings					
ZTV 80	00078	**ZTV 100**	00073	**ZTV 160**	00074

Automatic supply air element ZLA 125 see product pages.

Installation in window frames

ALEF



Intake air element with volume flow control and limitation. See Intake air elements product page for detailed description. Ideal for retrofitting and new constructions.

V̇ m^3/h	Type	Ref. no.	Type	Ref. no.
Intake air element for installation in window frames – with volume flow control and limitation			Like ALEF, but also comes with sound insulation	
30	**ALEF 30**	02100	**ALEFS 30**	02102
45	**ALEF 45**	02101	**ALEFS 45**	02103
Intake air element for installation in window frames – humidity-controlled, with volume flow control and limitation			Like ALEF Hygro, but also comes with sound insulation	
5/45	**ALEF Hygro 5/45**	02056	**ALEFS Hygro 5/45**	02057

Flange connection plate

FAP



Flange connection plate FAP
Made of galvanised steel sheet. This allows the connection of the duct system and accessories to the roof fans DV EC if no base silencer SSD is used.

Type	FAP 200	FAP 250	FAP 400
Ref. no.	08382	08383	08384
☐ A mm	430	550	635
☐ B mm	330	450	535
Ø D mm	200	250	400
Ø LK mm	259	286	438
M	M 6	M 6	M 8
Gewicht kg	1.8	3.0	3.3

Flange, flanged flex. connector

FR

STS

Compatible with roof fan:					
DV EC 200		DV EC 250		DV EC 400	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Flange connection plate – Required for duct-pipe connection					
FAP 200	08382	**FAP 250**	08383	**FAP 400**	08384
Counterflange					
DFR 200	01201	**FR 250**	01203	**FR 400**	01206
Flanged flexible connector					
DSTS 200	01218	**STS 250**	01220	**STS 400**	01223

See product pages for detailed description.

Flat roof base

Base silencer

FDS

SSD

Compatible with roof fan:					
DV EC 200		DV EC 250		DV EC 400	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Flat roof base – With swing-action device for easy inspection					
FDS 200	01378	**FDS 250**	01379	**FDS 400**	01380
Base silencer – With swing-action device for easy inspection					
SSD 200	05290	**SSD 250**	05292	**SSD 400**	05291

See product pages for detailed description.

Fire protection

ELS-D

Z-41.3-368

Fire protection ceiling seal ELS-D to prevent spread of fire to other floors. Installation in main ventilation pipe according to DIN 18017 K90. Maintenance-free. For ventilation or mixed (even with combustible pipes) installation shafts which only require cladding with 12.5 mm plasterboard. All other parts (disc valves etc.) without fire resistance classification. Branch and connection pipes also available in Aluflex pipe. Shutter elements KAK are available to prevent the backflow of cold smoke (see left page or page 599).

ND mm main pipe	100	125	140	160	180	200
Type	**ELS-D 100**	**ELS-D 125**	**ELS-D 140**	**ELS-D 160**	**ELS-D 180**	**ELS-D 200**
Ref. no.	00270	00185	00186	00187	00188	00271

Control system

EUR EC

Universal control system
For the continuously variable control or regulation of single and three-phase EC fans with a setpoint of 0–10 V DC:

EUR EC	Ref. no. 01347

PU / PA

Speed potentiometer
For the direct control/setpoint setting of EC fans with a potentiometer input.

PU 10 (UP)	Ref. no. 01734
PA 10 (AP)	Ref. no. 01735

Accessory details	Page
Roof install. accessories	561 f.
Ventilation grilles	563 ff.
Extract air elements	576 ff.
Intake air elements	588 ff.
Fire protection systems	592 ff.
– Ceiling seal	598 ff.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Compact central extract ventilation systems.

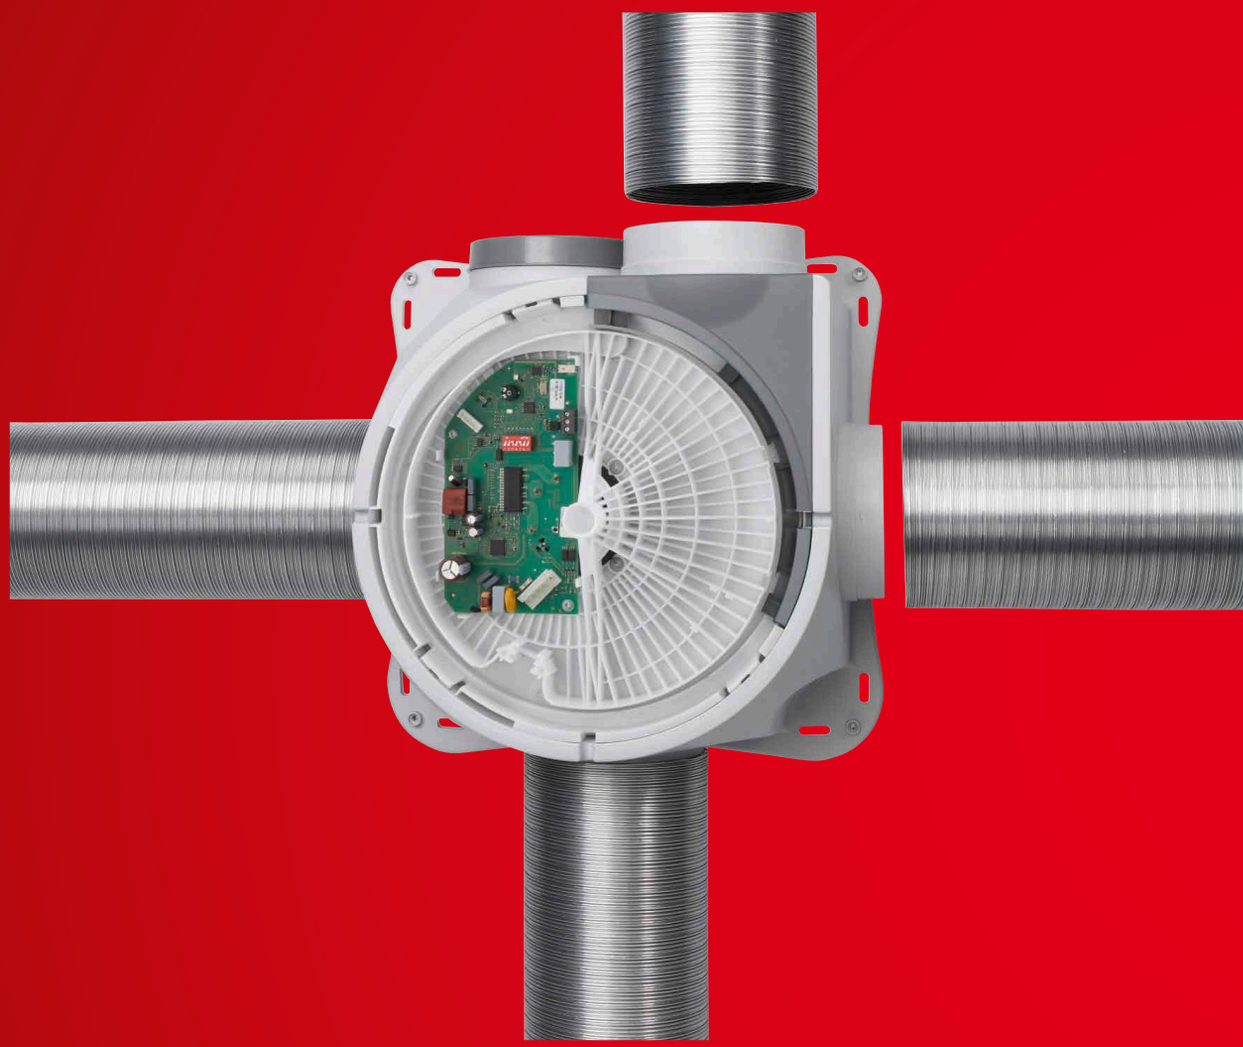

The energy-saving box with powerful performance. Ideal in low-energy houses or apartments.

Passive houses and low-energy houses set the standard for the watertightness and insulation of building envelopes. Compliance with requirements must be verified in a specific check upon formal acceptance of the building.

The removal of humidity, odours and pollutants as well as the draught-free, controlled introduction of fresh intake air are prerequisites for a pleasant indoor climate and maintaining a structurally-sound building.

The ZEB system achieves this perfectly, whether in a single-family house, in the floor-by-floor extract ventilation of residential units via a shared central shaft (DIN 18017-3) or in the commercial sector.

EC

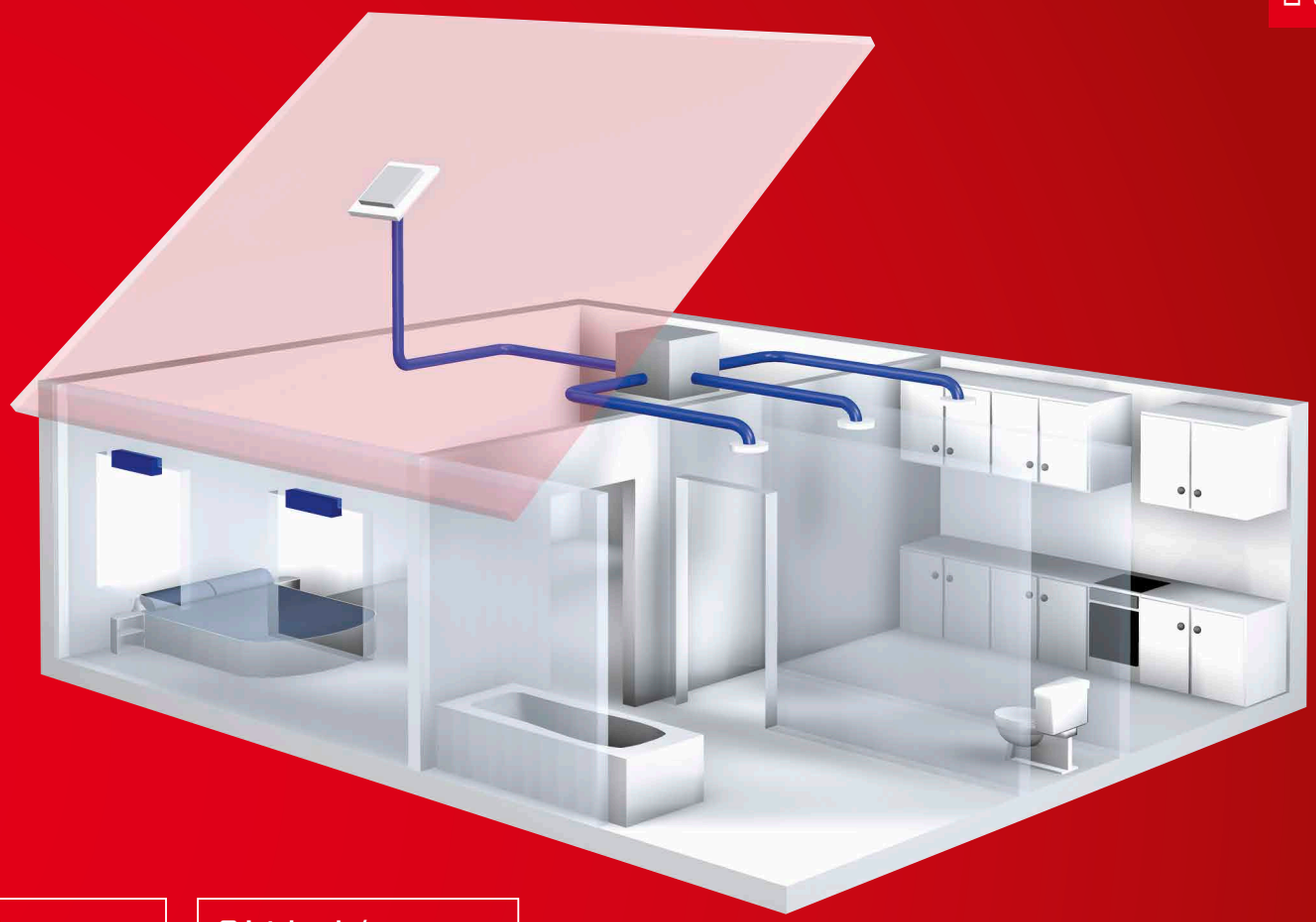

Extract air

ZEB positioned below the roof or in a secondary room as an extract air box. Operation is manual or automatic. The extract air is removed from rooms with contaminated air such as kitchens, bathrooms and WCs. Innovative extract air elements allow a constant or demand-oriented volume flow, adjusted to individual user requirements or room requirements.

94f

Intake air / Exhaust air

Finely dosed quantities of intake air flow in via pressure differential-controlled intake air elements, which must be placed in the walls or windows of living rooms and bedrooms. Overflow elements ensure the air circulation within the room unit. The exhaust air is discharged to the outside via a roof outlet or wall outlet.

96f

ZEB EC

Dimensions ZEB EC

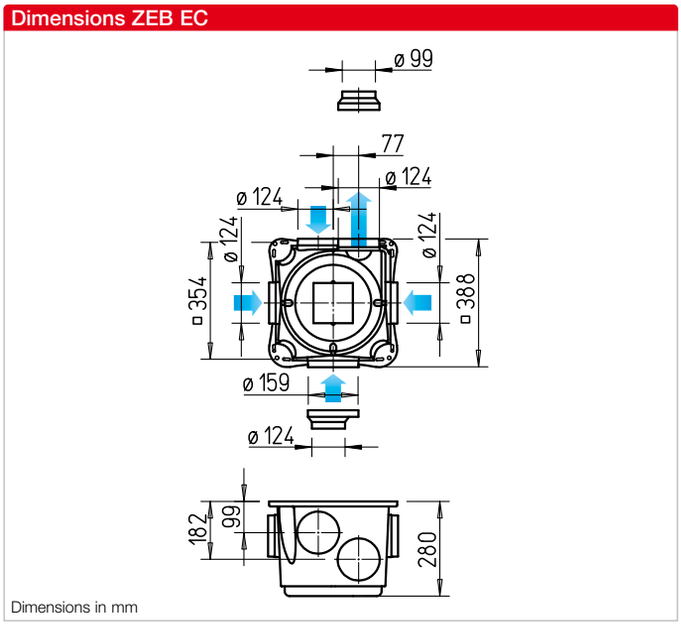

ZEB with EC technology – when equipped with a DC motor, the EC variant of the ZEB becomes the "energy-saving ventilation box", which is ideal for use in low-energy houses. Brushless DC motors operate with extremely low losses and also with higher efficiency than conventional motors, even in control mode.This results in compelling advantages:

- **Convenient, stepless speed control or 3-speed operation possible.**

Application

- For controlled domestic ventilation according to DIN 18017-3 and DIN 1946-6.
- Ideal in low-energy houses.
- For ventilation via a shared main pipeline in single-family houses as well as apartments and multi-floor residential units.

Casing

- Robust casing made of impact-resistant plastic, light grey.
- The three inlet connectors and the outlet connector are designed for pipes NW 100 and 125 mm. One inlet connector is designed for pipes NW 100, 125 and 160 mm.

Impeller

Low-noise centrifugal impeller made of steel in an aerodynamically optimised spiral. Inlet via nozzle.

Motor

- DC motor, electronically commutated, with high efficiency even in control mode. Ball-bearing external rotor motor with IP30 protection for maintenance-free continuous operation.
- Motor/impeller unit can be removed with one hand for cleaning and servicing.

Motor protection

Provided by the integrated, electronic temperature monitoring of the EC motor and the electronics.

Electrical connection

- Service-friendly and connection-friendly. Supplied ready for use with wired terminal box.
- Direct connection to 230 V mains power.
- NYM-J 5 x 1,5 mm² required for three level operation.

Power control

Continuous fan operation via speed control with potentiometer or universal control system (accessory). The power levels are shown in the performance curve as an example.
3-speed fan operation is possible using an operating switch (accessory). Several speeds can be selected using DIP switches on the drive electronics for customised power adjustment. Using the "3-speed operation" table, the appropriate DIP switch settings for three-speed operation can be selected from the air performance pairings shown (volume flow / pressure). The performance curves are shown as examples in the diagram "Performance curves for 3-speed operation".



Installation

No restrictions in any position. Preferably away from the room to be ventilated for less noise.

Duct system

For example, rigid spiral ducts, flexible aluminium ducts or even plastic ducts can be used. However, the fire protection regulations must be observed for crossing fire sections.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP30																
ZEB EC	01457	100	550	3950	40	0,079	0,34	1487	40	4,2	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

Performance curves 0-10 V control

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	54	60	60	52	49	42	35
L_{WA}	Inlet side	dB(A)	68	73	68	59	59	59	53	45
L_{WA}	Outlet side	dB(A)	74	77	73	74	65	66	60	51

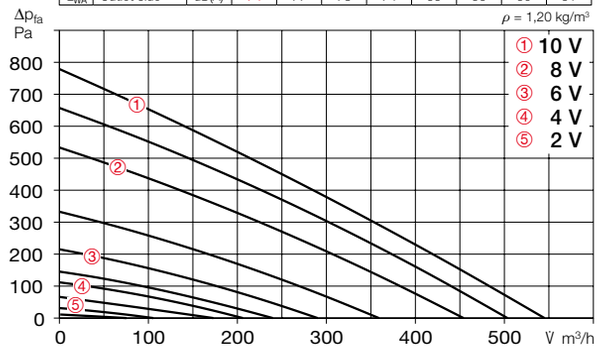

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3950	550	70	0,60	40	0,46
8	3230	450	45	0,40	36	0,36
6	2080	290	15	0,15	27	0,19
4	1500	210	10	0,10	20	0,17

Performance curves 3-speed operation

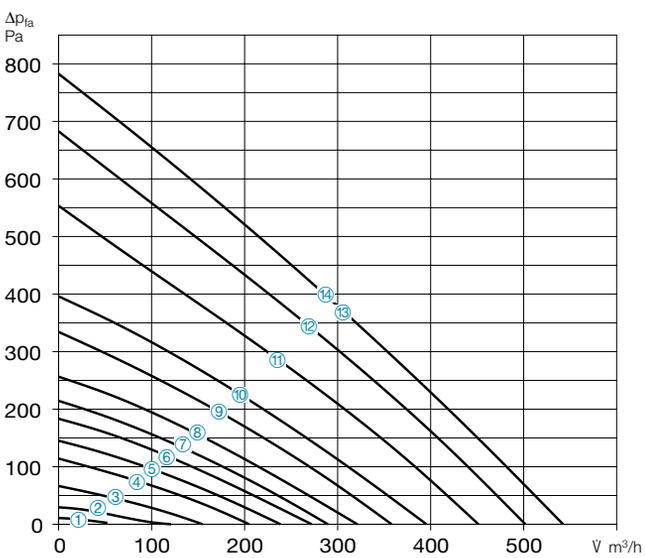

DIP switch setting	3-speed operation Low m³/h / Pa		Medium m³/h / Pa		High m³/h / Pa	
1	75 / 38	③	100 / 67	④	150 / 150	⑧
2	30 / 2	①	125 / 46	④	225 / 150	⑨
3	30 / 2	①	150 / 54	⑤	250 / 150	⑩
4	50 / 6	①	175 / 74	⑥	250 / 150	⑩
5	50 / 5	①	175 / 61	⑥	275 / 150	⑩
6	100 / 24	③	175 / 74	⑥	275 / 182	⑩
7	30 / 1	①	175 / 51	⑤	300 / 150	⑪
8	75 / 9	②	200 / 67	⑦	325 / 176	⑪
9	75 / 8	②	200 / 57	⑦	350 / 174	⑪
10	100 / 11	②	250 / 67	⑧	400 / 171	⑫
11	50 / 3	①	225 / 61	⑦	420 / 211	⑬
12	75 / 5	②	250 / 59	⑧	425 / 169	⑬
13	30 / 1	①	225 / 42	⑥	450 / 168	⑭
14	75 / 5	②	250 / 52	⑧	450 / 168	⑭

①-⑭ These values refer to the "3-speed operation" performance curves.

Accessories

Speed potentiometer
For direct control/setpoint setting for EC fans with potentiometer input.
PU 10 Ref. no. 01734
For flush-mounting.
Dim. mm (WxHxD) 80 x 80 x 21
PA 10 Ref. no. 01735
For surface-mounting.
Dim. mm (WxHxD) 80 x 80 x 65

Three level switch 10 V / 0–10 V
For three level control of EC fans or frequency converters, with a 0–10 V DC control input.
For surface and flush-mounted installation.
Dim. mm (WxH) 80 x 80
SU-3 10/SA-3 10 no. 04266/04267

Electronic control system
For continuously variable control or regulation of single phase and three-phase EC fans.
Dim. mm (WxHxD) 223 x 200 x 131
EUR EC Ref. no. 01347

Three level speed and operating switch with 0 position.
Convenient flush-mounted speed switch. Room light not switchable in parallel. Installation in flush-mounted switch box (depth min. 55 mm).
Dim. mm (WxHxD) 80 x 80 x 23
DSZ Ref. no. 01598

Weekly timer
Digital timer with LCD display for autom. control of operating mode, can be programmed for every day of the week. For surface and flush-mounted installation.
Dim. mm (WxHxD) 84 x 84 x 40
WSUP Ref. no. 09990
For switch cabinet installation (2 space units required).
Dim. mm (WxHxD) 36 x 90 x 63
WSUP-S Ref. no. 09577

Accessories	Page
Overview	96 f.

Accessory details	Page
Flexible ventilation ducts, roof outlets, shutters and ventilation grilles	563 ff.
Extract air elements	576 ff.
Intake air elements	588 ff.
Fire protection elements for use in multi-fl. const.	592 ff.
Control and regul. units	601 ff.

Extract air elements

AE

Ready-to-install extract air elements with mounting ring made of plastic.
For insertion in ducts with ND 125. With demand-controlled and basic ventilation level, electric, humidity, motion and time-controlled for use according to the adjacent table. Types AE and AE GB come with self-regulating constant volume flow control. Humidity-controlled types AE Hygro or type AE FV with filter and volume adjustment are preferable in kitchens and bathrooms.
Attachment filter element VFE
For installation in front of AE in case of greasy, contaminated room air. Details on product page.

Bathroom		WC		Kitchen	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Extract air element, with self-regulating constant volume flow control					
AE 45*	02031	**AE 30***	02030	**AE 75***	02033
Like above, but with two volume flows (demand-controlled and basic ventilation)					
AE GB 20/75*	02036	**AE GB 15/30***	02035	**AE GB 45/120***	02038
Like AE GB, with additional electr. time control (without constant volume flow control)					
AE GBE 30/60*	02047	**AE GBE 15/30***	02044	**AE GBE 45/120***	02048
Like AE GBE, but with presence detector					
		AE B 15/30*	02055		
Humidity-controlled extract air element with variable, limited volume flow					
AE Hygro 10/45*	02049				
Like AE Hygro, with additional electrically controlled demand-controlled ventilation level					
AE Hygro GBE 5/40/75*	02053			**AE Hygro GBE 10/45/120***	02054
Extract air element AE FV, with filter and volume adjustment					
AE FV 125	09478			**AE FV 125**	09478
Attachment filter element VFE					
– for AE / AE GBE, AE Hygro, prevents contamination of the extract air element and duct system					
				VFE 70/VFE 90	02552/02553

*Volume flow in m^3/h

Extract air (alternative to AE)

VKH

Automatic volume flow stabiliser for insertion in ventilation ducts and pipe fittings. Realises the rated output in the differential pressure range from approx. 50–250 Pa.

	Ø 80		Ø 100		Ø 125	
V̇ m^3/h	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
15-50	**VKH 80/15-50**	00001	**VKH 100/15-50**	00002	**VKH 125/15-50**	00004
50-100			**VKH 100/15-100**	00003	**VKH 125/50-100**	00005
100-180					**VKH 125/100-180**	00006

SVE

LG

Sound insulation elements for simple sound insulation and volume control through duct insertion. Also for pressure control.
Ventilation grilles and disc valve, especially for living spaces.

Ø 80		Ø 100		Ø 125	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Sound insulation elements					
SVE 80	08309	**SVE 100**	08310	**ZSVE 125**	08311
Ventilation grille (for covering types VKH and SVE)					
LGK 80	00259	**LGM 100**	00254	**LGM 125**	00258
Plastic disc valves, for extract air					
KTVA 75/80	00940	**KTVA 100**	00941	**KTVA 125**	00942

Intake air elements
Installation in wall openings

ZL

Universally applicable automatic disc air elements and thermostat supply valves for demand-based intake air volume control. See Intake air elements page for detailed description.

Ø 80		Ø 100		Ø 160	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Automatic supply air element – Automatically temperature-controlled incl. thermostat disc valve, sound insulation and external grille					
ZLA 80	00214	**ZLA 100**	00215	**ZLA 160**	00216
Disc air element – Manually controllable in four levels incl. disc valve with drawcord, sound insulation and external grille					
		ZLE 100	00079		
Thermostat disc valve – For installation in existing ventilation openings					
ZTV 80	00078	**ZTV 100**	00073	**ZTV 160**	00074

Automatic supply air element ZLA 125 see product pages.

Installation in window frames

ALEF



Intake air element with volume flow control and limitation. See Intake air elements product page for detailed description. Ideal for retrofitting and new constructions.

V̇ m^3/h	**Type**	Ref. no.	**Type**	Ref. no.
Intake air element for installation in window frames – with volume flow control and limitation			Like ALEF, but also comes with sound insulation	
30	**ALEF 30**	02100	**ALEFS 30**	02102
45	**ALEF 45**	02101	**ALEFS 45**	02103
Intake air element for installation in window frames – humidity-controlled, with volume flow control and limitation			Like ALEF Hygro, but also comes with sound insulation	
5/45	**ALEF Hygro 5/45**	02056	**ALEFS Hygro 5/45**	02057

Ducts, fittings

Ducts, fittings

Ø 80		Ø 100		Ø 125	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Fully flexible ventilation duct					
ALF 80	05711	**ALF 100**	05712	**ALF 125**	05713
Duct connector – Made of steel sheet, galvanised					
RVB 80	05993	**RVB 100**	05994	**RVB 125**	05995
Hose clips – Metal band with turnbuckle, unit = 10 pcs.					
SCH 80	05722	**SCH 100**	05722	**SCH 125**	05723
T-pieces – Made of steel sheet, galvanised					
		TS 100	01479	**TS 125**	05720

Duct reduction

RZ

Ø 80		Ø 100		Ø 125	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Duct reductions – Made of plastic					
		RZ 100/80	05223	**RZ 125/100**	05222
Flexible cross talk silencer – Made of flexible aluminium pipe					
		FSD 100	00676	**FSD 125**	00677
Duct shutters – Automatic, made of plastic					
		RSKK 100	05106	**RSKK 125**	05107
Inline duct shutters – Airtight, for duct insertion					
RVE 80	02584	**RVE 100**	02587	**RVE 125**	02588

Silencers, shutters

FSD

RVE

Wall duct, roof duct

DH, UDP, FDP



Ø 80		Ø 100		Ø 125	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Telescopic wall kit – For wall outlet from supply air pipes and extract air pipes					
		TMK 100	00844	**TMK 125/150**	00845
Universal roof outlet* DDF – Adjustable to all types of tile on gable and flat roofs					
				DDF 125	01964
Roof outlet, pan tiles for gable/flat roofs and pipe joints					
– Roof outlet*		**DH 100 S**	02015	**DH 125 S**	02017
– Gable roof universal pan tile*		**UDP 100 S**	02021	**UDP 125 S**	02021
– Flat roof pan tile		**FDP 100**	02024	**FDP 125**	02013
– Pipe joint		**STV 100**	02026	**STV 125**	02027

* See product page for other colour designs.

Overflow

LTG

Door grilles
Unobtrusive, sight screening ventilation grille made of break-resistant plastic for installation in door leaf. See Ventilation grilles product page for detailed description.

LTGW Ref. no. 00246
Made of plastic, white.

LTGB Ref. no. 00247
Made of plastic, brown.

Reference	Page
Dimensions, further technical information and other sizes:	
Ventilation grilles,	
Ducts, Fittings,	
Roof ducts	563 ff.
Extract air elements	576 ff.
Intake air elements	588 ff.
Fire protection elements for use in multi-fl. const.	592 ff.
Control and regul. units	601 ff.

Ventilation systems
with heat recovery

KWL ventilation systems with heat recovery from Helios ensure pleasantly tempered, draught-free and filtered air 24 hours a day. A balanced and comfortable climate prevails – all year round.

The KWL range from Helios includes decentralised and central ventilation units for use in single-family and multi-family homes, commercial buildings and individually selectable air distribution systems. Regardless of which system you choose, all options are characterised by the fact that the entire system is virtually invisible and even less audible.

Elegant, award-winning air inlets and outlets integrate harmoniously into floors, walls and ceilings.

Helios KWL added value. The universal, perfectly coordinated Helios KWL system solutions guarantee simple planning, safe installation and high efficiency.

Services such as KWL technical seminars and practical workshops, as well as the intuitive online software tool KWLeasyPlan.de, make design, planning and installation even easier.

KWLeasyPlan.de

Central domestic ventilation with heat recovery

KWL EC 45-160, KWL EC 60

For the flush-mounted wall installation in single rooms, ideal for renovations.

EC 104ff

KWL EC 70

The KWL EC 70 impresses with three installation options: Surface-mounted, partially wall-integrated and partially wall-integrated with second room connection.

EC 108f

KWL Yoga

Three compact unit sizes for airflows up to 400, 700 or 1,000 m³/h and in 6 different equipment options.

EC 150ff

Selection matrix

100f

Enthalpy heat exchangers

111ff

easyControls 3.0

112ff

Central ventilation units with heat recovery

Wall installation, wall mounting "W"

Series "W"
Compact wall units from 170 to 500 m³/h. All models come with easyControls 3.0 as standard and enthalpy heat exchangers as an option.

EC 116ff

Ceiling installation "D"

Series "D"
Ultra-flat units from 220 to 2000 m³/h for space-saving ceiling installation. KWL EC 220, 340 D come with easyControls 3.0 as standard.

EC 132ff

Floor-standing installation "S"

Series "S"
With air flow rates from 800 to 2600 m³/h, for standing floor installation. Ideal as central units in residential, commercial and industrial applications.

EC 142ff

Peripherals

Ideally matched additional equipment, such as ground heat exchangers and the active humidifying unit HygroBox for the functional expansion of the entire KWL system.

Innovative air distribution systems for all installation types and areas of application. Design ventilation valves, etc.

160ff

YouTube

KWL® ventilation units and peripherals at a glance

	Type	Installation			Decentralised / Central	Typical areas of application					Maximum energy efficiency class*	Moisture recovery	With passive house certificate
		Wall mounting / wall	Ceiling	Floor		Living room	Single family house	Apartment building – apartment central	Apartment building – building central	Commercial / municipal buildings			
	KWL EC 45-160	■			D	■	■	■			A+		
	KWL EC 60	■			D	■	■	■			A		
	KWL EC 70	■			D	■	■	■			A+		
	KWL EC 70 ET	■			D	■	■	■			A+	■	
	KWL 170 W CF	■			C		■	■			A+		■
	KWL 170 W ET CF	■			C		■	■			A	■	■
	KWL 200 W	■			C		■	■			A		
	KWL 200 W ET	■			C		■	■			A	■	
	KWL 250 W CF	■			C		■	■			A+		
	KWL 250 W ET CF	■			C		■	■			A	■	
	KWL 300 W	■			C		■	■			A		
	KWL 300 W ET	■			C		■	■			A	■	
	KWL 360 W CF	■			C		■	■			A+		■
	KWL 360 W ET CF	■			C		■	■			A	■	■
easy Controls 3.0	KWL 470 W CF	■			C		■	■		■	A+		
	KWL 470 W ET CF	■			C		■	■		■	A	■	
	KWL 500 W	■			C		■	■		■	A		
	KWL 500 W ET	■			C		■	■		■	A	■	
	KWL 890 W CF	■			C		■	■	■	■	A+		■
	KWL 890 W ET CF	■			C		■	■	■	■	A+	■	
	KWL 220 D		■		C		■	■			A+		■
	KWL 340 D		■		C		■	■			A+		
	KWL EC 700 D		■		C				■	■			■
	KWL EC 1400 D		■		C				■	■			■
	KWL EC 2000 D		■		C				■	■			■
	KWL EC 800 S			■	C				■	■			■
	KWL EC 1200 S			■	C				■	■			■
	KWL EC 1800 S			■	C				■	■			■
	KWL EC 2600 S			■	C				■	■			■
	KWL YOGA Style 400		■		D					■			
	KWL YOGA Style 400 ET		■		D					■		■	
	KWL YOGA Style 700		■		D					■			
	KWL YOGA Style 700 ET		■		D					■		■	
	KWL YOGA Style 1000		■		D					■			
	KWL YOGA Style 1000 ET		■		D					■		■	
	KWL® peripherals: **flex***pipe*plus, KWL® MultiZoneBox, IsoPipe, **reno***pipe*, Flat duct, KWL HygroBox, Ground heat exchanger												

* See KWL® unit product pages for details.

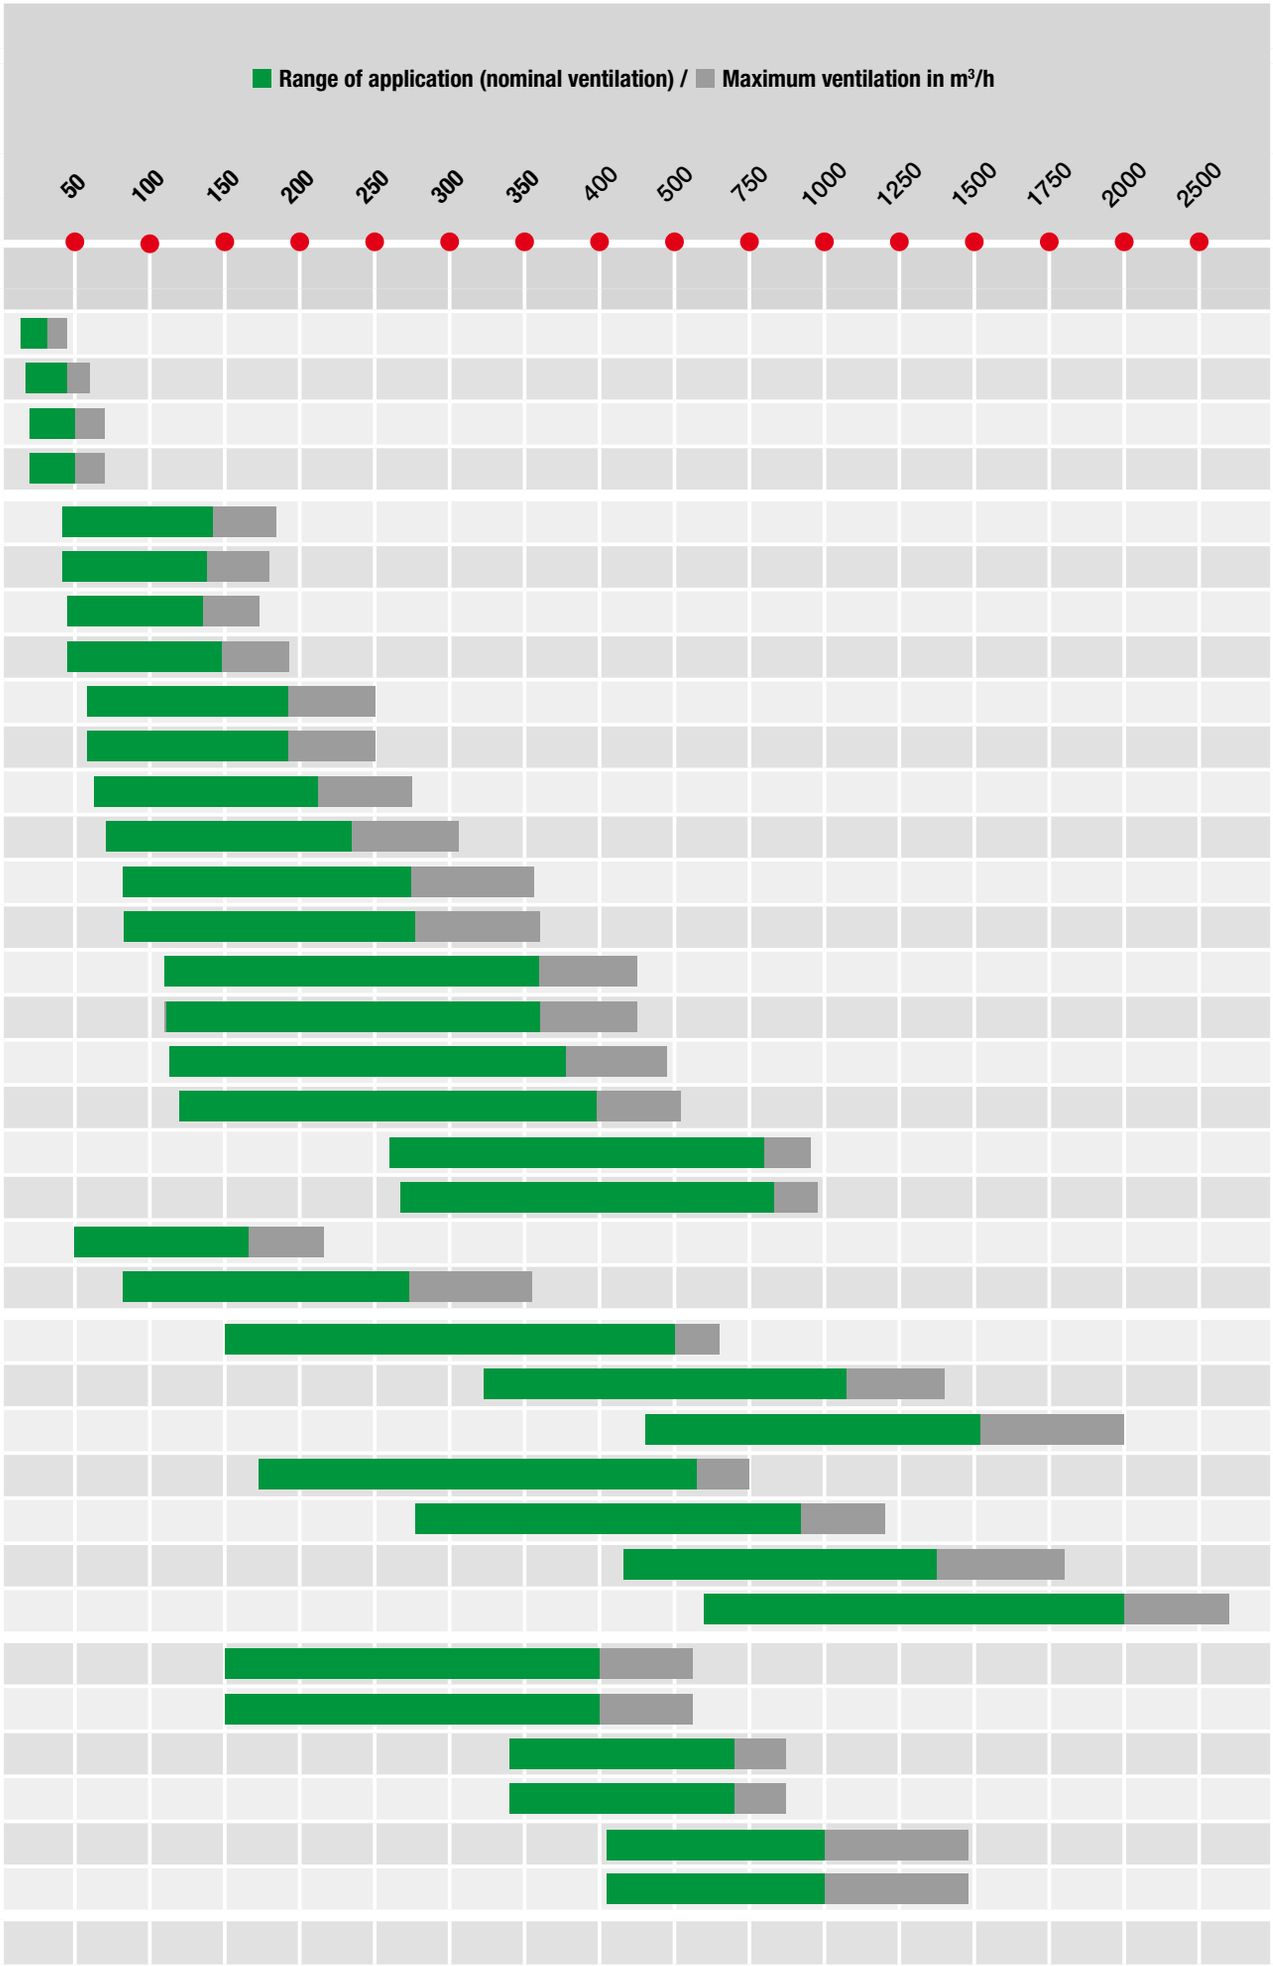
Range of application (nominal ventilation) / Maximum ventilation in m³/h
50
100
150
200
250
300
350
400
500
750
1000
1250
1500
1750
2000
2500
Page
104
106
108
108
116
116
118
118
120
120
122
122
124
124
126
126
128
128
130
130
132
134
136
138
140
142
144
146
148
152
152
154
154
156
156
162

Decentralised domestic ventilation **with heat recovery.**

▶ PLAY

Learn about the many possibilities offered by EcoVent Verso KWL EC 45-160 now on our YouTube channel.

Controlled domestic ventilation with heat recovery (KWL) ensures ventilation in accordance with DIN 1946-6 and thus contributes to improving both the indoor environment and the building's energy performance.

In this respect, a decentralised ventilation system with heat recovery offers major advantages, especially in renovation, as it is an economical and simple solution for single rooms.

The focus is on two main points:
On the one hand, high efficiency is a prerequisite for the economical operation of the units and, on the other hand, the individual ventilation units must form a complete system in perfect coordination with each other.

Helios' decentralised ventilation units with heat recovery perform impressively in both categories.
Thanks to the quick and simple installation, they provide an economical solution for the supply and extract ventilation of single rooms. Residents can sit back and enjoy a comfortable indoor climate.

UPGRADE AIR

Discover how ventilation becomes a game-changer! Experience the versatile, decentralised KWL EC 70 in our interactive product video with retro gaming vibes.

PLAY NOW!

→ heliosventilatoren.de/en/UpgradeAir

EcoVent Verso KWL EC 45-160

With a ceramic heat exchanger, flow straightener and EC fan.
For flush wall mounting in single rooms, ideal if space is limited.

EC 104f

EcoVent KWL EC 60

With a large-scale aluminium plate heat exchanger and two EC fans.
For flush wall mounting in single rooms - ideal for retrofitting as part of a refurbishment project.

EC 106f

KWL EC 70

With highly efficient cross-counterflow or enthalpy heat exchanger.
Three installation options: Surface-mounted, partially wall-integrated and partially wall-integrated with second room connection.

EC 108f

Selection matrix

100f

YouTube

Wall installation unit with heat recovery for single rooms, with air flow rates up to approx. 45 m³/h

KWL EC 45-160

Efficiency class

A+ KWL EC 45-160 with additional room sensor

A KWL EC 45-160

BEST OF SHK AWARD

PLUS X AWARD 2016 achieved for: High Quality, Functionality, Ecology

EC

Dimensions KWL EC 45-160

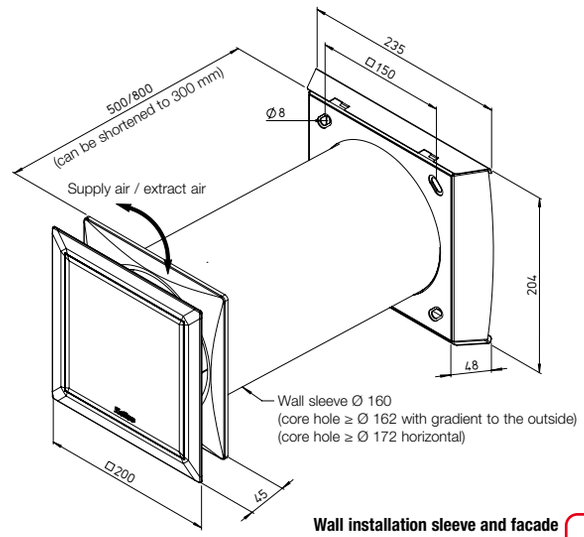

Dimensions in mm

Wall installation sleeve and facade panel essential for unit installation.

KWL EC 45-160 belongs to the category of switching ventilation units with heat recovery.
It is intended for installation in the external building wall.
The passage of air is from the outside of the wall through a stainless steel panel. A closable plastic panel on the inner side of the wall, which has integrated sound insulation and a fibre fleece air filter (class ISO Coarse 50 % (G3)), is used for this purpose.
The KWL EC 45-160 has an EC axial fan which operates in reversing cycles. In this respect, the supply air phases, where the intake air flows into the building, continuously alternate with the extract air phases, which are characterised by the extraction of indoor air from the building.

The heat recovery is regenerative using a ceramic heat exchanger. During extract air operation, this absorbs heat from the indoor air (storage charge) to transfer it to the incoming intake air (storage discharge) in the subsequent supply air cycle. Heat recovery efficiency up to 88 %.
There is an insect screen on the outside of the ceramic heat exchanger in order to protect against course dirt.
In order to maintain balanced ventilation operation, at least 2 units are required for a residential unit, which operate out of phase in terms of operating phases (supply air/extract air). Depending on the total air requirement of the residential unit, more than 2 units are normally installed, whose individual volume flows are automatically coordinated using the central control unit.

Highlights KWL EC 45-160

- ▢ Economical, quiet EC axial fan.
- ▢ Elegant and timeless design.
- ▢ Tool-free, simple installation and dismantling of components.
- ▢ Integrated sound insulation.
- ▢ Integrated ISO Coarse 50 % (G3) air filter, easily accessible and changeable without tools.
- ▢ Simple, intuitive operation via two keys.
- ▢ LED display for operating mode and current ventilation level.
- ▢ Up to 8 controllable units.
- ▢ 5 ventilation levels: 14, 24, 32, 37, 45 m³/h.
- ▢ 4 operating modes: Heat recovery (= reversing operation), cross ventilation and supply air/extract air mode.
- ▢ Possibility of external activation from standby, cross ventilation, supply air mode or party mode (maximum ventilation level) by evaluating an external, potential-free contact.
- ▢ Intelligent integration of e.g. demand-controlled extract air fans via an extension module (accessories).
- ▢ Filter change indicator.
- ▢ Configuration via laptop/PC possible.

Control

The central control unit with control element enables the controlling of up to 8 units.
5 ventilation levels and 4 operating modes can be set on the control element:
Heat recovery (= reversing operation), cross ventilation and supply air/extract air mode.
The user is reminded to replace the filter by flashing LEDs on the control element after a preset time period.

GUI user interface

It is possible to connect the control element to a PC or laptop via the USB interface with Helios software.
This makes it easy and convenient to access the control settings.

- ▢ Thus, the commissioning and entry of required values (e.g. filter replacement interval or minimum ventilation level) within a very short time.
All specified setting options can be changed quickly via the programme interface with the user-friendly assistance of appropriate help texts.

- ▢ The configuration settings can be stored directly on the PC or laptop and reloaded into the control system, if required. This makes installation in larger buildings particularly straightforward. If several identical ventilation systems are installed, the required configuration is carried out once for a ventilation system and it can then be transferred to any number of control elements. Controller and software can be secured with a PIN.

Replacement air filter

– 2 pcs. ISO Coarse 50 % (G3)
ELF-KWL 45-160/3/3 No. 09366

Sound insulation element

Sound insulation element for use in the soffit channel, fire protection class B1.
KWL 45 SEL No. 04170

Sound insulation element for use in the wall sleeve, fire protection class B1.
KWL 45-160 SE No. 09362

Technical data

Unit[1]	KWL EC 45-160[1]				Ref. no. 09361
Flow rate at level supply air/extract air $\dot{V}$ m³/h	❺ 45	❹ 37	❸ 32	❷ 24	❶ 14
Sound pressure L_{PA} dB(A) at 3 m	34	29	27	21	14
Sound power L_{WA}	52	47	45	39	32
Standard sound level diff. $D_{n,e,w}$ dB[2]	Facade panel 44 / Soffit				
Power consumption W	4.5	3.4	2.8	2.1	1.6
Heat recovery efficiency	up to 88 %				
Operating voltage mains adapter	Input 230 V~, 50/60 Hz / Output 12 V⎓				
Rated current mA	42	32	27	21	17
El. supply line mains adapter[3]	NYM-O 2 x 1.5 mm²				
El. supply line power supply control[3]	NYM-O 2 x 1.5 mm²				
El. supply line to fan[4]	J-Y (ST) Y 3 x 0.8 mm				
Protection class III, protection cat.	IP20				
Wiring diagram no.	1091 / 1093				
Temperature operating range	– 12 °C to + 40 °C				
Weight (unit+inner panel) approx. kg	2.8				

[1] The required wall installation sleeve and facade panel must be ordered separately.
[2] Test value. [3] Use of NYM-J 3 x 1.5 mm² is permitted. [4] Use of J-Y (ST) Y 2 x 2 x 0.8 mm is permitted.

Unit with inner panel
KWL 45-160 No. 09361
Consists of design inner panel with filter, ceramic heat exchanger, flow straightener, insect screen, EC axial fan with protection grille, removal tool (cord) and EPP half shell base.

Wall installation sleeve
Length 500 mm
KWL 45-160 WH No. 09319
Length 800 mm
KWL 45-160 WH-L No. 09320
Ø 160 mm, plastic, incl. condensate wedge and 2 covers.



Facade panel
Made of stainless steel
KWL 45-160 FB-E No. 09321
With additional coating
KWL 45-160 FB-B No. 09322
For use in environments with severe air pollution or high salt concentration in the air (near the coast).
With white coating
KWL 45-160 FB-W No. 09323

Facade panel DEEP
Made of stainless steel
KWL 45-160 FBT-E No. 09324
For installation in external wall thicknesses from 250 – 300 mm.
With additional coating
KWL 45-160 FBT-B No. 09326
For use in environments with severe air pollution or high salt concentration in the air (near the coast).
With white coating
KWL 45-160 FBT-W No. 09340



Installation package soffit
KWL 45-160 LE-RP No. 08160
With wall sleeve and plaster protective cover. Made of EPP, fire protection class B1.

Soffit grille
Made of stainless steel
KWL 45 LG No. 04167
External grille with integrated condensate drain and seal.
Dim. mm (H x W) 324 x 74
With additional coating
KWL 45 LG-B No. 04168
For use in environments with severe air pollution or high salt concentration in the air (near the coast).
With white coating
KWL 45 LG-W No. 04169

Insect screen
KWL 45 ISL No. 03004
Made of stainless steel.
For installation package soffit (KWL 45-160 LE-RP).
Suitable for retrofitting.
Dim. mm (H x W) 203 x 48

Installation kit pitched roof
Colour: Black
KWL 45-160 SD-RP-S No.40731
Colour: Red
KWL 45-160 SD-RP-R No.40732
Pipe bend element incl. universal roof pan tile and roof hood.

Pipe bend element
KWL 45-160 SD-RS No. 40733
Pipe bend element without universal roof pan tile and roof hood.

Wall stone
Length 365 mm
KWL 45-160 WS No. 09302
Length 490 mm
KWL 45-160 WS-L No. 09306
Installation aid for brickwork. Made of EPS, fire protection class B1. Replaces the otherwise necessary core hole drilling.

Control set UP
KWL 45 STS-UP No. 03006
Consists of control element KWL 45 BEU and switching power supply KWL 45 SNU for installation in flush-mounted box. Allows the connection of up to 6 units. In case of more than 6 units, an additional KWL 45 SNU is required. Max. 8 units per control element.

Switching power supply UP
KWL 45 SNU No. 03008
For extending the control set KWL 45 STS-UP from 6 to 8 units.
Input 230 V AC, 50/60 Hz. output 12 V DC / 1.9 A for flush-mounted installation in insulated wall.
Output voltage according to SELV protection class 3.

Casing for surface installation
KWL-APG* No. 04270

Extension module
KWL 45 EM No. 03012
For the combined operation of an extract air system, e.g. according to DIN 18017-3 with KWL EC 45-160 (combined ventilation). Installation in flush-mounted box.
Dim. mm (WxHxD) 40 x 40 x 29

Reference
A flush-mounted box (depth 61 mm) is required for the control element KWL 45 BEU and for each installed switching power supply KWL 45 SNU.
Control element (w/o adapter)
KWL 45 BEU No. 03041

Control set HS
KWL 45 STS-HS No. 03007
Consists of control element KWL 45 BEU and switching power supply KWL 45 SNH for top-hat rail (2 pcs). Allows the connection of up to 4 units. In case of more than 4 units, an additional KWL 45 SNH is required. Max. 8 units per control element.

Switching power supply HS
KWL 45 SNH No. 03001
For extending the control set KWL 45 STS-HS from 4 to 8 units.
Input 230 V AC, 50/60 Hz.
Output 12 V DC / 1.5 A for installation in distribution box (2 pcs). Output voltage according to SELV protection class 3.

Room sensor
HY 3 No. 01359
With internal scale
HY 3 SI No. 01360
Electromechanical humidity controller for connection to the external contact of the control element. For surface installation. Function type can be adjusted using Helios software or control element.
Attention: Parallel use with KWL-EM is not possible.

* Hinweis: Nur für die AP-Montage des KWL 45 BEU in Verbindung mit Hutschienennetzteil KWL 45 SNH.

KWL EC 60

Efficiency class

A — KWL EC 60 Pro FF

B — KWL EC 60 Eco / Pro

EC

Installation example KWL EC 60

Compact wall installation unit with heat recovery for the supply and extract ventilation of individual rooms. KWL EC 60 is a convincing solution for a comfortable indoor climate and energy savings in individual rooms. KWL EC 60 ventilates small and large individual rooms. The installation of multiple units is recommended for a medium-sized residential unit.

Ideal for renovation due to simple installation
EcoVent is ideal for retrofitting as part of a refurbishment project. The intake air connection is simply through a core hole in the external wall, in which the wall sleeve is inserted.
This simply takes place during the facade renovation. The openings are closed by two building protection covers. The elegant stainless steel outer facade is installed upon completion of plastering. The desired unit is inserted into the wall sleeve and electrically connected in the course of the interior work. Only the elegant facade can be seen on the room side, the front of which is completely closed. As a result, EcoVent blends discreetly into a variety of interior settings, and dirty ventilation grilles are a thing of the past. Multiple units can be independently controlled. Adjustment is not necessary.

Aluminium plate heat exchanger with a heat recovery rate of up to 71 %
Thanks to its efficient, generously sized aluminium plate heat exchanger with a heat recovery rate of up to 71 %, EcoVent reduces ventilation heat losses and thus helps save on heating energy costs.

Functionality of the KWL EC 60 ventilation with heat recovery
Two highly efficient direct current EC fans ensure a uniform air exchange. Contaminants, odours and the stale room air is moved outside, and fresh, preheated air is supplied to the room.
The heat is transferred from the stale extract air to the fresh supply air in the large aluminium plate heat exchanger, whereby both airflows remain separate.

Delivery / scope of order
Designed for the installation steps, the following elements can be ordered separately:

- **Installation kit**

KWL 60 RS	No. 00708
KWL 60 RS-B	No. 01961

Consists of wall sleeve (349 mm long), two building protection covers, outer facade and deflector plate made of stainless steel (type RS-B with additional coating*).

- **Unit optionally available in Eco or Pro version.**

** The external components, such as facade panel, spacer frames and protection grille, are made of high-quality stainless steel.*
Alternatively available in coated version (types -B) for use in environments with severe air pollution or high salt concentration in the air (near the coast).

Common features Eco and Pro

Heat exchanger
- Large aluminium plate heat exchanger with a heat recovery rate of up to 71 %.

Air delivery
Two highly efficient direct current EC fans ensure a uniform air exchange.

Condensate drain
Condensate is drained outside directly via the deflector plate on the external cover.

Air filters
- Two efficient air filters (class ISO coarse 60% (G4)) in the supply air and extract airflow help to ensure high air quality. An ISO $ePM_{2.5}$ 65 % (F7) pollen filter on the supply air side is optional.

ECO

KWL EC 60 Eco
The economical solution with a favourable price / performance ratio.

Unit Eco

KWL EC 60 Eco	No. 09950

Consists of inner facade made of high-quality plastic with an integrated, three-step control element.

Power control
Three-step operation via the control element integrated in the inner facade (can be placed at the top or bottom by rotating the facade 180°).
0 position via on-site off-switch.

Electrical connection
Via screwless terminals.

Technical Data

Unit [1]	**KWL EC 60 Eco** [1]		Ref. no. 09950
Flow rate at level [2]	❸	❷	❶
supply air/extract air V̇ m³/h	60	30	17
Noise dB(A) radiation L_{PA} at 3 m	30	22	18
Power consumption Fans 2xW	4	2	1
Standard sound level diff. $D_{n,e,w}$ dB	39 – 41		
Voltage/Frequency	230 V~, 50 Hz		
Rated current A	0.05		
Protection category IP	X4		
Electrical supply line	NYM-J 3 x 1.5 mm²		
Wiring diagram no.	949		
Temperature operating range	– 20 °C to + 40 °C		
Weight approx. kg	6.5		

[1] The required installation kit (types KWL 60 RS) must be ordered separately (see above for details).
[2] Volume reduction of approx. 10 % when using pollen filters.

Dimensions EcoVent KWL EC 60

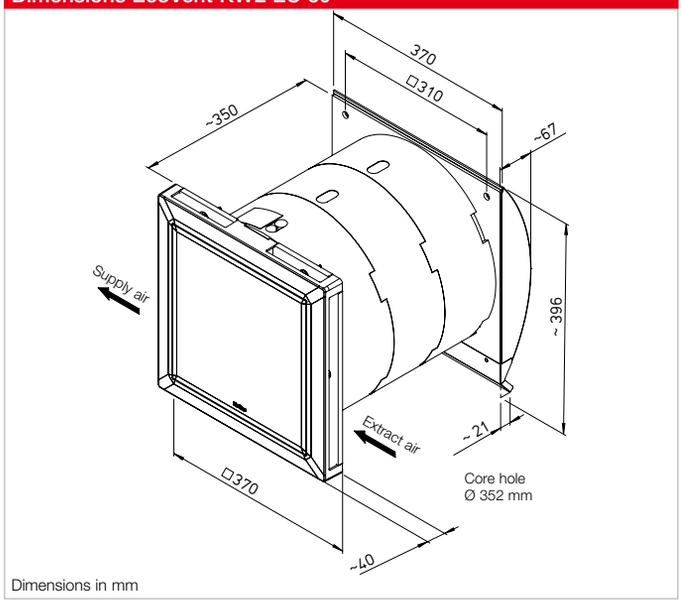

Dimensions in mm

PRO

KWL EC 60 Pro / Pro FF
Meets even the highest comfort requirements with many useful functions.

Unit Pro

KWL EC 60 Pro No. 09951

Consists of inner facade made of high-quality plastic and comfort control element (KWL-BCU, 1 pc. included in delivery). See right for details.

Unit Pro FF

KWL EC 60 Pro FF No. 09957

Like KWL EC 60 Pro, but with additional integrated humidity sensor for demand-dependent ventilation. The humidity values can be adjusted.

Power control

The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:

- Four-step manual operation or with digital weekly timer.
- Supply air/extract air operation individually switchable.
- Party mode, intensive ventilation.
- Indication of necessary filter replacement, operating status, operating hours, error messages.
- Multiple units can be controlled via one control element.
- Multiple control elements can be connected to one unit.

Shutters

In case of absence (holiday) or standstill periods, two airtight shutters will close outwards or one airtight shutter will close in case of supply air or extract air operation.

Electrical connection

Via plug-in coupling (included in delivery.)

Technical data				
Unit [1] – incl. humidity sensor	**KWL EC 60 Pro** [1] **KWL EC 60 Pro FF** [1]			Ref. no. 09951 Ref. no. 09957
Flow rate at level [2] Supply/extract air V m³/h	❹ 60	❸ 45	❷ 30	❶ 17
Noise dB(A) Radiation L_{PA} at 3 m	30	29	22	18
Power consumption Fans 2xW	4	3	2	1
Standard sound level diff. $D_{n,e,w}$ dB	39 – 41			
Voltage/Frequency	230 V~, 50 Hz			
Rated current A	0.06			
Protection category IP	X4			
Electrical supply line	NYM-J 3 x 1.5 mm²			
Wiring diagram no.	950			
Temperature operating range	– 20 °C to + 40 °C			
Weight approx. kg	6.5			

[1] The required installation kit (types KWL 60 RS) must be ordered separately (see above for details).
[2] Volume reduction of approx. 10 % when using pollen filters.

Delivery / scope of order

Designed for the installation steps, the following elements can be ordered separately:

□ **Installation kit**

KWL 60 RS	No. 00708
KWL 60 RS-B	No. 01961

As described on the left.

□ **Unit optionally available in Eco or Pro version.**

Common accessories

Wall sleeve extension

KWL 60 WV No. 00884

For wall thicknesses from 349 to 571 mm. Can be optionally shortened or connected, 111 mm long, with separator.

Sound insulation set

KWL 60 SDS No. 03059

Consists of sound insulation frame and matting, white, 100 mm deep. Noise reduction up to 6 dB.

Spacer frame

KWL 60 DR	No. 00888
KWL 60 DR-B	No. 01962

External stainless steel frame, 100 mm deep, with separator. For wall thicknesses from 249 to 349 mm.

Protection grille

KWL 60 SG	No. 09978
KWL 60 SG-B	No. 09976

Made of stainless steel (2 pcs.), for side attachment to outer facade.

Installation kit essential for unit installation.

Replacement air filter

– 2 pcs. ISO coarse 60 % filter
ELF-KWL 60/4/4 No. 09445
– 2 pcs. ISO ePM$_{2.5}$ 65 % filter
ELF-KWL 60/7/7 No. 09446



PRO

Accessories for KWL EC 60 Pro

Control element (additional)

KWL-BCU (Flush-mounted) 09955
Dim. mm (WxHxD) 80x80x37
Display and function as described on the left. 1 KWL-BCU included in delivery. Connection of up to 4 pcs. possible. Delivery incl. 3 m connection cable.

KWL-BCA (Surface-mounted) 09956
Dim. mm (WxHxD) 83x83x51

Casing for surface installation

KWL-APG No. 04270
Dim. mm (WxHxD) 83x83x41

Connection cable

KWL-SL 6/5	(5 m)	No. 09980
KWL-SL 6/10	(10 m)	No. 09444
KWL-SL 6/20	(20 m)	No. 09959

For distances > 3 m, with 2 RJ 12 plugs. For connection between control element and KWL EC 60 Pro or between multiple units.

Connection cable branch

KWL-ALA No. 09960

For the connection of additional units or control elements and accessory components (1 pc. always required) which are not included in the delivery.

KWL EC 70

Efficiency class
A+ KWL EC 70

BEST OF SHK AWARD
DIE BESTEN PRODUKTE 2026 GEWINNER haustec.de
EC

With second room connection

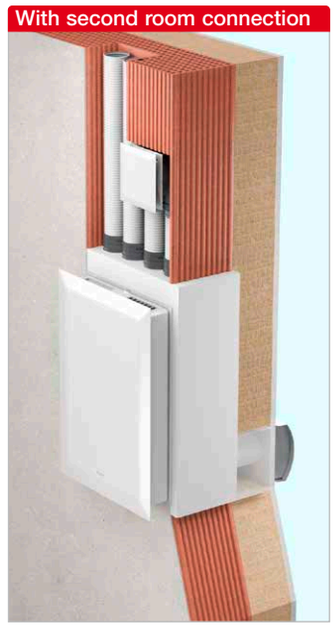

Surface mounting

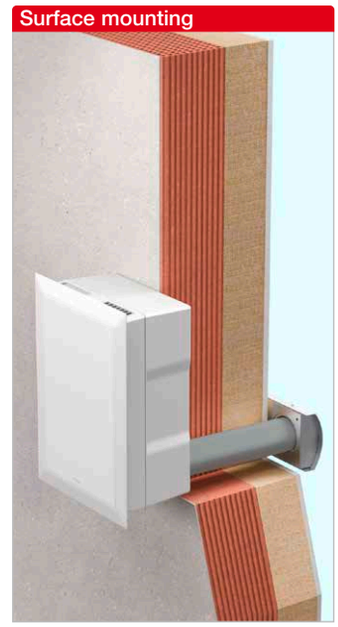

Compact ventilation unit with heat recovery for wall mounting – on or in the exterior wall. In addition to the room in which it is installed, another room can also be ventilated or deaerated. KWL EC 70 offers an efficient solution for ensuring comfortable indoor air quality while maintaining high energy efficiency. The space-saving design allows flexible use in many living and usage situations. Ideal for smaller residential units such as flats, hotel rooms, retirement homes, residential homes or student accommodation. Equipped with economical EC fans, highly efficient cross-counterflow or enthalpy heat exchangers and user-friendly operation.

Casing
- Universal housing concept. Unit made of highly insulating EPP. Maintenance-friendly access to filters via hinged inner panel. Automatic supply and exhaust air dampers. Easy-to-maintain filter access via hinged inner cover. Surface mounting: easy retrofitting during renovation. Partially integrated into wall: discreet appearance, connection to second room possible (supply/extract air).

Heat exchanger
- Large-area cross-counterflow heat exchanger made of plastic, with a heat recovery rate of up to 87 %.
- Type 'ET' is equipped with a highly efficient enthalpy heat exchanger for additional moisture recovery.

Fans
- Two quiet, high-performance centrifugal fans with energy-saving EC motors ensure air supply and extraction.

Condensate drainage
- If condensate forms due to air conditions, it is reliably drained via the facade cover or the soffit element.

Air filter
- Clean outdoor air supply via ISO Coarse 65% (G4) filter or alternatively through ISO ePM_1 60% (F7) or activated carbon filter. The extract air side is equipped with an ISO Coarse 65% (G4) filter before the heat exchanger. Easy filter maintenance without opening the unit is possible.

Frost protection for the heat exchanger
- The standard frost monitoring system automatically adjusts the supply air volume.

Control
- The casing features a discreet membrane keypad with 5 ventilation settings.
- Operating modes: Pure supply air / Pure extract air / Heat recovery.
- After a pre-set time interval, the user is reminded of the filter replacement via an optical signal.
- The unit features an integrated humidity sensor for demand-based automatic operation. Additional air quality sensors (VOC, CO_2) are available for integration into the device or external variants for installation in the room.

Electrical connection
- Fixed line connection via an NYM cable 3 x 1.5 mm².

Commissioning
- Easy configuration of the KWL EC 70 using the setup tool (PC/laptop) via USB connection.
- Commissioning and parameter entry (e.g. filter change, minimum fan speed) are easily carried out via the programme interface with context-sensitive help texts.
- Configurations can be saved on a PC/laptop and reloaded as required.
- The configuration can be saved and transferred to other devices. This makes commissioning in larger properties particularly easy.
- The set values can be secured in the software using a PIN.

Dimensions KWL EC 70

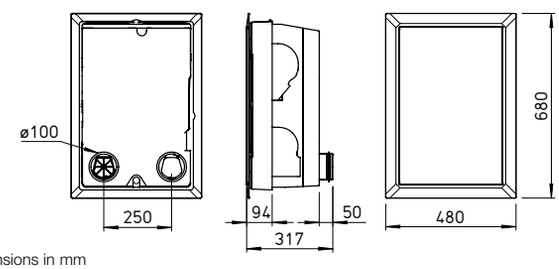

Dimensions in mm

Replacement air filters
– 2 pc. ISO Coarse 65% (G4)
ELF-KWL EC 70/2x Coarse 65%
Ref. no. 40849
– 1 pc. ISO ePM_1 60% (F7)
ELF-KWL EC 70/ePM1 60%
Ref. no. 40868
– 1 pc. ISO ePM_{10} 80% (AK/M6)[1]
ELF-KWL EC 70/ePM10 80% AK
Ref. no. 40869

Reference
Enthalpy heat exchanger (accessories) for retrofitting:
KWL-ET 70 Ref. no. 40957

Technical data	With cross-counterflow heat exchanger Type	Ref. no.				With enthalpy heat exchanger Type	Ref. no.
	KWL EC 70	40787				KWL EC 70 ET	40788
Heating capacity	87 %					85 %	
Levels	❶	❷	❸	❹	❺		
Ventilation levels V̇ m³/h	30	40	50	60	70		
Sound power L_{WA} dB(A)	33	38	40	43	45		
Sound pressure L_{PA} dB(A) at 3 m	15	20	22	25	27		
Power consumption fans 2xW	2.5	3.5	5	7	9.5		
Rated current A	0,36						
Max. electrical input power W	50						
Standard sound level difference $D_{n,e,w}$ dB	53						
Temperature operating range	–20 °C to +40 °C						
Voltage/Frequency	1~, 230 V, 50 Hz						
Wiring diagram no.	1535						
Weight approx. kg	9						

[1] AK = Activated carbon filter

Performance curves KWL EC 70

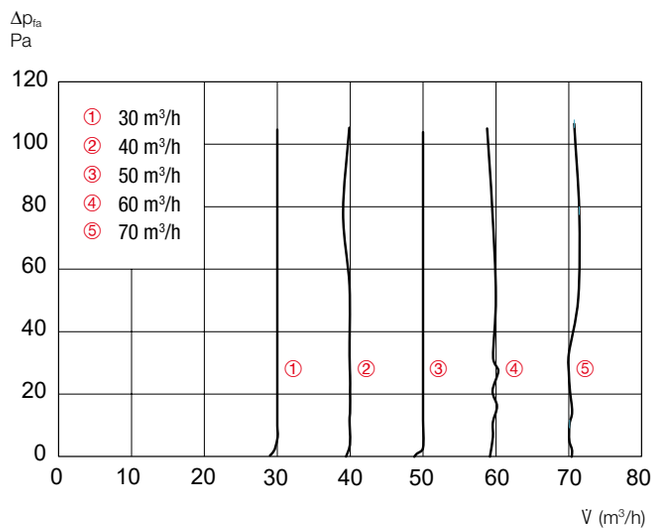



Dimensions in mm



Dimensions in mm

Room sensors

AIR1/KWL-VOC 0-10V No. 20250
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252

For detecting the CO2, mixed gas (VOC) concentration or relative room air humidity.
Dim. mm (W x H x D) 85 x 85 x 27

Internal sensors

KWL 70 VOC-I Ref. no. 40867
KWL 70 CO2-I Ref. no. 40866

Internal sensor for detecting the CO2, or mixed gas (VOC) concentration.

Surface-mounted housing

KWL 70 AG Ref. no. 40865

For installing the KWL EC 70 on the wall. Material: Plastic.
Colour: white (similar RAL 9003)

KWL® with heat recovery

Wall installation element

KWL 70 WEE Ref. no. 40852

made of EPS, incl. 2 wall installation sleeves (500 mm) with protective cover, as well as rectangular protective cover for the unit insert.

Adaptor

KWL 70 PS Ref. no. 40853

For completing the KWL EC 70 WEE with a full wall opening.

Second room connection

KWL 70 ZAS Ref. no. 40854

For the connection of an additional room. Set consists of:
2 × connectors for FRS-R 75
4 × bracket FRS-FK
1 × Closing cover for supply or extract air side
2 × sealing ring 75 mm

Ceiling/wall box DN 125

FRS-DWK 2-75/125 No. 03857

Ceiling/wall box for max. 2 round ducts FRS-R 75. For connection of supply/extract air valves DN 125. Height marks can be shortened to fit. Includes 1 blind cover DN 75 and DN 125. Integr. mounting clips, duct mounting brackets (4 pcs.), made of impact-resistant polypropylene.

Flexible ventilation duct

FRS-R 75/20* Ref. no. 40973

Corrugated plastic pipe made of PE-HD in quality-assured quality. Outer diameter: 75 mm, inner diameter: 63 mm. For volume flows up to 30 m³/h. Packaging unit: 1 bundle of 20 running metres.

Seal ring for ventilation duct 75 mm

FRS-DR 75 Ref. no. 02916

Seal ring for FRS-R 75. Required at every connection point. Set of 10 pcs.

Design ventilation valve

DLV 125 Ref. no. 03049

With integrated filter for supply and extract air, DN 125, adjustable.

DLV 125 black Ref. no. 40786



Dimensions in mm

Wall installation sleeve
Length 500 mm

KWL 70 WH Ref. no. 40855

Set consisting of 2 pieces. Diameter 110 mm. Material: PPS. Includes 4 building protection covers and 2 mounting templates for hygienic closure during the shell construction phase.

Lenth 800 mm

KWL 70 WH-L Ref. no. 40856



Dimensions in mm

Facade panel

KWL 70 FB-E Ref. no. 40857

Stainless steel panel for the external facade.

KWL 70 FB-B Ref. no. 40858

With additional coating for environments with high levels of air pollution or high salt concentrations in the air (near the coast).

KWL 70 FB-W Ref. no. 40859

With white coating.

Installation kit Soffit

KWL 70 LE-RP Ref. no. 40860

Soffit channel with plaster frame and adapter. Made of EPP, fire protection class B1. Can be installed on the left or right side of the window.

Stainless steel soffit grille

KWL 70 LG-E Ref. no. 40861

External grille including stainless steel condensate drain and seal.

KWL 70 LG-B Ref. no. 40862

With an additional coating for environments with high air pollution or elevated salt levels in the air (near the coast).

KWL 70 LG-W Ref. no. 40863

With white coating.



Dimensions in mm

Insect screen

KWL 70 ISL Ref. no. 40864

Made of stainless steel. For Installation kit Soffit (KWL 70 LE-RP). Suitable for retrofitting.

* Also available with 50 m duct length, see page 163.

Central domestic ventilation **with heat recovery.**

A central KWL system with heat recovery from Helios fully ensures continuous ventilation for humidity protection pursuant to DIN 1946-6, regardless of user behaviour.

The required minimum air exchange is also automatically ensured around the clock.

How it works:
The heat exchanger of the KWL system continuously extracts heat from the stale indoor air and transfers it to the fresh outdoor air. The air is then supplied to the rooms as preheated and filtered supply air. Heat recovery and efficient EC fan technology can help reduce the energy required for heating.

Added value of Helios KWL.
The versatile, coordinated Helios KWL system solutions support simple planning and safe installation and enable efficient operation.

CERTIFIED COMPONENT Passive House Institute

easy Controls 3.0

***KWL**easy**Plan**.de*

Enthalpy heat exchanger – balanced indoor humidity for enhanced comfort.

KWL units with enthalpy heat exchangers support comfortable indoor humidity levels and contribute to a pleasant indoor climate.

The relative room humidity in living areas should lie between 35 – 60 %. If the humidity is too low, mucous membranes will dry out, and electrostatic charges and dust levels in the air will build up. If the used air with a high absolute moisture content is replaced by fresh but dry air with a smaller absolute moisture content, the humidity in the room will decrease noticeably.

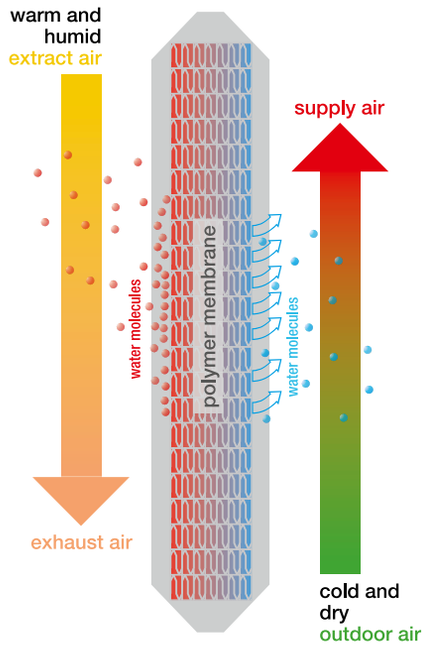

Ventilation units with enthalpy heat exchangers offer convincing advantages:

- Twofold benefit through energy-saving heat recovery and hygienic humidity recovery in the cold season.
- Humidity recovery from the extract air up to 70 %, depending on the indoor air humidity.

How the enthalpy heat exchanger works:

The membrane of the heat exchanger ensures the heat transfer from the extract air to the supply air. In addition, it offers the advantage that it is permeable to moisture. Important here: Air pollutants such as bacteria, viruses, mould spores or other contaminants (e.g. odours) cannot pass through the membrane.

The moisture contained in the warm extract air collects as water vapour on the membrane of the heat exchanger. Due to the special properties of this polymer membrane, the water vapour can now pass over to the supply air side. There it is absorbed by the air flow and returned into the building. This ensures that permanently preheated and clean supply air flows efficiently and without contamination into the living spaces.

Wall installation "W"

Series "W"
Compact wall units up to 500 m³/h.

All models equipped with easyControls as standard and optional enthalpy exchanger.

easyControls 3.0

EC 116ff

Ceiling installation "D"

Series "D"
Ultra-flat units up to 2000 m³/h for space-saving ceiling installation.

With ultra-efficient heat exchanger, EC technology and passive house certificate:
KWL 220 D and 340 D with easyControls as standard.

easyControls 3.0

EC 132ff

Standing installation "S"

Series "S"
With air outputs up to 2600 m³/h, for floor-standing installation.

Ideal as central systems in residential, commercial and industrial applications. With ultra-efficient heat exchanger, EC technology and passive house certificate.

EC 142ff

Selection matrix

100f

Peripherals

160ff

Smart, intuitive and individual.
Helios KWL® with easyControls 3.0

Your needs – our solution:
With Helios easyControls 3.0, you can expect not only a new generation of controls, but also a new product range offering high airflow capacity for a wide range of applications and energy-efficient performance.

The **new, intuitive control concept easyControls 3.0** can be easily adapted to the individual needs of residents and it can be manually controlled via the control element, internal web server or from any location via the Cloud as required. It‘s that simple!

Highlights:

- Smart touch control element in black and white, compatible with almost every switch range.
- Customised ventilation: adjustable weekly programme or fully automatically via room air quality sensors.
- Unit access via PC or Smartphone – also on the move via the new easyControls 3.0 Cloud.

This sets a new standard for a smart, modern control system. Or simply put: Helios easyControls 3.0.

Modern and intuitive: Touch control element

The ventilation unit can be adapted to individual paces of life by creating a weekly programme and by selecting from four different ventilation profiles.

The dark mode always ensures the best readability – even at night thanks to its illuminated screen.

The control element can be integrated in common switch ranges and fits perfectly in any living environment.

The status of the selected ventilation profile, temperature and sensor values as well as filter replacement notifications can be viewed at any time.

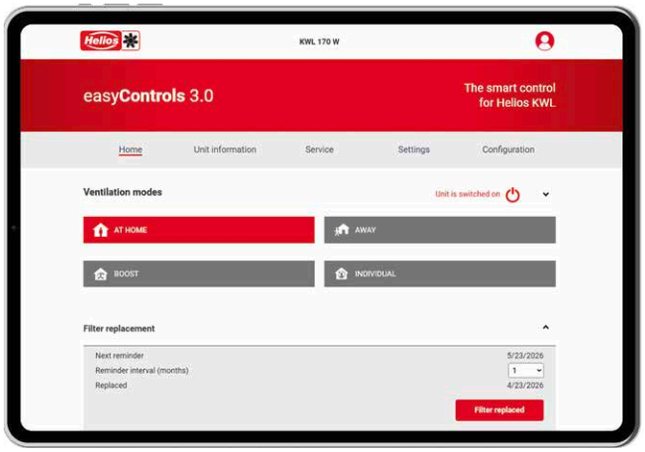

Smart ventilation, simple control system

- Location-independent control of the KWL system via the integrated web server or with the easy-Controls Cloud, as required.
- Individual access rights through selectable profiles.
- Assistant-supported, fast commissioning.
- Practical and cost-effective remote maintenance when servicing.
- Smart integration in the existing building control system (KNX).

Customised ventilation for individual comfort

- The establishment of a personal weekly programme is possible.
- Individual configuration of up to four ventilation programmes.
- Compact overview of current status.

Functional principle

The control system with unlimited possibilities: Helios easyControls 3.0.

Controllable anywhere and at any time, whether at home or on the move.

Building control system

- ModBus interface (integrated)
- KNX-EIB module (optional)

Demand-controlled ventilation with sensors

- FTF rel. humidity (1x integrated)
- CO_2
- VOC mixed gas

Manual control elements

- Modern touch control element
- Discreet 3-level slide switch

High flexibility in selecting the control elements

If no PC networks are available, or if manual access is preferred, easyControls can be controlled via a modern touch control element or a discreet slide switch.

- Touch control element in white or black
- 3-level switch in white

Fully automated ventilation with comfort room sensors in 3 versions

- Relative humidity sensor
- VOC sensor
- CO_2 sensor

Easy integration in the building control system

The KWL units can be easily integrated in a building control system network via the standard Modbus interface (RTU) or an optional KNX module.

Extension module for further comfort options

To control post-heating (either hot water or electric heating register) for additional supply air heating, e.g. in a passive house.

KWL 170 W CF

Efficiency class

A+ KWL 170 W CF with additional room sensor

A KWL 170 W CF

easy Controls 3.0

EC

Dimensions KWL 170 W CF

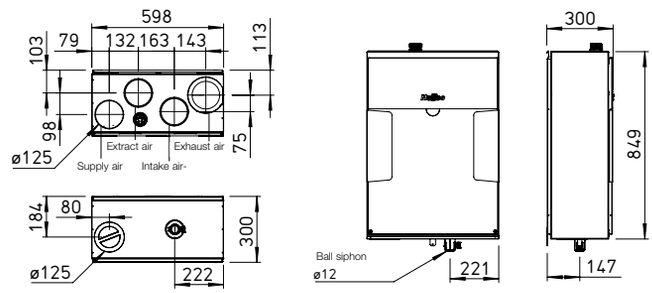

Dimensions in mm

CERTIFIED COMPONENT Passive House Institute

Compact unit with heat recovery for the central supply and extract ventilation of residential units up to 110 m². Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection. Equipped with energy-efficient EC fans featuring constant airflow or constant speed control, as well as a highly efficient plastic heat exchanger or, optionally, an enthalpy heat exchanger for additional moisture recovery.

Casing

Universal casing concept: Intake air left/right, supply air top or bottom, suitable for plasterboard installation.
Outside made of galvanised steel sheet in white, internal components made of highly thermal insulating EPP. The intake air connection can be installed on the left or right. Maintenance-friendly access to all unit components through removable front panels. Delivery state: Intake air on the right.

- ☐ Suitable inspection solution for drywall construction upon request.

Heat exchanger

- ☐ Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- ☐ Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

Fans

Two low-noise, high-performance centrifugal fans with EC motors and constant airflow or constant speed control ensure supply and extract air ventilation.

Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

Condensate connection

Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

Air filter

Clean outdoor air supply via ISO Coarse 65 % (G4) filter and 2nd filter stage via optional ISO ePM_1 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 65 % (G4) filter in front of the heat exchanger. Easy filter maintenance without opening the unit.

Summer operation

Equipped with automatic bypass function and heat exchanger cover as standard.

Heat exchanger anti-icing protection

The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 170 W, accessories).

Control system

EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 112 for functionality. Helios easyControls 3.0 is prepared for:

- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories).
- ☐ The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

Electrical connection

Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

Accessories – Functional description (see right for details)

KWL 170 W CF can be individually expanded with the following accessories:

☐ **Control element ECO**

- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

☐ **Control element Touch**

Touch control element with graphic display and user-friendly menu navigation:

- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

☐ **KNX/EIB module**

For connecting the ventilation unit to the building control system via the KNX Connect module.

☐ **Room sensors**

Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

☐ **Post-heating**

Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.
Moisture recovery through enthalpy heat exchangers	111

Performance curves KWL 170 W CF

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	49	40	44	44	42	34	24	21
L_{WA}	Supply air	dB(A)	59	48	52	53	54	51	47	36
L_{PA} at 1 m	Radiation	dB(A)	36	19	26	32	30	27	22	14

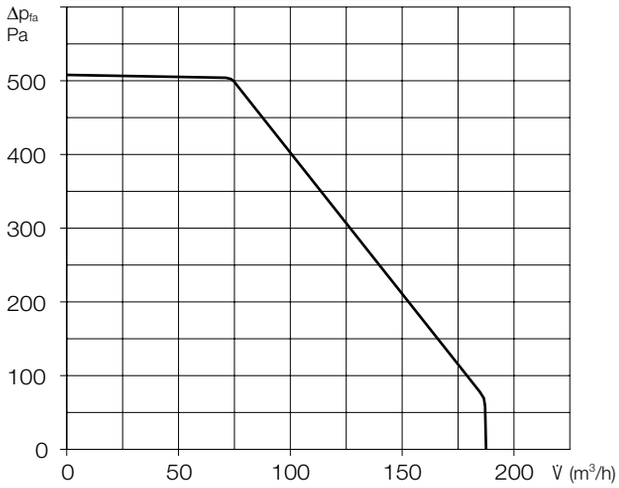

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element
KWL BE ECO Ref. no. 20246
Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.
Dim. mm (W x H x D) 80 x 80 x 37
Casing for surface installation
KWL APG Ref. no. 04270
Dim. mm (W x H x D) 83 x 83 x 41

Touch control element
KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245
With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35
Casing for surface installation
KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177
Dim mm (W x H x D) 85 x 85 x 25

Control line cable
KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger Type			Ref. no.	With enthalpy heat exchanger Type			Ref. no.
	KWL 170 W CF			40043	KWL 170 W ET CF			40044
Flow rate at level [1) 2)] Supply air/extract air V̇ m³/h	162	126	90	54	162	126	90	54
Power consumption fans 2xW [1)]	27	18	13	9	25	18	12	9
Voltage/Frequency	1~, 230 V, 50 Hz							
Rated current A – ventilation	0.7							
– preheating	4.4							
– max. total	0.7 (5.1 incl. preheater, accessories)							
Electric preheater kW	1.0 kW (accessories)							
Summer bypass	automatic (adjustable), with heat exchanger cover							
Wiring diagram no.	1433							
Temperature operating range	–20 °C to +40 °C							
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensin)							
Weight approx. kg	36				39			

[1)] At 50 Pa, performance levels adjustable. [2)] Volume reduction by approx. 10 % when using pollen filter.

KNX/EIB module
KNX Connect Ref. no. 40969
For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors
KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric preheater
KWL-EVH 170 W No. 00936
Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

Extension module
KWL-EM eC Ref. no. 40155
For controlling external post-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector
BWM Ref. no. 08323
Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Electric post-heating element
For additional supply air heating.
EHR-R 1.2/125 Ref. no. 09433
Rectangular duct temp. sensor
KWL-LTK eC (1 pc. req.) No. 40156

Warm water post-heating element
For additional supply air heating.
WHR 125 Ref. no. 09480
Rectangular duct temp. sensor
KWL-LTK eC (2 pc. req.) No. 40156
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Alternative:
Air temperature control
WHST 300 T38 Ref. no. 08817



Replacement air filters
– 2 pcs. ISO Coarse 65 % (G4)
ELF-KWL 170/4/4 No. 00951
– 1 pc. ISO ePM$_1$ 50 % (F7)
ELF-KWL 170/7 No. 00965

Reference
Enthalpy heat exchanger (accessories) for retrofitting:
KWL-ET 170 No. 00976

Circular duct connector
Connector with seal for unit connection to circular duct system with Ø 125 mm.
RVBD 125 K No. 03414

Other accessories

Other accessories	Page
KWL peripherals	160 ff.
– Ground heat exchanger	184 ff.
– Insulated duct system	174 f.
– Air distribution systems	176 ff.
Heating element, control	488 ff.
ventilation grilles, ducts, roof outlets	132 ff.
extract air elements, design ventilation valves	132 ff.

KWL 200 W

KWL 200 W R with accessories (pollen filter, KWL-EVH 200 W)

Efficiency class

A KWL 200 W R/L and 200 W ET R/L

easy Controls 3.0

EC

Dimensions KWL 200 W R

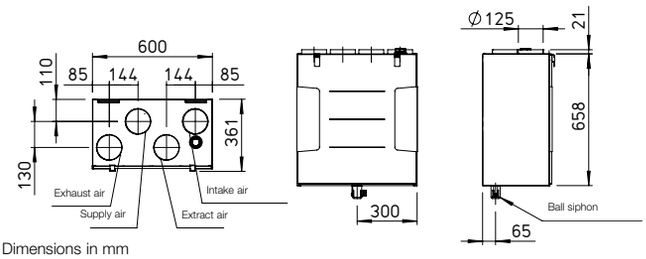

Dimensions in mm

Dimensions KWL 200 W L

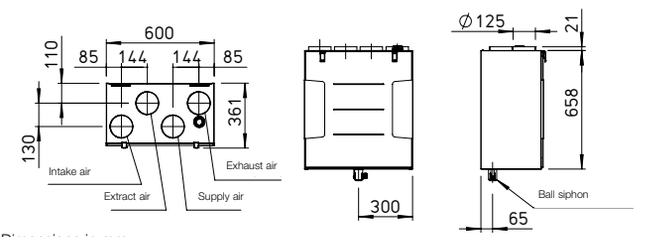

Dimensions in mm

Compact unit with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection.
Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.

Casing
Made of galvanised steel sheet, powder-coated in white, double-walled, with 12 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable front panels.

Heat exchanger
- Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- Types “ET” are equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

Fans
Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

Condensate connection
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM_1 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

Summer operation
Equipped with automatic bypass function and heat exchanger cover as standard.

Heat exchanger anti-icing protection
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 200 W, accessories).

Control system
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 112 for functionality. Helios easyControls 3.0 is prepared for:
- The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

Electrical connection
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

Accessories – Functional description (see right for details)
KWL 200 W can be individually expanded with the following accessories:

Control element ECO
- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

Control element Touch
Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

KNX/EIB module
For connecting the ventilation unit to the building control system via the KNX Connect module.

Room sensors
Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

Post-heating
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.
Moisture recovery through enthalpy heat exchangers	111

Performance curves KWL 200 W

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	48	39	42	43	42	34	25	20
L_{WA}	Supply air	dB(A)	58	46	50	52	53	50	46	34
L_{PA} at 1 m	Radiation	dB(A)	36	17	29	30	30	27	22	12

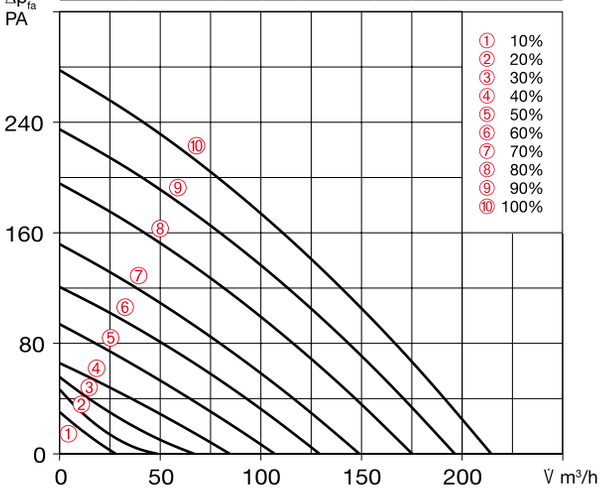

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element
KWL BE ECO Ref. no. 20246
Dim. mm (W x H x D) 80 x 80 x 37
Casing for surface installation
KWL APG Ref. no. 04270
Dim. mm (W x H x D) 83 x 83 x 41

Touch control element
KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245
With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dim. mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35
Casing for surface installation
KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177
Dim mm (W x H x D) 85 x 85 x 25

Control line cable
KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger Type	Ref. no.	With enthalpy heat exchanger Type	Ref. no.
Right-hand version	**KWL 200 W R**	40045	**KWL 200 W ET R**	40047
Left-hand version	**KWL 200 W L**	40046	**KWL 200 W ET L**	40048

Flow rate at level [1) 2)]	❿	❽	❻	❹	❷	❿	❽	❻	❹	❷
Supply air/extract air V̇ m³/h	214	175	129	71	46	190	151	111	73	39
Power consumption fans 2xW [1)]	40	26	16	8	5	40	26	16	8	5
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	1.2									
– preheating	4.4									
– max. total	1.2 (5.6 incl. preheater, accessories)									
Electric preheater kW	1.0 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	–20 °C to +40 °C									
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)									
Weight approx. kg	37					41				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10 % when using pollen filter.
3) AK = Activated carbon filter

KNX/EIB module
KWL-KNX Connect No. 20253
For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors
KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric preheater
KWL-EVH 200/300/500 W No. 04224
Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

Extension module
KWL-EM eC Ref. no. 40155
For controlling external post-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector
BWM Ref. no. 08323
Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Electric post-heating element
For additional supply air heating.
EHR-R 1.2/125 Ref. no. 09433
Rectangular duct temp. sensor
KWL-LTK eC (1 pc. req.) No. 40156

Warm water post-heating element
For additional supply air heating.
WHR 125 Ref. no. 09480
Rectangular duct temp. sensor
KWL-LTK eC (2 pc. req.) No. 40156
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Alternative:
Air temperature control
WHST 300 T38 Ref. no. 08817



Replacement air filters
– 2 pcs. ISO Coarse 75 % (G4)
ELF-KWL 200/4/4 No. 00021
– 1 pc. ISO ePM$_1$ 50 % (F7)
ELF-KWL 200/7 No. 00038
– 1 pc. ISO ePM$_{2.5}$ 60 % (AK)[3)]
ELF-KWL 200 AK No. 04198

Reference
Enthalpy heat exchanger (accessories) for retrofitting:
KWL-ET 200 No. 00896

Circular duct connector
Connector with seal for unit connection to circular duct system with Ø 125 mm.
RVBD 125 K No. 03414

Other accessories
Other accessories	Page
KWL peripherals	160 ff.
– Ground heat exchanger	184 ff.
– Insulated duct system	174 f.
– Air distribution systems	176 ff.
Heating element, control	488 ff.
ventilation grilles, ducts, roof outlets	132 ff.
extract air elements, design ventilation valves	132 ff.

KWL 250 W CF

Efficiency class

A+ KWL 250 W CF with additional room sensor

A KWL 250 W CF

easy Controls 3.0

EC

Dimensions KWL 250 W CF

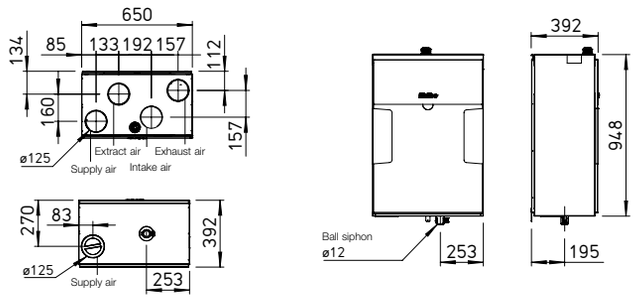

Dimensions in mm

Compact unit with heat recovery for the central supply and extract ventilation of residential units up to 190 m². Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection. Equipped with energy-efficient EC fans featuring constant airflow or constant speed control, as well as a highly efficient plastic heat exchanger or, optionally, an enthalpy heat exchanger for additional moisture recovery.

Casing

Universal casing concept: Intake air left/right, supply air top or bottom.
Outside made of galvanised steel sheet in white, internal components made of highly thermal insulating EPP. The intake air connection can be installed on the left or right. Maintenance-friendly access to all unit components through removable front panels. Delivery state: Intake air on the right.

Heat exchanger

- ☐ Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- ☐ Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

Fans

Two low-noise, high-performance centrifugal fans with EC motors and constant airflow or constant speed control ensure supply and extract air ventilation.

Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

Condensate connection

Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

Air filter

Clean outdoor air supply via ISO Coarse 65 % (G4) filter and 2nd filter stage via optional ISO ePM_1 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 65 % (G4) filter in front of the heat exchanger. Easy filter maintenance without opening the unit.

Summer operation

Equipped with automatic bypass function and heat exchanger cover as standard.

Heat exchanger anti-icing protection

The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 250 W, accessories).

Control system

EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 112 for functionality. Helios easyControls 3.0 is prepared for:

- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- ☐ The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

Electrical connection

Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

Accessories – Functional description (see right for details)

KWL 250 W CF can be individually expanded with the following accessories:

☐ **Control element ECO**
- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

☐ **Control element Touch**
Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

☐ **KNX/EIB module**
For connecting the ventilation unit to the building control system via the KNX Connect module.

☐ **Room sensors**
Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

☐ **Post-heating**
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.
Moisture recovery through enthalpy heat exchangers	111

Performance curves KWL 250 W CF

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	46	37	44	39	34	28	18	20
L_{WA}	Supply air	dB(A)	60	46	58	53	52	48	38	29
L_{PA} at 1 m	Radiation	dB(A)	35	21	30	30	30	26	16	13

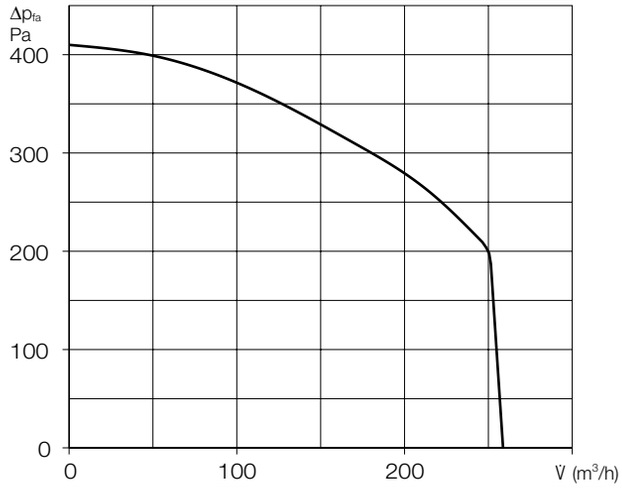

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element
KWL BE ECO Ref. no. 20246
Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.
Dim. mm (W x H x D) 80 x 80 x 37
Casing for surface installation
KWL APG Ref. no. 04270
Dim. mm (W x H x D) 83 x 83 x 41

Touch control element
KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245
With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35
Casing for surface installation
KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177
Dim mm (W x H x D) 85 x 85 x 25

Control line cable
KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger Type			Ref. no.	With enthalpy heat exchanger Type			Ref. no.
	KWL 250 W CF			40149	KWL 250 W ET CF			40150
Flow rate at level [1) 2)] Supply air/extract air V̇ m³/h	252	180	108	54	252	180	108	54
Power consumption fans 2xW [1)]	41	24	14	10	38	22	13	10
Voltage/Frequency	1~, 230 V, 50 Hz							
Rated current A – ventilation	1,5							
– preheating	4,4							
– max. total	1.5 (5.9 incl. preheater, accessories)							
Electric preheater kW	1.0 kW (accessories)							
Summer bypass	automatic (adjustable), with heat exchanger cover							
Wiring diagram no.	1433							
Temperature operating range	–20 °C to +40 °C							
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)							
Weight approx. kg	43				47			

[1)] At 50 Pa, performance levels adjustable. [2)] Volume reduction by approx. 10 % when using pollen filter.

KNX/EIB module
KNX Connect Ref. no. 40969
For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors
KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric preheater
KWL-EVH 250 W No. 40157
Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

Extension module
KWL-EM eC Ref. no. 40155
For controlling external post-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector
BWM Ref. no. 08323
Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Electric post-heating element
For additional supply air heating.
EHR-R 1.2/125 Ref. no. 09433
Rectangular duct temp. sensor
KWL-LTK eC (1 pc. req.) No. 40156

Warm water post-heating element
For additional supply air heating.
WHR 125 Ref. no. 09480
Rectangular duct temp. sensor
KWL-LTK eC (2 pc. req.) No. 40156
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Alternative:
Air temperature control
WHST 300 T38 Ref. no. 08817



Replacement air filters
– 2 pcs. ISO Coarse 65 % (G4)
ELF-KWL 250/2xCoarse65%
Ref. no. 40151
– 1 pc. ISO ePM₁ 50 % (F7)
ELF-KWL 250/ePM1 50%
Ref. no. 40152
– 1 pc. Activated carbon filter
ELF-KWL 250 AK No. 40153

Reference
Enthalpy heat exchanger (accessories) for retrofitting:
KWL-ET 250 No. 40159

Circular duct connector
Connector with seal for unit connection to circular duct system with Ø 125 mm.
RVBD 125 K No. 03414

Other accessories

Other accessories	Page
KWL peripherals	160 ff.
– Ground heat exchanger	184 ff.
– Insulated duct system	174 f.
– Air distribution systems	176 ff.
Heating element, control	488 ff.
ventilation grilles, ducts, roof outlets	132 ff.
extract air elements, design ventilation valves	132 ff.

KWL 300 W

KWL 300 W R with accessories (pollen filter, KWL-EVH 300 W)

Efficiency class

A KWL 300 W R/L and 300 W ET R/L

easy Controls 3.0

EC

Dimensions KWL 300 W R

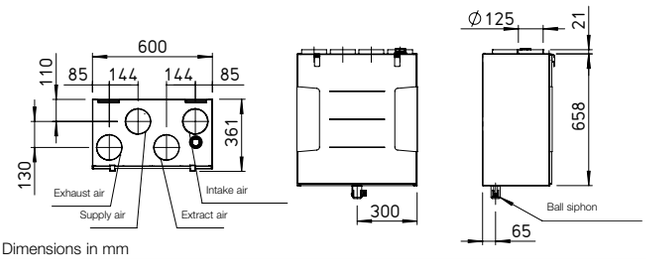

Dimensions in mm

Dimensions KWL 300 W L

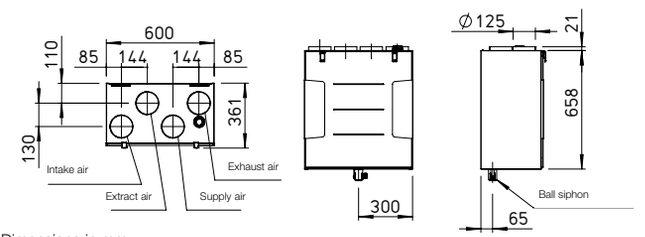

Dimensions in mm

Compact units with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection.
Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.

Casing
Made of galvanised steel sheet, powder-coated in white, double-walled, with 12 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable front panels.

Heat exchanger
- Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

Fans
Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

Condensate connection
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM_1 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

Summer operation
Equipped with automatic bypass function and heat exchanger cover as standard.

Heat exchanger anti-icing protection
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 300 W, accessories).

Control system
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 112 for functionality. Helios easyControls 3.0 is prepared for:
- The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

Electrical connection
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

Accessories – Functional description (see right for details)
KWL 300 W can be individually expanded with the following accessories:

Control element ECO
- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

Control element Touch
Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

KNX/EIB module
For connecting the ventilation unit to the building control system via the KNX Connect module.

Room sensors
Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

Post-heating
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.
Moisture recovery through enthalpy heat exchangers	111

Performance curves KWL 300 W

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	53	51	48	41	41	37	27	21
L_{WA}	Supply air	dB(A)	52	49	47	43	44	36	28	22
L_{PA} at 1 m	Radiation	dB(A)	38	31	30	29	34	31	19	13

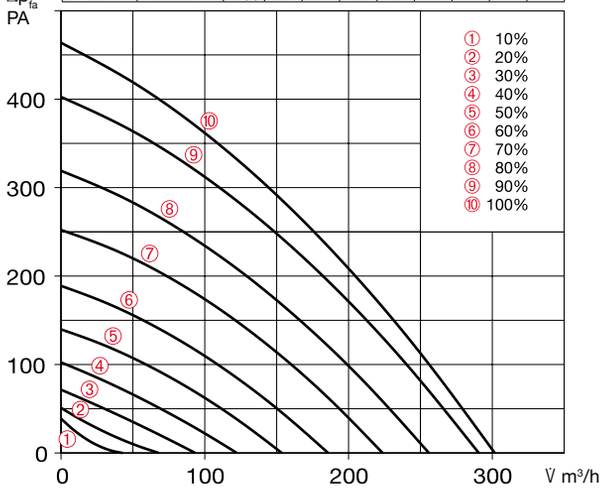

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element
KWL BE ECO Ref. no. 20246
Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.
Dim. mm (W x H x D) 80 x 80 x 37
Casing for surface installation
KWL APG Ref. no. 04270
Dim. mm (W x H x D) 83 x 83 x 41

Touch control element
KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245
With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35
Casing for surface installation
KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177
Dim mm (W x H x D) 85 x 85 x 25

Control line cable
KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger Type	Ref. no.				With enthalpy heat exchanger Type	Ref. no.			
Right-hand version	**KWL 300 W R**	40049				**KWL 300 W ET R**	40051			
Left-hand version	**KWL 300 W L**	40050				**KWL 300 W ET L**	40052			
Flow rate at level [1) 2)]	❿	❽	❻	❹	❷	❿	❽	❻	❹	❷
Supply air/extract air V̇ m³/h	301	255	186	122	68	270	216	161	107	56
Power consumption fans 2xW [1)]	84	54	27	13	6	86	54	27	13	7
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	2.0									
– preheating	4.4									
– max. total	2.0 (6.4 incl. preheater, accessories)									
Electric preheater kW	1.0 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	–20 °C to +40 °C									
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)									
Weight approx. kg	37					41				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10 % when using pollen filter.
3) AK = Activated carbon filter

KNX/EIB module
KWL-KNX Connect No. 20253
For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors
KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric preheater
KWL-EVH 200/300/500 W No. 04224
Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

Extension module
KWL-EM eC Ref. no. 40155
For controlling external post-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector
BWM Ref. no. 08323
Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Electric post-heating element
For additional supply air heating.
EHR-R 1.2/125 Ref. no. 09433
Rectangular duct temp. sensor
KWL-LTK eC (1 pc. req.) No. 40156

Warm water post-heating element
For additional supply air heating.
WHR 125 Ref. no. 09480
Rectangular duct temp. sensor
KWL-LTK eC (2 pc. req.) No. 40156
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Alternative:
Air temperature control
WHST 300 T38 Ref. no. 08817



Replacement air filters
– 2 pcs. ISO Coarse 75 % (G4)
ELF-KWL 300/4/4 No. 00021
– 1 pc. ISO ePM$_1$ 50 % (F7)
ELF-KWL 300/7 No. 00038
– 1 pc. ISO ePM$_{2.5}$ 60 % (AK)[3)]
ELF-KWL 300 AK No. 04198

Circular duct connector
Connector with seal for unit connection to circular duct system with Ø 125 mm.
RVBD 125 K No. 03414

Reference
Enthalpy heat exchanger (accessories) for retrofitting:
KWL-ET 300 No. 00896

KWL 360 W CF

Efficiency class

A+ KWL 360 W CF

easy Controls 3.0

EC

Dimensions KWL 360 W CF

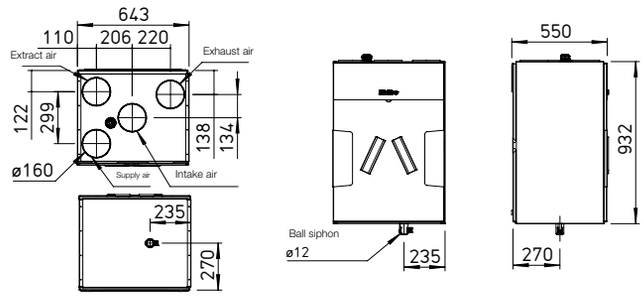

Dimensions in mm

CERTIFIED COMPONENT Passive House Institute

Compact unit with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection.
Equipped with energy-efficient EC fans featuring constant airflow or constant speed control, as well as a highly efficient plastic heat exchanger or, optionally, an enthalpy heat exchanger for additional moisture recovery.

Casing
Universal casing concept: Intake air and exhaust air side left/right, with integrated sound insulation. Made of galvanised sheet steel with sound and heat insulation, powder-coated in white. The intake air and exhaust air connection can be on the left or right side. Maintenance-friendly access to all unit components through removable front panel. Delivery condition: Intake air and exhaust air side on the right.

Heat exchanger
- Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

Fans
Two low-noise, high-performance centrifugal fans with EC motors and constant airflow or constant speed control ensure supply and extract air ventilation.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 160 mm using duct connectors (RVBD 160 K, accessories).

Condensate connection
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Clean outdoor air supply via ISO Coarse 65 % (G4) filter and 2nd filter stage via optional ISO ePM_1 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 65 % (G4) filter in front of the heat exchanger. Easy filter maintenance without opening the unit.

Summer operation
Equipped with automatic bypass function and heat exchanger cover as standard.

Heat exchanger anti-icing protection
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 360/470 W, accessories).

Control system
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 112 for functionality. Helios easyControls 3.0 is prepared for:
- The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

Electrical connection
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

Accessories – Functional description (see right for details
KWL 360 W CF can be individually expanded with the following accessories:

Control element ECO
- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

Control element Touch
Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

KNX/EIB module
For connecting the ventilation unit to the building control system via the KNX Connect module.

Room sensors
Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

Post-heating
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.
Moisture recovery through enthalpy heat exchangers	111

Performance curves KWL 360 W CF

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	48	37	47	33	28	21	17	20
L_{WA}	Supply air	dB(A)	56	40	55	48	46	39	23	20
L_{PA} at 1 m	Radiation	dB(A)	29	15	28	20	15	17	13	13

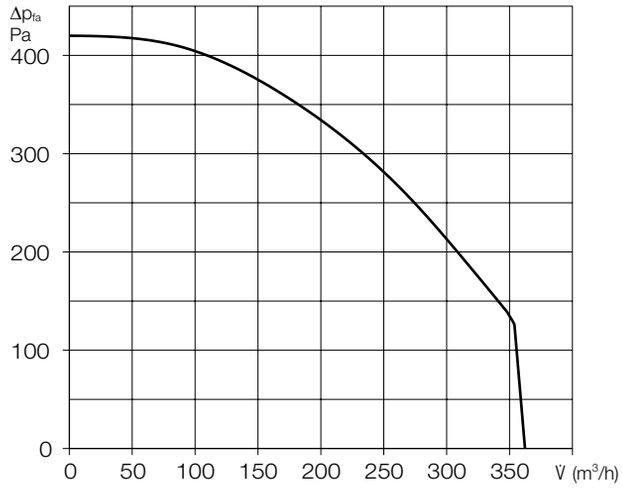

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element
KWL BE ECO Ref. no. 20246
Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.
Dim. mm (W x H x D) 80 x 80 x 37
Casing for surface installation
KWL APG Ref. no. 04270
Dim. mm (W x H x D) 83 x 83 x 41

Touch control element
KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245
With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35
Casing for surface installation
KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177
Dim mm (W x H x D) 85 x 85 x 25

Control line cable
KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger Type			Ref. no.	With enthalpy heat exchanger Type			Ref. no.
	KWL 360 W CF			40061	KWL 360 W ET CF			40062
Flow rate at level [1) 2)] Supply air/extract air V̇ m³/h	360	252	180	108	360	252	180	108
Power consumption fans 2xW [1)]	46	24	16	11	44	23	15	10
Voltage/Frequency	1~, 230 V, 50 Hz							
Rated current A – ventilation	0.5							
– preheating	6.3							
– max. total	0.5 (6.8 incl. preheater, accessories)							
Electric preheater kW	1.5 kW (accessories)							
Summer bypass	automatic (adjustable), with heat exchanger cover							
Wiring diagram no.	1433							
Temperature operating range	–20 °C to +40 °C							
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)							
Weight approx. kg	70				71			

[1)] At 50 Pa, performance levels adjustable. [2)] Volume reduction by approx. 10 % when using pollen filter.

KNX/EIB module
KNX Connect Ref. no. 40969
For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors
KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric preheater
KWL-EVH 360/470 W No. 07360
Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1500 W.

Extension module
KWL-EM eC Ref. no. 40155
For controlling external post-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector
BWM Ref. no. 08323
Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Electric post-heating element
For additional supply air heating.
EHR-R 2.4/160 Ref. no. 09435
Rectangular duct temp. sensor
KWL-LTK eC (1 pc. req.) No. 40156

Warm water post-heating element
For additional supply air heating.
WHR 160 Ref. no. 09481
Rectangular duct temp. sensor
KWL-LTK eC (2 pc. req.) No. 40156
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Alternative:
Air temperature control
WHST 300 T38 Ref. no. 08817



Replacement air filters
– 2 pcs. ISO Coarse 65 % (G4)
ELF-KWL 360/470/4/4 No. 07371
– 1 pc. ISO ePM$_1$ 50 % (F7)
ELF-KWL 360/470/7 No. 07375
– 1 pc. Activated carbon filter
ELF-KWL 360/470 AK No. 08129

Circular duct connector
Connector with seal for unit connection to circular duct system with Ø 160 mm.
RVBD 160 K No. 03415

Reference
Enthalpy heat exchanger (accessories) for retrofitting:
KWL-ET 360/470 No. 07354

KWL 470 W CF

Efficiency class

A+ KWL 470 W CF with additional room sensor

A KWL 470 W CF

easy Controls 3.0

EC

Dimensions KWL 470 W CF

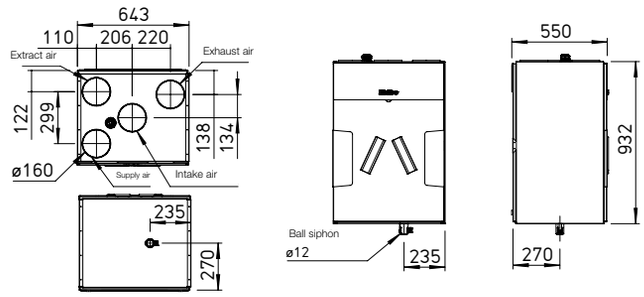

Dimensions in mm

Compact unit with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection.
Equipped with energy-efficient EC fans featuring constant airflow or constant speed control, as well as a highly efficient plastic heat exchanger or, optionally, an enthalpy heat exchanger for additional moisture recovery.

Casing
Universal casing concept: Intake air and exhaust air side left/right, with integrated sound insulation. Made of galvanised sheet steel with sound and heat insulation, powder-coated in white. The intake air and exhaust air connection can be on the left or right side. Maintenance-friendly access to all unit components through removable front panel. Delivery condition: Intake air and exhaust air side on the right.

Heat exchanger
- Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

Fans
Two low-noise, high-performance centrifugal fans with EC motors and constant airflow or constant speed control ensure supply and extract air ventilation.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 160 mm using duct connectors (RVBD 160 K, accessories).

Condensate connection
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Clean outdoor air supply via ISO Coarse 65 % (G4) filter and 2nd filter stage via optional ISO ePM_1 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 65 % (G4) filter in front of the heat exchanger. Easy filter maintenance without opening the unit.

Summer operation
Equipped with automatic bypass function and heat exchanger cover as standard.

Heat exchanger anti-icing protection
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 360/470 W, accessories).

Control system
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 112 for functionality. Helios easyControls 3.0 is prepared for:
- The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

Electrical connection
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

Accessories – Functional description (see right for details)
KWL 470 W CF can be individually expanded with the following accessories:

Control element ECO
- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

Control element Touch
Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

KNX/EIB module
For connecting the ventilation unit to the building control system via the KNX Connect module.

Room sensors
Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

Post-heating
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.
Moisture recovery through enthalpy heat exchangers	111

Performance curves KWL 470 W CF

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	53	41	52	42	34	29	20	20
L_{WA}	Supply air	dB(A)	61	43	60	53	52	45	30	23
L_{PA} at 1 m	Radiation	dB(A)	36	19	35	24	19	24	21	13

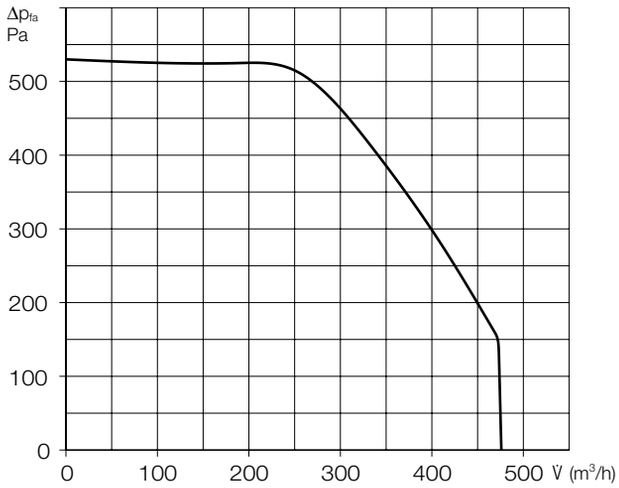

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element
KWL BE ECO Ref. no. 20246
Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.
Dim. mm (W x H x D) 80 x 80 x 37
Casing for surface installation
KWL APG Ref. no. 04270
Dim. mm (W x H x D) 83 x 83 x 41

Touch control element
KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245
With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35
Casing for surface installation
KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177
Dim mm (W x H x D) 85 x 85 x 25

Control line cable
KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger **Type**			Ref. no.	With enthalpy heat exchanger **Type**			Ref. no.
	KWL 470 W CF			40409	**KWL 470 W ET CF**			40410
Flow rate at level [1) 2)] Supply air/extract air V̇ m³/h	415	306	252	145	415	306	252	145
Power consumption fans 2xW [1)]	61	35	25	14	60	33	23	13
Voltage/Frequency	1~, 230 V, 50 Hz							
Rated current A – ventilation	1.4							
– preheating	6.3							
– max. total	1.4 (7.7 incl. preheater, accessories)							
Electric preheater kW	1.5 kW (accessories)							
Summer bypass	automatic (adjustable), with heat exchanger cover							
Wiring diagram no.	1433							
Temperature operating range	–20 °C to +40 °C							
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)							
Weight approx. kg	70				69			

[1)] At 50 Pa, performance levels adjustable. [2)] Volume reduction by approx. 10 % when using pollen filter.

KNX/EIB module
KNX Connect Ref. no. 40969
For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors
KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric preheater
KWL-EVH 360/470 W No. 07360
Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1500 W.

Extension module
KWL-EM eC Ref. no. 40155
For controlling external post-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector
BWM Ref. no. 08323
Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Electric post-heating element
For additional supply air heating.
EHR-R 2.4/160 Ref. no. 09435
Rectangular duct temp. sensor
KWL-LTK eC (1 pc. req.) No. 40156

Warm water post-heating element
For additional supply air heating.
WHR 160 Ref. no. 09481
Rectangular duct temp. sensor
KWL-LTK eC (2 pc. req.) No. 40156
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Alternative:
Air temperature control
WHST 300 T38 Ref. no. 08817



Replacement air filters
– 2 pcs. ISO Coarse 65 % (G4)
ELF-KWL 360/470/4/4 No. 07371
– 1 pc. ISO ePM$_1$ 50 % (F7)
ELF-KWL 360/470/7 No. 07375
– 1 pc. Activated carbon filter
ELF-KWL 360/470 AK No. 08129

Circular duct connector
Connector with seal for unit connection to circular duct system with Ø 160 mm.
RVBD 160 K No. 03415

Reference
Enthalpy heat exchanger (accessories) for retrofitting:
KWL-ET 360/470 No. 07354

KWL 500 W

KWL 500 W R CF with accessories (pollen filter, KWL-EVH 500 W)

Efficiency class

A KWL 500 W R/L and 500 W ET R/L

easy Controls 3.0

EC

Dimensions KWL 500 W R

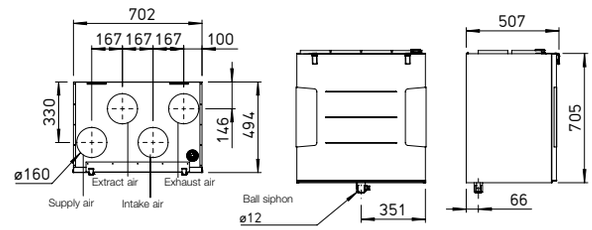

Dimensions in mm

Dimensions KWL 500 W L

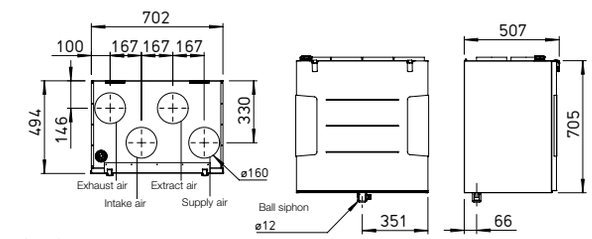

Dimensions in mm

Compact unit with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection.
Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.

■ **Casing**
Made of galvanised steel sheet, powder-coated in white, double-walled, with 12 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable front panels.

■ **Heat exchanger**
▢ Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
▢ Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

■ **Fans**
Two low-noise, constant-flow high-performance centrifugal fans with energy-efficient EC motors ensure air supply and extraction.

■ **Ducts**
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 160 mm using duct connectors (RVBD 160 K, accessories).

■ **Condensate connection**
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

■ **Air filter**
Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM_1 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

■ **Summer operation**
Equipped with automatic bypass function and heat exchanger cover as standard.

■ **Heat exchanger anti-icing protection**
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 500 W, accessories).

■ **Control system**
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 112 for functionality. Helios easyControls 3.0 is prepared for:
▢ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
▢ The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
▢ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

■ **Electrical connection**
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

■ **Accessories – Functional description (see right for details)**
KWL EC 500 W can be individually expanded with the following accessories:

▢ **Control element ECO**
– Three ventilation profiles selectable via slide switch.
– Control voltage can be measured directly on the control element.
– LED for visual indication of operating statuses, e.g. filter replacement and faults.

▢ **Control element Touch**
Touch control element with graphic display and user-friendly menu navigation:
– Commissioning assistant.
– Selection of four ventilation profiles.
– Adjustment of an individual weekly programme.
– Adjustment of parameters for room sensors.
– Indication of e.g. filter replacement, operating statuses and error messages.
– Different access authorisations and child lock.
– Other functions (see operating instructions).

▢ **KNX/EIB module**
For connecting the ventilation unit to the building control system via the KNX Connect module.

▢ **Room sensors**
Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

▢ **Post-heating**
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

■ References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.
Moisture recovery through enthalpy heat exchangers	111

Performance curves KWL 500 W

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	53	49	50	41	43	34	26	21
L_{WA}	Supply air	dB(A)	54	50	49	44	45	36	27	21
L_{PA} at 1 m	Radiation	dB(A)	39	32	36	30	32	27	23	14

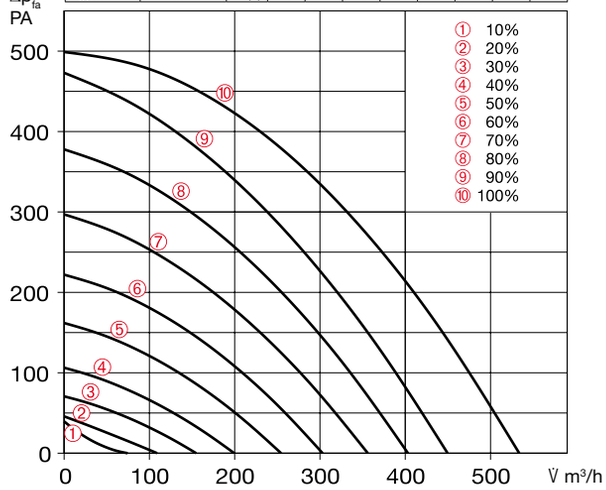

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element

KWL BE ECO Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.
Dim. mm (W x H x D) 80 x 80 x 37

Casing for surface installation

KWL APG Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

Touch control element

KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

Casing for surface installation

KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177

Dim mm (W x H x D) 85 x 85 x 25

Control line cable

KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger Type	Ref. no.				With enthalpy heat exchanger Type	Ref. no.			
Right-hand version	**KWL 500 W R**	40053				**KWL 500 W ET R**	40055			
Left-hand version	**KWL 500 W L**	40054				**KWL 500 W ET L**	40056			
Flow rate at level [1) 2)]	❿	❽	❻	❹	❷	❿	❽	❻	❹	❷
Supply air/extract air V̇ m³/h	490	403	303	200	109	506	387	295	190	103
Power consumption fans 2xW [1)]	150	82	41	16	7	152	83	41	17	7
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	2.5									
– preheating	4.4									
– max. total	2.5 (6.9 incl. preheater, accessories)									
Electric preheater kW	1.0 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	–20 °C to +40 °C									
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)									
Weight approx. kg	58					66				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10 % when using pollen filter.
3) AK = Activated carbon filter 4) For a duct diameter of 160 mm. 5) For a duct diameter of 180 mm.

KNX/EIB module

KWL-KNX Connect No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors

KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247

For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric preheater

KWL-EVH 200/300/500 W No. 04224

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

Extension module

KWL-EM eC Ref. no. 40155

For controlling external post-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector

BWM Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Electric post-heating element

For additional supply air heating.

EHR-R 2.4/160 Ref. no. 09435

Rectangular duct temp. sensor

KWL-LTK eC (1 pc. req.) No. 40156

Warm water post-heating element

For additional supply air heating.

WHR 160 Ref. no. 09481

Rectangular duct temp. sensor

KWL-LTK eC (2 pc. req.) No. 40156

Hydraulic unit

WHSH HE 24 V (0-10 V) No. 08318

Alternative:

Air temperature control

WHST 300 T38 Ref. no. 08817



Replacement air filters

– 2 pcs. ISO Coarse 75 % (G4)
ELF-KWL 500/4/4 No. 00039
– 1 pc. ISO ePM$_1$ 50 % (F7)
ELF-KWL 500/7 No. 00042
– 1 pc. ISO ePM$_{2.5}$ 60 % (AK)[3)]
ELF-KWL 500 AK No. 04199

Reference

Enthalpy heat exchanger (accessories) for retrofitting:
KWL-ET 500 No. 00897

Circular duct connector

Connector with seal for unit connection to circular duct system.
RVBD 160 K[4)] No. 03415
RVBD 180/160[5)] No. 09589

Other accessories

Other accessories	Page
KWL peripherals	160 ff.
– Ground heat exchanger	184 ff.
– Insulated duct system	174 f.
– Air distribution systems	176 ff.
Heating element, control	488 ff.
ventilation grilles, ducts, roof outlets	132 ff.
extract air elements, design ventilation valves	132 ff.

KWL 890 W CF

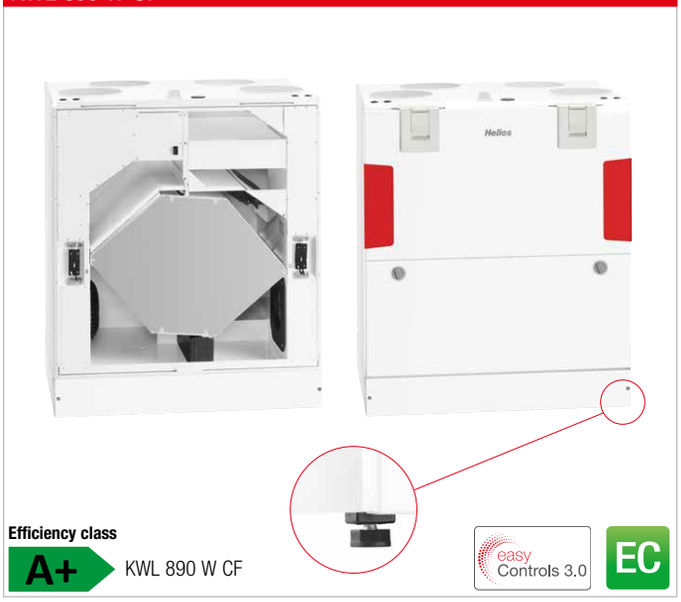

Dimensions KWL 890 W R CF

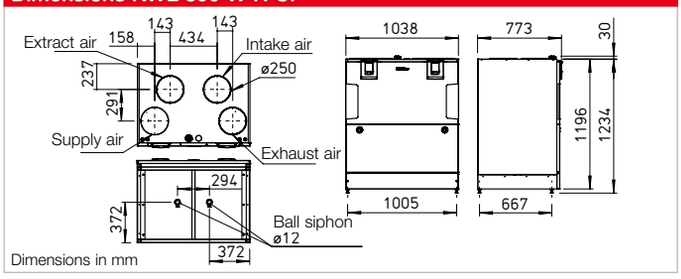

Dimensions KWL 890 W L CF

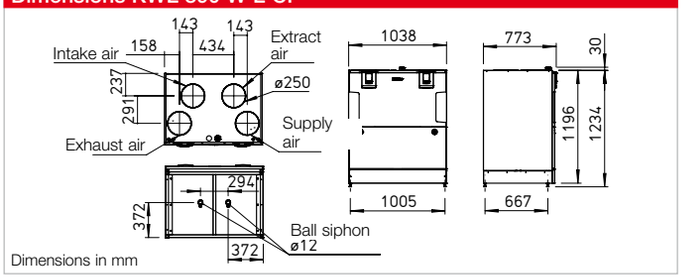

CERTIFIED COMPONENT
Passive House Institute

Compact unit with heat recovery for the central supply and extract ventilation of residential buildings, commercial units and practices. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection.
Equipped with energy-efficient EC fans featuring constant airflow or constant speed control, as well as a highly efficient aluminium heat exchanger or, optionally, an enthalpy heat exchanger for additional moisture recovery.

Casing
Made of galvanised steel sheet, powder-coated in white, double-walled, with heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable front panels.
Adjustable feet for balancing.

Heat exchanger
- ▢ Large cross counterflow heat exchanger made of aluminium, heat recovery efficiency up to 86 %.
- ▢ Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

Fans
Two low-noise, high-performance centrifugal fans with EC motors and constant airflow or constant speed control ensure supply and extract air ventilation.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 250 mm. Direct connection of e.g. Aluflex pipe by means of an external double nipple joint.

Condensate connection
Double condensate drain at the bottom; ball siphons included in delivery.
On-site connection to drain pipe.

Air filter
Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage ISO ePM_1 50 % (F7). Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger. Easy filter maintenance.

Summer operation
Equipped with automatic bypass function and heat exchanger cover as standard.

Heat exchanger anti-frost protection
The standard frost monitoring system automatically controls the supply air flow volume and the optionally internal electrical postheater (KWL-ENH 890 W, accessories).

Control system
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. Helios easyControls 3.0 is prepared for:
- ▢ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- ▢ **The humidity- and CO_2-Sensor integrated as standard** and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- ▢ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

Electrical connection
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

Accessories – Functional description (see right for details)
KWL 890 W CF can be individually expanded with the following accessories:

▢ **Control element ECO**
- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

▢ **Control element Touch**
Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

▢ **KNX/EIB module**
For connecting the ventilation unit to the building control system via the KNX Connect module.

▢ **Room sensors**
Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

▢ **External post-heating**
The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.
Moisture recovery through enthalpy heat exchangers	111

Performance curves KWL 890 W CF

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	62	53	55	54	56	56	46	34
L_{WA}	Supply air	dB(A)	49	38	46	39	41	38	28	21
L_{PA} at 1 m	Radiation	dB(A)	36	27	34	27	23	21	15	13

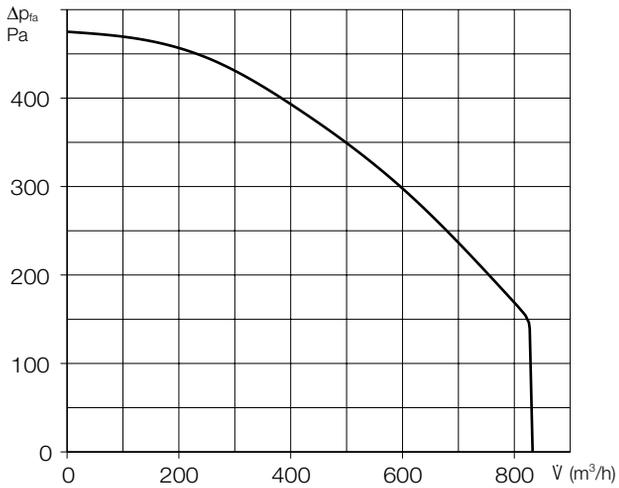

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element
KWL BE ECO Ref. no. 20246
Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.
Dim. mm (W x H x D) 80 x 80 x 37
Casing for surface installation
KWL APG Ref. no. 04270
Dim. mm (W x H x D) 83 x 83 x 41

Touch control element
KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245
With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35
Casing for surface installation
KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177
Dim mm (W x H x D) 85 x 85 x 25

Technical data	With aluminium heat exchanger Type	Ref. no.			With enthalpy heat exchanger Type	Ref. no.		
	KWL 890 W L CF **KWL 890 W R CF**	40721 40722			**KWL 890 W ET L CF** **KWL 890 W ET R CF**	40723 40724		
Flow rate at level [1] Supply air/extract air V̇ m³/h	810	630	450	270	810	630	450	270
Power consumption fans 2xW [1]	138	84	49	30	121	76	46	29
Voltage/Frequency	1~, 230 V, 50 Hz							
Rated current A – ventilation	1.4							
– postheating	12.1							
– max. total	1.4 (13.6 incl. postheater, accessories)							
Electric postheater kW	3.0 kW (accessories)							
Summer bypass	automatic (adjustable), with heat exchanger cover							
Wiring diagram no.	1433							
Temperature operating range	–20 °C to +40 °C							
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)							
Weight approx. kg	178				174			

[1] At 100 Pa, performance levels adjustable.

Control line cable
KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180
Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

KNX/EIB module
KNX Connect Ref. no. 40969
For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors
KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric postheater, internal
KWL-ENH 890 W No. 40728
Electrical postheater for simple, plug-in unit installation. For postheating the supply air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 3000 W.

Extension module
KWL-EM eC Ref. no. 40155
For controlling external warm water-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector
BWM Ref. no. 08323
Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Warm water post-heating element
For additional supply air heating.
WHR 250 Ref. no. 09483

Rectangular duct temp. sensor
KWL-LTK eC (2 pc. req.) No. 40156

Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Alternative:
Air temperature control
WHST 300 T38 Ref. no. 08817

Flexible connector
FVR 250 No. 40831
Flexible connector round (uninsulated), with lip seals on both sides, for connection to pipe systems.



Replacement air filters
– Filter Set (G4 + F7)
ELF-KWL 890/4/4/7 No. 40729

Reference
Enthalpy heat exchanger (accessories) for retrofitting:
KWL-ET 890 No. 40730

Other accessories	Page
KWL peripherals	160 ff.
– Ground heat exchanger	184 ff.
– Insulated duct system	174 f.
– Air distribution systems	176 ff.
Heating element, control	488 ff.
ventilation grilles, ducts, roof outlets	132 ff.
extract air elements, design ventilation valves	132 ff.

KWL 220 D

Efficiency class

A+ KWL 220 D R/L with additional room sensor

A KWL 220 D R/L

easy Controls 3.0

EC

Dimensions KWL 220 D R

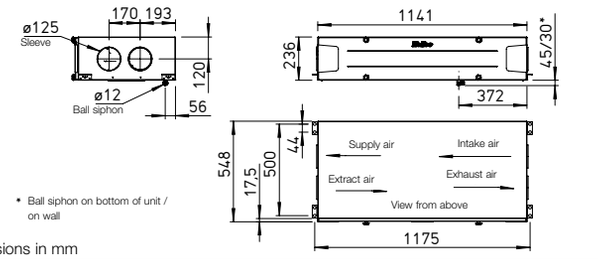

Dimensions in mm

Dimensions KWL 220 D L

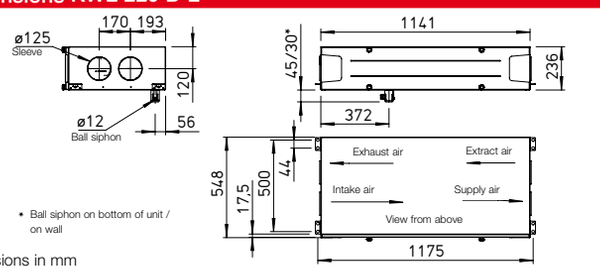

Dimensions in mm

CERTIFIED COMPONENT
Passive House Institute

Ultra-flat ceiling units with heat recovery for the central supply and extract ventilation of apartments and small single family houses. Certified according to the passive house standard. Equipped with Helios easyControls 3.0, the innovative control concept for simple network connection and web browser control. Units come with highly efficient plastic heat exchangers and energy-efficient EC motors.

Casing
Made of galvanised steel sheet, inner and front panels powder-coated in white, double-walled, with 20 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable side panels.

Heat exchanger
Large cross counterflow heat exchanger made of plastic, heat recovery efficiency of up to 90 %.

Fans
Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction. Maintenance-free, easily removable for cleaning, if required.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

Condensate connection
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM_1 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

Summer operation
Equipped with automatic bypass function and heat exchanger cover as standard.

Heat exchanger anti-icing protection
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 220 D, accessories).

Control system
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 112 f. Helios easyControls 3.0 is prepared for:

- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- ☐ The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

Electrical connection
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

Accessories – Functional description (see right for details)
KWL EC 220 D can be individually expanded with the following accessories:

☐ **Control element ECO**
- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

☐ **Control element Touch**
Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

☐ **KNX/EIB module**
For connecting the ventilation unit to the building control system via the KNX Connect module.

☐ **Room sensors**
Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

☐ **Post-heating**
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.

Performance curves KWL 220 D

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	57	48	53	53	45	39	27	20
L_{WA}	Supply air	dB(A)	72	59	65	68	65	58	50	36
L_{PA} at 1 m	Radiation	dB(A)	41	22	35	39	31	23	18	12

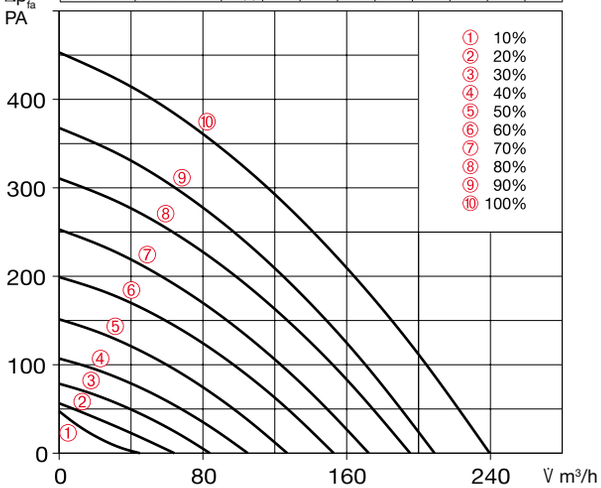

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element
KWL BE ECO Ref. no. 20246
Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.
Dim. mm (W x H x D) 80 x 80 x 37
Casing for surface installation
KWL APG Ref. no. 04270
Dim. mm (W x H x D) 83 x 83 x 41

Touch control element
KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245
With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35
Casing for surface installation
KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177
Dim mm (W x H x D) 85 x 85 x 25

Control line cable
KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	KWL 220 D R/L		For ceiling installation		
Right-hand version	**KWL 220 D R**		Ref. no. 40057		
Left-hand version	**KWL 220 D L**		Ref. no. 40058		
Flow rate at level [1) 2)]	❿	❽	❻	❹	❷
Supply air/extract air V̇ m³/h	239	195	153	105	64
Power consumption fans 2xW [1)]	47	30	18	10	6
Voltage/Frequency	1~, 230 V, 50 Hz				
Rated current A – ventilation	0.8				
– preheating	4.4				
– max. total	0.8 (5.2 incl. preheater, accessories)				
Electric preheater kW	1.0 kW (accessories)				
Summer bypass	automatic (adjustable), with heat exchanger cover				
Wiring diagram no.	1433				
Temperature operating range	–20 °C to +40 °C				
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)				
Weight approx. kg	47				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10 % when using pollen filter.
3) AK = Activated carbon filter

KNX/EIB module
KWL-KNX Connect No. 20253
For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors
KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric preheater
KWL-EVH 220 D No. 09636
Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

Extension module
KWL-EM eC Ref. no. 40155
For controlling external post-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector
BWM Ref. no. 08323
Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Electric post-heating element
For additional supply air heating.
EHR-R 1.2/125 Ref. no. 09433
Rectangular duct temp. sensor
KWL-LTK eC (1 pc. req.) No. 40156

Warm water post-heating element
For additional supply air heating.
WHR 125 Ref. no. 09480
Rectangular duct temp. sensor
KWL-LTK eC (2 pc. req.) No. 40156
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Alternative:
Air temperature control
WHST 300 T38 Ref. no. 08817



Replacement air filters
– 2 pcs. ISO Coarse 75 % (G4)
ELF-KWL 220 D/4/4 No. 09638
– 1 pc. ISO ePM$_1$ 50 % (F7)
ELF-KWL 220 D/7 No. 09639
– 1 pc. ISO ePM$_{2.5}$ 60 % (AK)[3)]
ELF-KWL 220 AK No. 03050

Circular duct connector
Connector with seal for unit connection to circular duct system with Ø 125 mm.
RVBD 125 K No. 03414

Other accessories

Other accessories	Page
KWL peripherals	160 ff.
– Ground heat exchanger	184 ff.
– Insulated duct system	174 f.
– Air distribution systems	176 ff.
Heating element, control	488 ff.
ventilation grilles, ducts, roof outlets	132 ff.
extract air elements, design ventilation valves	132 ff.

KWL 340 D

Efficiency class

A+ KWL 340 D R/L with additional room sensor

A KWL 340 D R/L

easy Controls 3.0

EC

Dimensions KWL 340 D R

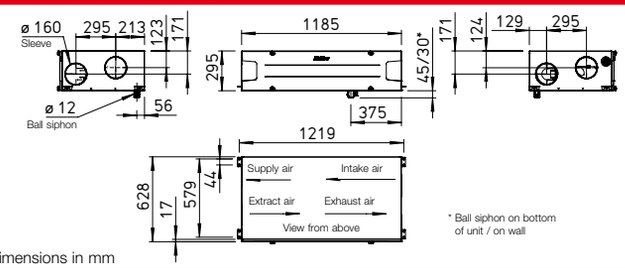

Dimensions in mm

Dimensions KWL 340 D L

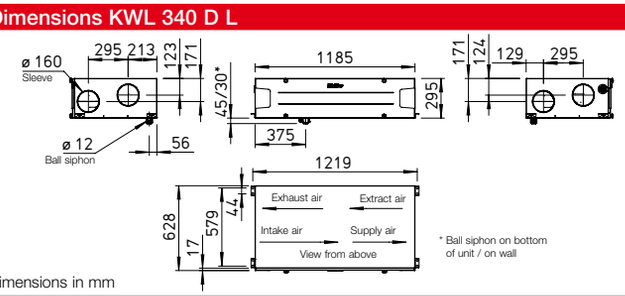

Dimensions in mm

Ultra-flat ceiling units with heat recovery for the central supply and extract ventilation of apartments and small single family houses. Equipped with Helios easyControls 3.0, the innovative control concept for simple network connection and web browser control. Units come with highly efficient plastic heat exchangers and energy-efficient EC motors.

Casing
Made of galvanised steel sheet, inner and front panels powder-coated in white, double-walled, with 20 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable side panels.

Heat exchanger
Large cross counterflow heat exchanger made of plastic, heat recovery efficiency of up to 90 %.

Fans
Two low-noise high-performance EC fans with backward-curved impellers ensure energy-efficient operation. Maintenance-free, easily removable for cleaning, if required.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 160 mm using duct connectors (RVBD 160 K, accessories).

Condensate connection
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM_1 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

Summer operation
Equipped with automatic bypass function and heat exchanger cover as standard.

Heat exchanger anti-icing protection
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 340 D, accessories).

Control system
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 112 f. Helios easyControls 3.0 is prepared for:

- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- ☐ The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

Electrical connection
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

Accessories – Functional description (see right for details)
KWL EC 340 D can be individually expanded with the following accessories:

☐ **Control element ECO**
- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

☐ **Control element Touch**
Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

☐ **KNX/EIB module**
For connecting the ventilation unit to the building control system via the KNX Connect module.

☐ **Room sensors**
Room sensors, which measure the mixed gas, CO_2 concentration or relative room air humidity, are available for automatic operation and demand-oriented air exchange.

☐ **Post-heating**
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	112 f.

Performance curves KWL 340 D

Frequency*		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	58	50	55	52	47	43	29	22
L_{WA}	Supply air	dB(A)	75	64	72	70	67	61	50	44
L_{PA} at 1 m	Radiation	dB(A)	48	26	43	45	38	30	25	17

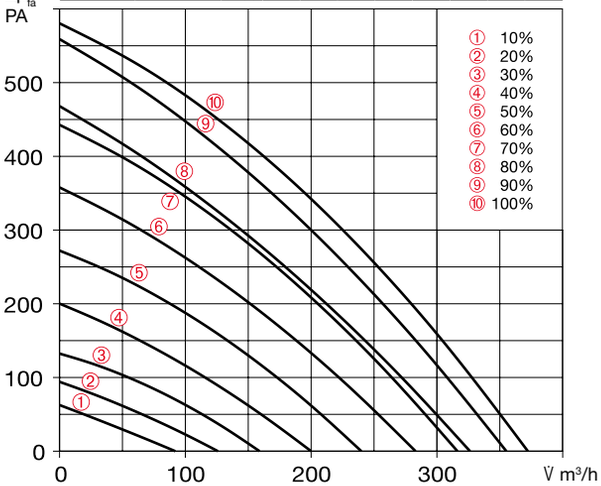

*Sound information relates to Vref. according to ErP data sheet.

Slide switch control element

KWL BE ECO Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.
Dim. mm (W x H x D) 80 x 80 x 37

Casing for surface installation

KWL APG Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

Touch control element

KWL BE Touch bl (black) Ref. no. 20244
KWL BE Touch wh (white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

Casing for surface installation

KWL APG Touch bl No. 40178
KWL APG Touch wh No. 40177

Dim mm (W x H x D) 85 x 85 x 25

Control line cable

KWL-SL eC 5m Ref. no. 40179
KWL-SL eC 10m Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	KWL 340 D R/L		For ceiling installation		
Right-hand version **Left-hand version**	**KWL 340 D R** **KWL 340 D L**		Ref. no. 40059 Ref. no. 40060		
Flow rate at level [1) 2)]	❿	❽	❻	❹	❷
Supply air/extract air V̇ m³/h	372	326	283	200	126
Power consumption fans 2xW [1)]	79	56	40	20	10
Voltage/Frequency	1~, 230 V, 50 Hz				
Rated current A – ventilation	1.2				
– preheating	5.6				
– max. total	1.2 (6.8 incl. preheater, accessories)				
Electric preheater kW	1.3 kW (accessories)				
Summer bypass	automatic (adjustable), with heat exchanger cover				
Wiring diagram no.	1433				
Temperature operating range	–20 °C to +40 °C				
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)				
Weight approx. kg	77				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10 % when using pollen filter.
3) AK = Activated carbon filter

KNX/EIB module

KWL-KNX Connect No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

Room sensors

KWL-CO2 eC Ref. no. 20248
KWL-FTF eC Ref. no. 20249
KWL-VOC eC Ref. no. 20247

For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.
Dim. mm (W x H x D) 98 x 98 x 33

Electric preheater

KWL-EVH 340 D No. 04241

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1280 W.

Extension module

KWL-EM eC Ref. no. 40155

For controlling external post-heating elements.
Dim. mm (W x H x D) 210 x 210 x 100

Motion detector

BWM Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Electric post-heating element

For additional supply air heating.

EHR-R 2.4/160 Ref. no. 09435

Rectangular duct temp. sensor

KWL-LTK eC (1 pc. req.) No. 40156

Warm water post-heating element

For additional supply air heating.

WHR 160 Ref. no. 09481

Rectangular duct temp. sensor

KWL-LTK eC (2 pc. req.) No. 40156

Hydraulic unit

WHSH HE 24 V (0-10 V) No. 08318

Alternative:

Air temperature control

WHST 300 T38 Ref. no. 08817



Replacement air filters

– 2 pcs. ISO Coarse 75 % (G4)
ELF-KWL 340 D/4/4 No. 04239
– 1 pc. ISO ePM$_1$ 50 % (F7)
ELF-KWL 340 D/7 No. 04240
– 1 pc. ISO ePM$_{2.5}$ 60 % (AK)[3)]
ELF-KWL 340 AK No. 03051

Circular duct connector

Connector with seal for unit connection to circular duct system with Ø 160 mm.
RVBD 160 K No. 03415

Other accessories

Other accessories	Page
KWL peripherals	160 ff.
– Ground heat exchanger	184 ff.
– Insulated duct system	174 f.
– Air distribution systems	176 ff.
Heating element, control	488 ff.
ventilation grilles, ducts, roof outlets	132 ff.
extract air elements, design ventilation valves	132 ff.

KWL EC 700 D

Dimensions KWL EC 700 D

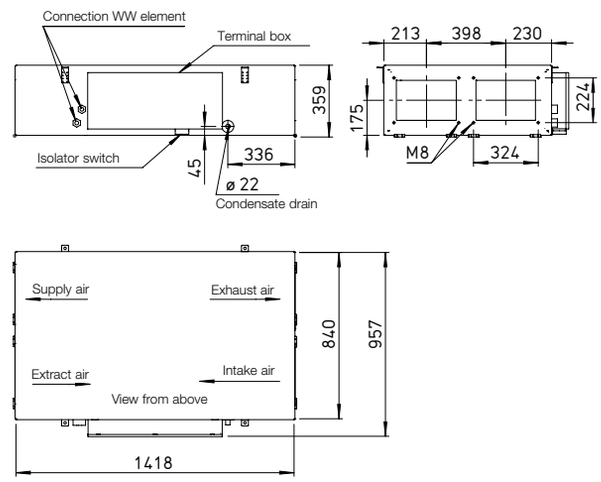

Dimensions in mm

Ultra-flat ventilation units with heat recovery for compact and space-saving ceiling installation.
With a wide range of residential, commercial and industrial applications. Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022.
Available in various comfort and equipment variants.

Casing
Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides. The inspection openings for filter replacement are accessible at the bottom of the unit without tools.
Ceiling installation via vibration-damping fastening elements included in the delivery.

Heat exchanger
Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

Fans
Two low-noise high-performance EC fans with backward-curved impellers ensure energy-efficient operation. The special control technology enables constant volume control or constant pressure control.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 250 mm.

Condensate connection
A separate condensate tray below the heat exchanger facilitates maintenance work on the unit. Drain connectors on the side next to the terminal box. Ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Standard equipment:
Clean intake air supply via ISO ePM_1 55% filter (F7).
The heat exchanger requires an ISO ePM_{10} 50% filter (M5) on the extract air side.
All filters are pressure-controlled and exchangeable in just a few simple steps.

Summer operation
Standard equipment with automatic bypass function for maximum comfort.

Heat exchanger anti-icing protection
An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it reduces the risk of the heat exchanger icing up and supports its safe functioning and heat recovery during the entire heating period.

Power control
The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:
- ▢ Control directly via touchscreen.
- ▢ Freely definable operating points within the entire range of the performance curve.
- ▢ Selection between constant volume control or constant pressure control.
- ▢ Demand-oriented ventilation using CO_2, VOC (mixed gas) or humidity sensor.
- ▢ Initial commissioning (automatic determination of the system performance curve).
- ▢ Control of external shutters.
- ▢ Connection of a fire alarm contact.
- ▢ Weekly or daily programme.
- ▢ Pressure monitoring of filter contamination.
- ▢ Indication of necessary filter replacement, operating status, error messages.
- ▢ Different access levels. The ventilation unit is alternatively controllable via Modbus (RS 485, TCP/IP).

Electrical connection
Easily accessible terminal box on the side of the casing.
The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

Post-heating
Type KWL EC Pro WW
The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element.
The hydraulic unit (Type WHSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

Reference
The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters.

Replacement air filter
– 1 pc. ISO ePM_{10} 50 % (M5)
ELF-KWL 700 D/5 VDI No.04189
– 1 pc. ISO ePM_1 55 % (F7)
ELF-KWL 700 D/7 VDI No.04191

Control lines
ALB EC-SK 20 20m No. 06816
ALB EC-SK 40 40m No. 06817
8-pin AWG24 twisted pair cable for the control element.

Other accessories	Page
KWL peripherals	160 ff.
– Air distribution systems	176 ff.
– Further overview	180 f.
Accessory details	
Ventilation grilles, ducts, fittings	
roof outlets	132 ff.
extract air elements	132 ff.

Performance curve KWL EC 700 D

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	53	46	49	47	41	40	34	23
L_{WA}	Supply air	dB(A)	68	54	65	63	59	53	48	39
L_{PA} at 1 m	Radiation	dB(A)	47	33	41	43	41	35	29	14

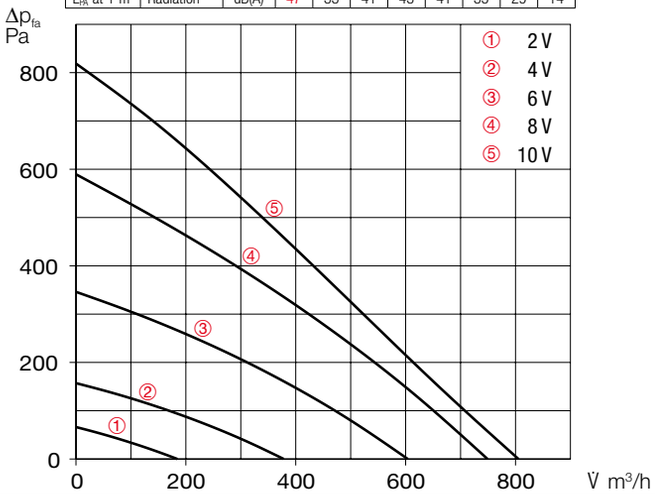

Included in delivery:
Surface comfort control element
User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).
Dim. mm (W x H x D) 115 x 80 x 25

Control element with connection cable (10 m) included in the scope of delivery.
Dim. mm (WxHxD) 115 x 80 x 25

Accessories for Type Pro WW
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.

Accessories for all types

Room sensor – Air quality
AIR1/KWL-VOC 0-10V No. 20250
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL No. 07277
For measuring the room temperature and controlling the ventilation unit according to the set value. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 80 x 80 x 25

Transition piece – Symmetrical
KWL-ÜS 700 D No. 04206
From unit flange to round duct systems.

Flexible connecting sleeve
FM 250 No. 01672
For acoustic decoupling, incl. 2 pcs. hose clamps.

Flexible connector
FVR 250 No. 40831
Flexible connector round (uninsulated), with lip seals on both sides, for connection to pipe systems.
Accessories for FVR:
Potential equalisation cable
PAK M8 No. 40812



Dimensions in mm

Duct shutter, motorised
RVMD 250/230V No. 40252
Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).

Technical data	KWL EC 700 D			KWL EC 700 D, with warm water post-heater		
For ceiling installation	Type KWL EC 700 D Pro		Ref. no. 04171	Type KWL EC 700 D Pro WW		Ref. no. 04172
Flow rate at level [1]	❸	❷	❶	❸	❷	❶
Supply air/extract air V̇ m³/h approx.	510	330	210	510	330	210
Noise dB(A) [1]						
Supply air L_{WA} (sound power)	72	70	69	72	70	69
Extract air L_{WA} (sound power)	59	56	55	59	56	55
Radiation L_{PA} at 1 m	41	38	36	41	38	36
Power consumption fans 2 x W	126	70	46	130	72	47
Voltage/Frequency	230 V~, 50 Hz			230 V~, 50 Hz		
Rated current A – Ventilation	2.7			2.7		
– Preheating	12.3			12.3		
– max. total	15.0			15.0		
Heat output/Postheater kW	–			2.3 (at 60/40 °C) / 2.1 (at 50/40 °C) / 1.3 (at 40/30 °C)		
Electric preheater kW	2.9			2.9		
Summer bypass	automatic			automatic		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	111			115		

[1] At 200 Pa.

KWL EC 1400 D

Dimensions KWL EC 1400 D

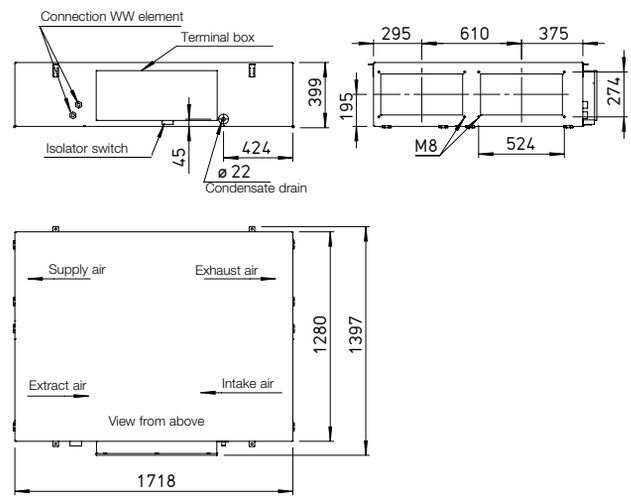

Dimensions in mm

CERTIFIED COMPONENT
Passive House Institute

Ultra-flat ventilation units with heat recovery for compact and space-saving ceiling installation. With a wide range of residential, commercial and industrial applications. Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022.
Available in various comfort and equipment variants.

Casing
Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides. The inspection openings for filter replacement are accessible at the bottom of the unit without tools.
Ceiling installation via vibration-damping fastening elements included in the delivery.

Heat exchanger
Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

Fans
Two low-noise high-performance EC fans with backward-curved impellers ensure energy-efficient operation. The special control technology enables constant volume control or constant pressure control.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 315 mm.

Condensate connection
A separate condensate tray below the heat exchanger facilitates maintenance work on the unit. Drain connectors on the side next to the terminal box. Ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Standard equipment:
Clean intake air supply via ISO ePM_1 55% filter (F7).
The heat exchanger requires an ISO ePM_{10} 50% filter (M5) on the extract air side.
All filters are pressure-controlled and exchangeable in just a few simple steps.

Summer operation
Standard equipment with automatic bypass function for maximum comfort.

Heat exchanger anti-icing protection
An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it reduces the risk of the heat exchanger icing up and supports its safe functioning and heat recovery during the entire heating period.

Power control
The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:
- ▢ Control directly via touchscreen.
- ▢ Freely definable operating points within the entire range of the performance curve.
- ▢ Selection between constant volume control or constant pressure control.
- ▢ Demand-oriented ventilation using CO_2, VOC (mixed gas) or humidity sensor.
- ▢ Initial commissioning (automatic determination of the system performance curve).
- ▢ Control of external shutters.
- ▢ Connection of a fire alarm contact.
- ▢ Weekly or daily programme.
- ▢ Pressure monitoring of filter contamination.
- ▢ Indication of necessary filter replacement, operating status, error messages.
- ▢ Different access levels. The ventilation unit is alternatively controllable via Modbus (RS 485, TCP/IP).

Electrical connection
Easily accessible terminal box on the side of the casing.
The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

Post-heating
Type KWL EC Pro WW
The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element.
The hydraulic unit (Type WHSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

Reference
The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters.

Replacement air filter
– 1 pc. ISO ePM_{10} 50 % (M5)
ELF-KWL 1400 D/5 VDI No.04193
– 1 pc. ISO ePM_1 55 % (F7)
ELF-KWL 1400 D/7 VDI No.04195

Control lines
ALB EC-SK 20 20m No. 06816
ALB EC-SK 40 40m No. 06817
8-pin AWG24 twisted pair cable for the control element.

Other accessories	Page
KWL peripherals	160 ff.
– Air distribution systems	176 ff.
– Further overview	180 f.
Accessory details	
Ventilation grilles, ducts, fittings	
roof outlets	132 ff.
extract air elements	132 ff.

Performance curve KWL EC 1400 D

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	60	51	53	53	50	51	49	45
L_{WA}	Supply air	dB(A)	80	63	68	71	71	75	71	70
L_{PA} at 1 m	Radiation	dB(A)	53	42	48	48	47	43	33	21

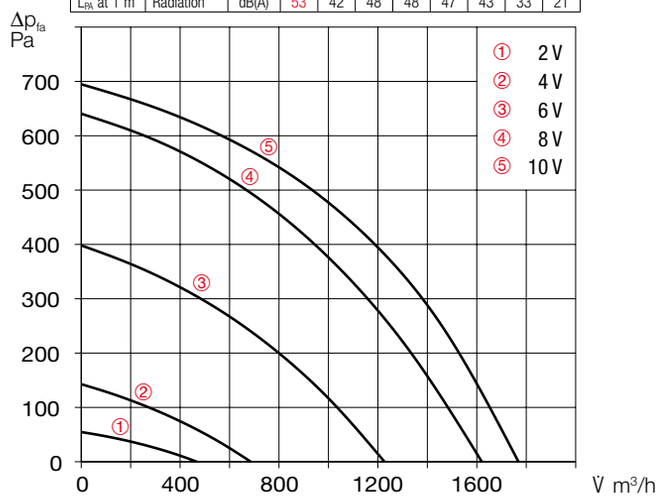

Included in delivery:

Surface comfort control element
User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).
Dim. mm (W x H x D) 115 x 80 x 25

Control element with connection cable (10 m) included in the scope of delivery.
Dim. mm (WxHxD) 115 x 80 x 25

Accessories for Type Pro WW

Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.

Accessories for all types

Room sensor – Air quality
AIR1/KWL-VOC 0-10V No. 20250
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL No. 07277
For measuring the room temperature and controlling the ventilation unit according to the set value. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 80 x 80 x 25

Transition piece – Symmetrical
KWL-ÜS 1400 D No. 04207
For acoustic decoupling, incl. 2 pcs. hose clamps.

Flexible connecting sleeve
FM 315 No. 01674
For acoustic decoupling, incl. 2 pcs. hose clamps.

Flexible connector
FVR 315 No. 40832
Flexible connector round (uninsulated), with lip seals on both sides, for connection to pipe systems.
Accessories for FVR:
Potential equalisation cable
PAK M8 No. 40812



Dimensions in mm

Duct shutter, motorised
RVMD 315/230V No. 40253
Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).

Technical data	KWL EC 1400 D			KWL EC 1400 D, with warm water post-heater		
For ceiling installation	Type KWL EC 1400 D Pro		Ref. no. 04173	Type KWL EC 1400 D Pro WW		Ref. no. 04174
Flow rate at level [1] Supply air/extract air V̇ m³/h approx.	❸ 1000	❷ 650	❶ 400	❸ 1000	❷ 650	❶ 400
Noise dB(A) [1]						
Supply air L_{WA} (sound power)	82	79	76	82	79	76
Extract air L_{WA} (sound power)	67	63	62	67	63	62
Radiation L_{PA} at 1 m	52	50	49	52	50	49
Power consumption fans 2 x W	291	180	128	300	184	129
Voltage/Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	6.0 / – / –			6.0 / – / –		
– Preheating	– / 11.7 / 11.7			– / 11.7 / 11.7		
– max. total	6.0 / 11.7 / 11.7			6.0 / 11.7 / 11.7		
Heat output/Postheater kW	–			4.7 (at 60/40 °C) / 4.2 (at 50/40 °C) / 2.7 (at 40/30 °C)		
Electric preheater kW	4.5			4.5		
Summer bypass	automatic			automatic		
Wiring diagram no.	1370			1370		
Temperature operating range	– 20 °C to + 40 °C			– 20 °C to + 40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	179			183		

[1] At 250 Pa.

KWL EC 2000 D

Dimensions KWL EC 2000 D

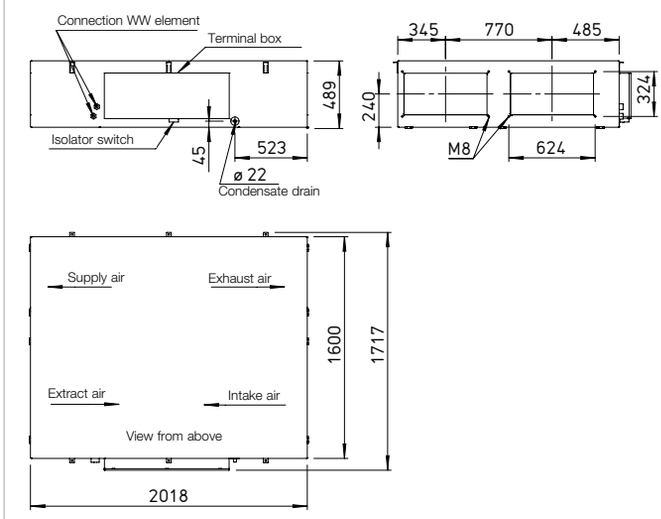

Dimensions in mm

CERTIFIED COMPONENT
Passive House Institute

Ultra-flat ventilation units with heat recovery for compact and space-saving ceiling installation. With a wide range of residential, commercial and industrial applications. Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022.
Available in various comfort and equipment variants.

Casing
Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides. The inspection openings for filter replacement are accessible at the bottom of the unit without tools.
Ceiling installation via vibration-damping fastening elements included in the delivery.

Heat exchanger
Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

Fans
Two low-noise high-performance EC fans with backward-curved impellers ensure energy-efficient operation. The special control technology enables constant volume control or constant pressure control.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 400 mm.

Condensate connection
A separate condensate tray below the heat exchanger facilitates maintenance work on the unit. Drain connectors on the side next to the terminal box. Ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Standard equipment:
Clean intake air supply via ISO ePM_1 55% filter (F7).
The heat exchanger requires an ISO ePM_{10} 50% filter (M5) on the extract air side.
All filters are pressure-controlled and exchangeable in just a few simple steps.

Summer operation
Standard equipment with automatic bypass function for maximum comfort.

Heat exchanger anti-icing protection
An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it reduces the risk of the heat exchanger icing up and supports its safe functioning and heat recovery during the entire heating period.

Power control
The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:
- ▢ Control directly via touchscreen.
- ▢ Freely definable operating points within the entire range of the performance curve.
- ▢ Selection between constant volume control or constant pressure control.
- ▢ Demand-oriented ventilation using CO_2, VOC (mixed gas) or humidity sensor.
- ▢ Initial commissioning (automatic determination of the system performance curve).
- ▢ Control of external shutters.
- ▢ Connection of a fire alarm contact.
- ▢ Weekly or daily programme.
- ▢ Pressure monitoring of filter contamination.
- ▢ Indication of necessary filter replacement, operating status, error messages.
- ▢ Different access levels. The ventilation unit is alternatively controllable via Modbus (RS 485, TCP/IP).

Electrical connection
Easily accessible terminal box on the side of the casing.
The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

Post-heating
Type KWL EC Pro WW
The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element.
The hydraulic unit (Type WHSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

Reference
The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters.

Replacement air filter
– 1 pc. ISO ePM_{10} 50 % (M5)
ELF-KWL 2000 D/5 VDI No. 04197
– 1 pc. ISO ePM_1 55 % (F7)
ELF-KWL 2000 D/7 VDI No. 04204

Control lines
ALB EC-SK 20 20m No. 06816
ALB EC-SK 40 40m No. 06817
8-pin AWG24 twisted pair cable for the control element.

Other accessories	Page
KWL peripherals	160 ff.
– Air distribution systems	176 ff.
– Further overview	180 f.
Accessory details	
Ventilation grilles, ducts, fittings	
roof outlets	132 ff.
extract air elements	132 ff.

Performance curve KWL EC 2000 D

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	59	56	52	48	49	47	45	40
L_{WA}	Supply air	dB(A)	77	66	68	67	72	69	69	64
L_{PA} at 1 m	Radiation	dB(A)	50	46	42	43	44	38	31	21

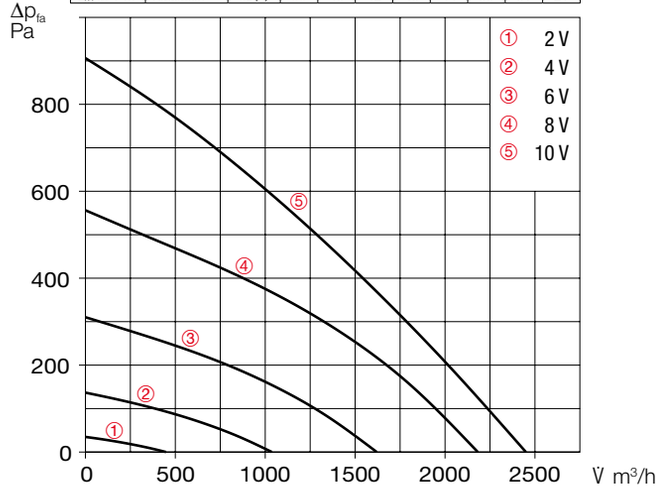

Included in delivery:
Surface comfort control element
User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).
Dim. mm (W x H x D) 115 x 80 x 25

Control element with connection cable (10 m) included in the scope of delivery.
Dim. mm (WxHxD) 115 x 80 x 25

Accessories for Type Pro WW
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.

Accessories for all types

Room sensor – Air quality
AIR1/KWL-VOC 0-10V No. 20250
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL No. 07277
For measuring the room temperature and controlling the ventilation unit according to the set value. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 80 x 80 x 25

Transition piece – Symmetrical
KWL-ÜS 2000 D No. 04208
From unit flange to round duct systems.

Flexible connecting sleeve
FM 400 No. 01676
For acoustic decoupling, incl. 2 pcs. hose clamps.

Flexible connector
FVR 400 No. 40834
Flexible connector round (uninsulated), with lip seals on both sides, for connection to pipe systems.
Accessories for FVR:
Potential equalisation cable
PAK M8 No. 40812



Dimensions in mm

Duct shutter, motorised
RVMD 400/230V No. 40255
Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).

Technical data	KWL EC 2000 D			KWL EC 2000 D, with warm water post-heater		
For ceiling installation	Type KWL EC 2000 D Pro		Ref. no. 04175	Type KWL EC 2000 D Pro WW		Ref. no. 04176
Flow rate at level [1]	❸	❷	❶	❸	❷	❶
Supply air/extract air V̇ m³/h approx.	1800	1150	720	1800	1150	720
Noise dB(A) [1]						
Supply air L_{WA} (sound power)	76	73	71	76	73	71
Extract air L_{WA} (sound power)	62	59	60	62	59	60
Radiation L_{PA} at 1 m	50	48	47	50	48	48
Power consumption fans 2 x W	441	234	152	460	241	155
Voltage/Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	4.2 / – / –			4.2 / – / –		
– Preheating	11.2 / 11.2 / 11.2			11.2 / 11.2 / 11.2		
– max. total	15.4 / 11.2 / 11.2			15.4 / 11.2 / 11.2		
Heat output/Postheater kW	–			8.1 (at 60/40 °C) / 7,3 (at 50/40 °C) / 4.6 (at 40/30 °C)		
Electric preheater kW	7.2			7.2		
Summer bypass	automatic			automatic		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	265			269		

[1] At 250 Pa.

KWL EC 800 S

KWL EC 800 S with base cover (accessories)

Dimensions KWL EC 800 S

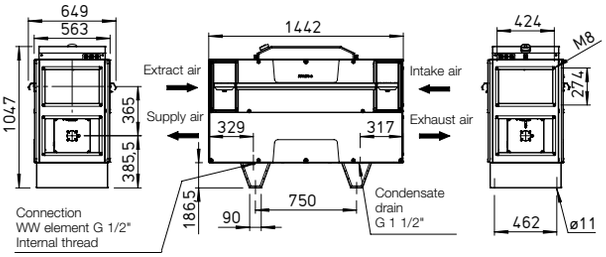

Dimensions in mm

Central units with heat recovery for compact and space-saving floor installation (floor standing). With a wide range of residential, commercial and industrial applications.
Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022. Optionally available with integrated warm water heating element.

Casing
Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides.
Inspection openings for filter replacement fastened to both side panels with screws.
Both side walls can be completely dismantled for free access to all components.
The unit is suitable for floor installation (standing) indoors.
Vibration dampers can be underlaid (on-site) to prevent the direct transmission of vibrations and structure-borne noise to building parts.

Heat exchanger
Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

Fans
Two low-noise high-performance EC fans with backward-curved impellers ensure energy-efficient operation. The special control technology enables constant volume control or constant pressure control.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 250 mm. The floor-standing unit can be rotated 180° for installation so that intake air and exhaust air as well as extract air and supply air connections can be on the left or right sides.

Condensate connection
The unit contains a stainless steel condensate tray with a condensate drain below. Ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Standard equipment:
Clean intake air supply via ISO ePM_1 55% filter (F7).
The heat exchanger requires an ISO ePM_{10} 50% filter (M5) on the extract air side.
All filters are pressure-controlled and exchangeable in just a few simple steps.

Summer operation
Standard equipment with automatic bypass function for maximum comfort.

Heat exchanger anti-icing protection
An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it reduces the risk of the heat exchanger icing up and supports its safe functioning and heat recovery during the entire heating period.

Power control
The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:
- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO_2, VOC (mixed gas) or humidity sensor.
- ☐ Building control system via Modbus (RS 485, TCP/IP).
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels.

Electrical connection
Easily accessible terminal box on top of the casing.
The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

Post-heating
Type KWL EC Pro WW
The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element.
The hydraulic unit (Type WHSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

Reference
The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters.

Replacement air filter
– 1 pc. ISO ePM_{10} 50 % filter
ELF-KWL 800 S/5 VDI No. 08256

– 1 pc. ISO ePM_1 55 % filter
ELF-KWL 800 S/7 VDI No. 08257

Control lines
ALB EC-SK 20 20m No. 06816
ALB EC-SK 40 40m No. 06817
8-pin AWG24 twisted pair cable for the control element.

Other accessories	Page
KWL peripherals	160 ff.
– Air distribution systems	176 ff.
– Further overview	180 f.
Accessory details	
Ventilation grilles, ducts, fittings	
roof outlets	132 ff.
extract air elements	132 ff.

Performance curve KWL EC 800 S

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	70	65	68	54	49	43	35	34
L_{WA}	Supply air	dB(A)	78	76	73	67	63	63	55	55
L_{PA} at 1 m	Radiation	dB(A)	54	50	50	42	42	41	31	25

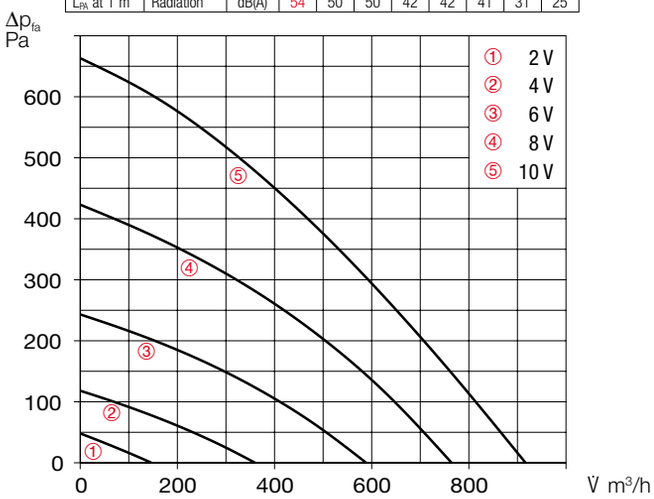

Included in delivery:

Surface comfort control element
User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).
Dim. mm (W x H x D) 115 x 80 x 25

Control element with connection cable (10 m) included in the scope of delivery.
Dim. mm (WxHxD) 115 x 80 x 25

Accessories for Type Pro WW

Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.

Accessories for all types

Room sensor – Air quality
AIR1/KWL-VOC 0-10V No. 20250
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL No. 07277
For measuring the room temperature and controlling the ventilation unit according to the set value. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 80 x 80 x 25

Transition piece – Symmetrical
KWL-ÜS 800 S No. 08339
From unit flange to round duct systems.

Flexible connecting sleeve
FM 250 No. 01672
For acoustic decoupling, incl. 2 pcs. hose clamps.

Flexible connector
FVR 250 No. 40831
Flexible connector round (uninsulated), with lip seals on both sides, for connection to pipe systems.
Accessories for FVR:
Potential equalisation cable
PAK M8 No. 40812



Dimensions in mm

Duct shutter, motorised
RVMD 250/230V No. 40252
Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).

Base cover
KWL-SB 800 S No. 09315
Made of galvanised steel sheet.

Technical data	KWL EC 800 S			KWL EC 800 S, with warm water post-heater		
For floor-standing installation	Type KWL EC 800 S Pro		Ref. no. 08327	Type KWL EC 800 S Pro WW		Ref. no. 08328
Flow rate at level [1]	❸	❷	❶	❸	❷	❶
Supply air/extract air V̇ m³/h approx.	600	490	325	600	490	325
Noise dB(A) [1]						
Supply air L_{WA} (sound power)	70	70	67	70	70	68
Extract air L_{WA} (sound power)	59	59	60	59	59	60
Radiation L_{PA} at 1 m	46	46	44	46	46	44
Power consumption fans 2xW	133	100	65	138	104	66
Standby power consumption	< 1 W			< 1 W		
Voltage / Frequency	1~, 230 V, 50 Hz			1~, 230 V, 50 Hz		
Rated current A – Ventilation	2.5			2.5		
– Preheating	11.9			11.9		
– max. total	14.4			14.4		
Electric preheater kW	2.9			2.9		
Heat output / post-heating element kW	–			2.8 (at 60/40 °C) / 2.6 (at 50/40 °C) / 1.6 (at 40/30 °C)		
Summer bypass	automatic (adjustable), with heat exchanger cover			automatic (adjustable), with heat exchanger cover		
Wiring diagram no.	1370			1370		
Temperature operating range	– 20 °C to + 40 °C			– 20 °C to + 40 °C		
Installation temperature	+ 5 °C to + 40 °C			+ 5 °C to + 40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	145			147		

[1] At 200 Pa.

KWL EC 1200 S

KWL EC 1200 S with base cover (accessories)

Dimensions KWL EC 1200 S

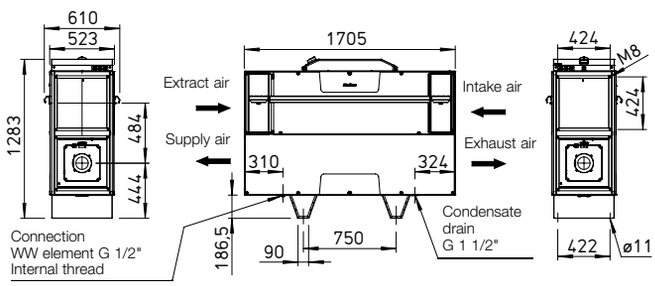

Dimensions in mm

Central units with heat recovery for compact and space-saving floor installation (floor standing). With a wide range of residential, commercial and industrial applications.
Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022. Optionally available with integrated warm water heating element.

Casing
Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides.
Inspection openings for filter replacement fastened to both side panels with screws.
Both side walls can be completely dismantled for free access to all components.
The unit is suitable for floor installation (standing) indoors.
Vibration dampers can be underlaid (on-site) to prevent the direct transmission of vibrations and structure-borne noise to building parts.

Heat exchanger
Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

Fans
Two low-noise high-performance EC fans with backward-curved impellers ensure energy-efficient operation. The special control technology enables constant volume control or constant pressure control.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 355 mm. The floor-standing unit can be rotated 180° for installation so that intake air and exhaust air as well as extract air and supply air connections can be on the left or right sides.

Condensate connection
The unit contains a stainless steel condensate tray with a condensate drain below. Ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Standard equipment:
Clean intake air supply via ISO ePM_1 55% filter (F7).
The heat exchanger requires an ISO ePM_{10} 50% filter (M5) on the extract air side.
All filters are pressure-controlled and exchangeable in just a few simple steps.

Summer operation
Standard equipment with automatic bypass function for maximum comfort.

Heat exchanger anti-icing protection
An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it reduces the risk of the heat exchanger icing up and supports its safe functioning and heat recovery during the entire heating period.

Power control
The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:
- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO_2, VOC (mixed gas) or humidity sensor.
- ☐ Building control system via Modbus (RS 485, TCP/IP).
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels.

Electrical connection
Easily accessible terminal box on top of the casing.
The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

Post-heating
Type KWL EC Pro WW
The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element.
The hydraulic unit (Type WHSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

Reference
The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters.

Replacement air filter
– 1 pc. ISO ePM_{10} 50 % (M5)
ELF-KWL 1200 S/5 VDI No.08347
– 1 pc. ISO ePM_1 55 % (F7)
ELF-KWL 1200 S/7 VDI No.08348

Control lines
ALB EC-SK 20 20m No. 06816
ALB EC-SK 40 40m No. 06817
8-pin AWG24 twisted pair cable for the control element.

Other accessories	Page
KWL peripherals	160 ff.
– Air distribution systems	176 ff.
– Further overview	180 f.
Accessory details	
Ventilation grilles, ducts, fittings	
roof outlets	132 ff.
extract air elements	132 ff.

Performance curve KWL EC 1200 S

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	62	46	55	60	53	53	42	32
L_{WA}	Supply air	dB(A)	76	53	63	71	69	73	66	62
L_{PA} at 1 m	Radiation	dB(A)	53	40	47	48	49	47	37	30

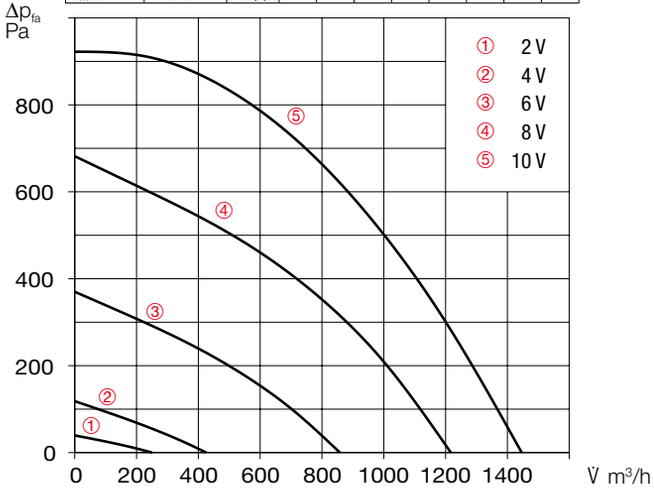

Accessories for all types

Room sensor – Air quality
AIR1/KWL-VOC 0-10V No. 20250
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL No. 07277
For measuring the room temperature and controlling the ventilation unit according to the set value. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 80 x 80 x 25

Transition piece – Symmetrical
KWL-ÜS 1200 S No. 08349
From unit flange to round duct systems.

Flexible connecting sleeve
FM 355 No. 01675
For acoustic decoupling, incl. 2 pcs. hose clamps.

Flexible connector
FVR 355 No. 40833
Flexible connector round (uninsulated), with lip seals on both sides, for connection to pipe systems.
Accessories for FVR:
Potential equalisation cable
PAK M8 No. 40812



Dimensions in mm

Duct shutter,motorised
RVMD 355/230V No. 40254
Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).

Base cover
KWL-SB 1200 S No. 09316
Made of galvanised steel sheet.

Included in delivery:
Surface comfort control element
User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).
Dim. mm (W x H x D) 115 x 80 x 25

Control element with connection cable (10 m) included in the scope of delivery.
Dim. mm (WxHxD) 115 x 80 x 25

Accessories for Type Pro WW
Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.

Technical data	KWL EC 1200 S			KWL EC 1200 S, with warm water post-heater		
For floor-standing installation	Type KWL EC 1200 S Pro		Ref. no. 08345	Type KWL EC 1200 S Pro WW		Ref. no. 08346
Flow rate at level [1]	❸	❷	❶	❸	❷	❶
Supply air/extract air V̇ m³/h approx.	1200	900	500	1200	900	500
Noise dB(A) [1]						
Supply air L_{WA} (sound power)	78	76	68	78	76	69
Extract air L_{WA} (sound power)	62	60	55	62	60	55
Radiation L_{PA} at 1 m	51	47	43	51	47	43
Power consumption fans 2xW	346	208	99	362	216	101
Standby power consumption	< 1 W			< 1 W		
Voltage / Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	5.3 / – / –			5.3 / – / –		
– Preheating	– / 12.7 / 12.7			– / 12.7 / 12.7		
– max. total	5.3 / 12.7 / 12.7			5.3 / 12.7 / 12.7		
Electric preheater kW	4.9			4.9		
Heat output / post-heating element kW	–			2.8 (at 60/40 °C) / 2.6 (at 50/40 °C) / 1.6 (at 40/30 °C)		
Summer bypass	automatic (adjustable), with heat exchanger cover			automatic (adjustable), with heat exchanger cover		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Installation temperature	+5 °C to +40 °C			+5 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	178			181		

[1] At 200 Pa.

KWL EC 1800 S

KWL EC 1800 S with base cover (accessories)

Dimensions KWL EC 1800 S

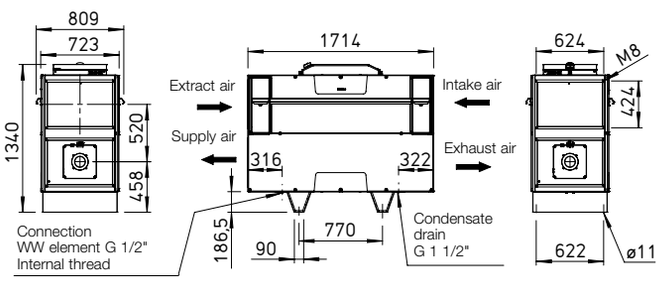

Dimensions in mm

Central units with heat recovery for compact and space-saving floor installation (floor standing). With a wide range of residential, commercial and industrial applications.
Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022. Optionally available with integrated warm water heating element.

Casing
Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides.
Inspection openings for filter replacement fastened to both side panels with screws.
Both side walls can be completely dismantled for free access to all components.
The unit is suitable for floor installation (standing) indoors.
Vibration dampers can be underlaid (on-site) to prevent the direct transmission of vibrations and structure-borne noise to building parts.

Heat exchanger
Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

Fans
Two low-noise high-performance EC fans with backward-curved impellers ensure energy-efficient operation. The special control technology enables constant volume control or constant pressure control.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 400 mm. The floor-standing unit can be rotated 180° for installation so that intake air and exhaust air as well as extract air and supply air connections can be on the left or right sides.

Condensate connection
The unit contains a stainless steel condensate tray with a condensate drain below. Ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Standard equipment:
Clean intake air supply via ISO ePM_1 55% filter (F7).
The heat exchanger requires an ISO ePM_{10} 50% filter (M5) on the extract air side.
All filters are pressure-controlled and exchangeable in just a few simple steps.

Summer operation
Standard equipment with automatic bypass function for maximum comfort.

Heat exchanger anti-icing protection
An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it reduces the risk of the heat exchanger icing up and supports its safe functioning and heat recovery during the entire heating period.

Power control
The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:
- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO_2, VOC (mixed gas) or humidity sensor.
- ☐ Building control system via Modbus (RS 485, TCP/IP).
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels.

Electrical connection
Easily accessible terminal box on top of the casing.
The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

Post-heating
Type KWL EC Pro WW
The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element.
The hydraulic unit (Type WHSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

Reference
The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters.

Replacement air filter
– 1 pc. ISO ePM_{10} 50 % (M5)
ELF-KWL 1800 S/5 VDI No.08258
– 1 pc. ISO ePM_1 55 % (F7)
ELF-KWL 1800 S/7 VDI No.08259

Control lines
ALB EC-SK 20 20m No. 06816
ALB EC-SK 40 40m No. 06817
8-pin AWG24 twisted pair cable for the control element.

Other accessories	Page
KWL peripherals	160 ff.
– Air distribution systems	176 ff.
– Further overview	180 f.
Accessory details	
Ventilation grilles, ducts, fittings	
roof outlets	132 ff.
extract air elements	132 ff.

Performance curve KWL EC 1800 S

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	61	54	58	51	52	49	38	14
L_{WA}	Supply air	dB(A)	72	61	66	63	65	64	56	56
L_{PA} at 1 m	Radiation	dB(A)	52	35	47	43	47	47	37	28

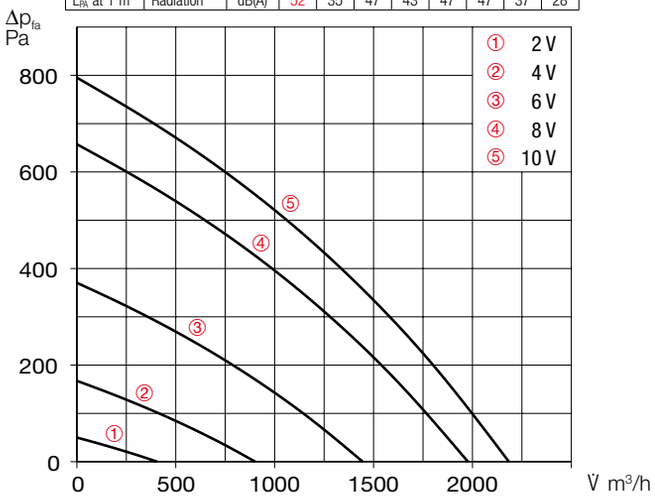

Included in delivery:

Surface comfort control element
User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).
Dim. mm (W x H x D) 115 x 80 x 25

Control element with connection cable (10 m) included in the scope of delivery.
Dim. mm (WxHxD) 115 x 80 x 25

Accessories for Type Pro WW

Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.

Accessories for all types

Room sensor – Air quality
AIR1/KWL-VOC 0-10V No. 20250
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL No. 07277
For measuring the room temperature and controlling the ventilation unit according to the set value. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 80 x 80 x 25

Transition piece – Symmetrical
KWL-ÜS 1800 S No. 08340
From unit flange to round duct systems.

Flexible connecting sleeve
FM 400 No. 01676
For acoustic decoupling, incl. 2 pcs. hose clamps.

Flexible connector
FVR 400 No. 40834
Flexible connector round (uninsulated), with lip seals on both sides, for connection to pipe systems.
Accessories for FVR:
Potential equalisation cable
PAK M8 No. 40812



Dimensions in mm

Duct shutter, motorised
RVMD 400/230V No. 40255
Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).

Base cover
KWL-SB 1800 S No. 09317
Made of galvanised steel sheet.

Technical data	KWL EC 1800 S			KWL EC 1800 S, with warm water post-heater		
For floor-standing installation	Type KWL EC 1800 S Pro		Ref. no. 08329	Type KWL EC 1800 S Pro WW		Ref. no. 08330
Flow rate at level [1]	❸	❷	❶	❸	❷	❶
Supply air/extract air V̇ m³/h approx.	1700	1200	800	1700	1200	800
Noise dB(A) [1]						
Supply air L_{WA} (sound power)	75	73	69	75	72	68
Extract air L_{WA} (sound power)	61	59	57	61	59	56
Radiation L_{PA} at 1 m	49	48	45	49	48	44
Power consumption fans 2xW	434	264	173	402	239	153
Standby power consumption	< 1 W			< 1 W		
Voltage / Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	3.7 / – / –			3.7 / – / –		
– Preheating	6.5 / 6.5 / 6.5			6.5 / 6.5 / 6.5		
– max. total	10.2 / 6.5 / 6.5			10.2 / 6.5 / 6.5		
Electric preheater kW	4.5			4.5		
Heat output / post-heating element kW	–			5.2 (at 60/40 °C) / 4.9 (at 50/40 °C) / 3.0 (at 40/30 °C)		
Summer bypass	automatic (adjustable), with heat exchanger cover			automatic (adjustable), with heat exchanger cover		
Wiring diagram no.	1370			1370		
Temperature operating range	– 20 °C to + 40 °C			– 20 °C to + 40 °C		
Installation temperature	+5 °C to + 40 °C			+5 °C to + 40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	236			241		

[1] At 250 Pa.

KWL EC 2600 S

KWL EC 2600 S with base cover (accessories)

Dimensions KWL EC 2600 S

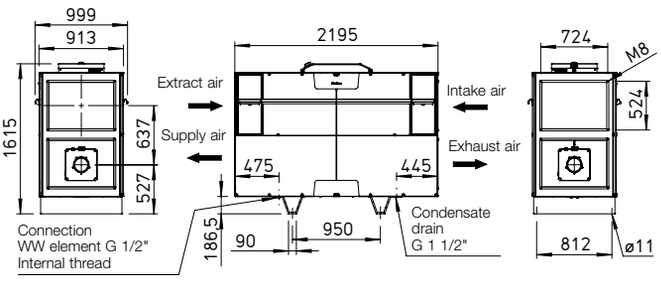

Dimensions in mm

Central units with heat recovery for compact and space-saving floor installation (floor standing). With a wide range of residential, commercial and industrial applications.
Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022. Optionally available with integrated warm water heating element.

Casing
Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides.
Inspection openings for filter replacement fastened to both side panels with screws.
Both side walls can be completely dismantled for free access to all components.
The unit is suitable for floor installation (standing) indoors.
Vibration dampers can be underlaid (on-site) to prevent the direct transmission of vibrations and structure-borne noise to building parts.

Heat exchanger
Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

Fans
Two low-noise high-performance EC fans with backward-curved impellers ensure energy-efficient operation. The special control technology enables constant volume control or constant pressure control.

Ducts
Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 560 mm. The floor-standing unit can be rotated 180° for installation so that intake air and exhaust air as well as extract air and supply air connections can be on the left or right sides.

Condensate connection
The unit contains a stainless steel condensate tray with a condensate drain below. Ball siphon included in delivery. On-site connection to drain pipe.

Air filter
Standard equipment:
Clean intake air supply via ISO ePM_1 55% filter (F7).
The heat exchanger requires an ISO ePM_{10} 50% filter (M5) on the extract air side.
All filters are pressure-controlled and exchangeable in just a few simple steps.

Summer operation
Standard equipment with automatic bypass function for maximum comfort.

Heat exchanger anti-icing protection
An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it reduces the risk of the heat exchanger icing up and supports its safe functioning and heat recovery during the entire heating period.

Power control
The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:
- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO_2, VOC (mixed gas) or humidity sensor.
- ☐ Building control system via Modbus (RS 485, TCP/IP).
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels.

Electrical connection
Easily accessible terminal box on top of the casing.
The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

Post-heating
Type KWL EC Pro WW
The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element.
The hydraulic unit (Type WHSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

Reference
The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters.

Replacement air filter
– 1 pc. ISO ePM_{10} 50 % (M5)
ELF-KWL 2600 S/5 VDI No.08308
– 1 pc. ISO ePM_1 55 % (F7)
ELF-KWL 2600 S/7 VDI No.08325

Control lines
ALB EC-SK 20 20m No. 06816
ALB EC-SK 40 40m No. 06817
8-pin AWG24 twisted pair cable for the control element.

Other accessories	Page
KWL peripherals	160 ff.
– Air distribution systems	176 ff.
– Further overview	180 f.
Accessory details	
Ventilation grilles, ducts, fittings	
roof outlets	132 ff.
extract air elements	132 ff.

Performance curve KWL EC 2600 S

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Extract air	dB(A)	62	52	58	56	54	49	43	27
L_{WA}	Supply air	dB(A)	77	67	69	69	72	67	60	51
L_{PA} at 1 m	Radiation	dB(A)	52	37	48	46	46	43	36	23

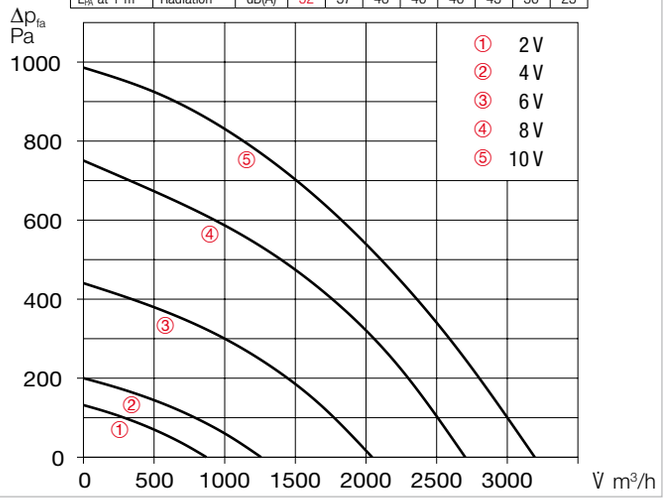

Included in delivery:

Surface comfort control element
User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).
Dim. mm (W x H x D) 115 x 80 x 25

Control element with connection cable (10 m) included in the scope of delivery.
Dim. mm (WxHxD) 115 x 80 x 25

Accessories for Type Pro WW

Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.

Accessories for all types

Room sensor – Air quality
AIR1/KWL-VOC 0-10V No. 20250
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL No. 07277
For measuring the room temperature and controlling the ventilation unit according to the set value. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 80 x 80 x 25

Transition piece – Symmetrical
KWL-ÜS 2600 S No. 08341
From unit flange to round duct systems.

Flexible connecting sleeve
FM 560 No. 01679
For acoustic decoupling, incl. 2 pcs. hose clamps.

Duct shutter, motorised
RVM 560 No. 02583
Prevents cold draughts when the unit is at a standstill. Automatic function through fan operation, with mounted spring return motor (outside of air flow). Installation in any position.



Dimensions in mm

Angle flange ring
FR 560 No. 01209
Made of galvanised steel sheet, for duct connection.

Base cover
KWL-SB 2600 S No. 09318
Made of galvanised steel sheet.

Technical data	KWL EC 2600 S			KWL EC 2600 S, with warm water post-heater		
For floor-standing installation	Type KWL EC 2600 S Pro		Ref. no. 08331	Type KWL EC 2600 S Pro WW		Ref. no. 08332
Flow rate at level [1]	❸	❷	❶	❸	❷	❶
Supply air/extract air V̇ m³/h approx.	2500	1800	1000	2500	1800	1000
Noise dB(A) [1]						
Supply air L_{WA} (sound power)	77	74	69	77	75	70
Extract air L_{WA} (sound power)	62	59	55	62	59	55
Radiation L_{PA} at 1 m	51	48	44	51	49	44
Power consumption fans 2xW	596	347	182	632	364	186
Standby power consumption	< 1 W			< 1 W		
Voltage / Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	4.0 / 4.0 / 4.0			4.0 / 4.0 / 4.0		
– Preheating	11.2 / 11.2 / 11.2			11.2 / 11.2 / 11.2		
– max. total	15.2 / 15.2 / 15.2			15.2 / 15.2 / 15.2		
Electric preheater kW	7.2			7.2		
Heat output / post-heating element kW	–			9.3 (at 60/40 °C) / 8.5 (at 50/40 °C) / 5.3 (at 40/30 °C)		
Summer bypass	automatic (adjustable), with heat exchanger cover			automatic (adjustable), with heat exchanger cover		
Wiring diagram no.	1370			1370		
Temperature operating range	– 20 °C to + 40 °C			– 20 °C to + 40 °C		
Installation temperature	+5 °C to + 40 °C			+5 °C to + 40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	355			362		

[1] At 250 Pa.

Relaxed ventilation with KWL® YOGA.

Are your buildings ready for the future? Whether in schools or public buildings, at work or during leisure time – our KWL Yoga decentralised ventilation units with heat recovery make ensuring good indoor air quality a breeze.

The compact design and simple installation without an air distribution system also make KWL Yoga perfect for renovation projects. Three available unit sizes for flow rates up to 400, 700 and 1000 m³/h and various equipment versions are only some of the highlights of KWL Yoga.

All advantages at a glance:

- Practical: Simple **maintenance** through freely accessible inspection flaps on the underside of the unit.
- Flexible: Three available unit sizes for flow rates up to **400, 700 and 1000 m³/h.**
- Diverse: Ideal for use in **schools, offices and public facilities.**
- Boosts performance: **High air quality** with low CO_2 levels helps you to concentrate whilst studying and working.
- Customised: 12 different **equipment options.**
- Types "ET" are equipped with highly efficient **enthalpy heat exchanger**.

KWL Yoga Style

Compact ceiling-mounted units from 400 to 1000 m³/h.

EC

152ff

KWL YOGA Style 400

Performance curve KWL YOGA Style 400

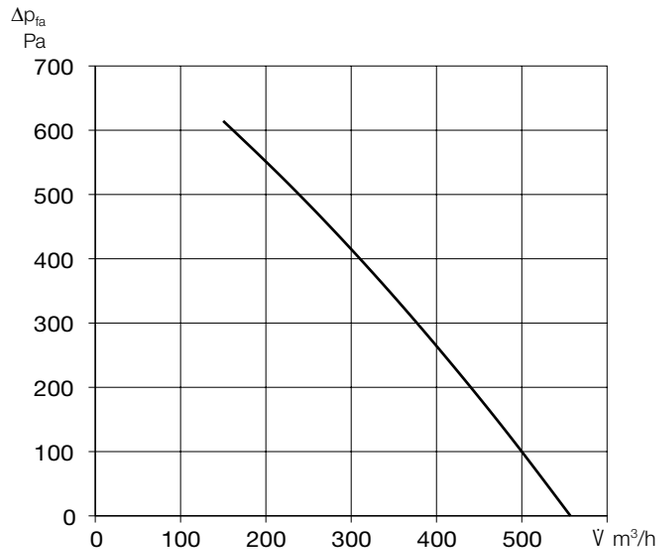

Decentralised compact ventilation units with heat recovery for the supply and extract ventilation of individual rooms, such as classrooms, recreation rooms, offices, commercial units, medical practices and many more. Equipped with highly-efficient aluminium heat exchangers and energy-saving EC motors. Automatic shutters for intake and exhaust prevent cold draughts when the fans are deactivated. The flow-optimised supply air grille allows draught-free ventilation, even in large rooms, through the optimal use of the Coanda effect. Includes a touch control element for easy operation and configuration of unit functions.

Casing
Made of galvanised steel sheet, the casing parts are painted white/powder-coated. The double-walled unit casing is equipped with 40 mm thermal and sound insulation on all sides. Easy installation and maintenance due to large inspection panel.

Installation
Ceiling installation is carried out using the vibration-damping fastening elements included in the scope of delivery.

Heat exchanger
Large aluminium cross counterflow heat exchanger with up to 90 % heat recovery efficiency. Dismantling is possible in a few steps. Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional humidity recovery of up to 50 %.

Fans
Two low-noise, high-performance EC fans with backward curved impellers for high energy efficiency.

Sensor system
Integrated CO_2 sensor system. Alternatively, this can be replaced by an external sensor (VOC, CO_2 or humidity) positioned in the room. KWL Yoga can also be controlled with a motion sensor (combination not possible!) instead of the sensors.

Air flow
Supply air on front side, two extract air openings on the underside of the unit. Intake and exhaust air connectors are equipped with spring-loaded shutters.

Condensate connection
Condensate connection horizontal (wall side), optionally via ball siphon in surface-mounted or flush-mounted design or via condensate pump.

Air filter, VDI-certified
Clean intake air flow via ISO ePM_1 60 % filter (F7). Two filters for extract air: ISO Coarse 60 % (G4); optionally available: ISO ePM_{10} 60 % (M5).

Summer operation
Equipped with automatic bypass function (bypassing the heat exchanger to use the cool night air for controlling the room temperature) as standard.

	Without electrical preheater/ without electrical after-heater	Without electrical preheater/ with electrical after-heater	Without electrical preheater/ with warm water after-heater	With electrical preheater/ without after-heater	With electrical preheater/with electrical after-heater
	KWL YOGA Style 400 Ref. no. 40008 **KWL YOGA Style 400 ET** Ref. no. 40667	**KWL YOGA Style 400 EN** Ref. no. 40010 **KWL YOGA Style 400 EN ET** Ref. no. 40668	**KWL YOGA Style 400 WW** Ref. no. 40012 **KWL YOGA Style 400 WW ET** Ref. no. 40669	**KWL YOGA Style 400 EV** Ref. no. 40014 **KWL YOGA Style 400 EV ET** Ref. no. 40670	**KWL YOGA Style 400 EV/EN** Ref. no. 40016 **KWL YOGA Style 400 EV/EN ET** Ref. no. 40671
Intake/exhaust air connector diameter	250	250	250	250	250
Air volume V̇ m³/h (Min. - Max.)	200 - 600	200 - 600	200 - 600	200 - 600	200 - 600
Radiation L_{PA} dB(A) in 1 m / 3 m (at 0 Pa)					
– 150 m³/h	26 / 20	26 / 20	26 / 20	26 / 20	26 / 20
– 200 m³/h	28 / 22	28 / 22	28 / 22	28 / 22	28 / 22
– 300 m³/h	31 / 25	31 / 25	31 / 25	31 / 25	31 / 25
– 560 m³/h	38 / 32	38 / 32	38 / 32	38 / 32	38 / 32
Maximum power consumption total (incl. control) W	350	1850	350	1850	3350
Rated current total (incl. control) A	2.45	9.0	2.45	9.0	15.51
Voltage / frequency	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz
Protection category IP	20	20	20	20	20
Temperature operating range °C	-10 to+40	-10 to+40	-10 to+40	-20 to+40	-20 to+40
Installation temperature °C	+5 to+40	+5 to+40	+5 to+40	+5 to+40	+5 to+40
Weight approx. kg	167	169	169	169	171
Wiring diagram no.	1500	1500	1500	1500	1500

Dimensions KWL YOGA Style 400

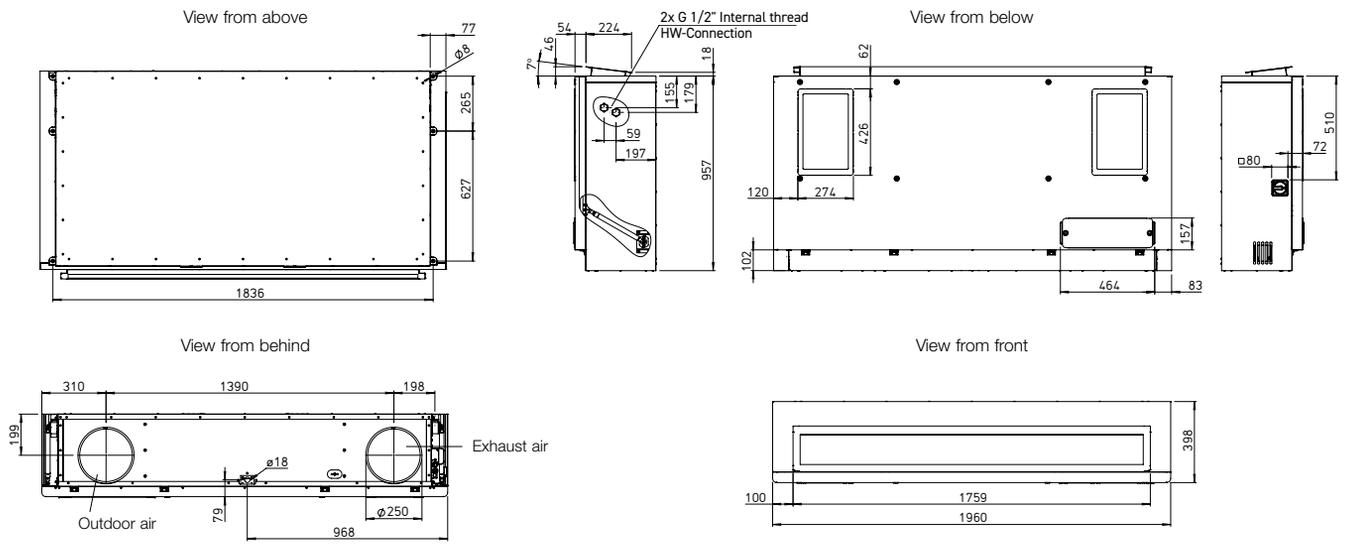

Dimensions in mm

Heat exchanger frost protection

The standard frost monitoring automatically regulates the supply air flow and the built-in electrical preheater, depending on the selected equipment.

After-heater

Unit variants with integrated post-heating (warm water or electrical after-heater) allow for convenient post-heating of the supply air. The target supply air temperature is set on the control element. The use of hydraulic unit type WHSH HE 24 V (0-10V), (accessories) is recommended for controlling the warm water heating element.

	With electrical preheater/ with warm water after-heater
	KWL YOGA Style 400 EV/WW Ref. no. 40018 **KWL YOGA Style 400 EV/WW ET** Ref. no. 40672
	250
	200 - 600
	26 / 20 28 / 22 31 / 25 38 / 32
	1850
	9.0
	1~, 230 V, 50 Hz
	20
	-20 to+40
	+5 to+40
	171
	1500

Power control

The included comfort control element with touch functionality and easy menu navigation provides the following functions:

- ▢ Demand-oriented ventilation, optionally with CO_2, VOC, or humidity sensor (1 sensor can be connected).
- ▢ Initial commissioning (automatic determination of system characteristic curve).
- ▢ Fire alarm contact connection.
- ▢ Weekly or daily programme.
- ▢ Automatic bypass (summer operation: use of cool night air).
- ▢ Pressure monitoring of filter contamination.
- ▢ Displays required filter replacement.
- ▢ 5 password-protected function levels can be configured.
- ▢ Control via central building control system possible (Modbus RTU and Modbus TCP, BACnet)
- ▢ Including control line cable (10 m)

Electrical connection

After removing the left side panel, the connection box is easily accessible on the outside of the casing. The isolator/main switch is located on the outside of the unit for easy maintenance. It can be locked using a padlock to prevent unauthorised access.

Sensors

Infrared motion sensor for detecting the presence of people in the room.

BWM	Ref. no. 08323

CO_2 sensor for measuring the CO_2 concentration.

AIR1/KWL-VOC 0-10V	No. 20250

VOC sensor for measuring the mixed gas concentration (VOC).

AIR1/KWL-CO2 0-10V	No. 20251

Humidity-temperature sensor for measuring the relative air humidity.

AIR1/KWL-FTF 0-10V	No. 20252

Control line cable

ALB EC-SK 20 20m	No. 06816
ALB EC-SK 40 40m	No. 06817

8-pin AWG24 twisted pair cable for the control element.

Installation accessories

Flush-mounted/wall-mounted siphon

KWL-KS WE	Ref. no. 40064

Ball-tube siphon

KWL-KS	Ref. no. 40065

Condensate submersible pump

KWL-KP-I	Ref. no. 40472

Hydraulic unit

WHSH HE 24V (0-10V)	No. 08318

Facade grille, circular

FGR 250	Ref. no. 40181

Filter, VDI-certified

Spare air filter (extract air)*
ISO Coarse 60 % (G4). Unit = 1 pc.
ELF-KWL YOGA 400/VDI/Coarse 60%
Ref. no. 40687

Spare air filter (extract air)*
ISO ePM_{10} 60 % (M5). Unit = 1 pc.
ELF-KWL YOGA 400/VDI/ePM10 60%
Ref. no. 40690

Spare air filter (intake air)
ISO ePM_1 60 % (F7). Unit = 1 pc.
ELF-KWL YOGA 400/VDI/ePM1 60%
Ref. no. 40693

*2 extract air filters are required per unit.

Attention: For spare air filters of older unit generations (orders before March 2023): Please contact us at export@heliosventilatoren.de

Important note

Further information on accessories can be found on page 158.

KWL YOGA Style 700
Air flow rates up to approx. 700 m³/h

KWL YOGA Style 700

EC

Performance curve KWL YOGA Style 700

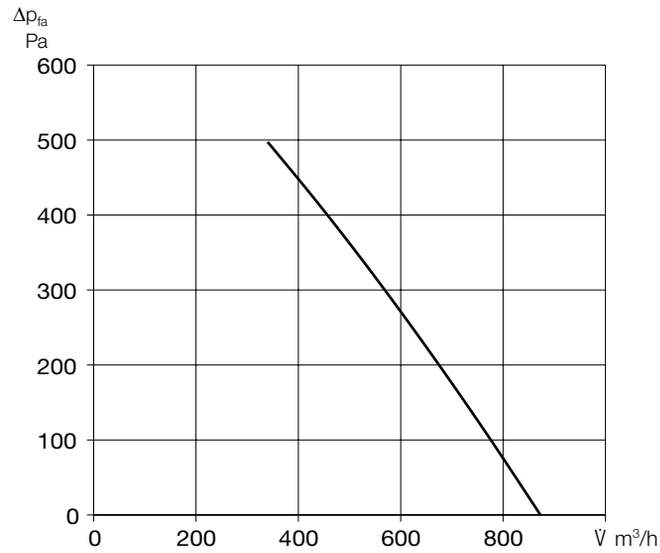

Decentralised compact ventilation units with heat recovery for the supply and extract ventilation of individual rooms, such as classrooms, recreation rooms, offices, commercial units, medical practices and many more. Equipped with highly-efficient aluminium heat exchangers and energy-saving EC motors. Automatic shutters for intake and exhaust prevent cold draughts when the fans are deactivated. The flow-optimised supply air grille allows draught-free ventilation, even in large rooms, through the optimal use of the Coanda effect. Includes a touch control element for easy operation and configuration of unit functions.

Casing
Made of galvanised steel sheet, the casing parts are painted white/powder-coated. The double-walled unit casing is equipped with 40 mm thermal and sound insulation on all sides. Easy installation and maintenance due to large inspection panel.

Installation
Ceiling installation is carried out using the vibration-damping fastening elements included in the scope of delivery.

Heat exchanger
Large aluminium cross counterflow heat exchanger with up to 90 % heat recovery efficiency. Dismantling is possible in a few steps. Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional humidity recovery of up to 50 %.

Fans
Two low-noise, high-performance EC fans with backward curved impellers for high energy efficiency.

Sensor system
Integrated CO_2 sensor system. Alternatively, this can be replaced by an external sensor (VOC, CO_2 or humidity) positioned in the room. KWL Yoga can also be controlled with a motion sensor (combination not possible!) instead of the sensors.

Air flow
Supply air on front side, two extract air openings on the underside of the unit. Intake and exhaust air connectors are equipped with spring-loaded shutters.

Condensate connection
Condensate connection horizontal (wall side), optionally via ball siphon in surface-mounted or flush-mounted design or via condensate pump.

Air filter, VDI-certified
Clean intake air flow via ISO ePM_1 60 % filter (F7). Two filters for extract air: ISO Coarse 60 % (G4); optionally available: ISO ePM_{10} 60 % (M5).

Summer operation
Equipped with automatic bypass function (bypassing the heat exchanger to use the cool night air for controlling the room temperature) as standard.

	Without electrical preheater/ without electrical after-heater	Without electrical preheater/ with electrical after-heater	Without electrical preheater/ with warm water after-heater	With electrical preheater/ without after-heater	With electrical preheater/with electrical after-heater
	KWL YOGA Style 700 Ref. no. 40020 **KWL YOGA Style 700 ET** Ref. no. 40673	**KWL YOGA Style 700 EN** Ref. no. 40022 **KWL YOGA Style 700 EN ET** Ref. no. 40674	**KWL YOGA Style 700 WW** Ref. no. 40024 **KWL YOGA Style 700 WW ET** Ref. no. 40675	**KWL YOGA Style 700 EV** Ref. no. 40026 **KWL YOGA Style 700 EV ET** Ref. no. 40676	**KWL YOGA Style 700 EV/EN** Ref. no. 40028 **KWL YOGA Style 700 EV/EN ET** Ref. no. 40677
Intake/exhaust air connector diameter	315	315	315	315	315
Air volume V̇ m³/h (Min. - Max.)	300 - 900	300 - 900	300 - 900	300 - 900	300 - 900
Radiation L_{PA} dB(A) in 1 m / 3 m (at 0 Pa)					
– 340 m³/h	23 / 17	23 / 17	23 / 17	23 / 17	23 / 17
– 500 m³/h	28 / 22	28 / 22	28 / 22	28 / 22	28 / 22
– 700 m³/h	33 / 27	33 / 27	33 / 27	33 / 27	33 / 27
– 870 m³/h	35 / 29	35 / 29	35 / 29	35 / 29	35 / 29
Maximum power consumption total (incl. control) W	350	2600	350	2350	4600
Rated current total (incl. control) A	2.45	12.3	2.45	11.2	9.8
Voltage / frequency	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	3~, 400 V, 50 Hz
Protection category IP	20	20	20	20	20
Temperature operating range °C	-10 to +40	-10 to +40	-10 to +40	-20 to +40	-20 to +40
Installation temperature °C	+5 to +40	+5 to +40	+5 to +40	+5 to +40	+5 to +40
Weight approx. kg	200	202	202	202	204
Wiring diagram no.	1500	1500	1500	1500	1500

Dimensions KWL YOGA Style 700

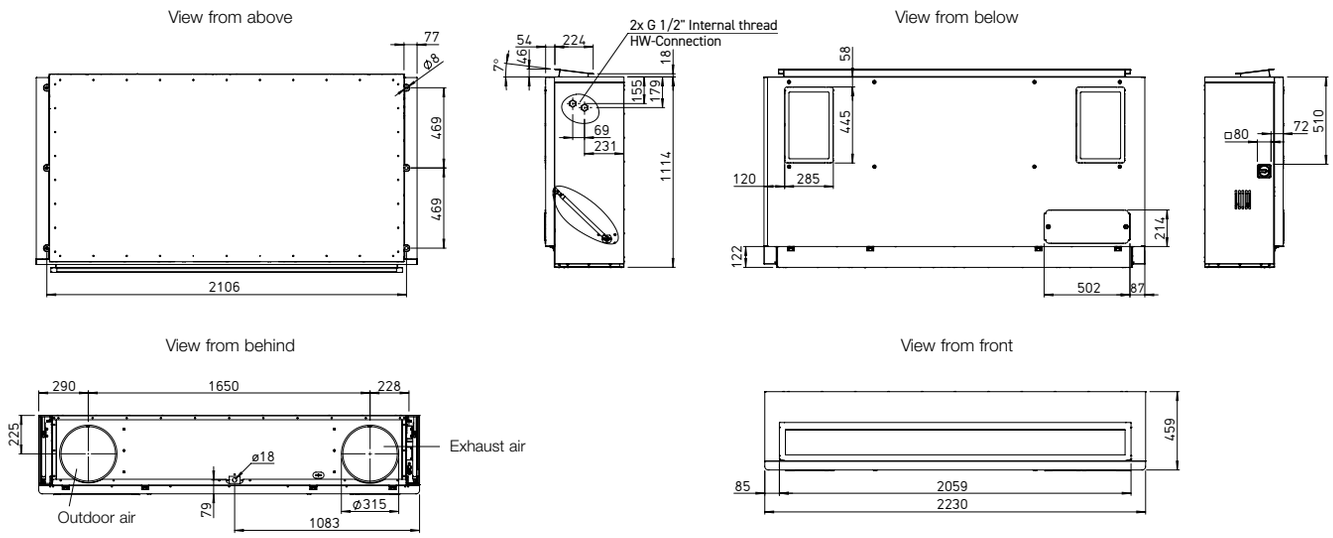

Dimensions in mm

Heat exchanger frost protection

The standard frost monitoring automatically regulates the supply air flow and the built-in electrical preheater, depending on the selected equipment.

After-heater

Unit variants with integrated post-heating (warm water or electrical after-heater) allow for convenient post-heating of the supply air. The target supply air temperature is set on the control element. The use of hydraulic unit type WHSH HE 24 V (0-10V), (accessories) is recommended for controlling the warm water heating element.

	With electrical preheater/ with warm water after-heater
	KWL YOGA Style 700 EV/WW Ref. no. 40030 **KWL YOGA Style 700 EV/WW ET** Ref. no. 40678
	315
	300 - 900
	23 / 17 28 / 22 33 / 27 35 / 29
	2350
	11.2
	1~, 230 V, 50 Hz
	20
	-20 to +40
	+5 to +40
	204
	1500

Power control

The included comfort control element with touch functionality and easy menu navigation provides the following functions:

- Demand-oriented ventilation, optionally with CO_2, VOC, or humidity sensor (1 sensor can be connected).
- Initial commissioning (automatic determination of system characteristic curve).
- Fire alarm contact connection.
- Weekly or daily programme.
- Automatic bypass (summer operation: use of cool night air).
- Pressure monitoring of filter contamination.
- Displays required filter replacement.
- 5 password-protected function levels can be configured.
- Control via central building control system possible (Modbus RTU and Modbus TCP, BACnet)
- Including control line cable (10 m)

Electrical connection

After removing the left side panel, the connection box is easily accessible on the outside of the casing. The isolator/main switch is located on the outside of the unit for easy maintenance. It can be locked using a padlock to prevent unauthorised access.

Sensors

Infrared motion sensor for detecting the presence of people in the room.

BWM	Ref. no. 08323

CO_2 sensor for measuring the CO_2 concentration.

AIR1/KWL-VOC 0-10V	No. 20250

VOC sensor for measuring the mixed gas concentration (VOC).

AIR1/KWL-CO2 0-10V	No. 20251

Humidity-temperature sensor for measuring the relative air humidity.

AIR1/KWL-FTF 0-10V	No. 20252

Control line cable

ALB EC-SK 20 20m	No. 06816
ALB EC-SK 40 40m	No. 06817

8-pin AWG24 twisted pair cable for the control element.

Installation accessories

Flush-mounted/wall-mounted siphon

KWL-KS WE	Ref. no. 40064

Ball-tube siphon

KWL-KS	Ref. no. 40065

Condensate submersible pump

KWL-KP-I	Ref. no. 40472

Hydraulic unit

WHSH HE 24V (0-10V)	No. 08318

Facade grille, circular

FGR 315	Ref. no. 40182

Filter, VDI-certified

Spare air filter (extract air)*
ISO Coarse 60 % (G4). Unit = 1 pc.
ELF-KWL YOGA 700/VDI/Coarse 60%
Ref. no. 40688

Spare air filter (extract air)*
ISO ePM_{10} 60 % (M5). Unit = 1 pc.
ELF-KWL YOGA 700/VDI/ePM10 60%
Ref. no. 40691

Spare air filter (intake air)
ISO ePM_1 60 % (F7). Unit = 1 pc.
ELF-KWL YOGA 700/VDI/ePM1 60%
Ref. no. 40694

*2 extract air filters are required per unit.

Attention: For spare air filters of older unit generations (orders before March 2023): Please contact us at export@heliosventilatoren.de

Important note

Further information on accessories can be found on page 158.

KWL YOGA Style 1000

Performance curve KWL YOGA Style 1000

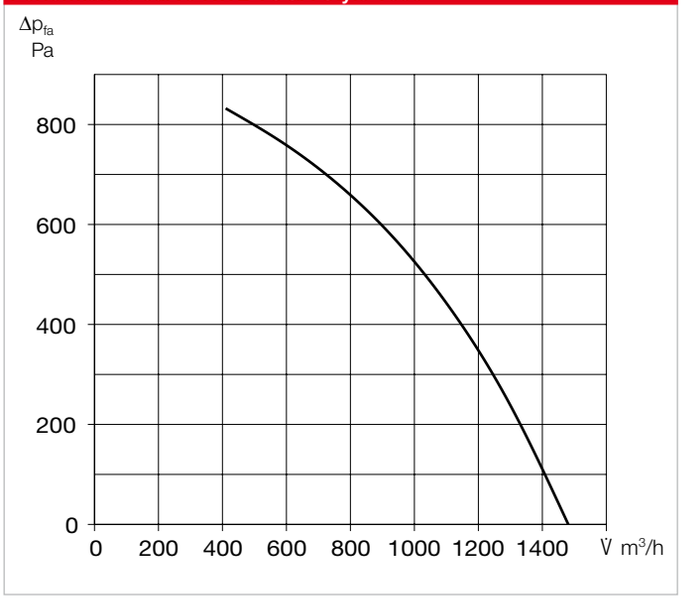

Decentralised compact ventilation units with heat recovery for the supply and extract ventilation of individual rooms, such as classrooms, recreation rooms, offices, commercial units, medical practices and many more. Equipped with highly-efficient aluminium heat exchangers and energy-saving EC motors. Automatic shutters for intake and exhaust prevent cold draughts when the fans are deactivated. The flow-optimised supply air grille allows draught-free ventilation, even in large rooms, through the optimal use of the Coanda effect. Includes a touch control element for easy operation and configuration of unit functions.

Casing
Made of galvanised steel sheet, the casing parts are painted white/powder-coated. The double-walled unit casing is equipped with 40 mm thermal and sound insulation on all sides. Easy installation and maintenance due to large inspection panel.

Installation
Ceiling installation is carried out using the vibration-damping fastening elements included in the scope of delivery.

Heat exchanger
Large aluminium cross counterflow heat exchanger with up to 90 % heat recovery efficiency. Dismantling is possible in a few steps. Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional humidity recovery of up to 50 %.

Fans
Two low-noise, high-performance EC fans with backward curved impellers for high energy efficiency.

Sensor system
Integrated CO_2 sensor system. Alternatively, this can be replaced by an external sensor (VOC, CO_2 or humidity) positioned in the room. KWL Yoga can also be controlled with a motion sensor (combination not possible!) instead of the sensors.

Air flow
Supply air on front side, two extract air openings on the underside of the unit. Intake and exhaust air connectors are equipped with spring-loaded shutters.

Condensate connection
Condensate connection horizontal (wall side), optionally via ball siphon in surface-mounted or flush-mounted design or via condensate pump.

Air filter, VDI-certified
Clean intake air flow via ISO ePM_1 60 % filter (F7). Two filters for extract air: ISO Coarse 60 % (G4); optionally available: ISO ePM_{10} 60 % (M5).

Summer operation
Equipped with automatic bypass function (bypassing the heat exchanger to use the cool night air for controlling the room temperature) as standard.

	Without electrical preheater/ without electrical after-heater	Without electrical preheater/ with electrical after-heater	Without electrical preheater/ with warm water after-heater	With electrical preheater/ without after-heater	With electrical preheater/with electrical after-heater
	KWL YOGA Style 1000 Ref. no. 40032 **KWL YOGA Style 1000 ET** Ref. no. 40679	**KWL YOGA Style 1000 EN** Ref. no. 40034 **KWL YOGA Style 1000 EN ET** Ref. no. 40680	**KWL YOGA Style 1000 WW** Ref. no. 40036 **KWL YOGA Style 1000 WW ET** Ref. no. 40681	**KWL YOGA Style 1000 EV** Ref. no. 40203 **KWL YOGA Style 1000 EV ET** Ref. no. 40682	**KWL YOGA Style 1000 EV/EN** Ref. no. 40040 **KWL YOGA Style 1000 EV/EN ET** Ref. no. 40683
Intake/exhaust air connector diameter	315	315	315	315	315
Air volume V̇ m³/h (Min. - Max.)	500 - 1400	500 - 1400	500 - 1400	500 - 1400	500 - 1400
Radiation L_{PA} dB(A) in 1 m / 3 m (at 0 Pa)					
– 410 m³/h	24 / 18	24 / 18	24 / 18	24 / 18	24 / 18
– 800 m³/h	30 / 24	30 / 24	30 / 24	30 / 24	30 / 24
– 1000 m³/h	34 / 28	34 / 28	34 / 28	34 / 28	34 / 28
– 1480 m³/h	42 / 36	42 / 36	42 / 36	42 / 36	42 / 36
Maximum power consumption total (incl. control) W	900	3900	900	2900	6900
Rated current total (incl. control) A	4.0	8.3	4.0	12.7	12.7
Voltage / frequency	1~, 230 V, 50 Hz	3~, 400 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	3~, 400 V, 50 Hz
Protection category IP	20	20	20	20	20
Temperature operating range °C	-10 to +40	-10 to +40	-10 to +40	-17 to +40	-20 to +40
Installation temperature °C	+5 to +40	+5 to +40	+5 to +40	+5 to +40	+5 to +40
Weight approx. kg	267	270	270	270	273
Wiring diagram no.	1500	1500	1500	1500	1500

Dimensions KWL YOGA Style 1000

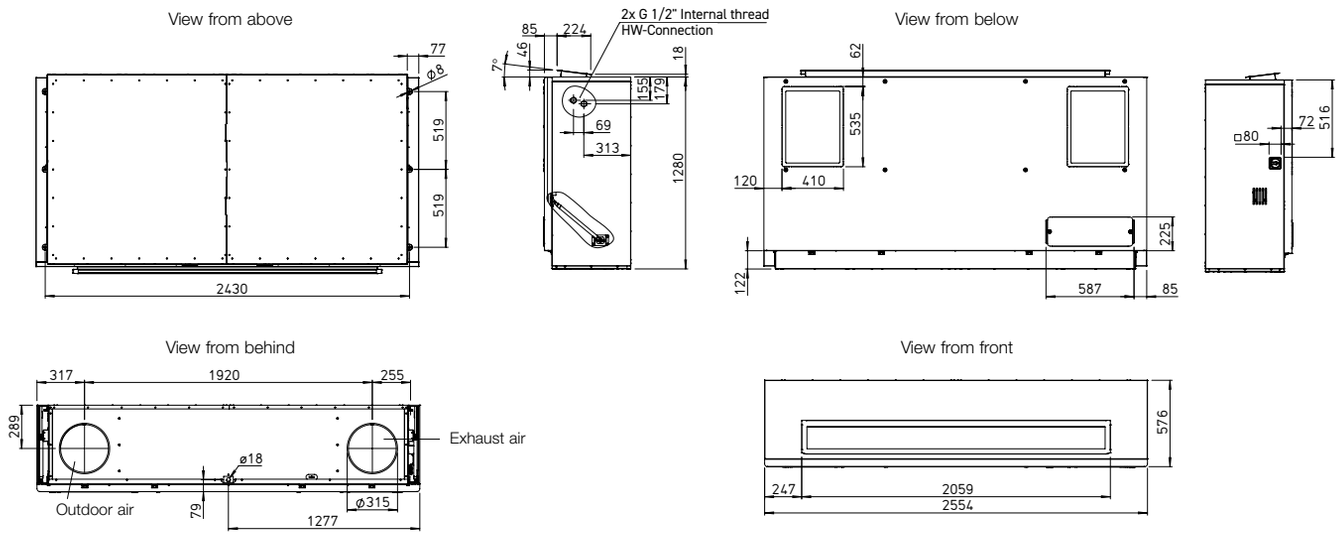

Dimensions in mm

Heat exchanger frost protection

The standard frost monitoring automatically regulates the supply air flow and the built-in electrical preheater, depending on the selected equipment.

After-heater

Unit variants with integrated post-heating (warm water or electrical after-heater) allow for convenient post-heating of the supply air. The target supply air temperature is set on the control element. The use of hydraulic unit type WHSH HE 24 V (0-10V), (accessories) is recommended for controlling the warm water heating element.

	With electrical preheater/ with warm water after-heater
	KWL YOGA Style 1000 EV/WW Ref. no. 40205 **KWL YOGA Style 1000 EV/WW ET** Ref. no. 40684
	315
	500 - 1400
	24 / 18 30 / 24 34 / 28 42 / 36
	2900
	12.7
	1~, 230 V, 50 Hz
	20
	-17 to +40
	+5 to +40
	273
	1500

Power control

The included comfort control element with touch functionality and easy menu navigation provides the following functions:

- ▢ Demand-oriented ventilation, optionally with CO_2, VOC, or humidity sensor (1 sensor can be connected).
- ▢ Initial commissioning (automatic determination of system characteristic curve).
- ▢ Fire alarm contact connection.
- ▢ Weekly or daily programme.
- ▢ Automatic bypass (summer operation: use of cool night air).
- ▢ Pressure monitoring of filter contamination.
- ▢ Displays required filter replacement.
- ▢ 5 password-protected function levels can be configured.
- ▢ Control via central building control system possible (Modbus RTU and Modbus TCP, BACnet)
- ▢ Including control line cable (10 m)

Electrical connection

After removing the left side panel, the connection box is easily accessible on the outside of the casing. The isolator/main switch is located on the outside of the unit for easy maintenance. It can be locked using a padlock to prevent unauthorised access.

Sensors

Infrared motion sensor for detecting the presence of people in the room.

BWM	Ref. no. 08323

CO_2 sensor for measuring the CO_2 concentration.

AIR1/KWL-VOC 0-10V	No. 20250

VOC sensor for measuring the mixed gas concentration (VOC).

AIR1/KWL-CO2 0-10V	No. 20251

Humidity-temperature sensor for measuring the relative air humidity.

AIR1/KWL-FTF 0-10V	No. 20252

Control line cable

ALB EC-SK 20 20m	No. 06816
ALB EC-SK 40 40m	No. 06817

8-pin AWG24 twisted pair cable for the control element.

Installation accessories

Flush-mounted/wall-mounted siphon

KWL-KS WE	Ref. no. 40064

Ball-tube siphon

KWL-KS	Ref. no. 40065

Condensate submersible pump

KWL-KP-I	Ref. no. 40472

Hydraulic unit

WHSH HE 24V (0-10V)	No. 08318

Facade grille, circular

FGR 315	Ref. no. 40182

Filter, VDI-certified

Spare air filter (extract air)*
ISO Coarse 60 % (G4). Unit = 1 pc.
ELF-KWL YOGA 1000/VDI/Coarse 60%
Ref. no. 40689

Spare air filter (extract air)*
ISO ePM_{10} 60 % (M5). Unit = 1 pc.
ELF-KWL YOGA 1000/VDI/ePM10 60%
Ref. no. 40692

Spare air filter (intake air)
ISO ePM_1 60 % (F7). Unit = 1 pc.
ELF-KWL YOGA 1000/VDI/ePM1 60%
Ref. no. 40695

*2 extract air filters are required per unit.

Attention: For spare air filters of older unit generations (orders before March 2023): Please contact us at export@heliosventilatoren.de

Important note

Further information on accessories can be found on page 158.

KWL-KS WE

Flush-mounted/wall-mounted siphon

Flush-mounted condensate siphon for ventilation units, for odourless discharge of condensate in the sewage system. Desiccation-safe and cleanable by removing siphon cartridge. Incl. plug-in seal (rubber) for Ø 20 – 32 mm. Vertical outlet connector DN32. Structural protection can be cut to installation depth. Incl. odour barrier, pursuant to EN 681, DIN 19541.

Technical data	KWL-KS WE Ref. no. 40064
Material	Polypropylene (PP) and ABS
Drainage capacity l/s	0.15
Min. - max. duct length (feed) in m	0.2 – 3.5
Minimum installation depth in mm	60
Condensate line connection	External Ø 20 – 32 mm / Internal Ø 18 mm
Dimensions (L x W x H) in mm	110 x 110 x 60
Weight approx. kg	0.25

KWL-KS

Ball-tube siphon

Ball-tube siphon for ventilation units, for odourless discharge of condensate in the sewage system. Desiccation-safe. Incl. plug-in seal (rubber) for Ø 9 – 29 mm. Horizontal outlet connector DN40.

Technical data	KWL-KS Ref. no. 40065
Material	Polypropylene (PP)
Drainage capacity l/s	0.6
Drain connection	DN40

KWL-KP-I

Condensate submersible pump

Condensate pump for unit-integrated use in ventilation units, if the condensate connection with a downward slope to a waste water pipe is not possible. The submersible pump is placed directly in the condensate pan. The maximum flow rate is 12 l/h at 0 m delivery height. 9 l/h at 5 m delivery head. Protection class: IP68. Incl. alarm circuit.

KWL-KP-I	Ref. no. 40472

WHSH HE 24 V (0-10V)

Hydraulic unit

Controls the water temperature of the PWW heater element by means of three point valve actuator 24 V (0-10 V) and thus the thermal output which is conveyed to the air. Delivered as complete unit, incl. flow/return temperature display, circulation pump and flexible connecting pipes.

WHSH HE 24V (0-10V)	Ref. no. 08318

ALB EC-SK

Control line cable

ALB EC-SK 20 20m	Ref. no. 06816
ALB EC-SK 40 40m	Ref. no. 06817

8-pin AWG24 twisted pair cable for the control element.

AIR1/KWL-VOC 0-10V / -CO2 0-10V / -FTF 0-10V

Room sensor

For measuring the CO_2, mixed gas (VOC) concentration or relative humidity. Dim. mm (W x H x D) 85 x 85 x 27

VOC sensor for measuring the mixed gas concentration (VOC).

AIR1/KWL-VOC 0-10V	Ref. no. 20250

CO_2 sensor for measuring the CO_2 concentration.

AIR1/KWL-CO2 0-10V	Ref. no. 20251

Humidity-temperature sensor for measuring the relative air humidity.

AIR1/KWL-FTF 0-10V	Ref. no. 20252

BWM

Infrared motion sensor

Motion sensor for detecting the presence of people in the room. Wall installation (surface mounted) (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Technical data	**BWM** Ref. no. 08323
Material casing	ABS plastic, white (similar RAL 9010)
Protection class	III
Protection category	IP30
Electrical connection	0.14 – 1.5 mm^2 (screw terminals)
Dimensions in mm (W x H x D)	85 x 85 x 27

FGR

Facade grille, circular

For flush covering of ventilation openings on the facade. Can be used for circular outdoor and exhaust air ducts. Two holes in the pipe spigot allow secure fastening with screws, to be provided by customer.
Solid aluminium construction. Fixed blades with stainless steel wire mesh behind, mesh size 10 x 10 mm.

FGR 250	Ref. no. 40181
FGR 315	Ref. no. 40182

For more information, see page 134.

ELF-KWL YOGA

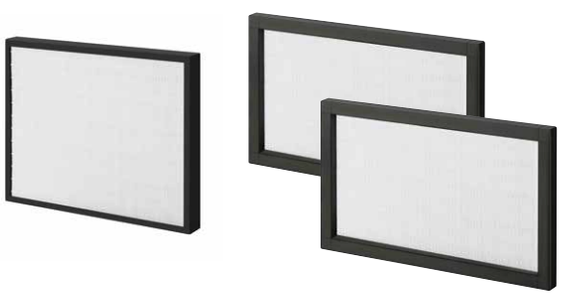

Intake air filter Extract air filter*

Filter, VDI-certified

Spare air filter (extract air)* ISO Coarse 60 % (G4). Unit = 1 pc.

ELF-KWL YOGA 400/VDI/Coarse 60%	Ref. no. 40687
ELF-KWL YOGA 700/VDI/Coarse 60%	Ref. no. 40688
ELF-KWL YOGA 1000/VDI/Coarse 60%	Ref. no. 40689

Spare air filter (extract air)* ISO ePM_{10} 60 % (M5). Unit = 1 pc.

ELF-KWL YOGA 400/VDI/ePM10 60%	Ref. no. 40690
ELF-KWL YOGA 700/VDI/ePM10 60%	Ref. no. 40691
ELF-KWL YOGA 1000/VDI/ePM10 60%	Ref. no. 40692

Spare air filter (intake air) ISO ePM_1 60 % (F7). Unit = 1 pc.

ELF-KWL YOGA 400/VDI/ePM1 60%	Ref. no. 40693
ELF-KWL YOGA 700/VDI/ePM1 60%	Ref. no. 40694
ELF-KWL YOGA 1000/VDI/ePM1 60%	Ref. no. 40695

* 2 extract air filters are required per unit.

Attention: For spare air filters of older unit generations (orders before March 2023): Please contact us at export@heliosventilatoren.de

Everything from one source. For an ideal functioning of the KWL® system.

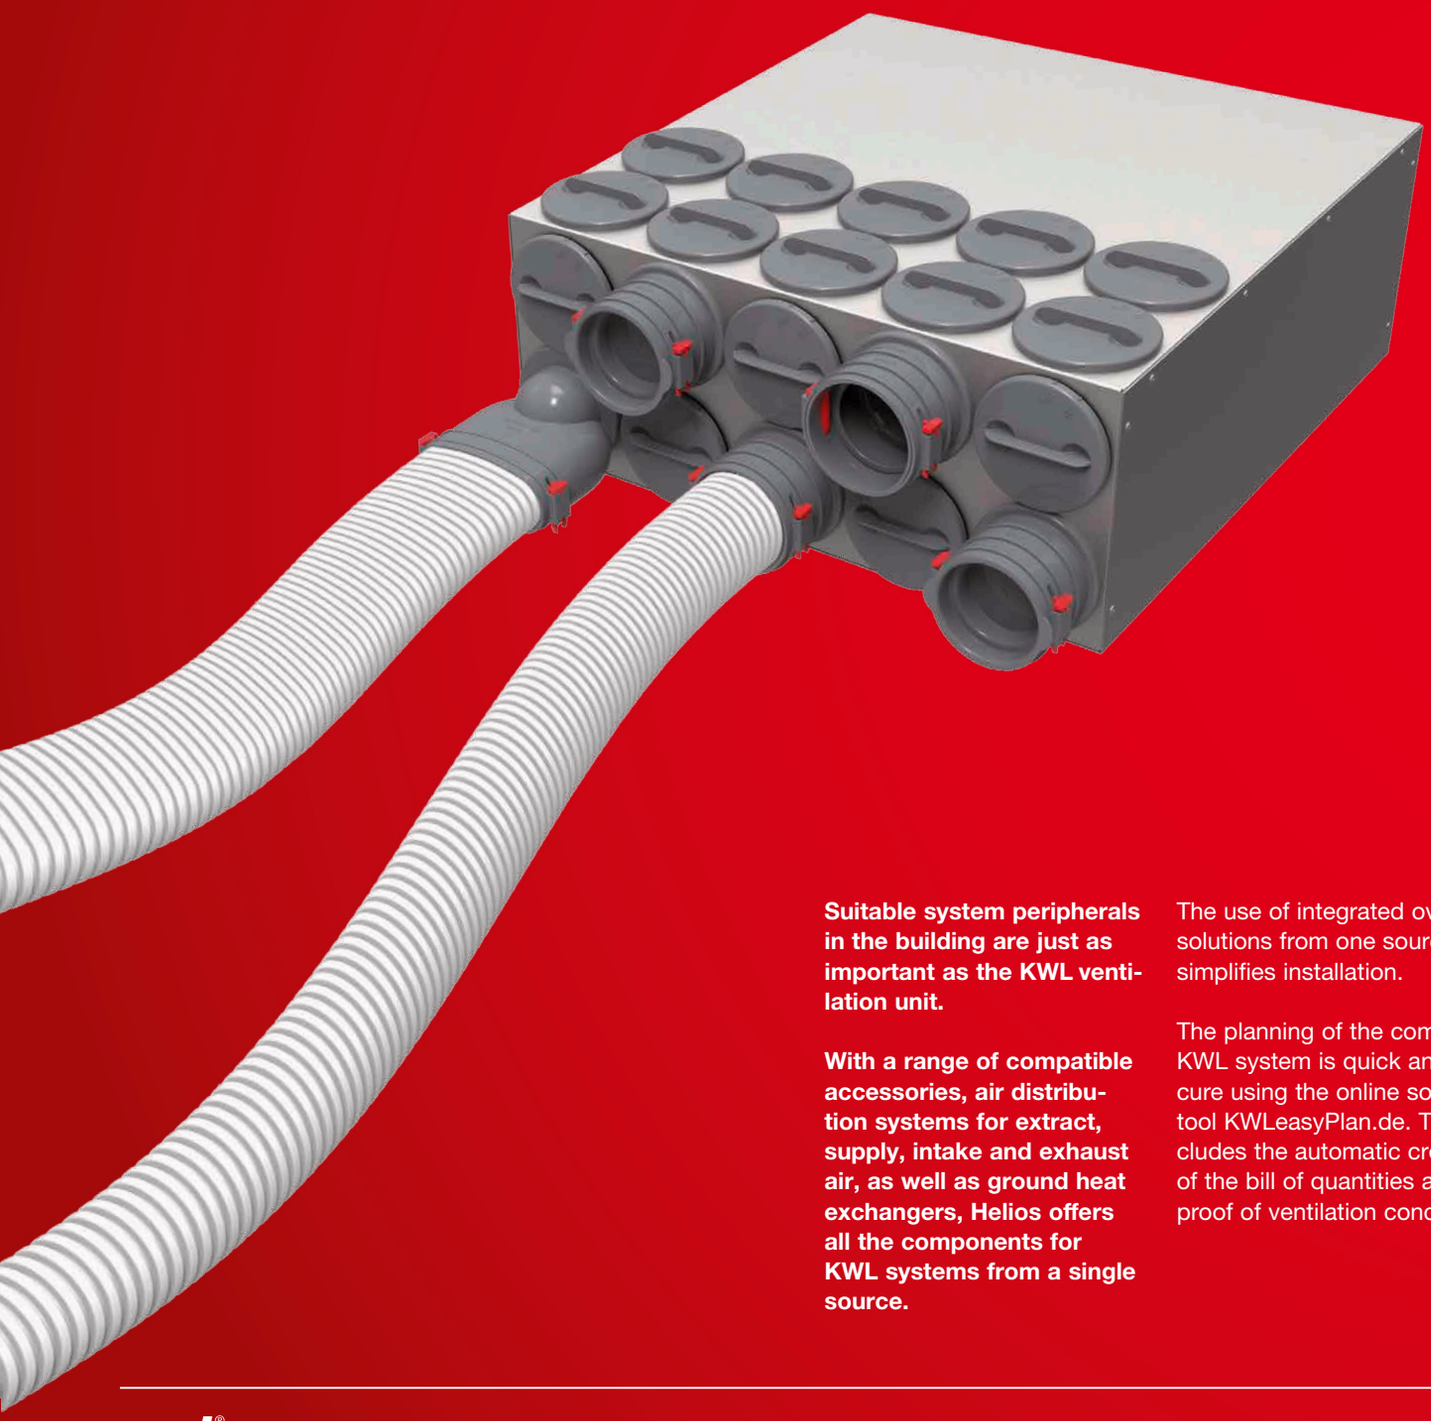

Suitable system peripherals in the building are just as important as the KWL ventilation unit.

With a range of compatible accessories, air distribution systems for extract, supply, intake and exhaust air, as well as ground heat exchangers, Helios offers all the components for KWL systems from a single source.

The use of integrated overall solutions from one source simplifies installation.

The planning of the complete KWL system is quick and secure using the online software tool KWLeasyPlan.de. This includes the automatic creation of the bill of quantities and proof of ventilation concept.

Accessories

180f

Flexible duct system FlexPipe

The right solution for every type of installation. FlexPipe*plus* combines the proven round duct concept with oval components.

This makes the planning and installation of complete ventilation systems with heat recovery exceptionally straightforward and supports standards-compliant planning and implementation.

FlexPipe*plus* offers a high degree of flexibility whilst minimising the number of components.

162ff

Duct system IsoPipe and air distribution system RenoPipe

IsoPipe is the practical alternative to spiral duct installation with subsequent thermal insulation. Since it is already fully insulated, IsoPipe is ideally suitable for intake air and exhaust air ducting as well as supply air and extract air ducting in basements or low-temperature zones.

RenoPipe is the perfect solution for energy-saving renovations and it is simply surface-mounted to the ceiling or wall.

174ff

KWL MultiZoneBox

When combined with a central building KWL unit from Helios, the MultiZoneBox ensures demand-oriented ventilation in multi-floor buildings.

Supply/extract air-side volume flow control, sound insulation, air distribution and intelligent system control – the KWL MultiZoneBox combines all seven components in one unit.

170f

KWL HygroBox and ground heat exchanger

As an active humidification unit, the **KWL HygroBox** helps maintain a comfortable level of indoor humidity all year round and can help prevent damage to furniture and floor coverings caused by dryness.

Optional **ground-to-brine or ground-to-air heat exchangers** pre-condition the outside air before it flows into the ventilation unit. This helps to reduce energy consumption in winter, whilst helping to lower the outside air temperature in summer.

182ff

flex*pipe*plus round and oval ducting system. Arbitrarily combinable.

flex*pipe*plus is the further development of the successful flex*pipe* air distribution system and it combines round and oval ducts in one smart system package with all conceivable round-oval combinations.

The oval duct has the identical hydraulic cross-section and pressure loss as the round duct as well as a point-symmetric design.
This results in unique advantages:

- No matter if it's planning and layout or installation and adjustment or maintenance, round and oval pipe behave completely identical.
- Depending on the structural circumstances, the optional change between round and oval ducts is possible using adapters, both in line and away from the distribution box. This offers a high degree of flexibility in planning and installation.
- For each application, an option can be selected that is both suitable from a construction perspective and economically attractive. The space-saving oval duct is mainly used if low installation heights are required.
- The round-oval compatibility results in low parts diversity. The stocking and consultation processes are greatly simplified. The installation is almost intuitive.
- The point-symmetric oval design allows installation from horizontal to vertical without the use of adapters for position correction.

Reference
flex*pipe* round duct system with ext. Ø 63 mm, int. 52 mm
for volume flows up to 20 m³/h
see page172

flex*pipe*plus is available in two designs which can be combined as required:

- FRS 75, round:
  External Ø: 75 mm, internal: 63 mm for volume flows up to 30 m³/h. For installation in concrete ceilings. High ring strength (STIS ≥ 10 kN/m² according to DIN EN 9969). Bending radius horizontal and vertical 150 mm.
- FRS 51, oval:
  51 x 114 mm, for volume flows up to 30 m³/h, ideal for space-saving installation e.g. on unfinished floors or in walls. Bending radius horizontal 300 mm, vertical 200 mm.

Installation, handling, commissioning

- Ultra-simple planning thanks to identical duct cross-sections and pressure losses.
- Quick installation due to radial, flexible endless installation from the roll.
- Construction site-compliant handling due to its low weight.
- Quick commissioning due to minimal adjustment effort.
- Uniform air distribution.
- To ensure high standards of hygiene and easy cleaning.

Duct properties and advantages

- Special round and oval ventilation duct made of hygienically safe PE-HD new material.
- Two-layer design – externally corrugated and internally smooth and antistatic. This reduces pressure losses and minimises airflow noise and dirt deposits.
- The extreme horizontal and vertical bending elasticity of both duct geometries minimises the number of necessary moulded parts.
- The point-symmetric design allows the installation of the oval duct from horizontal to vertical, upwards or downwards, without the use of adapters.

Duct concept, installation

- Mounting clips on all moulded parts for secure fixation to floors, walls or ceilings.
- Detachable mounting brackets guarantee quick, tear-proof duct fixation to all connection points.
- No additional cross talk silencer due to sound-insulating distribution box.
- Precisely fitting sealing system on all fittings for reliable air transport.
- Aerodynamically optimised ceiling and floor boxes as well as wall outlets are available for the use of room-side inlet and outlet elements at the duct ends. These have two parallel duct connections for delivering the volume flows required according to DIN 1946-6 with low pressure loss.

flex*pipe*plus round duct in concrete ceiling

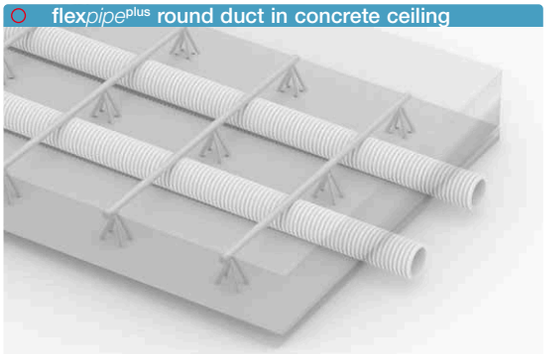

flex*pipe*plus oval duct on unfinished floor

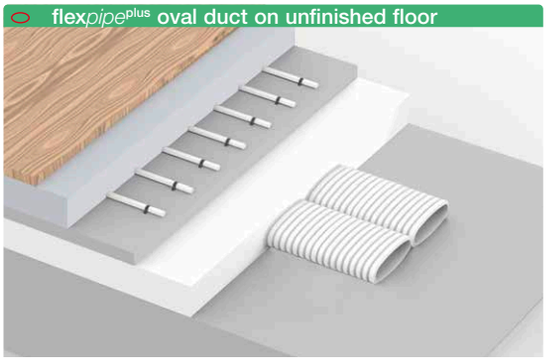

flex*pipe*plus allows any round-oval combination

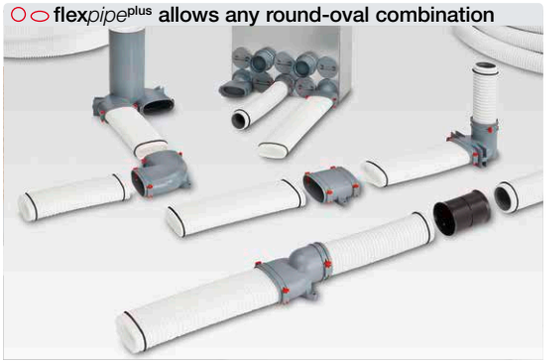

flex*pipe* vent. duct round



flex*pipe* vent. duct				
Type Ø 75 mm	Ref. no.	Length lin. m	Dim. in mm Ext. Ø	Int. Ø
FRS-R 75	02913	50	75	63
FRS-R 75/20	40973	20	75	63
Hygiene duct shutter cover				Unit
FRS-VD 75	02915			10 pcs.

Flexible round duct made of PE-HD, ideal for installation in concrete ceiling.
Includes two hygiene duct shutter covers, can also be ordered separately.

flex*pipe* vent. duct oval



flex*pipe* vent. duct (bundle = 20 lin. m)			
Type 114 x 51 mm	Ref. no.	Dim. in mm Width	Height
FRS-R 51	03850	114	51
Hygiene duct shutter cover			Unit
FRS-VD 51	03866		10 pcs.

Flexible oval duct made of PE-HD, for space-saving installation on unfinished floors, installation in walls or suspended ceilings. Includes two hygiene duct shutter covers, can also be ordered separately.

Cover, seal ring, bracket



Connector cover / seal ring / bracket		
Type Ø 75 mm	Ref. no.	Unit
Connector shutter cover with seal ring		
FRS-VDS 75	03855	1 pc.
Seal ring		
FRS-DR 75	02916	10 pcs.
Bracket, detachable		
FRS-FK	03854	10 pcs.

Cover, seal ring, bracket



Connector cover / seal ring / bracket		
Type 114 x 51 mm	Ref. no.	Unit
Connector shutter cover with seal ring		
FRS-VDS 51	03856	1 pc.
Seal ring		
FRS-DR 51	03864	10 pcs.
Bracket, detachable		
FRS-FK	03854	10 pcs.

Connecting sleeve



Connecting sleeve	
Type Ø 75 mm	Ref. no.
FRS-VM 75	02914

Connecting sleeve for round duct FRS-R 75 with tear-off protection on both sides, made of polyethylene.

Connecting sleeve



Connecting sleeve	
Type 114 x 51 mm	Ref. no.
FRS-VM 51	03862

Connecting sleeve for oval duct FRS-R 51.
With integrated fastening tabs, includes duct mounting brackets (4 pcs.).
Made of impact-resistant polypropylene.

Short bend 90°



Short bend 90°	
Type Ø 75 mm	Ref. no.
FRS-B 75	02994

Short bend 90° for bending radii < 2 x round duct external diameter. Horizontal and vertical application with tear-off protection on both sides.
Made of galvanised steel sheet.

Bend horizontal / vertical



Bend horizontal / vertical	
Type 114 x 51 mm	Ref. no.
FRS-BH 51	03863
FRS-BV 51	03859

Horizontal or vertical bend 90°.
With integrated fastening tabs, includes duct mounting brackets (4 pcs.).
Made of impact-resistant polypropylene.

Optional possibility to combine round and oval ducts

- With **flex*pipe*plus** from Helios, you rely on <u>one</u> system and you have the ideal solution at your fingertips at all times, depending on building requirements.
- The ultra-flat (only 51 mm) oval duct is used if low installation heights are required. The proven duct lends itself for direct embedding in concrete ceilings.
- Thanks to the identical hydraulic cross-sections and pressure losses of the two ducts and due to well-conceived system components, round and oval ducts can be combined in any way – both in line and away from the distribution box.

Vertical and horizontal adapters allow any round/oval, oval/oval and round/round combination.

The distribution boxes can be equipped with round and oval single connectors and mixed connectors.

Adapter straight / vertical



Adapter straight / vertical	
Type Ø 75 mm / 114 x 51 mm	Ref. no.
Adapter straight	
FRS-ÜG 51-75	03861
Adapter vertical	
FRS-ÜV 51-75	03860

Horizontal and vertical adapter from round duct FRS-R 75 to oval duct FRS-R 51.
With integrated fastening tabs, includes duct mounting brackets (4 pcs.).
Made of impact-resistant polypropylene.

Mounting clip



Mounting clip		
Type Ø 75 mm / 114 x 51 mm	Ref. no.	Unit
FRS-BS	03869	10 pcs.

Mounting clip for round duct FRS-R 75 and oval duct FRS-R 51.
For non-slip duct fixation.
Made of galvanised steel sheet.

Ceiling / wall box ○



Ceiling / wall box	
Type Ø 75 mm	Ref. no.
FRS-DWK 2-75/125 ○	03857
Extension for ceilings > 240 mm	
FRS-VV 125 ○ ⬭	03906

Ceiling / wall box for max. 2 round ducts FRS-R 75. For connection of supply / extract air valves DN 125. Height marks can be shortened to fit. Per 1 pc. connector blind cover DN 75, DN 125.

1) Integr. mounting clips, duct mounting brackets (4 pcs.), made of impact-resistant polypropylene.

Ceiling / wall box ⬭



Ceiling / wall box	
Type 114 x 51 mm	Ref. no.
FRS-DWK 2-51/125 ⬭	03858
Extension for ceilings > 240 mm	
FRS-VV 125 ○ ⬭	03906

Ceiling / wall box for max. 2 oval ducts FRS-R 51. For connection of supply / extract air valves DN 125. Height marks can be shortened to fit. Per 1 pc. connector blind cover 51 mm, DN 125.

2) Integr. mounting clips, duct mounting brackets (4 pcs.), made of impact-resistant polypropylene.

Multi-floor box ○



Multi-floor box	
Type Ø 75 mm	Ref. no.
FRS-MBK 2-75 ○	03872

Multi-floor box for connection of max. 2 round ducts FRS-R 75. Suitable for embedding in concrete ceiling, consists of:
- Floor box with air volume control insert in robust sheet metal design
- 2 pcs. connectors (round) and 1 pc. connector cover with seal (round)

Wall / floor box ⬭



Wall / floor box	
Type 114 x 51 mm	Ref. no.
FRS-WBK 2-51 ⬭	03877

Wall / floor box for connection of max. 2 oval ducts FRS-R 51. Installation in walls or on unfinished floor, consists of:
- Plastic box made of impact-resistant polypropylene with air volume control insert. For use with FRS-WGS or FRS-BGS.
- 1 pc. connector cover with seal (oval).

Floor grille set ○ ⬭



Floor grille set	
Type	Ref. no.
FRS-BGS 1 ○ ⬭	03878

Floor grille set made of stainless steel for multi-floor box FRS-MBK 2-75 and wall / floor box FRS-WBK 2-51, consists of:
- Grille frame with height adjustment for barrier-free installation in the floor covering
- Anti-puncture design floor grille
- Insert filter (replacement filter mats ELF-BGS, Ref. no. 03914, unit = 2 pcs.)

Wall grille set ⬭



* **Design 1:** FRS-WGS 1/1 E

Wall grille set		
Type	Ref. no.	
FRS-WGS 1 ⬭	03881	white
FRS-WGS 2 ⬭	03882	white
FRS-WGS 3 ⬭	03883	white
FRS-WGS 1 E ⬭	03886	Stainl. steel
FRS-WGS 2 E ⬭	03892	Stainl. steel
FRS-WGS 3 E ⬭	03904	Stainl. steel

Wall grille set with installation frame and insert filter for FRS-WBK 2-51. See p. 168 for grille designs.

Floor box set ○



Floor box set	
Type Ø 75 mm	Ref. no.
FRS-BKGS 2-75 ○	09992

Floor box set consists of:
- 1 pc. floor box for grille connection DN 160
- 1 pc. floor grille made of brushed stainless steel with adjustable volume flow
- 1 pc. cover

Wall outlet ○



* FRS-WDV 2-75/100

Wall outlet for valve connection		
Type Ø 75 mm	Ref. no.	Ø D mm
FRS-WDV 2-75/100 ○	09621	100
FRS-WDV 2-75/125 ○	09622	125

Wall outlet incl. plaster / formwork lid and cover (1 pc.). For connection of supply air or extract air valves DN 100 or DN 125.

Wall outlet set ○



Wall outlet set, straight	
Type Ø 75 mm	Ref. no.
FRS-WDS 2-75 ○	09994

Wall outlet set consists of:
- Wall outlet with sliding connector
- Wall outlet white (FK-WA 200 W), 250 x 103 mm
- 1 pc. cover

Angle bend set ○



Angle bend set, 90°	
Type Ø 75 mm	Ref. no.
FRS-WBS 2-75 ○	09996

Angle bend set consists of:
- Angle bend with sliding connector
- Wall outlet white (FK-WA 200 W), 250 x 103 mm
- 1 pc. cover

Basic set package ○

Basic set package		
Type	Ref. no.	Ø D mm
FRS-RP 75 ○	09397	75

flex*pipe* basic set package consists of:
- 3 pcs. FRS-R 75 (Ref. no. 02913)
- 2 pcs. FRS-VK 10-75/160 (Ref. no. 03847)
- 8 pcs. FRS-DWK 2-75/125 (Ref. no. 03857)
- 7 pcs. FRS-B 75 (Ref. no. 02994)
- 7 pcs. FRS-VM 75 (Ref. no. 02914)
- 4 units FRS-DR 75 (Ref. no. 02916)
- 1 units FRS-VD 75 (Ref. no. 02915)
- 1 pcs. cold shrink tape KSB (Ref. no. 09343)

By choosing the Helios basic set package, you can save
- money due to the discounted package price.
- time, because everything is included to get started right away. There is no need for time consuming, annoying additional trips because little things are missing.

1) Cover with integrated seal FRS-VDS 75, Ref. no. 03855 and -VD 125, Ref. no. 03865. Cover can be used for the connector or duct connection opening on distribution box.

2) Cover with integrated seal FRS-VDS 51, Ref. no. 03856 and -VD 125, Ref. no. 03865. Can also be used as cover for the connector or duct connection opening on distribution box.

Multi-distribution box 4+1x ○



Multi-distribution box [1]		
Type Ø 75 mm	Ref. no.	Ø NW mm
FRS-MVK 4+1-75/125 ○	03843	125

For universal installation in/on unfinished concrete flooring. With height-adjustable mounting brackets. Duct connection DN 125 optionally horizontal or vertical. 10 connection options for up to 5 ventilation ducts FRS-R 75. With sound-absorbing cladding and large inspection opening.

Multi-distribution box 4+1x ⬭



Multi-distribution box 4+1x [1]		
Type 114 x 51 mm	Ref. no.	Ø NW mm
FRS-MVK 4+1-51/125 ⬭	03841	125

For universal installation on unfinished concrete flooring. With height-adjustable mounting brackets. Duct connection DN 125 optionally horizontal or vertical. 10 connection options for up to 5 oval ventilation ducts FRS-R 51. With sound-absorbing cladding and large inspection opening.

Multi-distribution box 5+2x ○



Fig.: FRS-MVK 5+2-75/160

Multi-distribution box 5+2x [1]		
Type Ø 75 mm	No.	Ø NW mm
FRS-MVK 5+2-75/160 ○	03836	160
FRS-MVK 5+2-75/160 H ○	03835	160

For universal installation in/on unfinished concrete flooring. With height-adjustable mounting brackets. Duct connection DN 160 optionally horizontal or vertical. Type FRS-MVK 5+2-75/160 H with 380 mm casing height and 3 x duct connection DN 160. 12 connection options for up to 7 ventilation ducts FRS-R 75.

Multi-distribution box 5+2x ⬭



Multi-distribution box 5+2x [1]		
Type 114 x 51 mm	Ref. no.	Ø NW mm
FRS-MVK 5+2-51/160 ⬭	03838	160

For universal installation on unfinished concrete flooring or as floor distributor. With height-adjustable mounting brackets. Duct connection DN 160 optionally horizontal or vertical. 12 connection options for up to 7 oval ventilation ducts FRS-R 51. With sound-absorbing cladding and large inspection opening.

Distribution box 10x ○



Distribution box 10-75 [2]		
Type Ø 75 mm	Ref. no.	Ø NW mm
FRS-VK 10-75/160 ○	03847	160

20 connection options for up to 10 ventilation ducts FRS-R 75. Can be installed as straight distributor, 90° distributor or combined. Mixed setup with oval connectors possible (Type FRS-ES 51, Ref. no. 03851). With sound-absorbing cladding and large inspection opening.

Distribution box 10x ⬭



Distribution box 10-51 [2]		
Type 114 x 51 mm	Ref. no.	Ø NW mm
FRS-VK 10-51/160 ⬭	03849	160

20 connection options for up to 10 oval ventilation ducts FRS-R 51. Can be installed as straight distributor, 90° distributor or combined. Mixed setup with round connectors possible (Type FRS-ES 75, Ref. no. 03852). With sound-absorbing cladding and large inspection opening.

Flat distribution box 6x ○



Distribution box 6-75, flat design [1]		
Type Ø 75 mm	Ref. no.	Ø NW mm
FRS-FVK 6-75/125 ○	03845	125

For connection of up to 6 ventilation ducts FRS-R 75. Installation as straight distributor. Mixed setup with oval connectors possible (Type FRS-ES 51, Ref. no. 03851). With sound-absorbing cladding and large inspection opening.

Distribution box 6x ○



Distribution box 6-75 [1]		
Type Ø 75 mm	Ref. no.	Ø NW mm
FRS-VK 6-75/125 ○	03846	125

12 connection options for up to 6 ventilation ducts FRS-R 75. Can be installed as straight distributor, 90° distributor or combined. Mixed setup with oval connectors possible (Type FRS-ES 51, Ref. no. 03851). With sound-absorbing cladding and large inspection opening.

Distribution box 15x ○



Distribution box 15-75 [2]		
Type Ø 75 mm	Ref. no.	Ø NW mm
FRS-VK 15-75/180 ○	03848	180

30 connection options for up to 15 ventilation ducts FRS-R 75. Can be installed as straight distributor, 90° distributor or combined. Mixed setup with oval connectors possible (Type FRS-ES 51, Ref. no. 03851). With sound-absorbing cladding and large inspection opening.

Combination distribution box ○



Fig.: Type L

Combination distribution box [1]		
Type Ø 75 mm	Ref. no.	Ø NW mm
FRS-KVK 6-75/125 L* ○	03873	125
FRS-KVK 6-75/125 R* ○	03874	125

* Supply air connection on left or right. Compact distribution box, ideal for adjoining extract air rooms. 2 x DN 100 for direct insertion of extract air valves DLV (see accessories). Supply air distribution via connection of up to 6 ventilation ducts FRS-R 75.

Connector, cover ○ ⬭

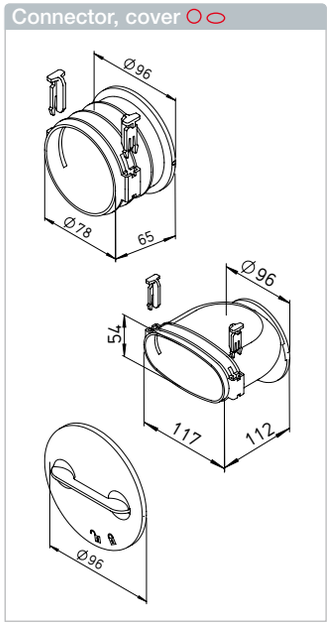

Connector, bayonet cap		
Type	Ref. no.	Unit
Connector, Ø 75 mm		
FRS-ES 75 ○	03852	1 pc.
Connector, 114 x 51 mm		
FRS-ES 51 ⬭	03851	1 pc.
Bayonet cap		
FRS-VDB ○ ⬭	03853	1 pc.

Additional connectors for connection of round ventilation duct FRS-R 75 or oval ventilation duct FRS-R 51 to distribution box. Easy and variable positioning using bayonet closure. Tight-closing, includes duct mounting brackets (2 pcs.), made of impact-resistant polypropylene. Bayonet cap for the connector openings on the distribution box.

[1] incl. 2 pcs. connector cover.

[2] incl. 4 pcs. connector cover.

Multi-distribution box 4+1x ○



Type Ø 75 mm	No.	Ø NW mm
FRS-MVK 4+1-75/125 ○	03843	125

Multi-distribution box 4+1x ⬭



Type 114 x 51 mm	No.	Ø NW mm
FRS-MVK 4+1-51/125 ⬭	03841	125

Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	23.5	30.6
250	24.2	25.3
500	19.3	18.3
1000	28.7	25.3
2000	30.8	39.0
4000	36.6	42.9
8000	38.3	40.8

Multi-distribution box 5+2x ○



Abb.: FRS-MVK 5+2-75/160

Type Ø 75 mm	No.	Ø NW mm
FRS-MVK 5+2-75/160 ○	03836	160
FRS-MVK 5+2-75/160 H ○	03835	160

Multi-distribution box 5+2x ⬭



Type 114 x 51 mm	No.	Ø NW mm
FRS-MVK 5+2-51/160 ⬭	03838	160

Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	21.0	28.8
250	16.5	24.7
500	24.6	28.0
1000	36.3	34.4
2000	35.2	40.2
4000	43.8	45.0
8000	46.1	41.1

Distribution box 10x ○



Type Ø 75 mm	No	Ø NW mm
FRS-VK 10-75/160 ○	03847	160

Distribution box 10x ⬭



Type 114 x 51 mm	No.	Ø NW mm
FRS-VK 10-51/160 ⬭	03849	160

Distribution box 6x ○



Type Ø 75 mm	No.	Ø NW mm
FRS-VK 6-75/125 ○	03846	125

Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	23.0	34.4
250	21.8	33.1
500	36.2	27.4
1000	29.4	26.9
2000	28.9	38.7
4000	34.4	44.2
8000	36.1	44.0

Flat distribution box 6x ○



Type Ø 75 mm	No.	Ø NW mm
FRS-FVK 6-75/125 ○	03845	125

Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	22.6	27.4
250	21.3	21.4
500	27.7	20.4
1000	28.8	20.2
2000	30.6	33.6
4000	42.6	40.1
8000	43.2	40.2

Distribution box 15x ○



Type Ø 75 mm	No.	Ø NW mm
FRS-VK 15-75/180 ○	03848	180

Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	26.8	30.9
250	19.4	30.2
500	28.4	25.3
1000	25.4	29.0
2000	30.8	39.8
4000	34.7	49.1
8000	34.9	53.0

Measured in accordance with DIN EN ISO 7235 and DIN EN ISO 11820.

flexpipe plus ceiling-integrated distribution element

With the ceiling-integrated distribution element, we are making it even easier for you to realise the perfect KWL ventilation system quickly and easily in the future. The distribution element is not only flexible in application due to its compact dimensions, but it also saves you the complicated duct insertion and removal from the concrete ceiling

Highlights:
- Intelligent, almost invisible solution for air distribution of **flexpipe plus** ducts in concrete ceilings for single-family houses and apartment buildings.
- Integrated height adjustment for different ceiling types.
- Installation without formwork damage and tool-free duct connection using a click system save time and money.

Installation in filigree ceiling:



Installation in raw concrete ceiling:



Distribution element 5x



Dimensions in mm

flexpipe distribution element 5x		
Type Ø 75 mm	Ref. no.	Ø NW mm
FRS-VE 5-75/160	40161	160

For universal installation in the unfinished concrete flooring. Duct connection DN 160 or DN 125 possible (duct connector RVBD 160 L or RVBD 160/125 required for this).
10 connection options for up to 5 FRS-R 75 ventilation ducts. Large inspection opening for easy cleaning incl. cover.

Fitting for duct connection



Dimensions in mm

Duct connector	
Type Ø 160/125 mm	Ref. no.
RVBD 160/125	40165

Duct connector for the connection of ventilation ducts/IsoPipe ducts DN 125.

Distribution element 9x



Dimensions in mm

flexpipe distribution element 9x		
Type Ø 75 mm	Ref. no.	Ø NW mm
FRS-VE 9-75/160	40162	160

For universal installation in the unfinished concrete flooring. Duct connection DN 160 or DN 125 possible (duct connector RVBD 160 L or RVBD 160/125 required for this).
12 connection options for up to 9 FRS-R 75 ventilation ducts. Large inspection opening for easy cleaning incl. cover.

Fitting for duct connection



Dimensions in mm

Duct connector long	
Type Ø 160 mm	Ref. no.
RVBD 160 L	40164

Duct connector for the connection of ventilation ducts/IsoPipe ducts DN 160.

flexpipe plus Silencer box

The ideal companion for the FRS-VE ceiling-integrated distribution element: The innovative FRS silencer box.

Highlights:
- Direct mounting on the ceiling-integrated distribution element for minimal space requirements, e.g. directly under the ceiling.
- Effective sound insulation properties. In combination with FRS-VE, values of up to 30 dB are achieved.
- Very good accessibility for easy cleaning thanks to extra-large inspection opening.
- Simple and flexible installation vertically on the wall or horizontally on the ceiling.

Silencer box



Dimensions in mm

flexpipe silencer box		
Type Ø 75 mm	Ref. no.	Ø NW mm
FRS-SDB 75/160	40163	75

Silencer and distribution box for combination with the FRS-VE. RVBD 160 L required for connection.
Horizontal and vertical installation possible.
4 optional connections 75 mm at the front.
Optional accessories:
Single connector ref. no. 03852.
Including: Mounting bracket, 75 mm cover and 160 mm cover.

Insertion losses

Type	Ref. no.	Insertion loss D_e dB at Hz						Average insertion loss
		125	250	500	1000	2000	4000	
FRS-SDB 75/160	40163	16	23	23	17	21	18	23

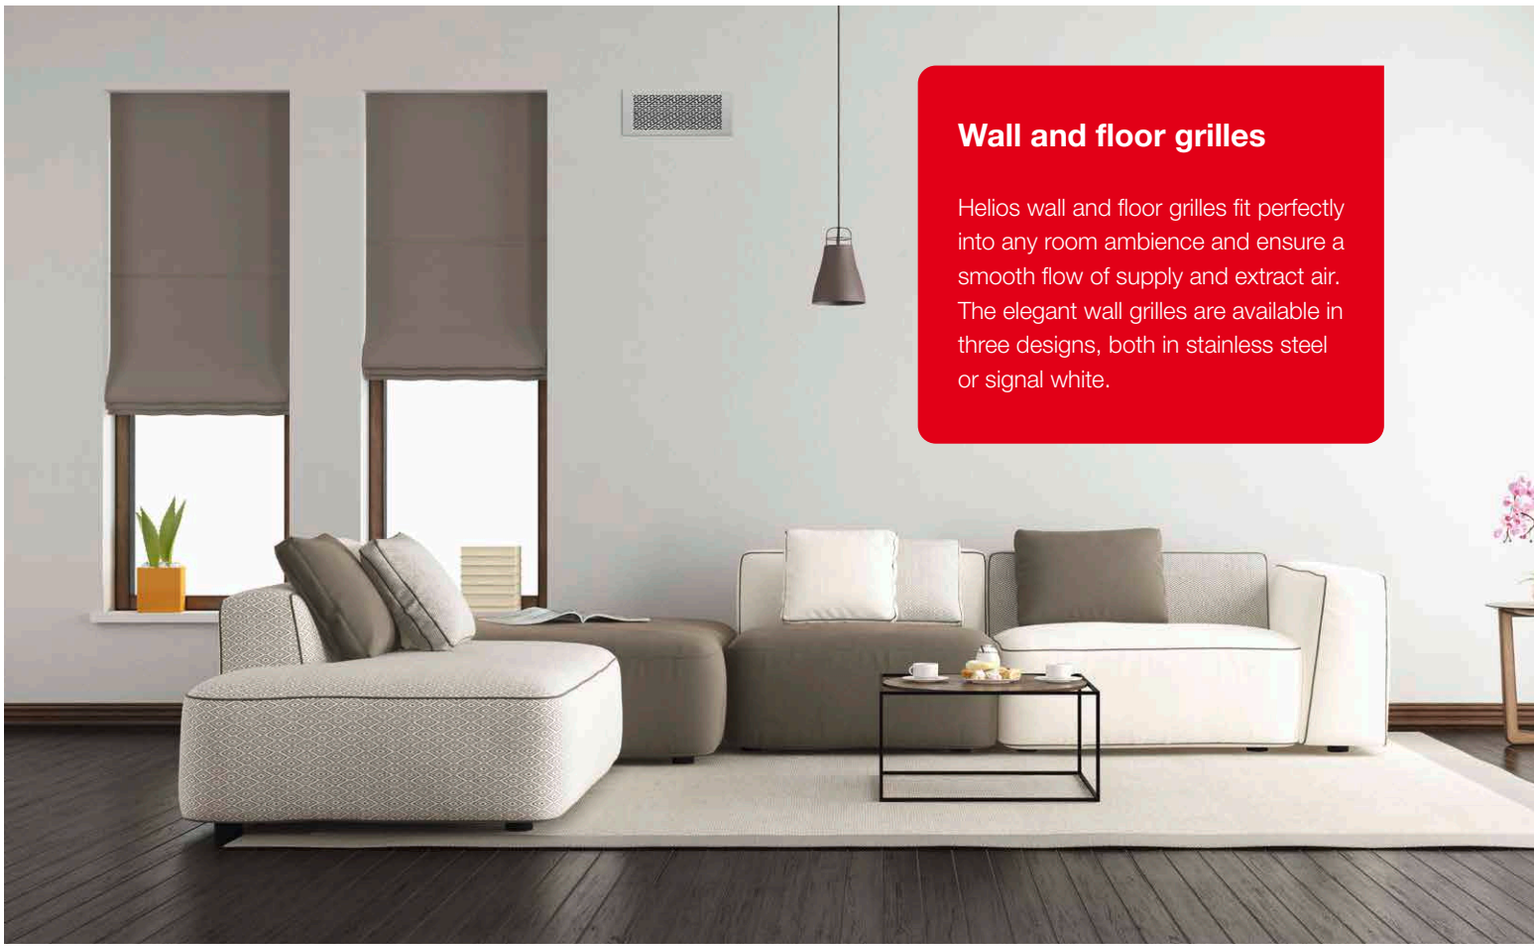

Wall and floor grilles

Helios wall and floor grilles fit perfectly into any room ambience and ensure a smooth flow of supply and extract air. The elegant wall grilles are available in three designs, both in stainless steel or signal white.

Design grilles for walls and floors

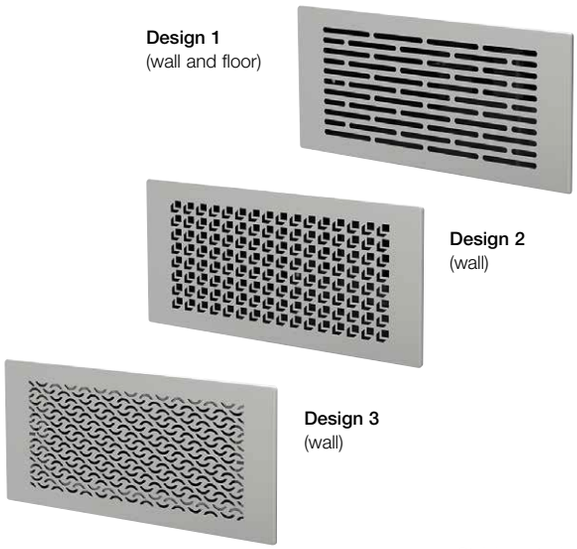

Stainless steel version

The elegant wall grilles in three high-quality designs (stainless steel or signal white coating) blend perfectly into any room atmosphere and guarantee the pleasant draught-free flow of supply air.

- **Description Wall grille set**
  Grille for wall / floor box FRS-WBK 2-51.
  - Set consists of:
    Metal wall grille with installation frame and insert filter.
- **Surfaces / Colours**
  - Powder coating in white: FRS-WGS 1, FRS-WGS 2 and FRS-WGS 3.
  - High-quality stainless steel: FRS-WGS 1 E, FRS-WGS 2 E and FRS-WGS 3 E.

Floor grille set for floor level installation. Three-dimensional adjustable compensation mechanism for adapting the grille to different floor covering heights or for alignment to a wall or window.

- **Description Floor grille set**
  Grille for multi-floor box FRS-MBK 2-75 and wall / floor box FRS-WBK 2-51.
  - Set consists of:
    Grille frame, design floor grille and insert filter.
- **Surfaces/ Colours**
  - High-quality stainless steel: FRS-BGS 1.

KWL® with heat recovery

Wall grille set / Design 1



Dimensions in mm

Wall grille set		
Type	Ref. no.	
FRS-WGS 1	03881	White
FRS-WGS 1 E	03886	Stainl. steel

Replacement filter mat for insert filter:
Type ELF-WGS, Ref. no. 03915, unit = 2 pcs.

- **Wall grille set FRS-WGS 1 E**
  with additional wall / floor box FRS-WBK 2-51.

Wall grille set / Design 2



Wall grille set		
Type	Ref. no.	
FRS-WGS 2	03882	White
FRS-WGS 2 E	03892	Stainl. steel

Replacement filter mat for insert filter:
Type ELF-WGS, Ref. no. 03915, unit = 2 pcs.

- **Wall grille set FRS-WGS 2 E**
  with additional wall / floor box FRS-WBK 2-51.

Wall grille set / Design 3



Wall grille set		
Type	Ref. no.	
FRS-WGS 3	03883	White
FRS-WGS 3 E	03904	Stainl. steel

Replacement filter mat for insert filter:
Type ELF-WGS, Ref. no. 03915, unit = 2 pcs.

- **Wall grille set FRS-WGS 3 E**
  with additional wall / floor box FRS-WBK 2-51.

Floor grille set



Floor grille set		
Type	Ref. no.	
FRS-BGS 1	03878	Stainl. steel

Replacement filter mat for insert filter:
Type ELF-BGS, Ref. no. 03914, unit = 2 pcs.

- **Floor grille set FRS-BGS 1**
  with additional wall / floor box FRS-WBK 2-51.
  Also suitable for multi-floor box FRS-MBK 2-75.

KWL-MZB 6+1-75/125 R90 and KWL-MZB 6+1-75/125 L90

Compact unit for connection of supply and extract air DN 125 and 2 x 7 connectors DN 75 with supply air on right or left side.

KWL-MZB 6+1-75/125 R90

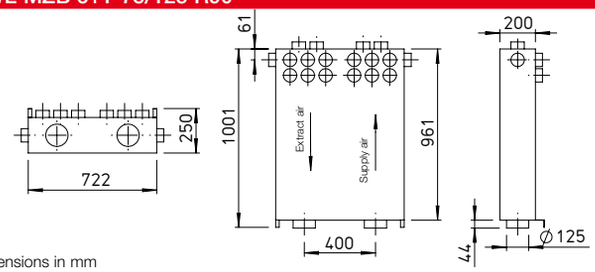

Dimensions in mm

KWL-MZB 6+1-75/125 L90

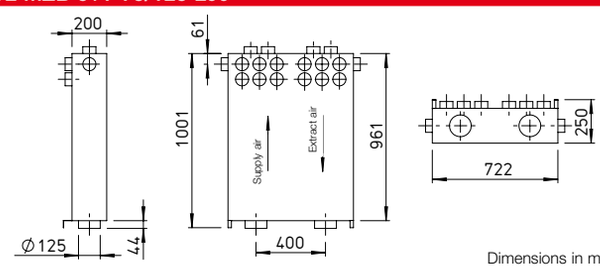

Dimensions in mm

KWL-MZB 6+1-75/125 and KWL-MZB 125/125

Compact unit for the connection of supply and extract air DN 125 and 2 x 7 connectors DN 75.

Box with one connection each for supply and extract air on each side DN 125.

KWL-MZB 6+1-75/125

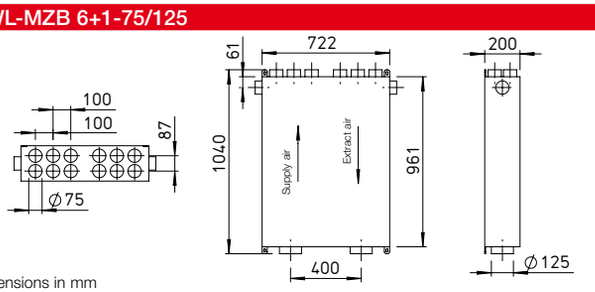

Dimensions in mm

KWL-MZB 125/125

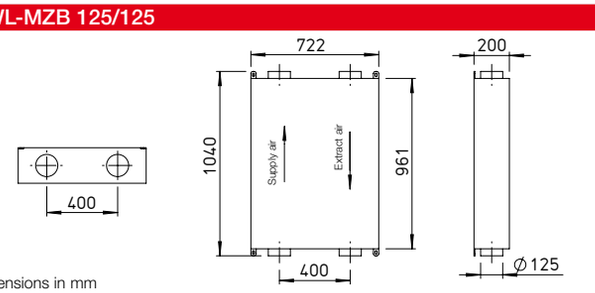

Dimensions in mm

Volume flow control, sound insulation, air distribution and system control – solve seven problems at once with the new KWL MultiZoneBox.
When combined with a central KWL or Helios AIR1 unit with constant pressure control, the MultiZoneBox ensures the silent, demand-oriented supply and extract ventilation of residential and commercial units.

Advantages

- The installation and commissioning are particularly simple and safe.
- Spiral ducts can also be connected just as easily as the flexible plastic duct system **flex***pipe*plus.
- Reliable air distribution for almost all areas of application.
- Practical advantages include freedom from maintenance, high functional reliability and whisper-quiet operation.
- When multiple KWL MultiZoneBoxes are used to ventilate a large unit, e.g. a doctor's surgery, different zones can be supplied with varying air volumes independently and according to demand.
- Whether the ventilation system is installed in the basement or on the roof, outdoors or indoors – the KWL MultiZoneBox always ensures that air is distributed according to requirements.

Special features

- Large sound insulation elements ensure silent operation.
- The optional room air sensor makes the MultiZoneBox a complete demand-controlled ventilation unit.
- Only one single, compact box is installed.
- The KWL MultiZoneBox has been designed without expendable or wear parts.
- An innovative technology reliably provides the predefined volume flow.

Functional principle

Thanks to the intuitive PC software, the commissioning of the KWL MultiZoneBox is convenient and fast:

- Start software > enter air volumes > done!
  There is no need for elaborate, time-consuming pressure differential measurements.
- A variety of other configuration options are available, if required.
- Once set, the defined parameters can be stored on a computer and transferred to other boxes.

The box in the network

All boxes can be combined to form a network and operated centrally (using a central controller, KWL-ZR, accessories):
The KWL MultiZoneBox software allows the central commissioning of all boxes in the network. Optionally on-site or via the internet.

The ultimate solution

This technology is used to constantly coordinate the performance of the central ventilation unit with the changing conditions for each KWL MultiZoneBox. The required airflow rate is supplied at any given time, precisely in line with demand. This helps reduce energy consumption while maintaining a high level of comfort.

Control element Touch
KWL-MZB-BET Ref. no. 04214

Description
- Touch display made of glass for controlling the boxes.
- Dimensions (WxHxD) 110x93x19 mm.
- 3.9 inch display including temperature sensor, flush-mounted version.

KWL-MZB-BET

KWL-MZB-ZR

Central controller
KWL-MZB-ZR Ref. no. 04215

Description
- Central control, configuration and management of all connected boxes.
- Networking of up to 256 boxes.
- Fan optimiser function.
- Suitable switching power supply: KWL 45 SNH, No. 03001.

Control element ECO
KWL-MZB-BE Ref. no. 04213

Description
- Manual 4-step operation or automatic mode.
  For flush-mounted installation.
- Dimensions (WxHxD) 80x80x10 mm.
- 4-step with LED, flush-mounted version.

KWL-MZB-BE

KWL-MZB-AP

Connection plate
KWL-MZB-AP Ref. no. 04217

Description
- For installation in concrete ceilings.
- Dimensions (WxHxD) 776x50x255 mm.
- 2 x 6 connectors DN 75.
- For direct box connection to the duct system in the ceiling.

Pipe support
KWL-MZB-RH13 Ref. no. 04249

Description
- Pipe supports for one-sided connection of **flex***pipe*plus.
- Consists of 1 connection plate with 13 supports.

KWL-MZB-RH13

KWL-MZB-VOC-F

Combi-sensor
KWL-MZB-VOC-F No. 04216

Description
- Combi-sensor (air humidity and VOC)for installation in MZB.
- VOC-humidity sensor.
- Installation in KWL MultiZone-Box.

Pipe support
KWL-MZB-RH7 Ref. no. 04236

Description
- Pipe supports for two-sided connection of **flex***pipe*plus.
- Set consists of 2 connection plates each with 7 supports.

KWL-MZB-RH7

KWL-MZB-F

Humidity sensor
KWL-MZB-F Ref. no. 04250

Description
- Air humidity sensor for installation in KWL MultiZoneBox.

Connection set
KWL-MZB-VSAP Ref. no. 04219

Description
- For ceiling installation with connection plate. Set with 12 connectors and mounting bracket.
- Includes 12 connectors for connection plate.

KWL-MZB-VSAP

KWL-MZB-KSS

Plastic connectors DN 75
KWL-MZB-KSS Ref. no. 04253

Description
- Set consists of 2 pcs., for the optional, side connection of a ventilation duct DN 75 to KWL-MZB 125/125 (Ref. no. 04053), included in delivery for boxes 04050, 04051, 04052.

Technical data MultiZoneBox

Type	Ref. no.	Type	Ref. no.
KWL-MZB 6+1-75/125 R90	04050	**KWL-MZB 6+1-75/125***	04052
KWL-MZB 6+1-75/125 L90	04051	**KWL-MZB 125/125***	04053
Range of application			40–220 m³/h
Measurement accuracy			+/-10 m³/h
Voltage / Frequency			1~, 230 V, 50 Hz
Max. power consumption			6 Watt
Protection category			IP40
Weight			25 kg

* Supply air and extract air flow directions freely selectable.
Individual type details at www.HeliosSelect.de.

Reference
Suitable revision solution for drywall construction on request.

flex*pipe* is embedded directly in concrete or on/under ceilings,
- **Simple planning and quick installation due to star-shaped, flexible continuous installation from the roll.**
- **Construction site-compliant handling due to low weight.**
- **Quick commissioning, uniform air distribution.**
- **Easy to clean.**

Available in two sizes and designs

- ☐ **flex*pipe*** FRS 63
  External Ø: 63 mm, internal: 52 mm for vol. flows up to 20 m³/h.
- ☐ **flex*pipe*plus**
  External Ø: 75 mm, internal: 63 mm for vol. flows up to 30 m³/h. Can be combined with oval duct FRS-R 51 and oval components, see page 162 ff.

Properties and advantages

- ☐ Special ventilation duct made of hygienically safe PE-HD new material, odourless.
- ☐ The two-layer design (externally corrugated and internally smooth and antistatically treated) offers the following advantages:
  - Low flow resistances and high sound insulation.
  - Minimal dirt deposits.
  - Easy to clean.

Installation

- ☐ The **flex*pipe*** plastic corrugated pipe has high ring strength (S_{R24} > 8 kN/m²) and it can be installed directly in, on or under concrete ceilings due to its high flexibility in the desired system.
- ☐ Airtight and watertight connection simply through the use of FRS seal rings.

flex*pipe* vent. duct round

flex*pipe* vent. duct (bundle = 50 lin. m)			
Type Ø 63 mm	Ref. no.	Dim. in mm Ext. Ø	Int. Ø
FRS-R 63	09327	63	52

Ceiling box



Dimensions in mm

Ceiling box [2] for valve connection DN 125	
Type Ø 63 mm	Ref. no.
FRS-DKV 2-63/125	09430

Ceiling box incl. plaster/formwork lid. For connection of supply or extract air valves DN 125 (accessories, see page 180).

Distribution box 6-63, 12-63



* FRS-VK 6-63/125

Distribution box 6-63, 12-63 [1]		
Type Ø 63 mm	Ref. no.	Ø NW mm
FRS-VK 6-63/125	09355	125
FRS-VK 12-63/160	09336	160

For connection of up to 6 or 12 ventilation ducts FRS-R 63, with sound-absorbing cladding. The connector plate can be replaced with the inspection opening and rotated 90° for type 12-63.

Floor box set



Floor box set [2]	
Type Ø 63 mm	Ref. no.
FRS-BKGS 2-63	09991

Floor box set consists of:
- 1 pc. floor box for grille connection DN 160
- 1 pc. floor grille made of brushed stainless steel with adjustable volume flow.

Distribution box 18-63



Distribution box 18-63 [1]		
Type Ø 63 mm	Ref. no.	Ø NW mm
FRS-VK 18-63/180	09364	180

For connection of up to 18 ventilation ducts FRS-R 63, with sound-absorbing cladding. The connector plate with the connectors can be replaced with the inspection opening and rotated 90°. This allows installation as a straight or 90° distributor.

Wall outlet set



Wall outlet set, straight [2]	
Type Ø 63 mm	Ref. no.
FRS-WDS 2-63	09993

Wall outlet set consists of:
- Wall outlet with sliding connector
- Wall outlet white (FK-WA 200 W), 250 x 103 mm

Short bend 90°



Short bend 90°	
Type Ø 63 mm	Ref. no.
FRS-B 63	09348

Short bend 90° for bending radius < 2 x external duct diameter.

Angle bend set



Angle bend set, 90° [2]	
Type Ø 63 mm	Ref. no.
FRS-WBS 2-63	09995

Angle bend set consists of:
- Angle bend with sliding connector
- Wall outlet white (FK-WA 200 W), 250 x 103 mm

Short bend 90°



Short bend 90°	
Type Ø 63 mm	Ref. no.
FRS-B 75/2-63	09341

Short bend 90° as transition from 1 x 75 mm to 2 hoses with 63 mm.

Sleeve, cover, seal ring



Sleeve, cover, seal ring		
Type Ø 63 mm	Ref. no.	Unit
FRS-VM 63 Sleeve	09329	
FRS-VD 63 Cover	09330	10 pcs.
FRS-DR 63 Seal ring	09331	10 pcs.

Note: A seal ring (for IP66) must be used at every connection point (duct / duct, duct / moulded part). Please order corresponding number separately. Coating with lubricant is recommended for installation.

[1] incl. 6 pcs. cover. [2] incl. 1 pcs. cover.

IsoPipe facade panels

IP-FKB

IP-FBF

IP-FBA

IsoPipe facade panels made of stainless steel for connection to intake air and exhaust air ducts.

Properties

All IsoPipe facade panels are made of high-quality stainless steel.
Also available in coated version (types B) for use in environments with severe air pollution or high salt concentration in the air (near the coast).

Application and installation

- **Facade combination panel IP-FKB**
  Designed for the compact installation of IsoPipe intake air and exhaust air ducts with just one facade panel. Universally applicable for horizontal or vertical installation.
- **Exhaust air facade panel IP-FBF**
  For the IsoPipe duct system. Horizontal installation position. The exhaust air is discharged directly and horizontally through the duct connectors.
- **Intake air facade panel IP-FBA**
  For the IsoPipe duct system. Horizontal installation position. The intake air is taken in through the side on both sides.

KWL® with heat recovery

IP-FKB



Dimensions in mm

IsoPipe Ø 125 mm						IsoPipe Ø 160 mm						IsoPipe Ø 180 mm					
Type	Ref. no.					**Type**	Ref. no.					**Type**	Ref. no.				
Facade combination panel – Stainless steel																	
IP-FKB 125	02689					**IP-FKB 160**	02694					**IP-FKB 180**	02695				
Dim. in mm	A	ØB	C	D	E	Dim. in mm	A	ØB	C	D	E	Dim. in mm	A	ØB	C	D	E
	420	157	200	100	170		480	192	240	118	210		520	212	290	150	230
Facade combination panel – Stainless steel with additional coating																	
IP-FKB 125 B	02661					**IP-FKB 160 B**	02662					**IP-FKB 180 B**	02663				
Dim. in mm	A	ØB	C	D	E	Dim. in mm	A	ØB	C	D	E	Dim. in mm	A	ØB	C	D	E
	420	157	200	100	170		480	192	240	118	210		520	212	290	150	230

IP-FBF



Dimensions in mm

IsoPipe Ø 125 mm					IsoPipe Ø 160 mm					IsoPipe Ø 180 mm				
Type	Ref. no.				**Type**	Ref. no.				**Type**	Ref. no.			
Facade panel – Stainl. steel, for exh. air														
IP-FBF 125	03126				**IP-FBF 160**	03128				**IP-FBF 180**	03131			
Dim. in mm	A	ØB	C	D	Dim. in mm	A	ØB	C	D	Dim. in mm	A	ØB	C	D
	230	157	200	78		265	192	240	97		285	212	260	126
Facade panel – Stainl. steel, for exh. air with additional coating														
IP-FBF 125 B	02901				**IP-FBF 160 B**	02902				**IP-FBF 180 B**	02903			
Dim. in mm	A	ØB	C	D	Dim. in mm	A	ØB	C	D	Dim. in mm	A	ØB	C	D
	230	157	200	78		265	192	240	97		285	212	260	126

IP-FBA



Dimensions in mm

IsoPipe Ø 125 mm				IsoPipe Ø 160 mm				IsoPipe Ø 180 mm			
Type	Ref. no.			**Type**	Ref. no.			**Type**	Ref. no.		
Facade panel – Stainl. steel, for intake air											
IP-FBA 125	03125			**IP-FBA 160**	03127			**IP-FBA 180**	03130		
Dim. in mm	A	B	C	Dim. in mm	A	B	C	Dim. in mm	A	B	C
	230	200	78		265	240	97		285	260	126
Facade panel – Stainl. steel, for intake air with additional coating											
IP-FBA 125 B	02664			**IP-FBA 160 B**	02665			**IP-FBA 180 B**	02666		
Dim. in mm	A	B	C	Dim. in mm	A	B	C	Dim. in mm	A	B	C
	230	200	78		265	240	97		285	260	126

Installation

- Types IP-FKB are universally applicable for horizontal or vertical installation. Intake air and exhaust air outlet on the right, left, top or bottom.
  The adjacent figure shows horizontal installation in an external wall.
- Types IP-FBF and IP-FBA for horizontal installation.

Insulated duct system IsoPipe

The innovative alternative to spiral duct installation with subsequent thermal insulation.

- **The insulated round duct system IsoPipe**
- **prevents condensation,**
- **has a smooth, sound-absorbing inner surface and is easy to clean,**
- **saves an enormous amount of installation time,**
- **is the ideal solution for intake air and exhaust air ducting.**

Installation

- All IsoPipe moulded parts, bends, wall outlets and roof outlets are precisely matched to each other and simply plugged into each other.
  IsoPipe is quick to install.

Properties

All pipe parts are fully insulated and consist of vapour-tight, anti-static EPE. Flame retardant according to fire class B1. Air flow temperature from –25 to +80 °C. λ = 0.04 W/mK, d = 16 mm.

Duct concept and installation

- IsoPipe is especially suitable for intake air and exhaust air ducting or supply air and extract air ducting in the basement or low-temperature zone of a KWL system.
- Can be used for volume flows up to 500 m^3/h.
- IsoPipe is shock-proof, particularly lightweight and it can easily be shortened to the desired length with a knife.

IsoPipe duct



Dimensions in mm

IsoPipe Ø 125 mm				IsoPipe Ø 160 mm				IsoPipe Ø 180 mm				IsoPipe Ø 200 mm			
Type	Ref. no.	ØA	ØB	**Type**	Ref. no.	ØA	ØB	**Type**	Ref. no.	ØA	ØB	**Type**	Ref. no.	ØA	ØB
Duct with sleeve															
IP 125/2000 [1]	09406	—	157	—	—		—	—	—		—	—	—		—
Duct with internal connector															
—			—	**IP 160/2000** [2]	09447	—	192	**IP 180/2000** [3]	09448	—	212	**IP 200/2000** [4]	03810	—	232

[1] Unit = 8 x 2 m [2] Unit = 6 x 2 m [3] Unit = 4 x 2 m [4] Unit = 3 x 2 m

Sleeve / Internal connector



Dimensions in mm

IsoPipe Ø 125 mm					IsoPipe Ø 160 mm					IsoPipe Ø 180 mm					IsoPipe Ø 200 mm				
Type	Ref. no.	ØA	ØB	C	**Type**	Ref. no.	ØA	ØB	C	**Type**	Ref. no.	ØA	ØB	C	**Type**	Ref. no.	ØA	ØB	C
Connecting sleeve																			
IP-MU 125	09394	157	—	104	—	—		—		—	—		—		—	—		—	
Internal connector																			
—				—	**IP-IV 160**	09453	—	160	80	**IP-IV 180**	09454	—	180	80	**IP-IV 200**	03811	—	200	80

Made of plastic.

Bend 45°



Dimensions in mm

IsoPipe Ø 125 mm					IsoPipe Ø 160 mm					IsoPipe Ø 180 mm					IsoPipe Ø 200 mm				
Type	Ref. no.	ØA	ØB	C	**Type**	Ref. no.	ØA	ØB	C	**Type**	Ref. no.	ØA	ØB	C	**Type**	Ref. no.	ØA	ØB	C
Bend 45° with sleeve																			
IP-B 125/45	09399	125	157	255	—	—		—		—	—		—		—	—		—	
Bend 45° with int. connector																			
—				—	**IP-B 160/45**	09449	160	192	242	**IP-B 180/45**	09450	180	212	256	**IP-B 200/45**	03809	200	232	270

Bend 90°



Dimensions in mm

IsoPipe Ø 125 mm					IsoPipe Ø 160 mm					IsoPipe Ø 180 mm					IsoPipe Ø 200 mm				
Type	Ref. no.	ØA	ØB	C	**Type**	Ref. no.	ØA	ØB	C	**Type**	Ref. no.	ØA	ØB	C	**Type**	Ref. no.	ØA	ØB	C
Bend 90° with sleeve																			
IP-B 125/90	09398	125	157	239	—	—		—		—	—		—		—	—		—	
Bend 90° with int. connector																			
—				—	**IP-B 160/90**	09451	160	192	272	**IP-B 180/90**	09452	180	212	292	**IP-B 200/90**	03808	200	232	312

Tape / Pipe clamp



Dimensions in mm

IsoPipe Ø 125 mm			IsoPipe Ø 160 mm			IsoPipe Ø 180 mm			IsoPipe Ø 200 mm		
Type	Ref. no.	ØB	**Type**	Ref. no.	ØB	**Type**	Ref. no.	ØB	**Type**	Ref. no.	ØB
Tape, insulated, 50x3 mm, 15 lin. m											
IP-KLB	09643		**IP-KLB**	09643		**IP-KLB**	09643		**IP-KLB**	09643	
Pipe clamp											
IP-S 125	09395	157	**IP-S 160**	09392	192	**IP-S 180**	09421	212	**IP-S 200**	03812	232

Fittings for unit connection



Dimensions in mm

IsoPipe Ø 125 mm				IsoPipe Ø 160 mm				IsoPipe Ø 180 mm				IsoPipe Ø 200 mm			
Type	Ref. no.	ØA	B	**Type**	Ref. no.	ØA	B	**Type**	Ref. no.	ØA	B	**Type**	Ref. no.	ØA	B
Connector with seal for connection to KWL units – with sleeve DN 125															
RVBD 125 K [1]	03414	125	70	—	—	—		—	—	—		—	—	—	
Connector with seal for connection to KWL units – with sleeve DN 160															
—	—	—		**RVBD 160 K** [2]	03415	160	70	**RVBD 180/160** [2]	09589	180	160	—	—	—	
Connector with seal for															
—	—	—		—	—	—		—	—	—		**RVBD 200 K**	03813	200	70

All fittings made of galvanised steel sheet.
[1] Compatible with KWL 170 W CF, KWL 200 W, KWL 300 W and KWL 220 D.
[2] Compatible with KWL 360 W CF, KWL 500 W and KWL 340 D.

Fittings for distribution box



Dimensions in mm

IsoPipe Ø 125 mm				IsoPipe Ø 160 mm				IsoPipe Ø 180 mm				IsoPipe Ø 200 mm			
Type	Ref. no.	ØA	ØB	**Type**	Ref. no.	ØA	ØB	**Type**	Ref. no.	ØA	ØB	**Type**	Ref. no.	ØA	ØB
Fitting for connection to distribution boxes – with connector DN 125															
Direct duct connection				**IP-ARZ 125/160**	09458	160	125	—	—	—		—	—	—	
Fitting for connection to distribution boxes – with connector DN 160															
IP-ARZ 160/125	09358	125	160	Direct duct connection				**IP-ARZ 160/180**	09459	180	160	**IP-ARZ 160/200**	03816	200	160
Fitting for connection to distribution boxes – with connector DN 180															
IP-ARZ 180/125	09360	125	180	**IP-ARZ 180/160**	09455	160	180	Direct duct connection				**IP-ARZ 180/200**	03814	200	180

All fittings made of galvanised steel sheet.

Fittings for KWL HygroBox and ground heat exchange



Dimensions in mm

IsoPipe Ø 125 mm				IsoPipe Ø 160 mm				IsoPipe Ø 180 mm				IsoPipe Ø 200 mm			
Type	Ref. no.	ØA	ØB	**Type**	Ref. no.	ØA	ØB	**Type**	Ref. no.	ØA	ØB	**Type**	Ref. no.	ØA	ØB
Fitting for connection to KWL HygroBox – KWL HB 250, connec. DN 160															
IP-ARZ 160/125	09358	125	160	Direct duct connection				—	—	—		**IP-ARZ160/200**	03816	200	160
Fitting for connection to KWL HygroBox – KWL HB 500, connec. DN 250															
—	—	—		**IP-ARZ 250/160**	09590	160	250	**IP-ARZ 250/180**	09591	180	250	**IP-ARZ 250/200**	03815	200	250
Fitting for connection to ground heat exchanger – LEWT, connector DN 200															
IP-ARZ 200/125	09359	125	200	**IP-ARZ 200/160**	09456	160	200	**IP-ARZ 200/180**	09457	180	200	Direct duct connection			
Fitting for connection to ground heat exchanger – SEWT, connector DN 180															
IP-ARZ 180/125	09360	125	180	**IP-ARZ 180/160**	09455	160	180	Direct duct connection				**IP-ARZ 180/200**	03814	200	180

All fittings made of galvanised steel sheet.

Roof outlets



Dimensions in mm

IsoPipe Ø 125 mm				IsoPipe Ø 160 mm				IsoPipe Ø 180 mm			
Type	Ref. no.	ØB	ØC	**Type**	Ref. no.	ØB	ØC	**Type**	Ref. no.	ØA	ØC
Roof outlet, consisting of hood and pan tile* **– Roof hood** black											
IP-DHS 125	03541	157	160	**IP-DHS 160**	03542	192	250	**IP-DHS 180**	03542	180	210
Roof outlet, consisting of hood and pan tile* **– Roof hood including duct** red											
—			—	**IP-DHR 160**	03543	192	250	**IP-DHR 180**	03543	180	210
Roof outlet, consisting of hood and pan tile* **– Roof pan tile for pitched roofs**											
IP-UDPS 125	03546	α 25°– 45°		**IP-BP 160/25**	09384	α 20°– 30°		**IP-BP 180/25**	09384	α 20°– 30°	
—			—	**IP-BP 160/35**	09385	α 30°– 40°		**IP-BP 180/35**	09385	α 30°– 40°	
—			—	**IP-BP 160/45**	09386	α 40°– 50°		**IP-BP 180/45**	09386	α 40°– 50°	
Roof outlet, consisting of hood and pan tile* **– Roof pan tile for flat roof**											
IP-FDP 125	03544	—	158	**IP-FDP 160**	03545	—	203	**IP-FDP 180**	03545	—	203

* Please order roof hoods and pan tiles separately.

Silencer

IsoPipe Ø 125 mm		IsoPipe Ø 160 mm		IsoPipe Ø 180 mm	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Flexible duct silencer, made of aluminium duct, Length approx. 1 m, elastic					
SDE 125	00789	**SDE 160**	00790	**SDE 180**	00499

Type	Insulation	Insertion loss D_e dB at Hz						
	mm	125	250	500	1000	2000	4000	8000
SDE 125	50	32	42	45	46	50	42	41
SDE 160	50	23	40	43	46	46	31	29
SDE 180	50	20	39	43	47	46	28	29

Air distribution system reno*pipe*

The smart solution, specifically developed for energy-saving renovation: reno*pipe* combines ducting and ventilation duct cladding in one component.

- **Quick, easy installation, even in occupied buildings.**
- **Installation without rework possible in drywall construction.**
- **Reduced use of materials and lower costs.**
- **Cost-effective due to few components and elimination of exhaust air piping.**

Installation

- The RP moulded parts can be easily shortened to the desired length with a fine-toothed saw.
- Visible installation in ceilings or walls by clicking the long connector into the mounting brackets included in the delivery.
- Free cuts in the duct compensate for unevenness, miter cuts are unnecessary due to precision-fit moulded parts. Fastening elements with longitudinal, lateral and height compensation guarantee a precise fit.

Properties and advantages

- Coatable components made of smooth, high-density EPS in white.
- Quick visible installation, without elaborate ceiling suspensions and drywall construction work.

Duct concept, installation

- The extract air from the adjoining extract air rooms is collected directly in the sound-insulated combination distributor. There is no extract air piping or separate silencers.
- Asymmetric lip seals ensure the leak tightness of the entire **reno*pipe*** system.

Combination distribution box, supply air right
Compact distributor made of galvanised steel sheet with sound-absorbing lining of inner sides. Properties: Extract air collector, supply air distributor with sound insulation function. Unit connection 2 x DN 125, 2 x DN 100 for extract air, 2 x DN 100 for supply air. Incl. inspection opening and cover.
RP-KVK 3-100/125 R No. 03048

Combination distributor



Dimensions in mm

Duct piece



Duct Unit = 4 pcs.*
Duct with smooth, square profile. Internal diameter DN 100, length 1 m.
RP-K Ref. no. 03061

Duct with stucco profile Unit = 4 pcs.*
Like above but with visually appealing stucco profile.
RP-SK Ref. no. 03065

Combination distribution box, supply air left
Compact distributor made of galvanised steel sheet with sound-absorbing lining of inner sides. Properties: Extract air collector, supply air distributor with sound insulation function. Unit connection 2 x DN 125, 2 x DN 100 for extract air, 2 x DN 100 for supply air. Incl. inspection opening and cover.
RP-KVK 3-100/125 L No. 03038

Combination distributor



T-piece



T-piece Unit = 4 pcs.*
Compact T-piece with smooth, square profile. Internal diameter DN 100/100/100.
RP-T Ref. no. 03062

T-piece with stucco Unit = 4 pcs.*
Like above but with visually appealing stucco profile.
RP-ST Ref. no. 03066

Long connector set
Consists of a connecting sleeve DN 100 made of impact-resistant polypropylene and two lip seals for airtight connection of the duct. Includes mounting bracket for simple click installation of the duct.
RP-LV Ref. no. 03029

Long connector set



Inner angle



Inner angle Unit = 2 pcs.*
90° inner angle with smooth, square profile. Internal diameter DN 100.
RP-IW Ref. no. 03075

Inner angle with stucco Unit = 2 pcs.*
Like above but with visually appealing stucco profile.
RP-SIW Ref. no. 03077

Long connector set
Consists of a connecting sleeve DN 100 made of impact-resistant polypropylene and two lip seals for airtight connection of the duct. Includes mounting bracket for simple click installation of the duct.
RP-KV Ref. no. 03030

Short connector



Outer angle



Outer angle Unit = 2 pcs.*
90° outer angle with smooth, square profile. Internal diameter DN 100.
RP-AW Ref. no. 03076

Outer angle with stucco Unit = 2 pcs.*
Like above but with visually appealing stucco profile.
RP-SAW Ref. no. 03078

* Delivered in packaging units.

Design ventilation valve
Design ventilation valve for extract air operation, DN 100, adjustable. With closed front and integrated filter.
DLV 100 Ref. no. 03039

Replacement air filter Unit = 5 pcs.*
ELF-DLV 100 Ref. no. 03042

Ventilation valve



Dimensions in mm

Cutting aid



Cutting aid
Stable cutting aid, beech multiplex 15 mm, for easy cutting of duct to length.
RP-SH Ref. no. 03036

Design ventilation valve, for supply air
Design ventilation valve for supply air operation, DN 100.
DLVZ 100 Ref. no. 03040

Ventilation valve



Fine-toothed saw



Fine-toothed saw
Special fine-toothed handsaw for precise cuts.
RP-FS Ref. no. 03044

Mounting bracket Unit = 5 pcs.*
Made of high-quality, impact-resistant plastic.
RP-BK Ref. no. 03031

Lip seal Unit = 10 pcs.*
DN 100 made of EPDM.
RP-LD Ref. no. 03033

Wall sleeve
DN 100 made of PVC, incl. mounting template for simple wall outlet.
RP-WH Ref. no. 03035

Wall sleeve



End/inspection cover

End / inspection cover
DN 100 made of high-quality plastic, with lip seal. For attachment to am duct end piece.
RP-RD Ref. no. 03037

Reducer
Made of galvanised steel sheet.
RP-RZ 125/100 Ref. no. 03017

Components for connection of RenoPipe to KWL EC 70

RenoPipe Installation kit
For the connection of RenoPipe to KWL EC 70.
Set consists of:
1 × FRS-DWK 2-75/125**
1 × connecting sleeve DN 125/100
1 × seal ring DN 125
1 × seal ring DN 100
2 × duct FRS-R 75 (1 m)
2 × sealing ring DN 75
RP-RS KWL 70 Ref. no. 40974

RenoPipe Installation kit



FRS-DWK... to be cut on-site

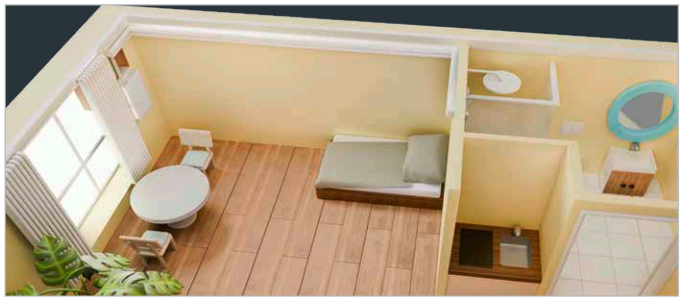

* Delivered in packaging units. ** For information on delivery of the FRS-DWK 2-75/125 see page 164.

Flat duct system FK

Underfloor duct system made of galvanised steel sheet, specifically developed for domestic ventilation. The optimal solution for concealed air ducts; ideal for air distribution in new buildings.

Properties

- All components made of galvanised steel sheet, corrosion-resistant and non-flammable.

Available in two sizes

- FK 150 x 50 mm for volume flows up to 90 m³/h.
- FK 200 x 50 mm for volume flows up to 140 m³/h.

Duct concept and installation

- Flat design and rigid construction allow easy installation in unfinished flooring.
- Connection using external connector. Moulded parts with integrated sleeve (insertion depth approx. 35 mm). The smooth internal walls result in low flow resistances and do not create obstacles for dirt deposits. Cleaning (disinfection) is still possible.
- The distribution box, which must be installed per floor for extract and supply air delivery, simplifies the duct layout.
- Flat silencers (FK-SD) can be installed in the duct system to protect noise-sensitive rooms, e.g. bedrooms.

Flat duct



Dimensions in mm

Flat duct				
Type	Ref. no.	Dim. in mm Width	Height	Length
150 x 50 m				
FK 150	02905	150	50	1500
200 x 50 mm				
FK 200	02906	200	50	1500

Bend, horizontal 45°



Bend, horizontal 45°				
Type	Ref. no.	Dim. in mm Width	Height	Radius
150 x 50 m				
FK-BH 150/45	02910	153	53	45°
200 x 50 mm				
FK-BH 200/45	02912	203	53	45°

Connector



Connector				
Type	Ref. no.	Dim. in mm Width	Height	Length
150 x 50 m				
FK-V 150	02941	153	53	200
200 x 50 mm				
FK-V 200	02942	203	53	200

Bend, vertical 90°



Bend, vertical 90°				
Type	Ref. no.	Dim. in mm Width	Height	Radius
150 x 50 m				
FK-BV 150/90	02919	153	103	90°
200 x 50 mm				
FK-BV 200/90	02920	203	103	90°

Mounting bracket



Mounting bracket				
Type	Ref. no.	Dim. in mm Width	Height	Length
150 x 50 m				
FK-B 150	02907	151	52	30
200 x 50 mm				
FK-B 200	02908	201	52	30

Bend, vertical 45°



Bend, vertical 45°				
Type	Ref. no.	Dim. in mm Width	Height	Radius
150 x 50 m				
FK-BV 150/45	02917	153	73	45°
200 x 50 mm				
FK-BV 200/45	02918	203	73	45°

Bend, horizontal 90°



Bend, horizontal 90°				
Type	Ref. no.	Dim. in mm Width	Height	Radius
150 x 50 m				
FK-BH 150/90	02909	153	53	90°
200 x 50 mm				
FK-BH 200/90	02911	203	53	90°

Y-branch



Y-branch				
Type	Ref. no.	Dim. in mm A	B	C
150 x 50 m				
FK-Y 150/150/150	02927	153	153	153
200 x 50 mm				
FK-Y 200/150/150	02929	153	153	203

T-piece



Dimensions in mm

T-piece					
Type	Ref. no.	Dim. in mm A	B	C	E
FK-T 150/150/150	02921	153	153	153	250
FK-T 150/150/200	02923	153	153	203	390
FK-T 150/200/150	02926	153	203	153	300
FK-T 200/150/200	02925	203	153	203	250
FK-T 150/200/200	02924	153	203	203	440
FK-T 200/200/200	02922	203	203	203	300

Transition piece



Transition piece				
Type	Ref. no.	Dim. in mm A	ØB	C
150 x 50 mm				
FK-Ü 75/150	02948	153	78	260
FK-Ü 100/150	02996	153	103	260
200 x 50 mm				
FK-Ü 100/200	02997	203	103	260
FK-Ü 125/200	02998	203	128	260

Reducers



Reducers			
Type	Ref. no.	Dim. in mm Length	Heigth
Reducer symmetrical			
FK-RS 200/150	02932	260	53
Reducer asymmetrical			
FK-RA 200/150	02933	260	53

Outlet



Ceiling/wall outlet				
Type	Ref. no.	Dim. in mm Colour	A	B
200 x 50 mm				
FK-WA 200 W	09350	White	250	103
FK-WA 200 AL	09351	Alum.	250	103

End piece – Spiral duct



End piece with connection for spiral duct			
Type	Ref. no.	Dim. in mm Ø D	L
150 x 50 mm			
FK-ER 150/100	02934	99	200
FK-ER 150/125	02935	124	200
200 x 50 mm			
FK-ER 200/160	02936	159	220

Silencer



Silencer			
Type	Ref. no.	Dim. in mm A	B
150 x 50 mm			
FK-SD 150	02945	153	53
200 x 50 mm			
FK-SD 200	02946	203	53

End piece – Valve



End piece with connection for spiral duct			
Type	Ref. no.	Dim. in mm Ø D	L
150 x 50 mm			
FK-EV 150/100	02937	102	200
FK-EV 150/125	02938	127	200
200 x 50 mm			
FK-EV 200/100	02939	102	200
FK-EV 200/125	02940	127	200

Distribution box



Distribution box	
Type	Ref. no.
FK-VK	02987
Delivery FK-VK	
4 connectors 150 x 50 (2 enclosed loose),	
1 connectors 200 x 50 and 1 inspection panel.	
Add. connectors for straight distributor	
FK-ZS	02947

Inspection piece



Inspection piece						
Type	Ref. no.	Dim. in mm A	B	C	D	L
150 x 50 mm						
FK-RZ 150	02930	153	53	347	137	500
200 x 50 mm						
FK-RZ 200	02931	203	53	347	137	500

Dim. E can vary from 105-130 mm.

End cover



End cover	
Type	Ref. no.
150 x 50 mm	
FK-ED 150	02943
200 x 50 mm	
FK-ED 200	02944

Floor grille



Aluminium floor grille with inst. casing						
Type	Ref. no.	Dim. in mm A	B	C	D	L
150 x 50 mm						
FK-BA 150	02986	153	53	348	152	500

Dim. E can vary from 112-152 mm.

Sealing tape



Sealing tape/Tape		
Type	Ref. no.	
Cold shrink tape		
KSB	09343	50 mm wide, 15 lin. m
Aluminium cold shrink tape		
KSB ALU	09344	50 mm wide, 15 lin. m
Tape		
KLB	00619	50 mm wide, 20 lin. m

Extract air elements

Design ventilation valves and disc valves

DLV: modern, square design, with closed front and integrated filter. Can be used for supply and extract air.
KTVA/MTVA: classic round shape, especially for extract air.

Ø 80		Ø 100		Ø 125		Ø 160	
Type	**Ref. no.**	**Type**	**Ref. no.**	**Type**	**Ref. no.**	**Type**	**Ref. no.**
Design ventilation valve DLV [1] for extract air							
		DLV 100	03039	**DLV 125**	03049		
		ELF-DLV 100 [2]	03042	**ELF-DLV 125 [2]**	03058		
Plastic disc valve KTVA							
KTVA 75/80	00940	**KTVA 100**	00941	**KTVA 125**	00942	**KTVA 160**	00943
Metal disc valve for extract air (for areas where non-flammable components are compulsory)							
MTVA 75/80	08868	**MTVA 100**	08869	**MTVA 125**	08870	**MTVA 160**	08871

[1] With integrated filter. [2] Replacement air filter for DLV, unit = 5 pcs.

Supply air elements

Design ventilation valves and disc valves

DLV: modern, square design, with discreet supply air grille and integrated filter.
KTVZ/KTVZ: classic round shape, closed front, especially for supply air.
LGK 80: Ventilation grille made of white plastic. For insertion in 80 mm spiral ducts or FRS-VM 75.

Ø 80		Ø 100		Ø 125		Ø 160	
Type	**Ref. no.**	**Type**	**Ref. no.**	**Type**	**Ref. no.**	**Type**	**Ref. no.**
Ventilation grille LGK, Design ventilation valve DLV for supply air							
LGK 80	00259	**DLVZ 100**	03040	**DLV 125**	03049		
				ELF-DLV 125 [1]	03058		
Plastic disc valve KTVZ							
KTVZ 80	02762	**KTVZ 100**	02736	**KTVZ 125**	02737	**KTVZ 160**	02738
Metal disc valve for supply air (for areas where non-flammable components are compulsory)							
MTVZ 75/80	09603	**MTVZ 100**	09604	**MTVZ 125**	09605	**MTVZ 160**	09606

[1] Replacement air filter for DLV 125, unit = 5 pcs.

Supply air-extract air valve ZAV

Supply air-extract air valve ZAV

Elegant plastic valve for wall and ceiling installation.
Can be used as a supply air element with an open front grille and as an extract air element with a closed front grille.

Ø 80		Ø 100		Ø 125		Ø 160	
Type	**Ref. no.**	**Type**	**Ref. no.**	**Type**	**Ref. no.**	**Type**	**Ref. no.**
Plastic valve for supply and extract air ZAV							
ZAV 80	03079			**ZAV 125**	03080		

Attachment filter element VFE

Attachment filter element VFE

For installation in front of disc valves for greasy, contaminated room air. Prevents grease and dirt deposits.
Casing made of galvanised steel sheet, white, plastic powder-coated. Filter made of dimensionally stable aluminium filter fabric with 324 cm² free filter surface and aluminium frame.

VFE 70	Ref. no. 02552
VFE 90	Ref. no. 02553
ELF/VFE	Ref. no. 02554

Replacement air filter, unit = 2 pcs.

Door ventilation grilles

Door ventilation grilles

Unobtrusive, sight screening ventilation grille made of break-resistant plastic for installation in door leaf.

See product page for detailed description.

LTGW	Ref. no. 00246

Made of plastic, white.

LTGB	Ref. no. 00247

Made of plastic, brown.

Cleaning set

Cleaning set for air distribution systems flex*pipe* and reno*pipe*.

The universal cleaning set KWL-RS is ideally suitable for cleaning the **flex***pipe* duct systems (DN 75, DN 63) and the **reno***pipe* air distribution system (DN 100).
Application is possible either by pushing (for short distances) or pulling. In case of longer duct sections or narrow bends, the round nylon brush is simply pulled in the direction of the distribution box, where the 90° bend is used for the intake connection. This is used to easily remove the dust loosened by the round nylon brush with a commercially available vacuum cleaner.

Delivered in a practical transport bag.
Delivery: Per 1 pc.
- Reel with flexible GFK wire (20 m)
- Round brushes DN 63, 75, 100
- 90° bend and seal for intake connection DN 56
- Adapter DN 56/40, DN 56/32.

KWL-RS	Ref. no. 02797

Silencer SDE

Flexible duct silencer, made of aluminium duct, Length approx. 1 m, elastic

Ø 125		Ø 160		Ø 180	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
SDE 125	00789	**SDE 160**	00790	**SDE 180**	00499

Type	Best.-Nr.	Insulation mm	Insertion loss D_e dB at Hz 125	250	500	1000	2000	4000	8000
SDE 125	00789	50	32	42	45	46	50	42	41
SDE 160	00790	50	23	40	43	46	46	31	29
SDE 180	00499	50	20	39	43	47	46	28	29

Silencer FSD / RSD

Flexible cross talk silencer FSD, duct silencer RSD – Galvanised steel sheet

Ø 100	Ø 125	Ø 160	Ø 200	Ø 250	Ø 315	Ø 355	Ø 400
—	**FSD 125** 00677	**FSD 160** 00678	**FSD 200** 00679	**FSD 250** 00680	**FSD 315** 00681	**FSD 355** 00682	**FSD 400** 00683
—	—	—	—	**RSD 250** 08739	**RSD 315** 08745	**RSD 355** 08748	**RSD 400** 08751

Type	Ref. no.	Dimensions in mm L	Ø D	Ø d	a	l	Insertion loss D_e dB at Hz 250	500	1000	2000	Weight aprx. kg	Average loss
FSD 125	00677	1000	236	125	34	54	13	22	39	42	1.7	18
FSD 160	00678	1000	262	160	34	54	10	21	39	30	1.9	16
FSD 200	00679	1000	312	200	34	54	8	16	32	22	2.4	12

For further diameters and sound insulation data, see Helios main catalogue.

Shutters

Flexible connecting sleeve

Ø 100	Ø 125	Ø 160	Ø 200	Ø 250	Ø 315	Ø 355	Ø 400
Cold smoke shutter							
KAK 100 04097	**KAK 125** 04098	**KAK 160** 04099	**KAK 200** 04100				
Duct shutters – Self-actuating or **motorised, installed in pipeline, casing made of galvanised steel sheet or *plastic							
RSKK* 100 05106	**RSKK* 125** 05107	**RSK 160** 05669	**RSK 200** 05074	**RSK 250** 05673	**RSK 315** 05674	**RSK 355** 05650	**RSK 400** 05651
				RVM 250** 02576	**RVM** 315** 02578	**RVM** 355** 02579	**RVM** 400** 02580
Flexible connecting sleeve – For acoustic decoupling, incl. 2 pcs. hose clamps							
FM 100 01681	**FM 125** 01682	**FM 160** 01684	**FM 200** 01670	**FM 250** 01672	**FM 315** 01674	**FM 355** 01675	**FM 400** 01676

Warm water heating element

Type	Ref. no.	Compatible with duct Ø mm	Air-side data: Heat output kW [1]	kW [2]	Δ T air K [1]	K [2]	at V̇ m³/h	Water-side data [1]: Pressure loss Δp_W kPa	with water volume l/h	Weight approx. kg	Compatible temperature control system: Type	Ref. no.
WHR 125	09480	125	2.6	1.1	29	13	250	2	115	3.2	**WHST 300 T50**	08820
WHR 160	09481	160	5.5	3.1	38	22	400	11	245	4.9	**WHST 300 T50**	08820
WHR 200	09482	200	7.2	4.1	33	19	600	17	317	4.9	**WHST 300 T50**	08820
WHR 250	09483	250	10.7	6.0	37	21	800	8	470	6.9	**WHSH HE 24 V**	08318
WHR 315	09484	351	18.3	10.4	36.2	21	1400	9	810	9.0	**WHSH HE 24 V**	08318
WHR 400	09524	400	26.2	15.0	36	21	2000	11	1060	12.5	**WHSH HE 24 V**	08318

Air temperature control

Air temperature control for KWL units with PWW post-heater.
For air heating control of the PWW post-heater integrated in KWL WW types. Consists of thermostat with remote adjustment and remote sensor. Simple, cost-effective and quick-to-install solution.
Temperature range 8 – 38 °C.
WHST 300 T38 Ref. no. 08817

Air temperature control

Air temperature control for warm water heating element WHR. Ideal for use as supply air heater.
Consists of thermostat incl. duct temperature sensor (with 2 m capillary tube) and valve. Provides a constant supply air temperature. Simple, cost-effective and quick-to-install solution.
Temperature range 20 – 50 °C.
WHST 300 T50 Ref. no. 08820

Hydraulic unit

Hydraulic unit
Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL-/RL temperature display, circulating pump and flexible connection hoses.

WHSH HE 24 V (0-10 V) No. 08318

WHR: The values apply for supply air temp. 0 °C and flow/return temperatures: [1] 90/70 °C, [2] 60/40 °C.

KWL HBX

Dimensions KWL HBX 250.. L

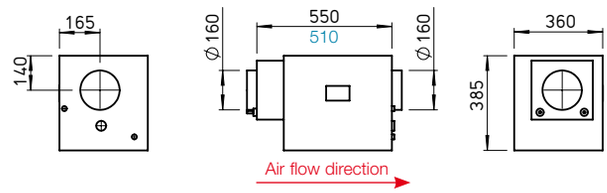

Dimensions in mm

KWL HBX 250 WW L, KWL HBX 250 EH L

Dimensions KWL HBX 500.. L

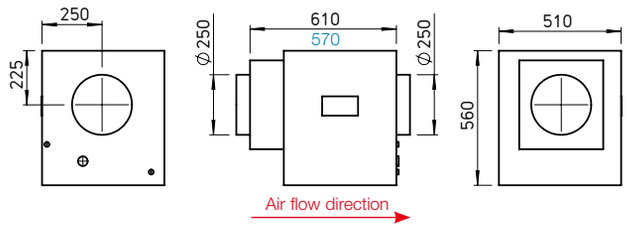

Dimensions in mm

KWL HBX 500 WW L, KWL HBX 500 EH L

Pressure loss KWL HBX

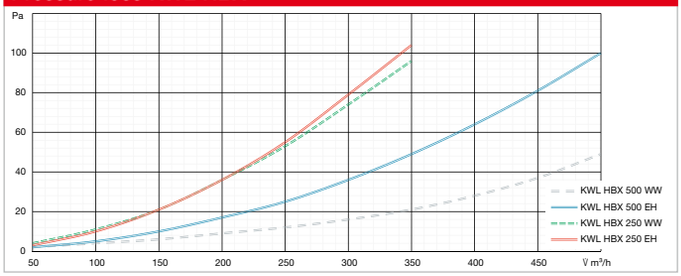

Schematic diagram KWL HBX.. WW R

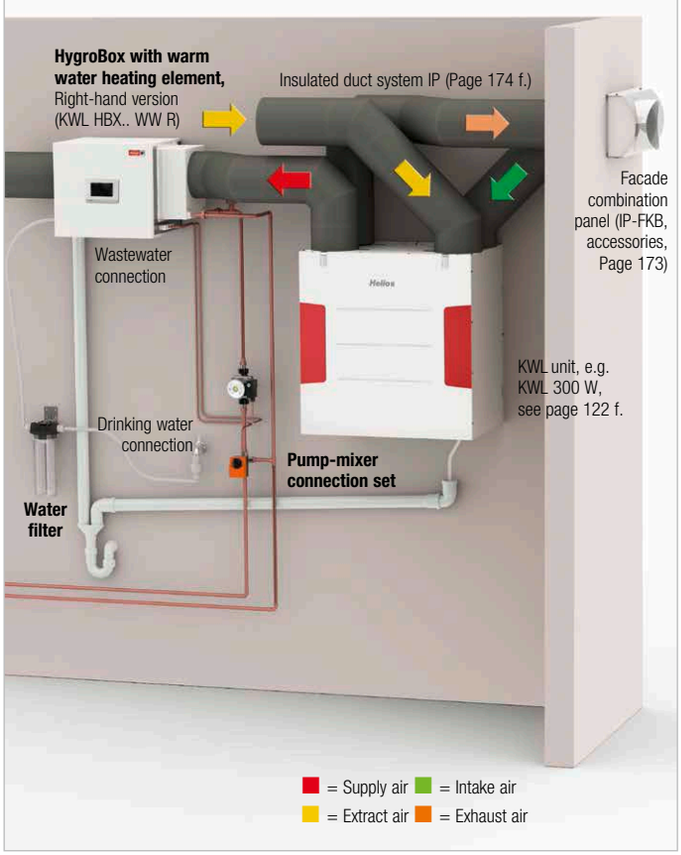

Specially designed for ventilation systems in residential buildings and offices, the Helios HygroBox automatically maintains a comfortable level of indoor humidity all year round and helps to create a pleasant indoor climate.

Advantages

- A comfortable indoor climate with balanced indoor humidity.
- Reduces damage caused by dryness to furniture, wooden flooring and antiques.
- Can help alleviate allergy symptoms.
- Reduces fine dust and electrostatic charges.

Special HygroBox features

- Constant supply air humidity and temperature in all rooms.
- The principle of natural evaporation prevents excessive humidification.
- Hygienically safe due to UVC disinfection.
- Fully automated operation with automatic summer deactivation.
- Low-maintenance and easy to install.
- Low operating costs through the use of evaporation energy from the existing heating system.

Functional principle

The HygroBox is an active humidification unit for integration in new or existing KWL ventilation units with heat recovery. The fresh intake air flows through the KWL unit heat exchanger and absorbs the thermal energy from the extract air. This preheated air is then delivered to the HygroBox, where active and automatic humidification takes place according to the principle of natural evaporation. A bladed rotor rotates continuously in a water bath inside the unit and releases water molecules into the preheated supply air via the wetted blade surface. Regardless of the KWL unit operating level and external weather influences, the HygroBox constantly maintains the preselected relative air humidity and thus helps to create a pleasant, comfortable environment with balanced indoor humidity.

Delivery

Delivered as a plug-in compact unit including water supply hoses and water filter.

Heating element

- The HygroBox is equipped with a warm water (WW types) or electric heating element (EH types). This heats the supply air before humidification and thereby guarantees the required evaporation energy and pleasant supply air temperature.
- With regard to heating systems with low flow temperature (e.g. heat pumps), a low-temperature heating element (type KWL-NHR, accessories, see right page) must be connected downstream of the HygroBox.

Summer operation

- The HygroBox automatically switches to standby mode when the moisture content of the intake air is sufficiently high (e.g. in summer). In this state, there is no water in the unit and the rotor remains at a standstill.

KWL-NHR

Low-temperature heating element (for KWL HBX.. WW)

Description

- The additional installation of a post-heating element on the HygroBox air outlet is recommended in combination with low-temperature heaters to compensate for the evaporative cooling.
- The external temperature sensor, which is included in the delivery of the post-heating element, must be installed in the supply air duct at a distance of approx. 50 cm behind the post-heating element.

Accessories

Low-temperature post-heating element

– for KWL HBX 250 WW
KWL-NHR 250 Ref. no. 05628

– for KWL HBX 500 WW
KWL-NHR 500 Ref. no. 05633

KWL-PMAS

Pump-mixer connection set (for KWL HBX.. WW)

Description

- For connection of the HygroBox to existing heating circuits.
- Consists of:
  – 1 pc. circulating pump 230 V
  – 2 pc. screw fittings, R 1/2a/15 mm MS (brass)
  – 1 pc. 3-way mixer valve with actuator 24 V (0-10 V), Rp1/2", DN 15.

Accessories

Pump-mixer connection set

– for KWL HBX 250 WW
KWL-PMAS 250 Ref. no. 40193

– for KWL HBX 500 WW
KWL-PMAS 500 Ref. no. 40194

KWL-UVR, KWL-OME

Replacement UVC ducts and osmosis membrane (for all types)

Description

- Helios HygroBoxes are equipped with a constant, automatically monitored UVC disinfection system which effectively kills germs and bacteria.
- In addition, the water in the evaporator tray is automatically changed depending on the water hardness and evaporation performance.
- A reverse osmosis unit protects the unit against limescale deposits.
- The hygienic safety of the HygroBox is documented and certified by experts.

Accessories

Replacement UVC ducts
KWL-UVR Ref. no. 05631

Replacement osmosis membrane
KWL-OME Ref. no. 05632

KWL-WF

Replacement water filter (for all types)

- As a general rule, the water filter in the water supply pipe must be replaced every 6 months. The filter replacement is indicated on the HygroBox display.

Accessories

Replacement water filter
Unit = 1 pc. filter cartridge
(without casing, without hoses)
KWL-WF Ref. no. 05630

Technical data

	With electric heating element				With warm water heating element			
	For KWL units up to 250 m³/h flow rate		For KWL units up to 500 m³/h flow rate		For KWL units up to 250 m³/h flow rate		For KWL units up to 500 m³/h flow rate	
	Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Right-hand version (air outlet right) **Left-hand version** (air outlet left)	**KWL HBX 250 EH R** **KWL HBX 250 EH L**	40188 40187	**KWL HBX 500 EH R** **KWL HBX 500 EH L**	40192 40191	**KWL HBX 250 WW R** **KWL HBX 250 WW L**	40186 40185	**KWL HBX 500 WW R** **KWL HBX 500 WW L**	40190 40189
Adjustable relative supply air humidity in %	40-60		40-60		40-60		40-60	
Adjustable supply air temperature °C	15-25		15-25		15-25		15-25	
Air volume flow m³/h	350		500		350		500	
Power consumption max. W	1450		2850		100		100	
Heat output W	1400		2800		2000		4200	
Voltage/Frequency	230 V~, 50 Hz		230 V~, 50 Hz		230 V~, 50 Hz		230 V~, 50 Hz	
Water connection	3/4“		3/4“		3/4“		3/4“	
Water drain Ø mm	40-50		40-50		40-50		40-50	
Weight (empty weight/operating weight) approx. kg	25		47		25/28		47/53	
Accessories								
Pump-mixer connection set	—		—		**KWL-PMAS 250**		**KWL-PMAS 500**	
Ref. no.	—		—		40193		40194	
Low-temperature post-heating element	—		—		**KWL-NHR 250**		**KWL-NHR 500**	
Ref. no.	—		—		05628		05633	
UVC ducts	**KWL-UVR**		**KWL-UVR**		**KWL-UVR**		**KWL-UVR**	
Ref. no.	05631		05631		05631		05631	
Water filter	**KWL-WF**		**KWL-WF**		**KWL-WF**		**KWL-WF**	
Ref. no.	05630		05630		05630		05630	
Osmosis membrane	**KWL-OME**		**KWL-OME**		**KWL-OME**		**KWL-OME**	
Ref. no.	05632		05632		05632		05632	

SEWT kit

The ground-to-brine heat exchanger SEWT boosts the efficiency of ventilation units with heat recovery.
The SEWT further reduces heating energy requirements, thereby helping to lower heating costs. The ideal addition to ventilation units with heat recovery.

Advantages

- Additional preheating and prevention of icing during the cold season.
- Pleasant "natural cooling" on hot days.
- Complete kit with coordinated components.

Functional principle

The ground-to-brine heat exchanger SEWT utilises the ground temperature which is relatively constant throughout the year. The ground collector pipe is laid in the ground at a depth of approx. 1.2 m. The hydraulic unit ensures the circulation of the brine depending on the outdoor temperature.
The brine serves as a heat transfer medium and releases the heat to the supply air through the heat exchanger module.

This results in the following:

- On hot summer days
  The ground-to-brine heat exchanger reduces the intake air temperature.
- During the transitional period
  The brine is circulated depending on the outdoor temperature measured via the thermostats. This preconditions the intake air before it reaches the ventilation unit, helping to achieve further energy savings and a comfortable indoor climate.
- During the cold season
  The preheating of cold intake air of up to 14 K.
  Thus, the intake air is normally at a temperature above 0 °C when it reaches the ventilation unit with heat recovery (anti-icing operation). This results in a higher supply air temperature and a positive effect on the total energy balance. Post-heating is only necessary in case of very low outdoor temperatures.

Planning information

- In order to maximise the heat transfer, the ground collector pipe should be laid at a depth of at least 1.2 m, since the temperature there is constantly approx. 8–12 °C throughout the year. The ground temperature increases and stabilises with installation depth.
- In order to increase the heat transfer, the pipe should be laid directly in the ground in a sand bed. Furthermore, if ground collector pipes are laid in parallel, the distance should not be less than 0.5 m (from pipe to pipe).
- There is also the option of probe drilling as an alternative to surface laying.

Delivery

- The ground-to-brine heat exchanger SEWT is delivered as a kit corresponding to the course of processing on-site and for optimised transportation.
  The complete set combines a high degree of precision in fit with a high level of operational reliability, as all the individual components are designed to work together seamlessly.

Schematic diagram

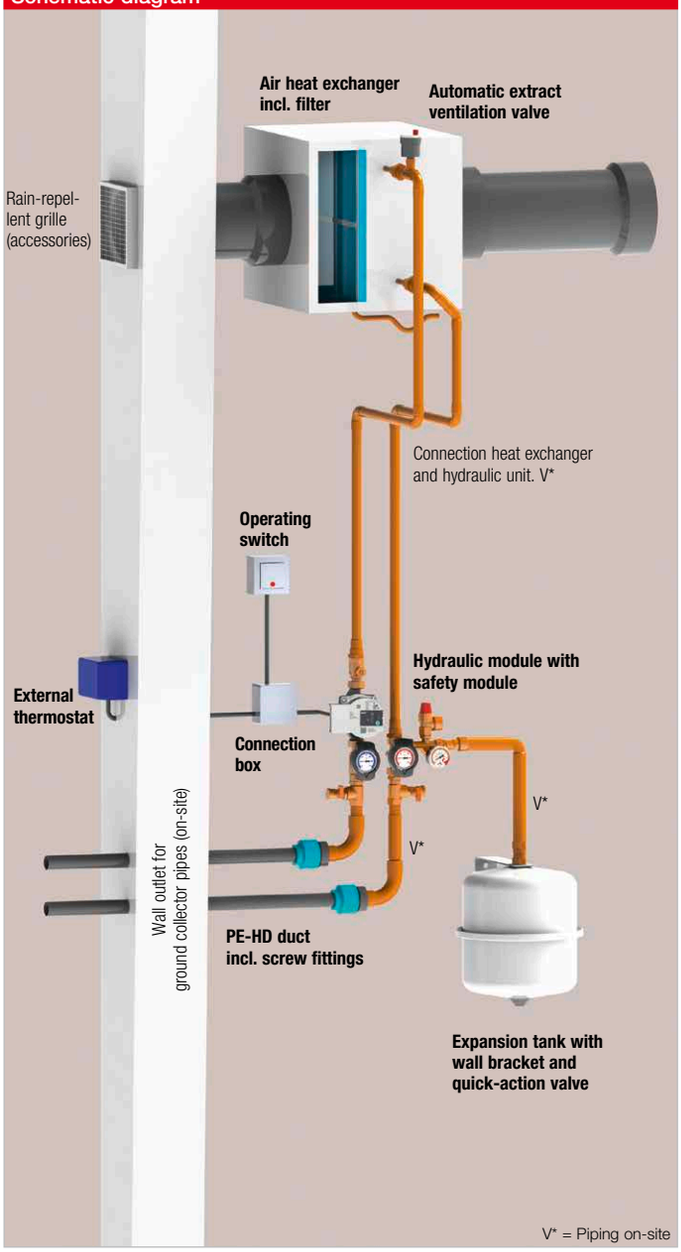

SEWT kit	Ref. no. 02564

Pictorial schematic

The pre-insulated duct system IsoPipe should be used to prevent condensation.
Alternative: Spiral duct with additional insulation.

SEWT-W

SEWT-H

SEWT-E

Dimensions SEWT-W



Dimensions in mm

Dimensions SEWT-H



Dimensions in mm

Dimensions SEWT-E



Dimensions in mm

Heat exchanger module

Description

- Highly efficient ground-to-brine heat exchanger unit with aluminium blades for optimal heat transfer to the intake air. Connection duct Ø 12 mm made of copper.
- Double-walled, fully insulated casing made of steel sheet (20 mm insulation, white powder-coated. With mounting bracket for wall or ceiling mounting.
- Connector Ø 180 mm with double lip seal.
- Variable air flow direction through convertible air filter.
- With integrated air filter, class ISO Coarse 75 % (G4). Prevents the ingress of dirt, insects, etc.
- Inspection panels are easy to open without tools for quick and easy access to the filter.
- Condensate drain connector incl. siphon, Ø 1/2".

Accessories

Replacement air filter class ISO Coarse 75 % (G4)

Unit = 3 pcs.

ELF-SEWT-F	No. 02568

Hydraulic module and control

Description

- Complete hydraulic kit with all components necessary for the connection of the ground-to-brine heat exchanger system and the corresponding control unit for automatic or manual system operation.

Delivery

- Brine pump unit (230 V) incl. safety module.
- Flow and return temperature display.
- Automatic quick-vent valve with non-return valve.
- Membrane pressure expansion tank – 12 litre, connection 3/4", incl. wall bracket and quick-action valve.
- Thermostat module with 2 setpoints for automatic control of the brine circuit in summer / winter operation.

- Switch unit for switching between automatic (thermostatic operation) and manual control of the brine circuit (incl. separate connection box – no Fig.)

Technical data Thermostat	
Load capacity	16 A (4 A ind.)
Voltage	230V, 50/60Hz
Protection category	IP54
Wiring diagram no.	906
Temperature range (adjust.)	2 x 0 – 40 °C
Technical data Hydraulic module	
Current consumption max.	0.44 A
Voltage	230 V, 50 Hz
Power consumption	3 – 45 W
Protection category	IP44

Ground installation set with screw fittings and 20 l ethylene glycol.

Description

- Flexible PE-HD ground collector pipe (PE-HD = polyethylene high-pressure pipe), wall thickness 2.9 mm, external Ø 32 mm. Delivered in 100 metre bundle.
- Specifically designed for ground installation.
- Screw fitting set made of high-quality polypropylene (PP) for connection of the ground collector pipe to the hydraulic unit.
- The screw fitting set (32-1") has an active seal system.
- 20 l canister of ethylene glycol, free from amines and nitrites. Sufficient for completely filling the duct system with a 25 % glycol-water mixture.

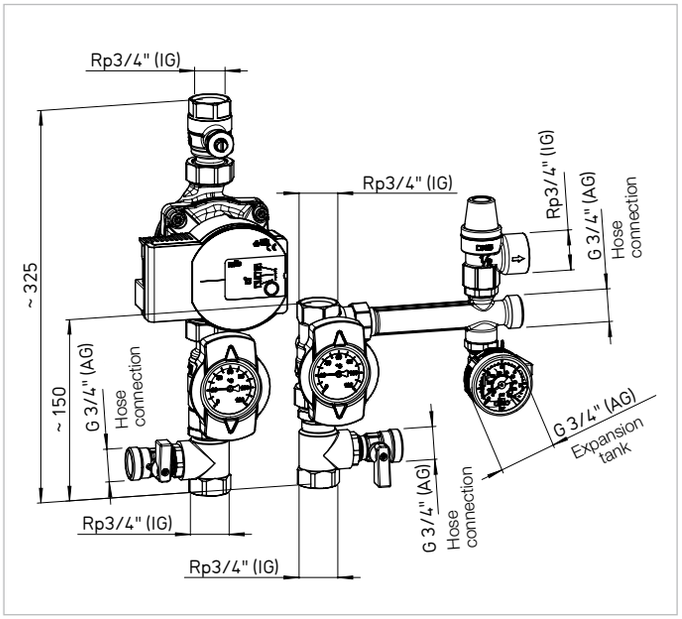

Technical data SEWT-W

Pressure loss Heat exchanger module
with filter ISO Coarse 75 % (G4) in pure state



Reference

The SEWT kit offers functional reliability and accuracy of fit in addition to the package price saving:

Type	Ref. no.
SEWT kit	02564

The individual components of the SEWT kit are to be ordered separately:

Type	Ref. no.
SEWT-W	02565
SEWT-H	02566
SEWT-E	02567

LEWT kit

Planning information

- In order to maximise the heat transfer, the ground collector pipe should be laid at a depth of at least 1.2 m, since the temperature there is constantly approx. 8 °C throughout the year. The ground temperature increases and stabilises with installation depth.
- During installation, it should be ensured that there is a gradient of at least 2% for the condensate drain.
- In order to increase the heat transfer, the pipe should be laid directly in the ground in a sand bed. Furthermore, if ground collector pipes are laid in parallel, the distance should not be less than 1 m (from pipe to pipe).
- A minimum bend radius of 1 m is recommended to minimise the air-side pressure loss.

The ground-to-air heat exchanger LEWT further optimises the efficiency of ventilation units with heat recovery.

Advantages

- Additional preheating during the cold season without any significant additional energy requirements.
- Prevention of icing of the heat exchanger.
- Pleasant cooling on hot days.
- Additional post-heating of supply air is only necessary in case of very low outdoor temperatures.
- Complete kit with coordinated components.

Functional principle

The ground-to-air heat exchanger LEWT utilises the fact that the ground temperature remains relatively constant throughout the year. The intake air is drawn through an upstream ground collector pipe. This can be installed in an existing construction pit at a depth of approx. 1.2 to 1.5 m; the total pipe length should be at least 40 m.

- This results in the following:
- During the cold season
  The preheating of cold intake air of up to 14 K. Thus, the intake air is normally at a temperature above 0 °C when it reaches the ventilation unit with heat recovery (anti-icing operation). This results in an increased heat recovery rate and a higher supply air temperature. Post-heating is only necessary in case of very low outdoor temperatures.
- On hot summer days
  The ground-to-air heat exchanger reduces the intake air temperature.
- During the transitional period
  Intake either through the ground collector or direct intake opening. This is dependent on the outdoor temperature measured via the thermostats. The electric bypass shutter automatically controls the ideal intake volume. This preconditions the intake air before it reaches the ventilation unit, helping to achieve further energy savings and a comfortable indoor climate.

Delivery

- The ground-to-air heat exchanger LEWT is delivered as a kit corresponding to the course of processing on-site and for optimised transportation. It consists of three sets, which are described on the adjacent page.
- The individual components are perfectly matched to each other and form a system. This guarantees simple, quick and precise installation as well as high functional reliability.

Complete kit
consisting of ground collector pipe, outlet wall bushing, air intake column, control and pipe fittings.

LEWT kit	Ref. no. 02977

Pictorial schematic for installation in buildings with basements

The ground collector pipe enters the building via an underground wall outlet.

Schematic diagram

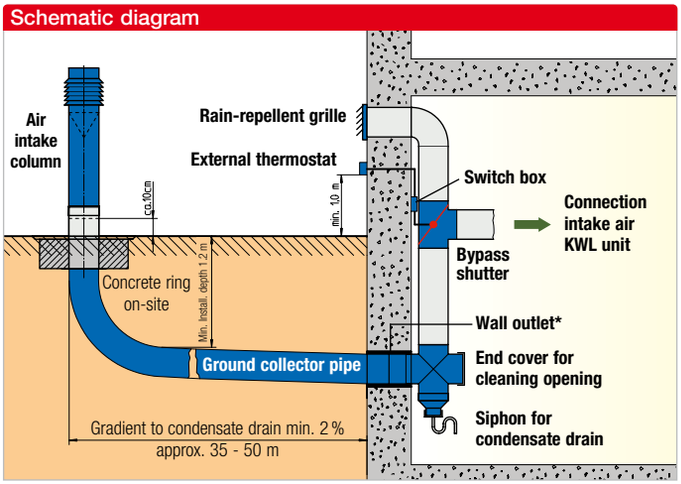

*not suitable for pressing water.

Pictorial schematic for installation in buildings without basements

The ground collector pipe is placed in the building via the floor panel. A shaft must be provided on-site for inspection purposes.

Schematic diagram

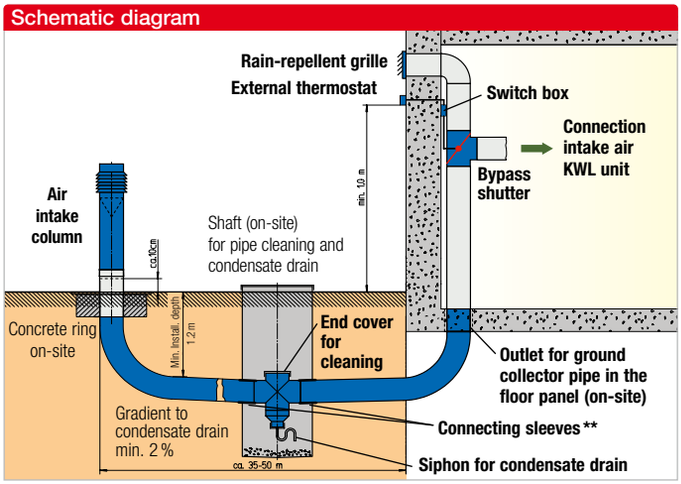

**in case of assembly with shaft please order additionally 1 pc. connecting sleeve LEWT-MU No. 02971.

LEWT-E+M

LEWT-A



LEWT-S+F

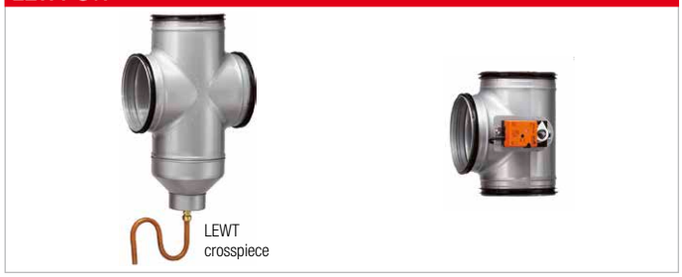

Outlet wall bushing



Air intake column



Crosspiece



Bypass shutter



Ground collector pipe and wall outlet LEWT-E+M

Description

- FFlexible, externally corrugated and internally smooth ground collector pipe with low air resistance; external Ø 200 mm.
- Coextruded composite pipe made of physiologically and toxicologically safe polyethylene (PE-HD). Antibacterial, antistatic inner wall. Specifically developed as a ventilation duct for ground installation.
- Easy to clean, fulfils DIN 1946-6 (VDI 6022).
- 100 % odourless, assured top quality level excludes the transmission of harmful substances and vapours.
- The PE-HD material achieves double the conductivity of PP with comparable wall thicknesses / pipe cross-sections. In comparison to PVC, the heat conductivity is two and a half times better.
- Delivered in bundle with 2 x 25 liner metres. Includes wall outlet DN 200 made of polypropylene (sanded), profile seal rings, connecting sleeve and seals.
- Ground collector pipe, wall outlet and profile seal rings comply with protection category IP 67 when processed according to instructions.

Air intake column LEWT-A with filter

Description

- Air intake column in modern design and aesthetic stainless steel look for supply air intake.
- Simple plug-in connection between the intake column and ground collector pipe.
- Fixation with support plate or bordering plate (on-site) in drywall construction or set in concrete.
- All parts made of stainless steel.
- With integrated cone air filter, class ISO Coarse 60 % (G4). Prevents the ingress of dirt, insects and contaminants.
- Cone filter must be removed by hand for cleaning and replacement after removing the blade head.

Pressure loss Air intake column
with filter ISO Coarse 60 % (G4) and 40 metre ground collector pipe in pure state



Control and moulded duct parts LEWT-S+F

Description

- Automatic control of air intake via the ground collector pipe or directly from the outdoor area depending on the outdoor temperature measured by the thermostat.
- Temperature range for direct intake individually adjustable at thermostat.
- The desired operating mode can be manually selected.

Delivery

- Bypass shutter NW 200 with actuator 230 V; for vertical installation using the crosspiece.
- Crosspiece for connection to the wall outlet. Includes cleaning opening, condensate collector, siphon and end cover.
- Rain-repellent grille (no Fig.) as wall cover for direct intake opening. Prevents the ingress of rain, small animals and insects into the intake air duct.

Technical data Thermostat	
Load capacity	16 A (4 A ind.)
Voltage	230V, 50/60 Hz
Protection category	IP54
Wiring diagram no.	798.1
Temperature range (adjust.)	2 x 0 – 40 °C
Technical data Actuator	
Voltage	230V, 50/60 Hz
Power consumption	1.5 W
Protection category	IP54

- Setpoint adjuster and thermostat for automatic and manual bypass shutter control. For attachment in weatherproof location in the outdoor area on the north side of the building at a height of approx. 1 m.

Dim. in mm B 200 x H 90 x T 70

- Switch box with double toggle switch for following operating modes:
  - Thermostatic operation, automatic
  - Ground heat, manual
  - Intake air, manual

Dim. in mm W 110 x H 180 x D 100

Accessories

Replacement air filter class ISO Coarse 60 % (G4)
Unit = 3 pcs.

ELF-LEWT-A	Ref. no. 02975

Additional connecting sleeve
Includes 2 pcs. seal rings.

LEWT-MU	Ref. no. 02971

Reference

The individual components of the LEWT kit are to be ordered separately:

Type	Ref. no.
LEWT-E+M	02991
LEWT-S+F	02990
LEWT-A	02992
LEWT crosspiece	02967

Competence in aerodynamics.
Axial fans without limits.

Helios offers an extensive, finely graduated standard range of high-performance axial and medium-pressure fans as well as RADAX® VAR high-pressure round duct fans for a wide range of performance requirements.

The series range of high performance axial fans with aerodynamically and acoustically optimised impellers and innovative motor concepts (Ø 250 to 500 mm) is presented on the following pages.

Voltage controllable high performance axial AC fans in Ø 250 to 500 mm are characterised by their proven robust design and a 25% increase in efficiency with 50% noise reduction.

The series range with Ø up to 1000 mm is complemented by technical building equipment (TGA) solutions. **See TGA catalogue, Ref. no. 86 979.**

- Fire gas and smoke extraction types according to DIN 12101-3 in temperature classes F300 (60 min.), F400 (120 min.) and F600 (120 min.). **See TGA catalogue, Ref. no. 86 979.**
- Special technical building equipment (TGA) solutions and large axial fans from Ø 1000 to 7100 mm, V up to 2.2 million m^3/h, are manufactured according to customer-specific requirements.

Renowned users rely on the application of Helios axial fans in ventilation, heating, cooling, air conditioning and drying systems around the world.

The large fans have been used successfully for decades, e.g. in cooling towers and air coolers.

High performance axial fans

Energy-efficient
EC version.

Ø 250 – 710 mm
V = 1970 – 19 400 m³/h

EC

192f

High performance axial fans

Standard
AC version.

Ø 200 – 630 mm
V = 520 – 17 840 m³/h

Also available in version:

Ex

210f

High performance axial fans

Product-specific information, selection table.

190f

Medium pressure axial fans

Product-specific information, selection table.

Ø 225 – 630 mm
V = 950 – 32 000 m³/h

228f

RADAX® VAR high pressure fans

Product-specific information, selection table.

Ø 225 – 630 mm
V = 900 – 22 310 m³/h

Also available in version:

Ex

254f

Installation accessories

For axial fans and VAR fans.

278f

This information supplements the "General technical information".

Designs

- Standard and high performance fans in industrial design are manufactured in series with more than 20 nominal sizes and more than 1000 types.
- A closely graduated range up to impeller Ø 7100 mm in various designs is available for higher volume and pressure rates. Four different versions are available as standard.
- Types HQ, HW and HRF up to nominal size 500 mm with efficient EC drive technology are optionally available for especially energy-efficient applications and reduced operating costs.

Versions in this catalogue

1. **Wall fan HQ**
   Square plate with intake nozzle
   Casing made of galvanised steel sheet. Motor with terminal box and protection grille on inlet side.
2. **Built-in fans HW**
   Wall ring with intake nozzle
   Casing made of galvanised steel sheet. Motor with terminal box and protection grille on inlet side.
3. **Built-in wall fan HS**
   Pipe sleeve, cylindrical with smooth ends
   For flush-mounted wall or duct installation. Casing made of galvanised steel sheet with circumferential reinforcing beads.
4. **Round duct fans HRF, with double-sided flanges**
   For direct intermediate flanges in pipeline. Flange in accordance with DIN 24155, p. 3. Casing made of galvanised steel sheet, with additional terminal box (IP55) on outside of duct.

Drive

- **AC types**
  Robust 1~ or 3~ internal rotor motors with thermal contacts in the winding. Ball bearings with lifetime lubrication.
- **EC types**
  Highly efficient, speed-controllable external rotor motors in protection category IP54. Ball bearings with lifetime lubrication.

Impellers

- Depending on requirements, the impellers are made of different materials; see information on the product pages. The standard versions are made of plastic, but other materials e.g. aluminium or steel are possible according to requirements.
- Common features:
  - Low operating noise level.
  - High level of efficiency.
  - Vibration-free running due to dynamic balancing in accordance with DIN ISO 21940-11 – quality grade 6.3.
- Impellers made of other materials are possible upon request.
- Impellers made of metal are available at an extra charge for higher temperatures. The information on the product pages is decisive.

Angle of attack

- The series products up to 630 mm Ø are equipped with fixed impellers.
- The blades can be delivered with order-based angles of attack from nominal size 710 mm upwards (except for type HQW 710/6).
- The sizes Ø 800/4, 900/4 and ../6 as well as Ø 1000 mm have blades which can be adjusted at standstill.
  This allows optimal coverage of the operating point. The angle of attack is adjusted (according to the order) and fixed in the factory. The motor is assigned using the maximum power (see table). The specified angle of attack must not be exceeded, otherwise the motor can be overloaded.

Contact protection

With regard to installation and operation, The applicable occupational safety and accident protection guidelines as well as contact protection according to VDE 0700 or DIN EN ISO 13857 must be observed. Contact with rotating parts must be prevented. It must be ensured that there are no loose substances in the intake area. Fans which are protected by their installation type (e.g. installation in ventilation duct or closed aggregates) do not require a protection grille if the system provides sufficient safety. Please note that the installer can be held liable for accidents as the result of the lack of protection devices. Suitable protection grilles are available as accessories. The installer and operator shall be responsible for observing safety regulations.

- **Air flow direction**
  All fans (except for HRF) are designed with air flow direction
  A = inlet over motor
  as standard. Air flow direction
  B = outlet over motor
  can be delivered for most types upon request (at an extra charge).
  HRF are delivered with air flow direction B as standard.
- The subsequent conversion of air flow direction is possible for most high performance axial AC fans. This requires the following:
  1. Change of direction of motor rotation by reversing the polarity on the terminal board.
  2. Removal of the impeller and reattachment the other way round (possible up to Ø 500). A performance reduction of approx. 1/3 should be expected for series HQ and HW.
- EC types can only be operated in the standard direction of rotation.

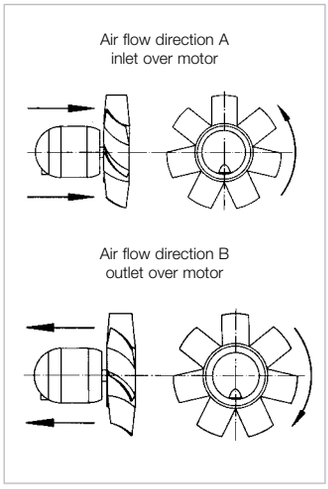

Installation position, installation, condensate outlets

- Axial fans can be installed and operated in any position in compliance with the permissible protection category (see product page). In case of equipment with condensate drain holes, please be aware of their position.
- In case of outdoor installation, installation in permanently humid or wet environments or in case of installation with a vertical shaft, this must be indicated when placing the order, because a special design may be required. The installation site and mounting should be such that the fan can be mounted securely and without warping.

Reverse operation

Most high performance axial AC fans (see product pages) are reversible. Either supply or extract ventilation can take place using a suitable reverser switch. There is a performance reduction of approx. 1/3 in an abnormal flow direction.

- The EC types are non-reversible as standard.

Air flow temperatures

Temporarily higher air flow temperatures are also possible with the exception of explosion-proof versions. Versions designed for higher continuous temperatures are possible in the area of custom production.

Motor protection

- Through built-in thermal contacts in the winding for AC types
  - standard for 1~ motors,
  - mostly standard for 3~ motors (see product page).
- Integrated electronic temperature monitoring system for EC types.
- The regulations DIN EN 60079-10 shall apply for explosion-proof types. According to this, overload protection must be provided for each fan by a motor protection circuit breaker, which must be triggered within the heating time specified in the test certificate in case of a short circuit.
  Fans must be protected by a protection grille or shutter against foreign bodies larger than 12 mm getting sucked in or falling in.
  Approved operating mode according to DIN EN 60034-1/ VDE 0530 = S1 (continuous operation). Speed control is not permitted.

Explosion protection

The explosion-proof types correspond to unit group II, category 2G for operation in zone 1 and 2.
Larger air gaps which result in a performance reduction of approx. 10% are stipulated in accordance with Directive 2014/34/EU (ATEX).

Special equipment, Additional costs upon request

- **Impeller made of die-cast aluminium**
- **Deviating voltage**
- **Deviating frequency**
- **Two-component lacquer coating** (RAL 6011) to protect the external unit parts against weak acids and alkaline solutions
- **Deviating air flow direction**
- **Special equipment for higher air flow temperatures**
- **Pressure-resistant encapsulated motors (standard for 1~ explosion-proof types)**

Vibration insulation

The use of vibration dampers (accessories SDD, SDZ) is recommended to prevent vibration transmission. Larger motors may protrude from the back and cause uneven distribution due to their high weight. An extension duct VR (accessories) should be provided to adjust the centre of gravity.

By combining the parameters of static pressure increase Δp_{fa}, flow rate $\dot{V}$, speed min^{-1}, sound pressure level dB(A) and impeller diameter DN mm, the following table facilitates the selection of high performance axial EC fans Ø 250 to 710 mm and high performance axial fans Ø 200 to 1000 mm.

EC	Speed	Sound pressure inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure																
		L_{PA} dB(A)	(Δp_{fa}) in Pa																
Ø in mm	min^{-1}	at 4 m distance	**0**	**10**	**20**	**30**	**40**	**50**	**60**	**80**	**100**	**120**	**140**	**160**	**200**	**250**	**300**	**350**	**400**
EC 250 A	2710	58	1970	1940	1900	1820	1790	1750	1680	1540	1330	1120	760						
EC 315 A	1920	52	2780	2740	2690	2600	2510	2420	2330	2160	1800								
EC 355 A	1460	49	2990	2910	2660	2490	2410	2240	2070										
EC 355 B	1975	59	4200	4150	4090	4020	3960	3890	3820	3690	3540	3360	3100	2790					
EC 400 A	1800	59	4790	4690	4610	4540	4460	4390	4310	4140	3920	3640	3240						
EC 400 B	2150	65	5850	5800	5760	5700	5640	5560	5490	5360	5210	5080	4870	4730	4030				
EC 450 A	1325	55	5460	5350	5250	5140	5030	4910	4790	4520	4200	3730							
EC 450 B	1835	64	7640	7580	7510	7450	7390	7330	7260	7070	6880	6680	6490	6200	5530				
EC 500 A	1025	54	6320	6190	6050	5900	5750	5590	5420	5010	4460								
EC 500 B	1450	62	8300	8230	8150	8070	7970	7880	7790	7490	7300	6910	6530	6140					
EC 560	1200	55	9740	9550	9360	9160	8780	8590	8400	8020	7440	6480							
EC 630	960	54	10330	10100	9860	9630	9400	8930	8700	7770	6370								
EC 710	1100	61	19400	18920	18440	18210	17970	17490	17240	16530	15570	14610	13650	11260					

	Speed	Sound pressure inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure																
		L_{PA} dB(A)	(Δp_{fa}) in Pa																
Ø in mm	min^{-1}	at 4 m distance	**0**	**10**	**20**	**30**	**40**	**50**	**60**	**80**	**100**	**120**	**140**	**160**	**200**	**250**	**300**	**350**	**400**
200	2300	55	910	860	810	760	710	490	420	330	220								
200	1360	42	520	410	210	170													
250	2800	53	2070	2040	2010	1970	1940	1910	1870	1800	1710	1610	1480						
250	1450	44	930	840	730														
250	950	31	660	570															
315	2800	69	4090	4050	4020	3990	3950	3920	3880	3790	3700	3610	3500	3380	3090				
315	1450	51	2090	2010	1930	1840	1740	1620	1410										
315	950	38	1330	1220	1070														
315	725	30	980	780															
355	2800	71	5710	5670	5620	5580	5530	5480	5430	5330	5220	5110	4990	4860	4550	4020			
355	1450	51	2850	2770	2670	2570	2450	2320	2160										
355	950	42	1940	1830	1690	1500	1060												
355	725	34	1430	1240	880														
400	2800	71	8410	8360	8310	8270	8220	8170	8130	8030	7940	7840	7750	7650	7440	7160	6840	6440	5820
400	1450	56	4010	3920	3810	3700	3580	3440	3300	2970									
400	950	45	2570	2410	2230	2020													
400	725	37	2010	1810	1530														
450	2800	78	11050	10960	10870	10770	10680	10590	10500	10310	10130	9950	9770	9580	9210	8690	8050	6930	4520
450	1450	58	5770	5680	5590	5500	5390	5280	5160	4870	4510	4010							
450	950	47	3890	3720	3550	3360	3150	2890											
450	725	51	2860	2680	2450	2120													
500	2800	81	13150	13040	12930	12820	12720	12610	12500	12290	12070	11860	11660	11440	11010	10380	9600	8620	5390
500	1450	65	8320	8220	8110	8000	7880	7760	7630	7370	7080	6760	6400	5970					
500	950	51	5500	5330	5140	4950	4740	4510	4240	3450									
500	725	44	3890	3690	3440	3150	2750												
560	1450	62	12910	12680	12550	12360	12140	11950	11770	11320	10900	10550	10000	9500	8270				
560	950	52	8100	7680	7370	7080	6680	6280	5830	4570									
560	725	46	6450	6070	5640	5230	4750	4140											
630	1450	65	17870	17650	17420	17200	16970	16750	16520	16010	15500	15000	14500	14000	13000	11300			
630	950	55	10520	10150	9780	9410	9040	8670	8220	7260									
630	725	49	8000	7580	7010	6530	5910	5300											

HQ EC 250

HW EC 250

HRF EC 250

Dimensions HQ EC 250



Dimensions HW EC 250



Dimensions HRF EC 250



Description for all types

- **Casing**
  Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white.

- **Impeller**
  High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP54 protection. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

- **Electrical connection**
  Standard terminal box (protection category IP54) mounted to external cable, or on outside of duct for HRF.

- **Protection grille**
  Made of powder-coated steel for HQ and HW in accordance with DIN EN ISO 13857.

- **Power control**
  All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. See type table.
  Performance levels are shown on the performance curve as examples.

- **Installation**
  Installation possible in any position.

- **Noise levels**
  The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type		
								HQ EC incl. protection grille / Ref. no.	**HW EC** incl. protection grille / Ref. no.	**HRF EC** / Ref. no.
min $^{-1}$	$\dot{V}$ m³/h	kW	A	dB(A) at 4m	No.	+°C	ca. kg			
Alternating current, 1~, 230 Volt, 50/60 Hz, EC motor, protection category IP54										
2710	1970	0.13	1.03	58	1252	40	6.0	**HQW EC 250 A** 04822	**HWW EC 250 A** 04823	**HRFW EC 250 A** 04824

Performance curves HQ EC / HW EC / HRF EC 250 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	78	58	71	74	71	68	63	50
$L_{PA, 4m}$	Air noise	dB(A)	58	38	51	54	51	48	43	30

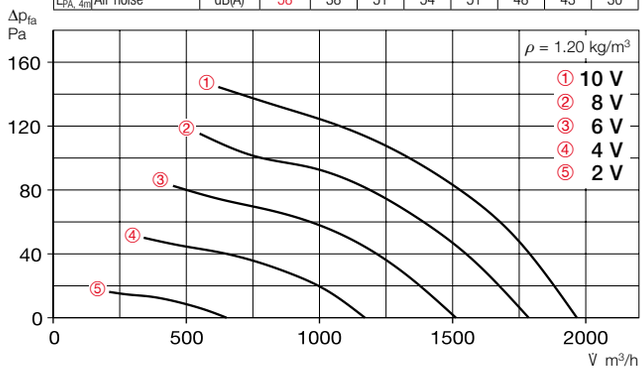

Voltage V	n min⁻¹	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA, 4m}$
10	2710	1970	125	1.00	58
8	2520	1790	92	0.80	56
6	2150	1510	57	0.51	52
4	1680	1170	30	0.26	46

Accessories for HRF EC 250 Description see page 278 ff.

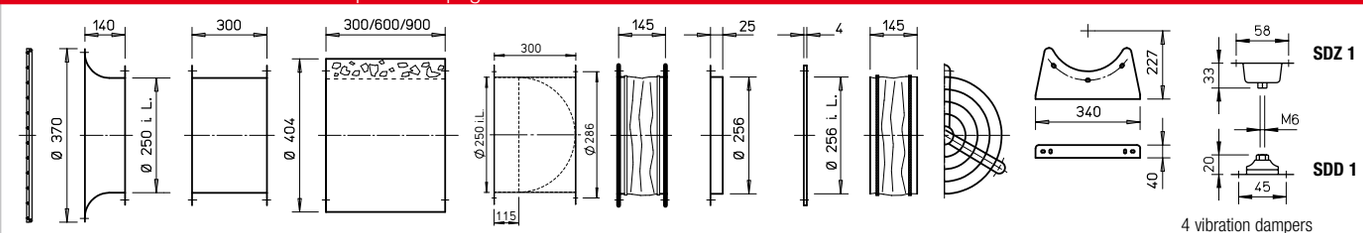

Intake nozzle with prot. grille **ASD-SGD 250** No. 01414

Extension duct **VR 250** No. 01402

Duct silencer **RSD 250/..**

Duct shutter, automatic **RVS 250** [a] No. 02592

Flanged flexible connector **STS 250** No. 01220

Counter flange **FR 250** No. 01203

Flat flange **FF 250** No. 04941

Flexible connecting sleeve **FM 250** No. 01672

Protection grille duct side **SG 250** No. 01236

2 mounting brackets **1 x MK 250** (= 2 pcs) No. 01447

4 vibration dampers for tensile load **1 x SDZ 1** (= 4 pc) No. 01454
4 vibration dampers for compression load **1 x SDD 1** (= 4 Pc) No. 01452

[a] Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Universal control system, electronic controller, Speed potentiometer	615 ff.
Five-step speed switch	610

Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surface-mounted		Three level speed switch flush-mounted		Three level speed switch surface-mounted		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438

[1] Multiple EC fans can normally be connected, see Accessories.

HQ EC 315

HW EC 315

HRF EC 315

Dimensions HQ EC 315



Dimensions HW EC 315



Dimensions HRF EC 315



Description for all types

- **Casing**
  Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white.

- **Impeller**
  High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP54 protection. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

- **Electrical connection**
  Standard terminal box (protection category IP54) mounted to external cable, or on outside of duct for HRF.

- **Protection grille**
  Made of powder-coated steel for HQ and HW in accordance with DIN EN ISO 13857.

- **Power control**
  All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. See type table.
  Performance levels are shown on the performance curve as examples.

- **Installation**
  Installation possible in any position.

- **Noise levels**
  The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type		
								HQ EC incl. protection grille / Ref. no.	**HW EC** incl. protection grille / Ref. no.	**HRF EC** / Ref. no.
min $^{-1}$	$\dot{V}$ m³/h	kW	A	dB(A) at 4m	No.	+°C	ca. kg			
Alternating current, 1~, 230 Volt, 50/60 Hz, EC motor, protection category IP54										
1920	2780	0.15	1.20	52	1252	40	7.5	**HQW EC 315 A** 04880	**HWW EC 315 A** 04881	**HRFW EC 315 A** 04882

Performance curves HQ EC / HW EC / HRF EC 315 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	72	43	64	65	65	66	62	53
$L_{PA,\ 4m}$	Air noise	dB(A)	52	23	44	45	45	46	42	33

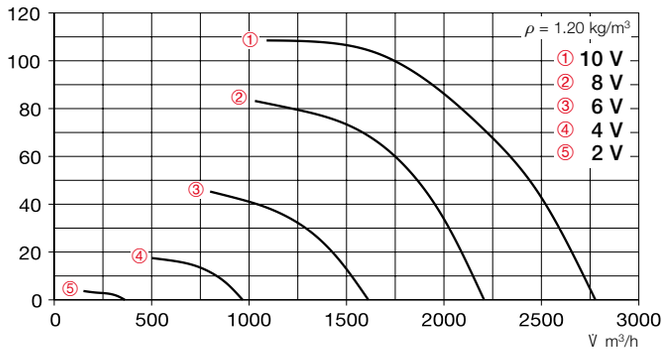

Voltage V	n min⁻¹	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA,\ 4m}$
10	1920	2780	150	1.20	52
8	1540	2210	90	0.75	48
6	1120	1610	40	0.36	41
4	710	970	15	0.15	31

Accessories for HRF EC 315 Description see page 278 ff.

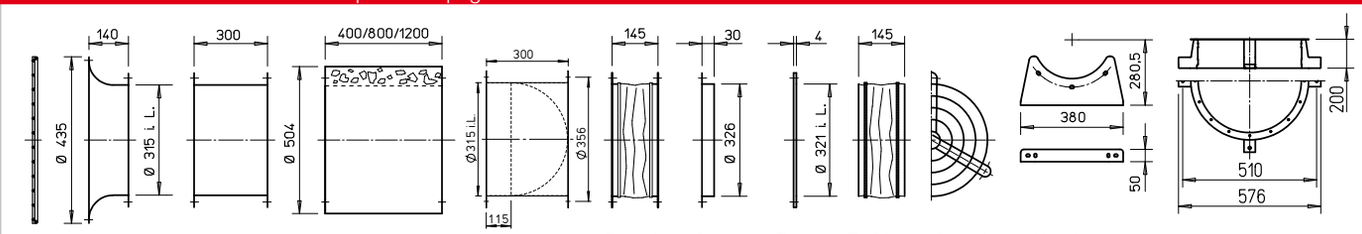

Intake nozzle with prot. grille **ASD-SGD 315** No. 01416

Extension duct **VR 315** No. 01404

Duct silencer- **RSD 315/..**

Duct shutter, automatic **RVS 315** [a] No. 02594

Flanged flexible connector **STS 315** No. 01221

Counter flange **FR 315** No. 01204

Flat flange **FF 315** No. 04943

Flexible connecting sleeve **FM 315** No. 01674

Protection grille duct side **SG 315** No. 01237

Mounting brackets **MK 315** (1 Set = 2 pcs) No. 01448

Mounting ring for vertical attachment **MRV 315** No. 01755

[a] Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Universal control system, electronic controller, Speed potentiometer	615 ff.
Five-step speed switch	610

Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surface-mounted		Three level speed switch flush-mounted		Three level speed switch surface-mounted		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438

[1] Multiple EC fans can normally be connected, see Accessories.

HQ EC 355

HW EC 355

HRF EC 355

Dimensions HQ EC 355



Dimensions HW EC 355



Dimensions HRF EC 355



Description for all types

Casing
Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white.

Impeller
High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

Drive
Energy-efficient, speed-controllable EC external rotor motor with IP54 protection. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
Standard terminal box (protection category IP54). Mounted to external cable for HQ and HW types (version “A”) or on back of motor (version “B”). Mounted on outside of duct for HRF types.

Protection grille
Made of powder-coated steel for HQ and HW in accordance with DIN EN ISO 13857.

Power control
All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. See type table.
Performance levels are shown on the performance curve as examples.

Installation
Installation possible in any position.

Noise levels
The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type		
								HQ EC incl. protection grille / Ref. no.	**HW EC** incl. protection grille / Ref. no.	**HRF EC** / Ref. no.
min $^{-1}$	V̇ m³/h	kW	A	dB(A) at 4m	No.	+°C	ca. kg			
Alternating current, 1~, 230 Volt, 50/60 Hz, EC motor, protection category IP54										
1460	3000	0.12	1.10	49	1252	40	8.5	**HQW EC 355 A** 04916	**HWW EC 355 A** 04917	**HRFW EC 355 A** 04918
1980	4200	0.32	1.40	59	1047	40	12.0	**HQW EC 355 B** 04919	**HWW EC 355 B** 04920	**HRFW EC 355 B** 04921

Performance curves HQ EC / HW EC / HRF EC 355 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	69	46	57	62	62	64	64	46
$L_{PA, 4m}$	Air noise	dB(A)	49	26	37	42	42	44	44	26

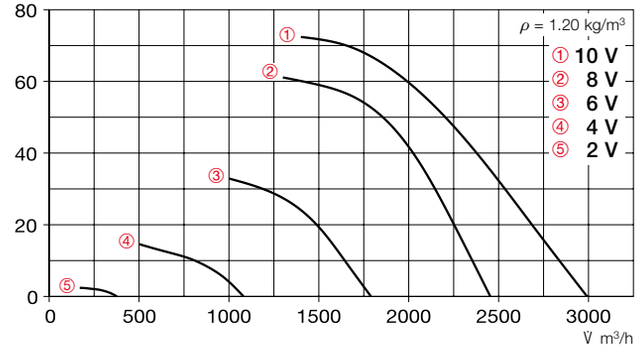

Voltage V	n min-1	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA, 4m}$
10	1460	3000	115	0.94	49
8	1200	2450	80	0.70	48
6	880	1790	35	0.30	39
4	560	1080	10	0.15	28

Performance curves HQ EC / HW EC / HRF EC 355 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	79	52	73	73	73	73	67	59
$L_{PA, 4m}$	Air noise	dB(A)	59	32	53	53	53	53	47	39

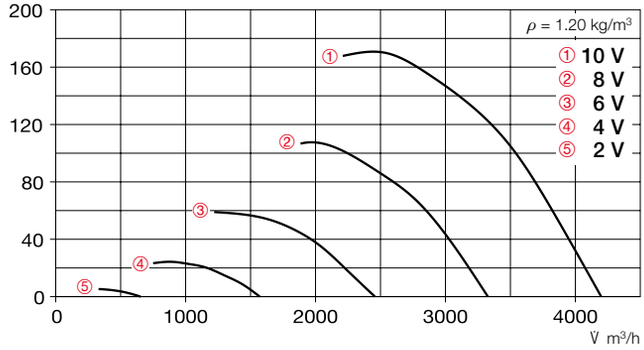

Voltage V	n min-1	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA, 4m}$
10	1980	4200	316	1.4	59
8	1600	3330	175	0.79	54
6	1170	2460	80	0.37	48
4	760	1570	30	0.20	39

Accessories for HRF EC 355 Description see page 278 ff.

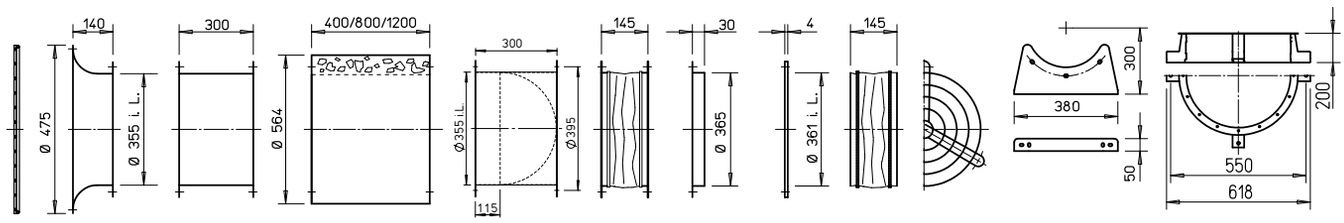

Intake nozzle with prot. grille **ASD-SGD 355** No. 01417

Extension duct **VR 355** No. 01405

Duct silencer- **RSD 355/..**

Duct shutter, automatic **RVS 355** [a] No. 02595

Flanged flexible connector **STS 355** No. 01222

Counter flange **FR 355** No. 01205

Flat flange **FF 355** No. 04944

Flexible connecting sleeve **FM 355** No. 01675

Protection grille duct side **SG 355** No. 01238

Mounting brackets **MK 355** (1 Set = 2 pcs) No. 01448

Mounting ring for vertical attachment **MRV 355** No. 01759

[a] Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Universal control system, electronic controller, Speed potentiometer	615 ff.
Five-step speed switch	610

Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surface-mounted		Three level speed switch flush-mounted		Three level speed switch surface-mounted		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438

[1] Multiple EC fans can normally be connected, see Accessories.

HQ EC 400

HW EC 400

HRF EC 400

Dimensions HQ EC 400



Dimensions HW EC 400



Dimensions HRF EC 400



Description for all types

- **Casing**
  Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white.

- **Impeller**
  High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP54 protection. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

- **Electrical connection**
  Standard terminal box (protection category IP54). Mounted to external cable for HQ and HW types (version “A”) or on back of motor (version “B”). Mounted on outside of duct for HRF types.

- **Protection grille**
  Made of powder-coated steel for HQ and HW in accordance with DIN EN ISO 13857.

- **Power control**
  All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. See type table.
  Performance levels are shown on the performance curve as examples.

- **Installation**
  Installation possible in any position.

- **Noise levels**
  The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type		
								HQ EC incl. protection grille / Ref. no.	**HW EC** incl. protection grille / Ref. no.	**HRF EC** / Ref. no.
min $^{-1}$	$\dot{V}$ m³/h	kW	A	dB(A) in 4m	No.	+°C	ca. kg			
Alternating current, 1~, 230 Volt, 50/60 Hz, EC motor, protection category IP54										
1700	4790	0.32	1.40	59	1047	40	13.4	**HQW EC 400 A** 04922	**HWW EC 400 A** 04923	**HRFW EC 400 A** 04924
2150	5850	0.65	3.10	65	1201	40	15.4	**HQW EC 400 B** 04925	**HWW EC 400 B** 04926	**HRFW EC 400 B** 04927

Performance curves HQ EC / HW EC / HRF EC 400 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	79	52	72	74	73	71	65	57
$L_{PA, 4m}$	Air noise	dB(A)	59	32	53	54	53	51	45	37

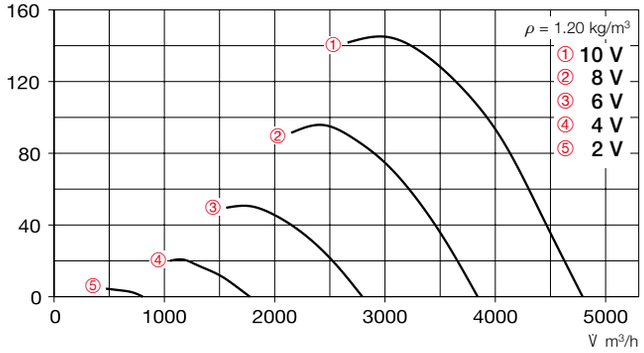

Voltage V	n min-1	Free-blow. A m³/h	Pel W	IMotor A	LPA, 4m
10	1700	4790	320	1.40	59
8	1380	3840	170	0.75	55
6	1000	2800	75	0.35	48
4	650	1780	30	0.20	39

Performance curves HQ EC / HW EC / HRF EC 400 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	85	57	75	80	80	78	71	63
$L_{PA, 4m}$	Air noise	dB(A)	65	37	55	60	60	58	51	43

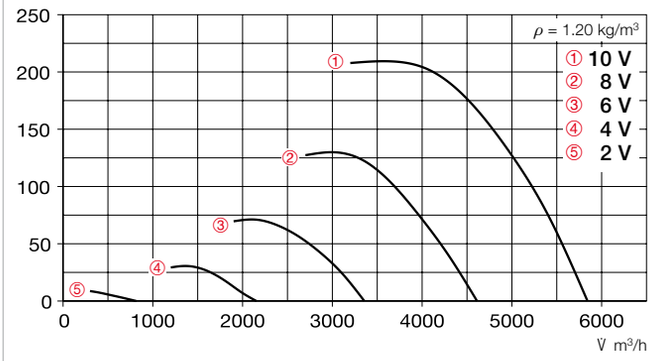

Voltage V	n min-1	Free-blow. A m³/h	Pel W	IMotor A	LPA, 4m
10	2150	5850	650	3.10	65
8	1700	4630	340	1.60	60
6	1250	3370	150	0.71	53
4	800	2120	60	0.35	44

Accessories for HRF EC 400 Description see page 278 ff.

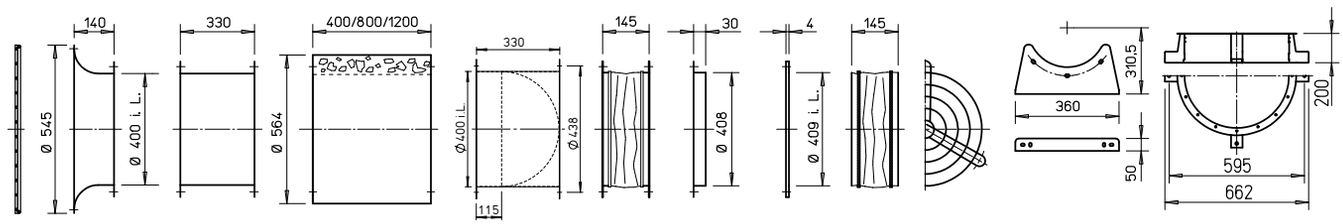

Intake nozzle with prot. grille **ASD-SGD 400** No. 01418

Extension duct **VR 400** No. 01406

Duct silencer- **RSD 400/..**

Duct shutter, automatic **RVS 400** a) No. 02596

Flanged flexible connector **STS 400** No. 01223

Counter flange **FR 400** No. 01206

Flat flange **FF 400** No. 04945

Flexible connecting sleeve **FM 400** No. 01676

Protection grille duct side **SG 400** No. 01239

Mounting brackets **MK 400** (1 Set = 2 pcs) No. 01449

Mounting ring for vertical attachment **MRV 400** No. 01760

a) Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Universal control system, electronic controller, Speed potentiometer	615 ff.
Five-step speed switch	610

Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surface-mounted		Three level speed switch flush-mounted		Three level speed switch surface-mounted		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438

1) Multiple EC fans can normally be connected, see Accessories.

HQ EC 450

HW EC 450

HRF EC 450

Dimensions HQ EC 450



Dimensions HW EC 450



Dimensions HRF EC 450



Description for all types

- **Casing**
  Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white.

- **Impeller**
  High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP54 protection. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

- **Electrical connection**
  Standard terminal box (protection category IP54). Mounted to external cable for HQ and HW types (version “A”) or on back of motor (version “B”). Mounted on outside of duct for HRF types.

- **Protection grille**
  Made of powder-coated steel for HQ and HW in accordance with DIN EN ISO 13857.

- **Power control**
  All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. See type table.
  Performance levels are shown on the performance curve as examples.

- **Installation**
  Installation possible in any position.

- **Noise levels**
  The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type		
								HQ EC incl. protection grille / Ref. no.	**HW EC** incl. protection grille / Ref. no.	**HRF EC** / Ref. no.
min $^{-1}$	$\dot{V}$ m³/h	kW	A	dB(A) at 4m	No.	+°C	ca. kg			
Alternating current, 1~, 230 Volt, 50/60 Hz, EC motor, protection category IP54										
1320	5460	0.29	1.30	55	1047	40	14.5	**HQW EC 450 A** 04928	**HWW EC 450 A** 04929	**HRFW EC 450 A** 04930
1835	7640	0.82	3.80	64	1201	40	16.5	**HQW EC 450 B** 04931	**HWW EC 450 B** 04932	**HRFW EC 450 B** 04933

Performance curves HQ EC / HW EC / HRF EC 450 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	75	49	68	71	68	67	61	52
$L_{PA, 4m}$	Air noise	dB(A)	55	29	48	51	48	47	41	32

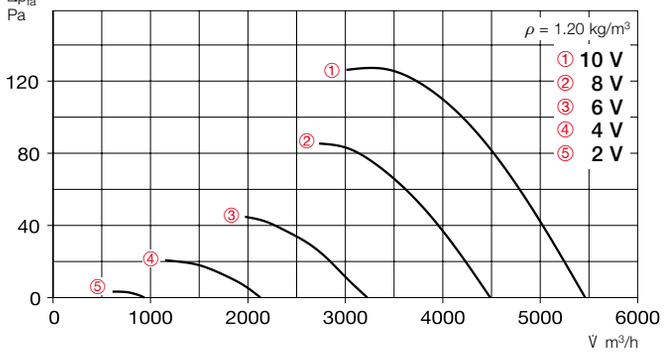

Voltage V	n min-1	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA, 4m}$
10	1320	5460	290	1.30	55
8	1090	4490	170	0.74	51
6	790	3230	75	0.35	44
4	525	2130	30	0.20	35

Performance curves HQ EC / HW EC / HRF EC 450 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	84	54	75	78	79	78	73	67
$L_{PA, 4m}$	Air noise	dB(A)	64	34	55	58	59	58	53	47

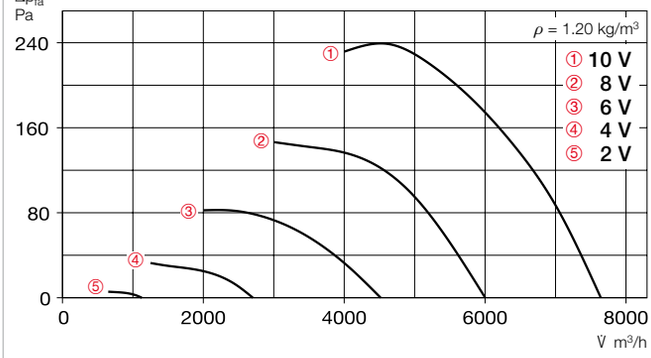

Voltage V	n min-1	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA, 4m}$
10	1835	7640	820	3.80	64
8	1460	6000	420	2.00	59
6	1080	4520	180	0.84	53
4	690	2700	60	0.37	43

Accessories for HRF EC 450 Description see page 278 ff.

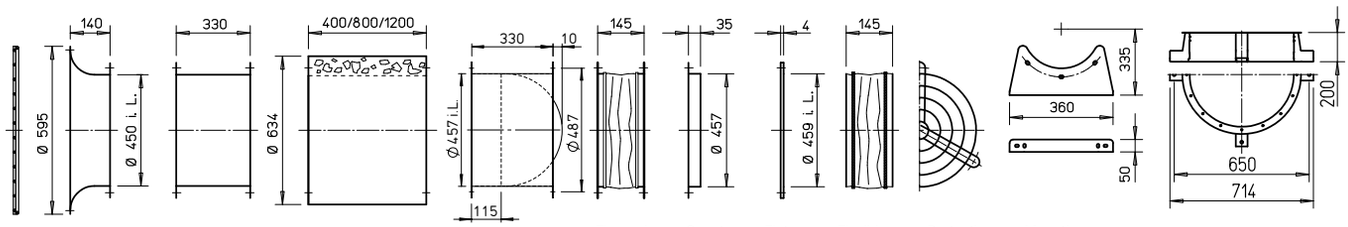

Intake nozzle with prot. grille **ASD-SGD 450** No. 01419

Extension duct **VR 450** No. 01407

Duct silencer- **RSD 450/..**

Duct shutter, automatic **RVS 450** [a] No. 02597

Flanged flexible connector **STS 450** No. 01224

Counter flange **FR 450** No. 01207

Flat flange **FF 450** No. 04946

Flexible connecting sleeve **FM 450** No. 01677

Protection grille duct side **SG 450** No. 01240

Mounting brackets **MK 450** (1 Set = 2 pcs) No. 01449

Mounting ring for vertical attachment **MRV 450** No. 01761

[a] Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Universal control system, electronic controller, Speed potentiometer	615 ff.
Five-step speed switch	610

Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surface-mounted		Three level speed switch flush-mounted		Three level speed switch surface-mounted		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438

[1] Multiple EC fans can normally be connected, see Accessories.

HQ EC 500

HW EC 500

HRF EC 500

Dimensions HQ EC 500



Dimensions HW EC 500



Dimensions HRF EC 500



Description for all types

Casing
Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white.

Impeller
High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

Drive
Energy-efficient, speed-controllable EC external rotor motor with IP54 protection. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
Standard terminal box (protection category IP54). Mounted to external cable for HQ and HW types (version “A”) or on back of motor (version “B”). Mounted on outside of duct for HRF types.

Protection grille
Made of powder-coated steel for HQ and HW in accordance with DIN EN ISO 13857.

Power control
All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. See type table.
Performance levels are shown on the performance curve as examples.

Installation
Installation possible in any position.

Noise levels
The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type		
								HQ EC incl. protection grille / Ref. no.	**HW EC** incl. protection grille / Ref. no.	**HRF EC** / Ref. no.
min $^{-1}$	$\dot{V}$ m³/h	kW	A	dB(A) at 4m	No.	+°C	ca. kg			
Alternating current, 1~, 230 Volt, 50/60 Hz, EC motor, protection category IP54										
1090	6320	0.29	1.30	54	1047	40	15.7	**HQW EC 500 A** 04934	**HWW EC 500 A** 04935	**HRFW EC 500 A** 04936
1450	8300	0.67	3.00	62	1201	40	17.7	**HQW EC 500 B** 04937	**HWW EC 500 B** 04938	**HRFW EC 500 B** 04939

Performance curves HQ EC / HW EC / HRF EC 500 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	74	54	67	68	69	67	62	55
$L_{PA, 4m}$	Air noise	dB(A)	54	34	47	48	49	47	42	35

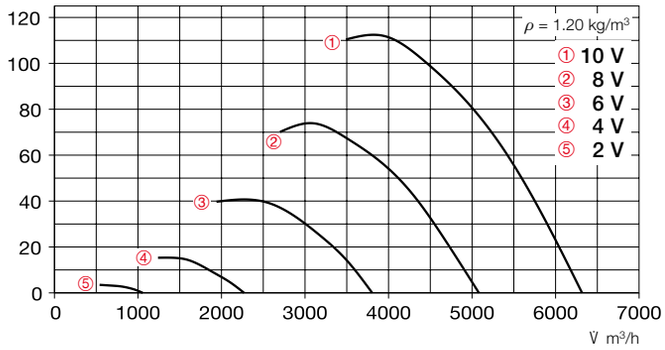

Voltage V	n min⁻¹	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA, 4m}$
10	1090	6320	290	1.3	54
8	880	5080	150	0.68	50
6	665	3800	70	0.34	44
4	400	2270	25	0.20	33

Performance curves HQ EC / HW EC / HRF EC 500 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	82	56	72	76	77	75	72	63
$L_{PA, 4m}$	Air noise	dB(A)	62	36	52	56	57	55	52	43

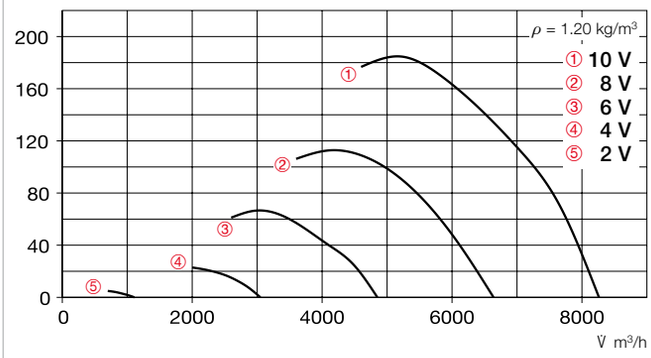

Voltage V	n min⁻¹	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA, 4m}$
10	1450	8300	670	3.00	62
8	1160	6640	350	1.70	57
6	860	4850	160	0.75	51
4	540	3050	55	0.34	41

Accessories for HRF EC 500 Description see page 278 ff.

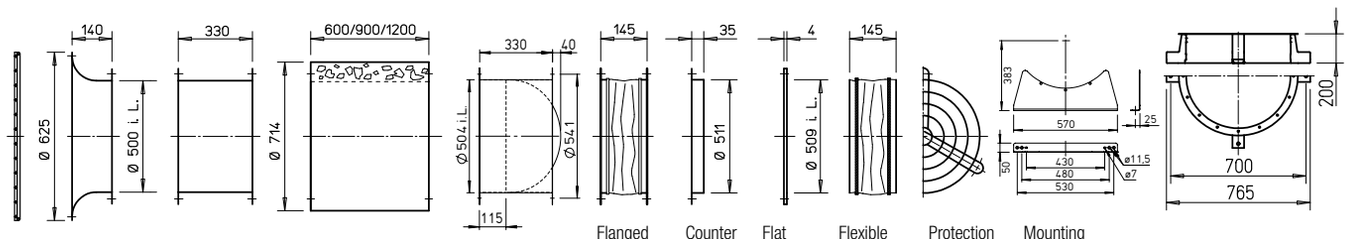

Intake nozzle with prot. grille **ASD-SGD 500** No. 01420

Extension duct **VR 500** No. 01408

Duct silencer- **RSD 500/..**

Duct shutter, automatic **RVS 500** [a] No. 02598

Flanged flexible connector **STS 500** No. 01225

Counter flange **FR 500** No. 01208

Flat flange **FF 500** No. 04947

Flexible connecting sleeve **FM 500** No. 01678

Protection grille duct side **SG 500** No. 01241

Mounting brackets **MK 500** (1 Set = 2 pcs) No. 00674

Mounting ring for vertical attachment **MRV 500** No. 01740

[a] Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Universal control system, electronic controller, Speed potentiometer	615 ff.
Five-step speed switch	610

Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surface-mounted		Three level speed switch flush-mounted		Three level speed switch surface-mounted		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438

[1] Multiple EC fans can normally be connected, see Accessories.

HRF EC 560

Dimensions HRF EC 560

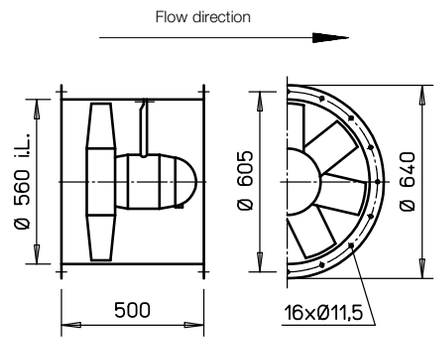

Dim. in mm

Description
High performance axial EC fan in pipe sleeve, with double-sided flanges for direct intermediate setting in pipelines. Flange in accordance with DIN 24155, p. 3.

Casing
Made of galvanised steel sheet, additional terminal box (IP54) on outside of duct.

Impeller
High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

Drive
Energy-efficient, speed-controllable EC external rotor motor with IP54 protection. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
Standard terminal box (protection category IP54) on back of motor, additional terminal box on outside of duct.

Power control
All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/ temperature controller. See type table.

Installation
Installation possible in any position.

Noise levels
The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type HRF EC	Ref. no.
min $^{-1}$	V̇ m³/h	kW	A	dB(A) at 4m	No.	+°C	ca. kg		
Alternating current, 1~, 230 Volt, 50/60 Hz, EC motor, protection category IP54									
1200	9740	0.56	2.45	55	1201	40	35	**HRFW EC 560**	04874

Performance curves HRF EC 560

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	75	57	66	70	69	68	62	54
$L_{PA,\ 4m}$	Air noise	dB(A)	55	37	46	50	49	48	42	34

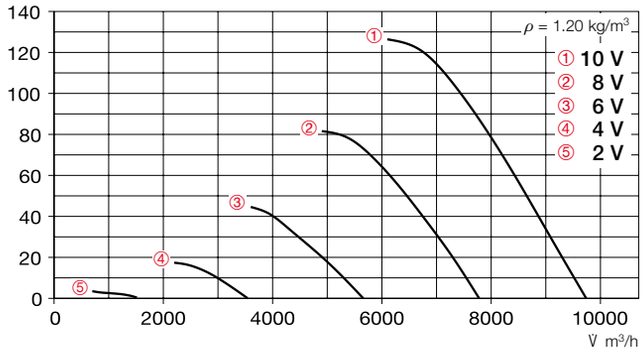

Voltage V	n min⁻¹	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA,\ 4m}$
10	1200	9740	555	2.50	55
8	965	7780	300	1.40	50
6	710	5660	130	0.66	44
4	450	3550	45	0.48	34

Accessories for HRF EC 560 Description see page 278 ff.

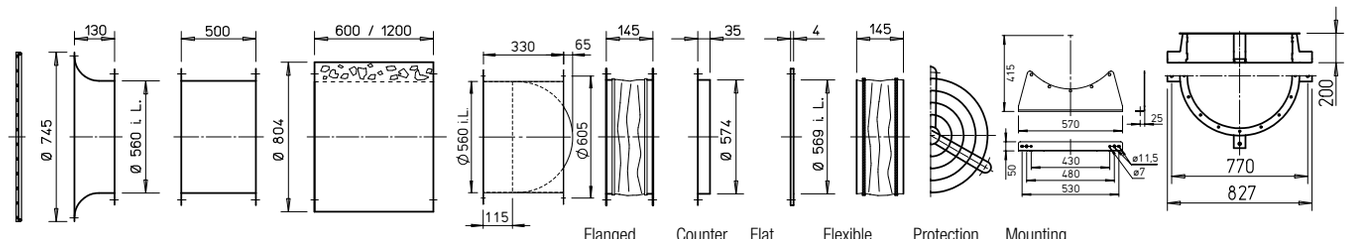

Intake nozzle with prot. grille **ASD-SGD 560** No. 01421

Extension duct **VR 560** No. 01409

Duct silencer- **RSD 560/..**

Duct shutter, automatic **RVS 560** [a] No. 02599

Flanged flexible connector **STS 560** No. 01226

Counter flange **FR 560** No. 01209

Flat flange **FF 560** No. 04948

Flexible connecting sleeve **FM 560** No. 01679

Protection grille duct side **SG 560** No. 01242

Mounting brackets **MK 560** (1 Set = 2 pcs) No. 00675

Mounting ring for vertical attachment **MRV 560** No. 01741

[a] Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Universal control system, electronic controller, Speed potentiometer	615 ff.
Five-step speed switch	610

Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surface-mounted		Three level speed switch flush-mounted		Three level speed switch surface-mounted		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438

[1] Multiple EC fans can normally be connected, see Accessories.

HRF EC 630

Dimensions HRF EC 630

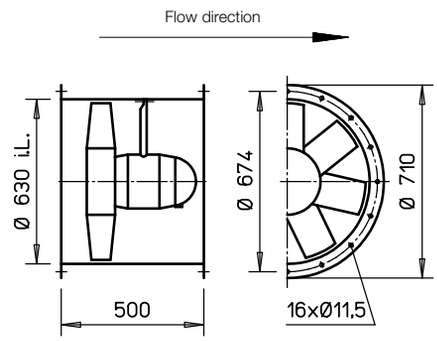

Dim. in mm

Description
High performance axial EC fan in pipe sleeve, with double-sided flanges for direct intermediate setting in pipelines. Flange in accordance with DIN 24155, p. 3.

Casing
Made of galvanised steel sheet, additional terminal box (IP54) on outside of duct.

Impeller
High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

Drive
Energy-efficient, speed-controllable EC external rotor motor with IP54 protection. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
Standard terminal box (protection category IP54) on back of motor, additional terminal box on outside of duct.

Power control
All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/ temperature controller. See type table.

Installation
Installation possible in any position.

Noise levels
The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type HRF EC	Ref. no.
min $^{-1}$	V̇ m³/h	kW	A	dB(A) at 4m	No.	+°C	ca. kg		
Alternating current, 1~, 230 Volt, 50/60 Hz, EC motor, protection category IP54									
960	10330	0.45	2.20	54	1201	40	37	**HRFW EC 630**	04875

Performance curves HRF EC 630

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	74	56	65	69	68	67	61	53
$L_{PA,\ 4m}$	Air noise	dB(A)	54	36	45	49	48	47	41	33

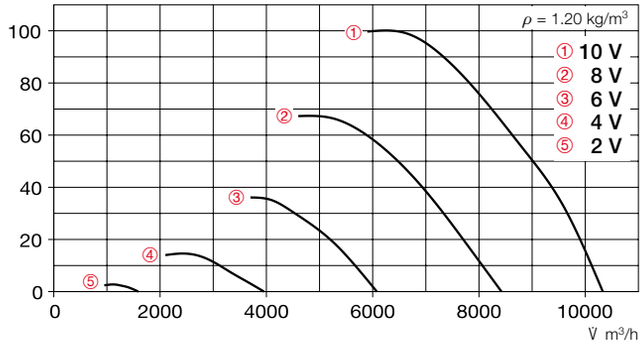

Voltage V	n min⁻¹	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA,\ 4m}$
10	960	10330	450	2.20	54
8	775	8430	250	1.20	50
6	570	6080	115	0.59	46
4	370	3960	45	0.33	37

Accessories for HRF EC 630 Description see page 278 ff.

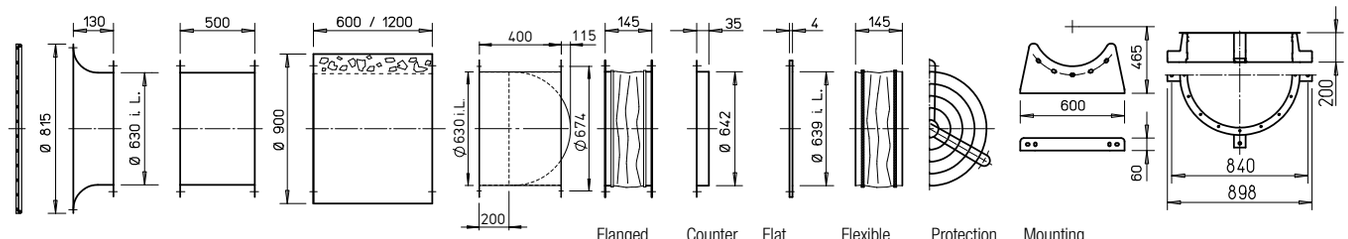

Intake nozzle with prot. grille **ASD-SGD 630** No. 01422

Extension duct **VR 630** No. 01410

Duct silencer- **RSD 630/..**

Duct shutter, automatic **RVS 630** [a] No. 02600

Flanged flexible connector **STS 630** No. 01228

Counter flange **FR 630** No. 01211

Flat flange **FF 630** No. 04949

Flexible connecting sleeve **FM 630** No. 01680

Protection grille duct side **SG 630** No. 01243

Mounting brackets **MK 630** (1 Set = 2 pcs) No. 01333

Mounting ring for vertical attachment **MRV 630** No. 01742

[a] Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Universal control system, electronic controller, Speed potentiometer	615 ff.
Five-step speed switch	610

Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surface-mounted		Three level speed switch flush-mounted		Three level speed switch surface-mounted		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438

[1] Multiple EC fans can normally be connected, see Accessories.

HRF EC 710

Dimensions HRF EC 710

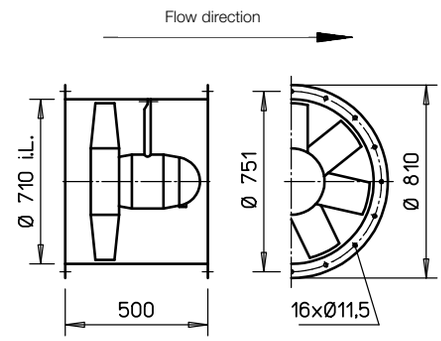

Dim. in mm

Description
High performance axial EC fan in pipe sleeve, with double-sided flanges for direct intermediate setting in pipelines. Flange in accordance with DIN 24155, p. 3.

Casing
Made of galvanised steel sheet, additional terminal box (IP54) on outside of duct.

Impeller
High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

Drive
Energy-efficient, speed-controllable EC external rotor motor with IP54 protection. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
Standard terminal box (protection category IP54) on back of motor, additional terminal box on outside of duct.

Power control
All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/ temperature controller. See type table.

Installation
Installation possible in any position.

Noise levels
The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type HRF EC	Ref. no.
min $^{-1}$	V̇ m³/h	kW	A	dB(A) at 4m	No.	+°C	ca. kg		
Three-phase current, 3~, 400 Volt, 50/60 Hz, EC motor, protection category IP54									
1100	19400	1.32	2.10	61	1203	40	40	**HRFD EC 710**	04876

Performance curves HRF EC 710

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	81	63	72	76	75	74	69	60
$L_{PA, 4m}$	Air noise	dB(A)	61	43	52	56	55	54	49	40

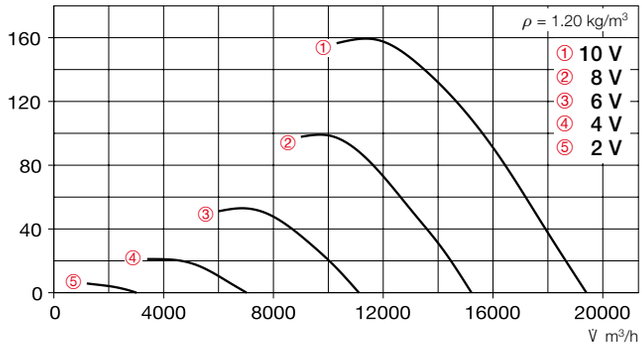

Voltage V	n min⁻¹	Free-blow. A m³/h	P_{el} W	I_{Motor} A	$L_{PA, 4m}$
10	1100	19400	1315	2.10	61
8	885	15220	680	1.20	56
6	650	11120	280	0.66	50
4	415	7020	90	0.35	41

Accessories for HRF EC 710 Description see page 278 ff.

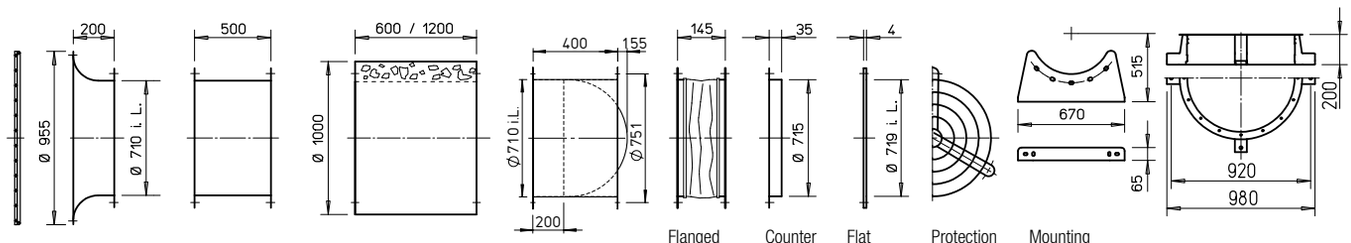

Intake nozzle with prot. grille **ASD-SGD 710** No. 01423

Extension duct **VR 710** No. 01411

Duct silencer **RSD 710/..**

Duct shutter, automatic **RVS 710** [a] No. 02601

Flanged flexible connector **STS 710** No. 01229

Counter flange **FR 710** No. 01212

Flat flange **FF 710** No. 04950

Protection grille duct side **SG 710** No. 01244

Mounting brackets **MK 710** (1 Set = 2 pcs) No. 01372

Mounting ring for vertical attachment **MRV 710** No. 01743

[a] Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Universal control system, electronic controller, Speed potentiometer	615 ff.
Five-step speed switch	610

Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surface-mounted		Three level speed switch flush-mounted		Three level speed switch surface-mounted		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
EUR EC[1]	01347	**PU 10**[1]	01734	**PA 10**[1]	01735	**SU-3 10**[1]	04266	**SA-3 10**[1]	04267	**EDR**[1]	01437	**ETR**[1]	01438

[1] Multiple EC fans can normally be connected, see Accessories.

HQ 200

HW 200

HS 200

HRF 200

Dimensions HQ 200



Dim. in mm

Dimensions HW 200



Dim. in mm

Dimensions HS 200



Dim. in mm

Dimensions HRF 200



Dim. in mm

Description for all types

Casing
Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white.

Impeller
High performance characteristics with profiled blades made of plastic, dynamically balanced.

Drive
Closed casing made of die-cast aluminium. Protection category IP54, ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature.

Motor protection
Through built-in thermal contacts wired in series with the winding, automatic deactivation and reactivation after cool down.

Electrical connection
Standard terminal box (IP54) on back of motor. Additionally on outside of duct for HRF types.

Protection grille
Made of powder-coated steel for HQ and HW, and plastic for HS. In accordance with DIN EN ISO 13857.

Power control
All types can be controlled through voltage reduction (electronic or via transformer). The flow rates are shown in the performance diagram.

Reverse operation
All types are reversible using a DSEL switch. Performance reduction of approx. 1/3 in abnormal flow direction.

Installation
Installation possible in any position, but be aware of any condensate drain holes depending on usage.

Noise levels
See performance diagram. The sound power and sound pressure at 1 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, protection category, air flow direction, higher air flow temperature, acid protection and impeller in other materials upon request.

The technical information on p. 19 ff. must be observed.

Speed	Flow rate free-blowing	Power consump.	Current consump. at rated voltage	Current consump. max. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net aprx.	Design type: HQ incl. protection grille	Ref. no.	HW incl. protection grille	Ref. no.	HS incl. protection grille	Ref. no.	HRF	Ref. no.
min⁻¹	V̇ m³/h	W	A	A	No.	+ °C	+ °C	kg								
Single-phase alternating current.230 Volt, 50 Hz, Capacitor motor, protection category IP54																
1360	520	25	0.11	0.11	439[1]	60	40	3.8	**HQW 200/4**	07537	**HWW 200/4**	07538	**HSW 200/4**	07502	**HRFW 200/4[1]**	07540
2250	930	66	0.26	0.31	439[1]	40	40	2.7	**HQW 200/2**	00960	–		**HSW 200/2**	07503	**HRFW 200/2[1]**	00199

[1] Type HRFW: Connection according to wiring diagram no. 962.

Performance curves 200/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	63	33	50	59	59	54	53	45
$L_{PA,1m}$	Air noise	dB(A)	55	25	42	51	51	46	45	37

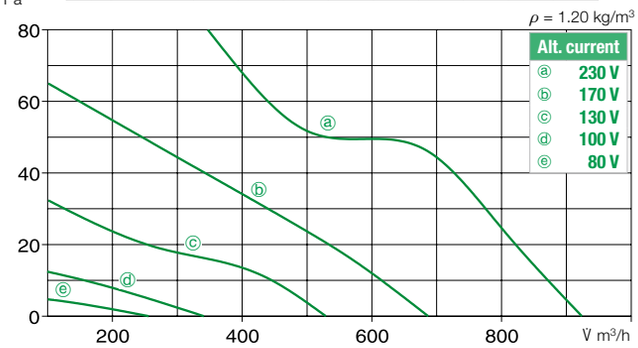

Performance curves 200/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	50	32	38	42	44	44	41	33
$L_{PA,1m}$	Air noise	dB(A)	42	24	30	34	36	36	33	25

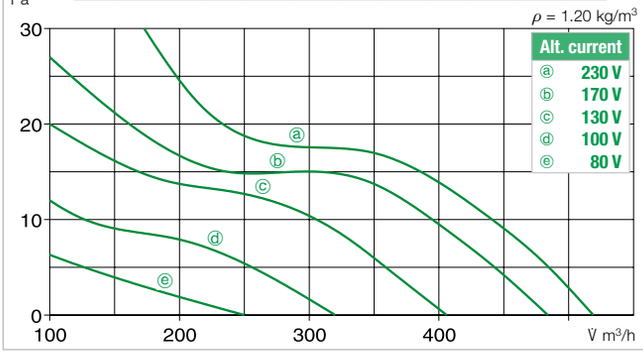

Accessories for HRF 200 Description see page 278 ff.



Intake nozzle
ASD 200
No. 01388



Flanged flexible connector
STS 200
No. 01219



Counter flange
FR 200
No. 01202



Flexible connecting sleeve
FM 200
No. 01670

Protection grille duct side
SG 200
No. 01216



2 mounting brackets
1 x MK 200
(= 2 pcs)
No. 01446



4 vibration dampers for tensile load
1 x SDZ 1 (= 4 Pc) No.01454
4 vibration dampers for compression load
1 x SDD 1 (= 4 Pc) No.01452

	Transformer speed controller 5-step		Electronic speed controller, continuously variable flush-m./surface-m.		Reverser switch		Electronic speed controller with reverser switch	
	Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
	TSW 0.3	03608	**ESU 1 / ESA 1**	00236/00238	**DSEL 2**	01306	**BSX**	00240
	TSW 0.3	03608	**ESU 1 / ESA 1**	00236/00238	**DSEL 2**	01306	**BSX**	00240

Other accessories	Page
Extension sleeve for HS VH 200 Ref. no. 01349 Cylindrical pipe section, galvanised steel, 15 cm long.	
Filters and silencers	483 ff.
shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

HQ 250

Also available in version:

HW 250

HS 250

HRF 250

Also available in version:

Dimensions HQ 250



Dim. in mm

Dimensions HW 250



Dim. in mm

Dimensions HS 250



Dim. in mm

Dimensions HRF 250



Dim. in mm

Description for all types

Casing
Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white. Explosion-proof types have no lacquer coating.

Impeller
High performance characteristics with profiled blades made of plastic, dynamically balanced. Different for explosion-proof types.

Drive
Closed die-cast aluminium casing. Protection category IP55 or IP54. Ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature.
Different for explosion-proof types.

Motor protection
All types (except for 3~ explosion-proof, see page 190) are equipped with thermal contacts or PTC thermistor. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. For types H..W 250/6, H..W 250/4 and all 1~ explosion-proof fans, the thermal contacts are wired in series with the winding, automatic deactivation and reactivation after cool down.

Electrical connection
Standard terminal box (IP54/55) on back of motor. Additionally on outside of duct for HRF types. Different for explosion-proof types.

Protection grille
Made of powder-coated steel for HQ/HW (HQ Ex galvanised), and plastic for HS. In accordance with DIN EN ISO 13857.

Power control
The voltage-controllable types are identified in the "Current consumption max. with control" column with a value which must be observed when determining the controller (see speed controller column). Possible assignments of frequency inverters to fans are shown in the type table. The flow rates are shown in the performance diagram.

Reverse operation
All types are reversible using a reverser switch. Performance reduction of approx. 1/3 in abnormal flow direction.

Installation
Installation possible in any position, but be aware of any condensate drain holes depending on usage.

Dimensions
Pole-changeable and explosion-proof types may differ from the above information.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.
Different for explosion-proof types.

Reference	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Speed	Flow rate free-blowing	Power consump.	Current consump. at rated voltage	Current consump. max. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net aprx.	Design type: HQ incl. protection grille	Ref. no.	HW incl. protection grille	Ref. no.	HS incl. protection grille	Ref. no.	HRF	Ref. no.
min⁻¹	V̇ m³/h	W	A	A	No.	+ °C	+ °C	kg								
Single-phase alternating current.230 Volt, 50 Hz, Capacitor motor, protection category IP54/55																
930	660	35	0.20	0.22	317	60	40	6.5	**HQW 250/6**	01102	—		**HSW 250/6**	00139	—	
1300	930	36	0.15	0.15	439[1]	60	40	7.5	**HQW 250/4**[1]	01103	**HWW 250/4**[1]	01001	**HSW 250/4**[1]	00140	**HRFW 250/4**[1)2)]	00200
2710	2100	187	0.81	0.9	317[1]	60	40	6.5	**HQW 250/2**	01104	**HWW 250/2**	01002	**HSW 250/2**	00141	**HRFW 250/2**[3]	00201
Three-phase current, 400 Volt, 50 Hz, Squirrel-cage rotor, protection category IP55																
980	700	61	0.27	0.33	469	60	40	6.5	**HQD 250/6**	01114	—		—		—	
1390	950	55	0.15	0.15	469	60	40	6.5	**HQD 250/4**[1]	01115	**HWD 250/4**[1]	01016	**HSD 250/4**[1]	00155	**HRFD 250/4**[1]	00220
2550	2050	169	0.31	0.33	469	60	40	6.5	**HQD 250/2**	01116	**HWD 250/2**	01017	—		**HRFD 250/2**	00221
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex d, alternating current 230 Volt, 50 Hz, protection category IP55**																
1400	1030	60*	0.70*		757	40	—	12	**HQW 250/4 Ex**	00438	—		—		**HRFW 250/4 Ex**	00437
2690	1950	180*	1.23*		757	40	—	13	**HQW 250/2 Ex**	01094	—		—		**HRFW 250/2 Ex**	01095
Ex **Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																
1355	1070	120*	0.37*		470	40	—	12	**HQD 250/4 Ex**	01144	—		—		**HRFD 250/4 Ex**	00470
2800	2070	250*	0.75*		470	40	—	11	**HQD 250/2 Ex**	01145	—		—		**HRFD 250/2 Ex**	00471

* Motor ratings, Ex see information on page 20. [1] Special design not possible. [2] Type HRFW../4: Connection according to wiring diagram no. 962. [3] Type HRFW../2: Connection according to wiring diagram no. 963.

Performance curves 250/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	75	38	53	66	68	70	69	62
$L_{PA,4m}$	Air noise	dB(A)	55	18	33	46	48	49	48	42

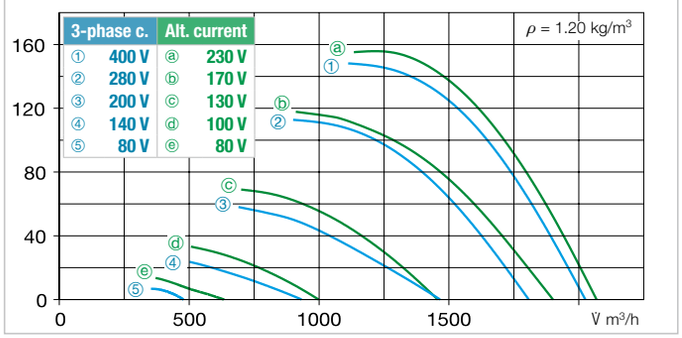

Performance curves 250/4 Three-phase current

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	60	34	49	53	53	54	50	38
$L_{PA,4m}$	Air noise	dB(A)	40	14	29	33	33	34	30	18

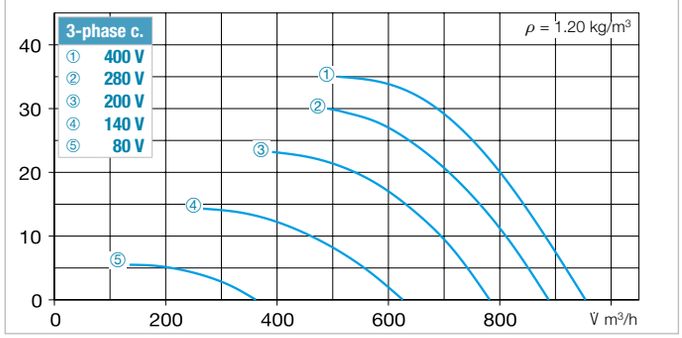

Performance curves 250/4 Alternating current

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	58	41	52	53	51	49	43	29
$L_{PA,4m}$	Air noise	dB(A)	38	21	32	33	31	29	23	9

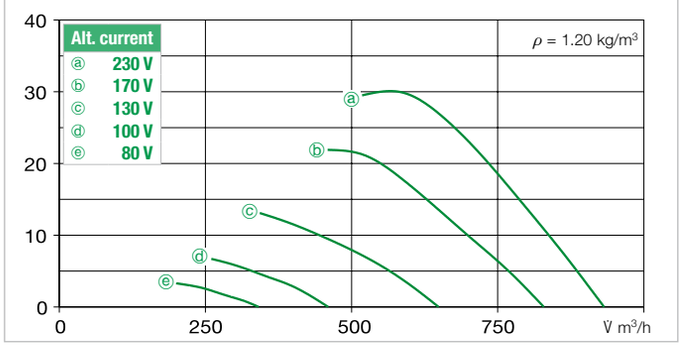

Performance curves 250/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	53	40	47	47	46	43	37	30
$L_{PA,4m}$	Air noise	dB(A)	33	20	27	27	26	23	17	10

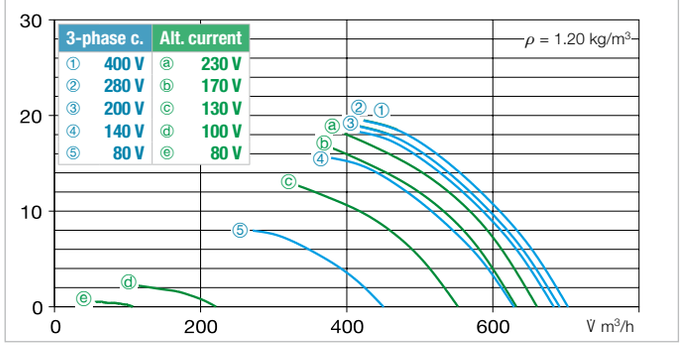

Accessories for HRF 250 Description see page 278 ff.

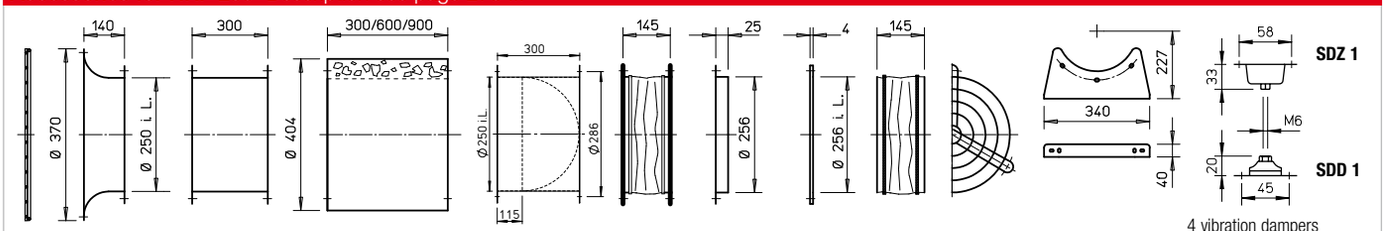

Intake nozzle with prot. grille **ASD-SGD 250** No. 01414

Extension duct **VR 250** No. 01402

Duct silencer **RSD 250/..**

Duct shutter, automatic **RVS 250** a) No. 02592

Flanged flexible connector **STS 250** b) No. 01220

Counter flange **FR 250** No. 01203

Flat flange **FF 250** No. 04941

Flexible connecting sleeve **FM 250** b) No. 01672

Protection grille duct side **SG 250** No. 01236

2 mounting brackets **1 x MK 250** (= 2 pcs) No. 01447

4 vibration dampers for tensile load **1 x SDZ 1** (= 4 Pc) No. 01454
4 vibration dampers for compression load **1 x SDD 1** (= 4 Pc) No. 01452

a) Shutter, motorised see Accessories product pages.

b) See below for types for explosion-proof fans.

Frequency inverter with integrated sine filter		Transformer speed controller 5-step, pole changing switch		Electronic speed controller, continuously variable flush-m./surface-m.		Motor protection circuit breaker		Reverser switch	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
—		**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236/00238	—		**WS**	01271
—		**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236/00238	—		**DSEL 2**	01306
—		**MWS 1.5** 4)	01947	**ESU 3 / ESA 3**	00237/00239	—		**WS**	01271
FU-BS 2.5 4)	05459	**RDS 1** 4)	01314	—		**MD**	05849	**WS**	01271
FU-BS 2.5 4)	05459	**RDS 1** 4)	01314	—		**MD**	05849	**WS**	01271
FU-BS 2.5 4)	05459	**RDS 1** 4)	01314	—		**MD**	05849	**WS**	01271
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	

4) Incl. motor protection circuit breaker. 5) Incl. speed pole changing switch. 6) Flush-m. version see Switch product page.

Other accessories — Page

b) **Access. for expl.-proof fans**

Flanged flexible connector STS 250 Ex Ref. no. 02501

Flexible connecting sleeve FM 250 Ex Ref. no. 01688

Extension sleeve for HS VH 250 Ref. no. 01343
Cylindrical pipe section, galvanised steel, 15 cm long.

Filter and silencers 483 ff.
Shutters and ventilation grilles 563 ff.
Speed controllers, controllers and switches 601 ff.

HQ 315

Also available in version:

HW 315

HS 315

HRF 315

Also available in version:

Dimensions HQ 315



Dim. in mm

Dimensions HW 315



Dim. in mm

Dimensions HS 315



Dim. in mm

Dimensions HRF 315



Dim. in mm

Description for all types

Casing
Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white. Explosion-proof types have no lacquer coating.

Impeller
High performance characteristics with profiled blades made of plastic, dynamically balanced. Different for explosion-proof types.

Drive
Closed die-cast aluminium casing. Prot. cat. IP55. Ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature. Different for explosion-proof types.

Motor protection
All types (except for 3~ explosion-proof, see page 190) are equipped with thermal contacts or PTC thermistor. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.
For types H..W 315/6 and all 1~ explosion-proof fans, the thermal contacts are wired in series with the winding, automatic deactivation and reactivation after cool down.

Electrical connection
Standard terminal box (IP55) on back of motor. Additionally on outside of duct for HRF types. Different for explosion-proof types.

Protection grille
Made of powder-coated steel for HQ/HW (HQ Ex galvanised), and plastic for HS. In accordance with DIN EN ISO 13857.

Power control
The voltage-controllable types are identified in the "Current consumption max. with control" column with a value which must be observed when determining the controller (see speed controller column). Possible assignments of frequency inverters to fans are shown in the type table. The flow rates are shown in the performance diagram.

Reverse operation
All types are reversible using a reverser switch. Performance reduction of approx. 1/3 in abnormal flow direction.

Installation
Installation possible in any position, but be aware of any condensate drain holes depending on usage.

Dimensions
Pole-changeable and explosion-proof types may differ from the above information.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.
Different for explosion-proof types.

Speed	Flow rate free-blowing	Power consump.	Current consump. at rated voltage	Current consump. max. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net aprx.	Design type: HQ incl. protection grille	Ref. no.	HW incl. protection grille	Ref. no.	HS incl. protection grille	Ref. no.	HRF	Ref. no.	Dim. B Motor protrusion in mm
min⁻¹	V̇ m³/h	W	A	A	No.	+ °C	+ °C	kg									
Single-phase alternating current.230 Volt, 50 Hz, Capacitor motor, protection category IP55																	
920	1330	33	0.25	0.35	317[1]	60	40	9.0	**HQW 315/6**	01105	—		**HSW 315/6**	00142	**HRFW 315/6**[1]	00202	—
1390	2080	104	0.45	0.47	475[1]	60	40	8.0	**HQW 315/4**	01106	**HWW 315/4**	01004	**HSW 315/4**	00143	**HRFW 315/4**[2]	00203	—
Three-phase current, 400 Volt, 50 Hz, Squirrel-cage rotor, protection category IP55																	
950	1370	68	0.27	0.32	469	60	40	9.0	**HQD 315/6**	01117	—		—		—		
1330	1960	84	0.24	0.26	469	60	40	9.0	**HQD 315/4**	01118	**HWD 315/4**	01019	**HSD 315/4**	00158	**HRFD 315/4**	00223	—
2790	4000	550	2.16	—	776	60	—	11.0	**HQD 315/2**	01119	—		—		**HRFD 315/2**	00224	50
Pole-changeable, 2 speeds, three-phase current, Dahlander winding, 400 Volt, 50 Hz, protection category IP55																	
720/1445	980/2060	49/115	0.20/0.43		472	60	—	12.0	—		—		**HSD 315/8/4**	00346	**HRFD 315/8/4**	00391	—
1310/2835	2100/4050	170/750	0.8/1.86		777	60	—	13.0	**HQD 315/4/2**	01131	—		**HSD 315/4/2**	00348	**HRFD 315/4/2**	00393	85
Ex Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex d, alternating current 230 Volt, 50 Hz, protection category IP55																	
1370	2070	60*	1.25*		757	40	—	13.0	**HQW 315/4 Ex**	00442	—		—		**HRFW 315/4 Ex**	00439	—
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55																	
925	1400	250*	0.80*		470	40	—	23.0	**HQD 315/6 Ex**	01098	—		—		—		
1355	2140	120*	0.37*		470	40	—	14.0	**HQD 315/4 Ex**	01147	—		—		**HRFD 315/4 Ex**	00473	—
2900	4130	550*	1.31*		470	40	—	8.0	**HQD 315/2 Ex**	01148	—		—		**HRFD 315/2 Ex**	00474	—

* Motor ratings, Ex see information on page 20. [1] Type HRFW../6: Connection according to wiring diagram no. 963. [2] Type HRFW../4: Connection according to wiring diagram no. 965. [3] Incl. motor protection circuit breaker.

Performance curves 315/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	89	61	71	87	81	81	75	65
$L_{PA,4m}$	Air noise	dB(A)	69	41	51	67	61	61	55	45

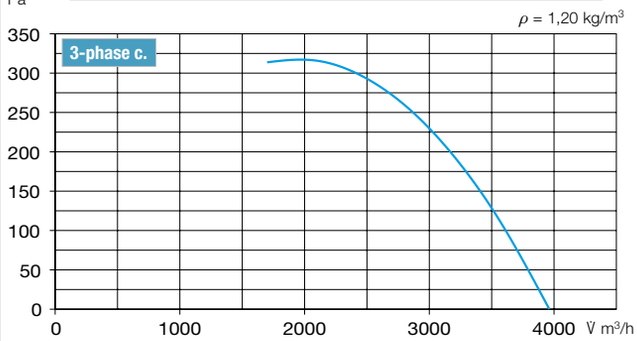

Performance curves 315/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	70	56	60	67	63	61	56	47
$L_{PA,4m}$	Air noise	dB(A)	50	36	40	47	43	41	36	27

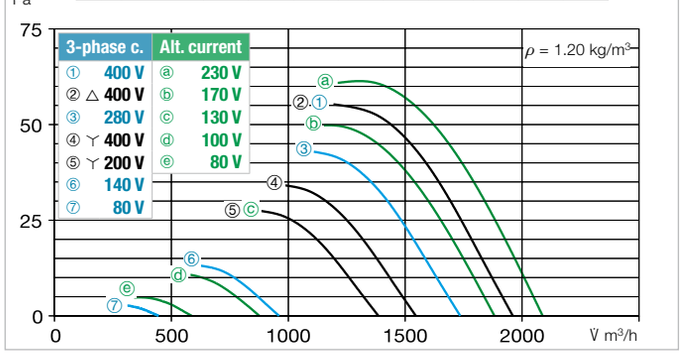

Performance curves 315/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	59	46	53	53	53	49	43	36
$L_{PA,4m}$	Air noise	dB(A)	39	26	33	33	33	29	23	16

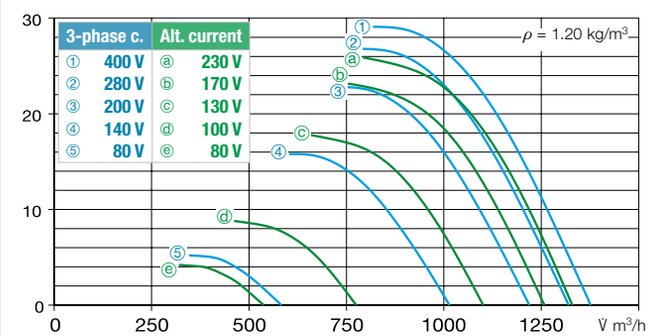

Performance curve 315/8

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	49	35	45	43	43	38	32	28
$L_{PA,4m}$	Air noise	dB(A)	29	15	25	23	23	18	12	8

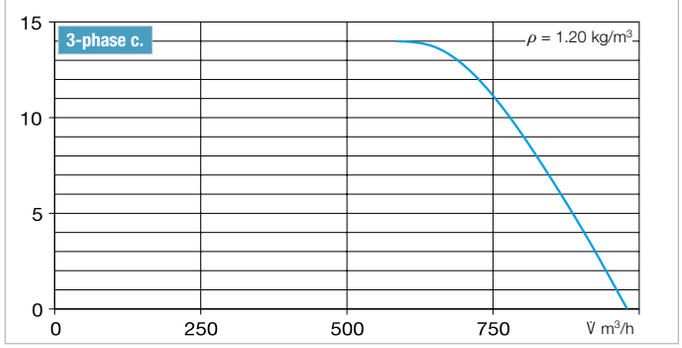

Accessories for HRF 315 Description see page 278 ff.

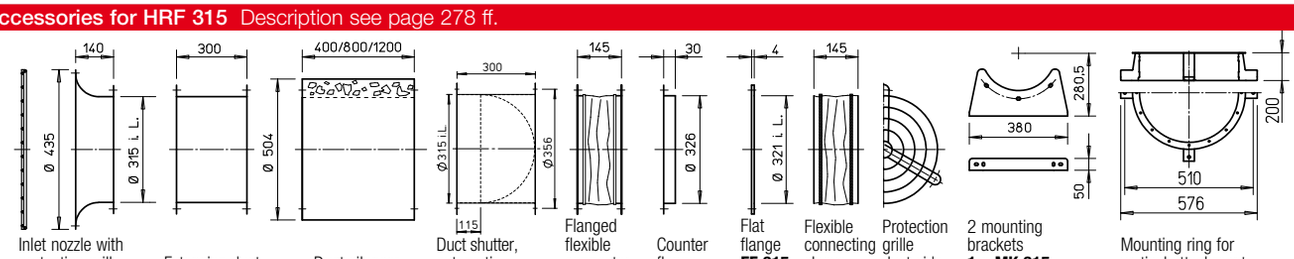

Inlet nozzle with protection grille **ASD-SGD 315** No. 01416

Extension duct **VR 315** No. 01404

Duct silencer **RSD 315/..**

Duct shutter, automatic **RVS 315** a) No. 02594

Flanged flexible connector **STS 315** b) No. 01221

Counter flange **FR 315** No. 01204

Flat flange **FF 315** No. 04943

Flexible connecting sleeve **FM 315** b) No. 01674

Protection grille duct side **SG 315** No. 01237

2 mounting brackets **1 x MK 315** (= 2 pcs) No. 01448

Mounting ring for vertical attachment **MRV 315** No. 01755

a) Shutter, motorised see Accessories product pages. b) See below for types for explosion-proof fans.

Frequency inverter with integrated sine filter		Transformer speed controller 5-step, pole changing switch		Electronic speed controller, continuously variable flush-m./surface-m.		Motor protection circuit breaker		Reverser switch	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
—		**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236/00238	—		**WS**	01271
—		**MWS 1.5**[3]	01947	**ESU 1 / ESA 1**	00236/00238	**MW**	01579	**WS**	01271
FU-BS 2.5[3]	05459	**RDS 1**[3]	01314	—		**MD**	05849	**WS**	01271
FU-BS 2.5[3]	05459	**RDS 1**[3]	01314	—		**MD**	05849	**WS**	01271
FU-BS 2.5[3]	05459	—		—		**MSA**	01289	**WS**	01271
		Pole changing switch							
—		**PDA 12**[5]	05081	—		**M 3**[4]	01293	**PWDA**	01282
—		**PDA 12**[5]	05081	—		**MSA**	01289	**PWDA**	01282
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	

[4] Incl. speed pole changing switch. [5] Flush-m. version see Switch product page.

Other accessories — Page

[b] **Access. for expl.-proof fans**

Flanged flexible connector STS 315 Ex Ref. no. 02503

Flexible connecting sleeve FM 315 Ex Ref. no. 01690

Extension sleeve for HS VH 315 Ref. no. 01344
Cylindrical pipe section, galvanised steel, 15 cm long.

Filter and silencers 483 ff.
Shutters and ventilation grilles 563 ff.
Speed controllers, controllers and switches 601 ff.

HQ 355

Also available in version:

HRF 355

Also available in version:

Dimensions HQ 355



Dim. in mm

Dimensions HRF 355



Dim. B see table
Dim. in mm

Description for all types

Casing
Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white. Explosion-proof types have no lacquer coating.

Impeller
High performance characteristics with profiled blades made of plastic, dynamically balanced. Different for explosion-proof types.

Drive
Closed die-cast aluminium casing. Prot. cat. IP55. Ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature. Different for explosion-proof types.

Motor protection
All types (except for 3~ explosion-proof, see page 190) are equipped with thermal contacts or PTC thermistor. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. For 1~ explosion-proof fans, the thermal contacts are wired in series with the winding, automatic deactivation and reactivation after cool down.

Electrical connection
Standard terminal box (IP55) on back of motor. Additionally on outside of duct for HRF types. Different for explosion-proof types.

Protection grille
Made of powder-coated steel for HQ and HW (HQ Ex galvanised). In accordance with DIN EN ISO 13857.

Power control
The voltage-controllable types are identified in the "Current consumption max. with control" column with a value which must be observed when determining the controller (see speed controller column). Possible assignments of frequency inverters to fans are shown in the type table. The flow rates are shown in the performance diagram.

Reverse operation
All types are reversible using a reverser switch. Performance reduction of approx. 1/3 in abnormal flow direction.

Installation
Installation possible in any position, but be aware of any condensate drain holes depending on usage.

Dimensions
Pole-changeable and explosion-proof types may differ from the above information.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.
Different for explosion-proof types.

Speed	Flow rate free-blowing	Power consump.	Current consump. at rated voltage	Current consump. max. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net aprx.	Design type HQ incl. protection grille	Ref. no.	HRF	Ref. no.	Dim. B Motor protrusion in mm
min⁻¹	V̇ m³/h	W	A	A	No.	+ °C	+ °C	kg					
Single-phase alternating current.230 Volt, 50 Hz, Capacitor motor, protection category IP55													
960	1940	75	0.47	0.47	475[1]	60	40	12	**HQW 355/6**	01107	**HRFW 355/6**[1]	00204	—
1320	2875	130	0.60	0.65	1638	60	40	11	**HQW 355/4**	01108	**HRFW 355/4**	00205	—
Three-phase current, 400 Volt, 50 Hz, Squirrel-cage rotor, protection category IP55													
960	1970	70	0.27	0.29	469	60	40	9.5	**HQD 355/6**	01120	—		—
1360	2920	130	0.30	0.30	469	60	40	14.0	**HQD 355/4**	01121	**HRFD 355/4**	00226	—
2890	5980	1100	1.10	—	776	60	—	18.0	**HQD 355/2**	01122	**HRFD 355/2**	00227	50
Pole-changeable, 2 speeds, three-phase current, Dahlander winding, 400 Volt, 50 Hz, protection category IP55													
700/1390	1430/2950	45/145	0.14/0.35		472	60	—	11.0	**HQD 355/8/4**	01132	**HRFD 355/8/4**	00394	—
1430/2840	3050/6150	250/950*	0.63/2.30*		472	40	—	16.0	**HQD 355/4/2**	01134	**HRFD 355/4/2**	00396	35
Ex Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex d, alternating current 230 Volt, 50 Hz, protection category IP55													
1370	2940	180*	1.25*		757	40	—	18.0	**HQW 355/4 Ex**	00444	**HRFW 355/4 Ex**	00443	30
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55													
925	2010	250*	0.80*		470	40	—	25.0	**HQD 355/6 Ex**	01101	—		—
1355	3060	120*	0.37*		470	40	—	18.0	**HQD 355/4 Ex**	01150	**HRFD 355/4 Ex**	00476	—
2900	5010	550*	1.31*		470	40	—	12.5	**HQD 355/2 Ex**	01151	**HRFD 355/2 Ex**	00477	—

* Motor ratings, Ex see information on page 20. [1] Type HRFW: Connection according to wiring diagram no. 965. [2] Incl. motor protection circuit breaker. [3] Incl. speed pole changing switch.

Performance curves 355/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	91	59	73	88	83	85	78	67
$L_{PA,4m}$	Air noise	dB(A)	71	39	53	68	63	65	58	47

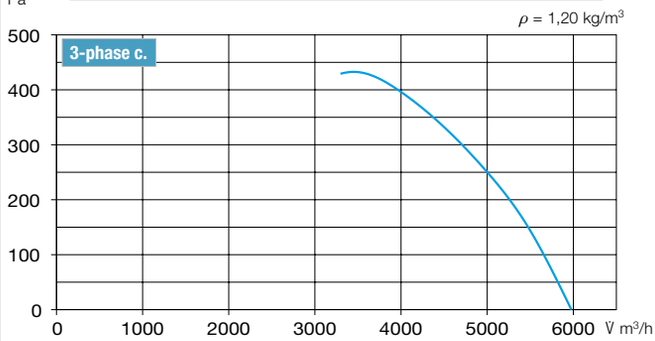

Performance curves 355/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	71	49	64	65	64	64	57	45
$L_{PA,4m}$	Air noise	dB(A)	51	29	44	45	44	44	37	25

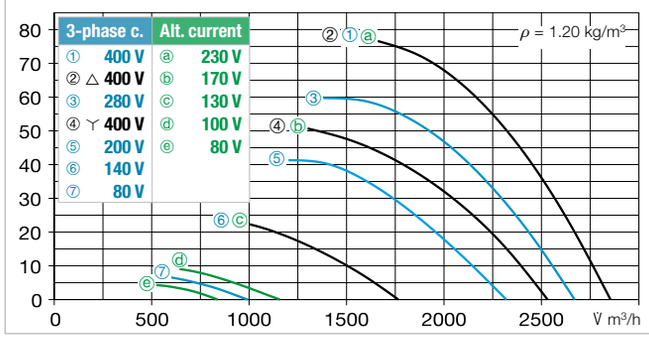

Performance curves 355/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	62	50	57	56	56	53	47	40
$L_{PA,4m}$	Air noise	dB(A)	42	30	37	36	36	33	27	20

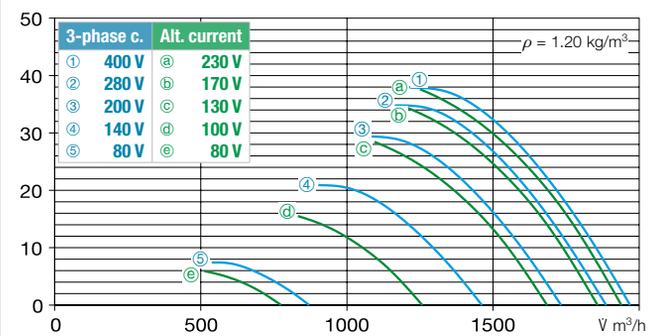

Performance curve 355/8

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	71	50	63	66	65	65	58	46
$L_{PA,4m}$	Air noise	dB(A)	51	30	43	46	45	45	38	26

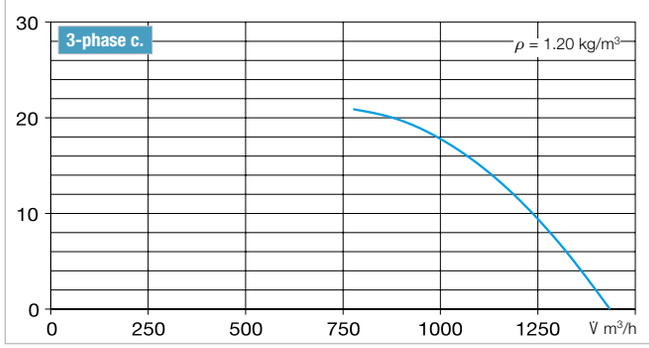

Accessories for HRF 355 Description see page 278 ff.

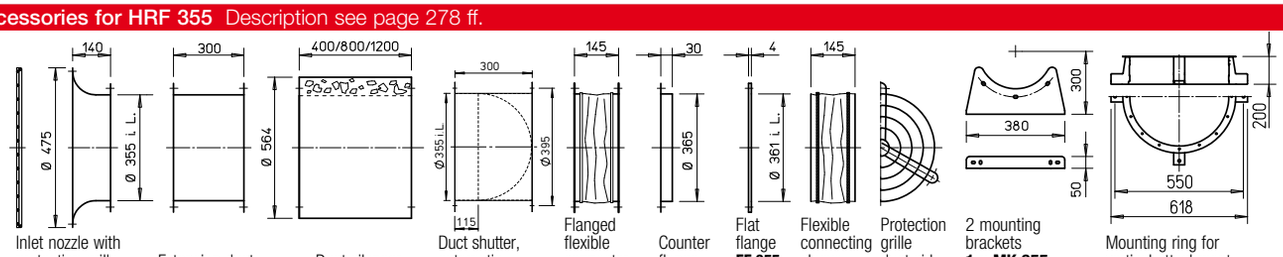

Inlet nozzle with protection grille **ASD-SGD 355** No. 01417

Extension duct **VR 355** No. 01405

Duct silencer **RSD 355/..**

Duct shutter, automatic **RVS 355** a) No. 02595

Flanged flexible connector **STS 355** b) No. 01222

Counter flange **FR 355** No. 01205

Flat flange **FF 355** No. 04944

Flexible connecting sleeve **FM 355** b) No. 01675

Protection grille duct side **SG 355** No. 01238

2 mounting brackets **1 x MK 355** (= 2 pcs) No. 01448

Mounting ring for vertical attachment **MRV 355** No. 01759

a) Shutter, motorised see Accessories product pages.

b) See below for types for explosion-proof fans.

Frequency inverter with integrated sine filter		Transformer speed controller 5-step, pole changing switch		Electronic speed controller, continuously variable flush-m./surface-m.		Motor protection circuit breaker		Reverser switch	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
—		**MWS 1.5** 2)	01947	**ESU 1 / ESA 1**	00236/00238	**MW**	01579	**WS**	01271
—		**MWS 1.5** 2)	01947	**ESU 1 / ESA 1**	00236/00238	**MW**	01579	**WS**	01271
FU-BS 2.5 2)	05459	**RDS 1** 2)	01314	—		**MD**	05849	**WS**	01271
FU-BS 2.5 2)	05459	**RDS 1** 2)	01314	—		**MD**	05849	**WS**	01271
FU-BS 2.5 2)	05459	—		—		**MSA**	01289	**WS**	01271
		Pole changing switch							
—		**PDA 12** 4)	05081	—		**M 3** 3)	01293	**PWDA**	01282
—		**PDA 12** 4)	05081	—		**MSA**	01289	**PWDA**	01282
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	

4) Flush-m. version see Switch product page.

Other accessories — Page

b) **Access. for expl.-proof fans**

Flanged flexible connector STS 355 Ex Ref. no. 02504

Flexible connecting sleeve FM 355 Ex Ref. no. 01691

Extension sleeve for HS VH 355 Ref. no. 01345
Cylindrical pipe section, galvanised steel, 15 cm long.

Filter and silencers 483 ff.
Shutters and ventilation grilles 563 ff.
Speed controllers, controllers and switches 601 ff.

HQ 400

Also available in version:

HRF 400

Also available in version:

Dimensions HQ 400



Dim. in mm

Dimensions HRF 400



Dim. B see table
Dim. in mm

Description for all types

Casing
Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white. Explosion-proof types have no lacquer coating

Impeller
High performance characteristics with profiled blades made of plastic, dynamically balanced. Different for explosion-proof types.

Drive
Closed die-cast aluminium casing. Prot. cat. IP55. Ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature. Different for explosion-proof types.

Motor protection
All types (except for explosion-proof, see page 190) are equipped with thermal contacts or PTC thermistor. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Electrical connection
Standard terminal box (IP55) on back of motor. Additionally on outside of duct for HRF types. Different for explosion-proof types.

Protection grille
Made of powder-coated steel for HQ and HW (HQ Ex galvanised). In accordance with DIN EN ISO 13857.

Power control
The voltage-controllable types are identified in the "Current consumption max. with control" column with a value which must be observed when determining the controller (see speed con-troller column).
Possible assignments of frequency inverters to fans are shown in the type table. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. The flow rates are shown in the perform. diagram.

Reverse operation
All types are reversible using a reverser switch. Performance reduction of approx. 1/3 in abnormal flow direction.

Installation
Installation possible in any position, but be aware of any condensate drain holes depending on usage.

Dimensions
Pole-changeable and explosion-proof types may differ from the above information.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.
Different for explosion-proof types.

Reference	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, protection category, air flow direction, higher air flow temperature, acid protection and impeller in other materials upon request.

The technical information on p. 19 ff. must be observed.

Speed	Flow rate free-blowing	Power consump.	Current consump. at rated voltage	Current consump. max. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net aprx.	Design type HQ incl. protection grille	Ref. no.	HRF	Ref. no.	Dim. B Motor protrusion in mm
min⁻¹	V̇ m³/h	W	A	A	No.	+ °C	+ °C	kg					
Single-phase alternating current.230 Volt, 50 Hz, Capacitor motor, protection category IP55													
930	2570	77	0.52	0.54	475[1]	60	40	13.0	**HQW 400/6**	01110	**HRFW 400/6**[1]	00206	—
1440	4260	250	1.73	—	475[1]	60	—	12.0	**HQW 400/4**	01111	**HRFW 400/4**[1]	00207	70
Three-phase current, 400 Volt, 50 Hz, Squirrel-cage rotor, protection category IP55													
950	2620	89	0.28	0.30	469	60	40	13.0	**HQD 400/6**	01123	—		—
1350	4000	250	1.15	—	776	60	—	14.0	**HQD 400/4**	01124	**HRFD 400/4**	00229	—
2895	8570	3000*	5.71*	—	776	60	—	36.0	**HQD 400/2**	01475	**HRFD 400/2**	01474	180
Pole-changeable, 2 speeds, three-phase current, Dahlander winding, 400 Volt, 50 Hz, protection category IP55													
645/1370	2010/4090	100/500	0.93/1.4	—	777	60	—	18.0	**HQD 400/8/4**	01137	**HRFD 400/8/4**	00399	110
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55													
925	2870	250*	0.80*	—	470	40	—	13.0	**HQD 400/6 Ex**	01109	—		—
1420	4380	370*	1.15*	—	470	40	—	16.0	**HQD 400/4 Ex**	01153	**HRFD 400/4 Ex**	00479	—

* Motor ratings, Ex see information on page 20. [1] Type HRFW: Connection according to wiring diagram no. 965 [2] Incl. motor protection circuit breaker. [3] Incl. speed pole changing switch.

Performance curves 400/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	91	58	72	85	86	86	79	69
$L_{PA,4m}$	Air noise	dB(A)	71	38	52	65	66	66	59	49

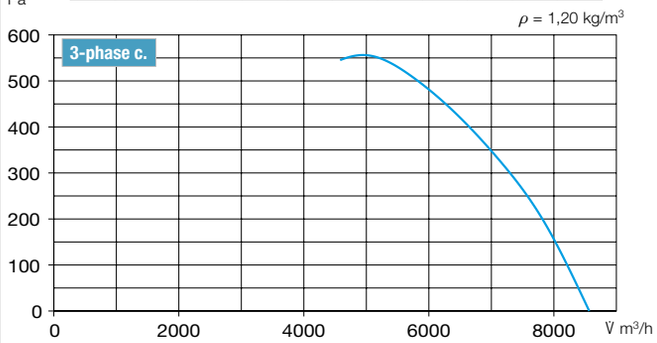

Performance curves 400/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	76	54	72	71	68	68	61	50
$L_{PA,4m}$	Air noise	dB(A)	56	34	52	51	48	48	41	30

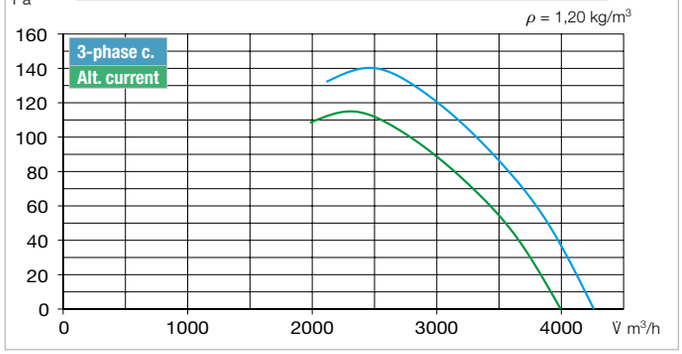

Performance curves 400/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	66	53	60	60	59	56	50	43
$L_{PA,4m}$	Air noise	dB(A)	46	33	40	40	39	36	30	2

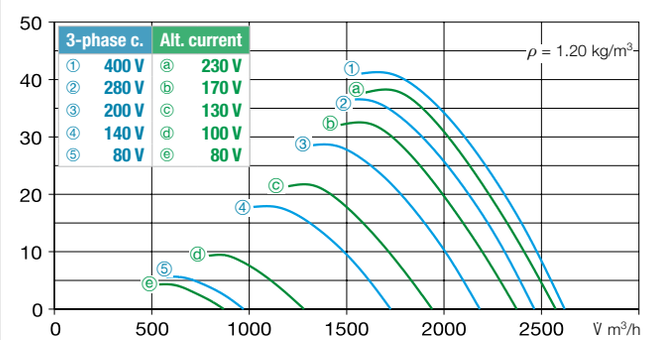

Performance curve 400/8

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	55	42	46	48	50	48	42	35
$L_{PA,4m}$	Air noise	dB(A)	35	22	26	28	30	28	22	15

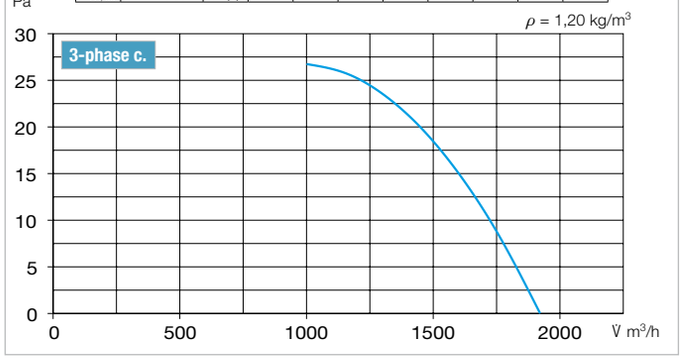

Accessories for HRF 400 Description see page 278 ff.

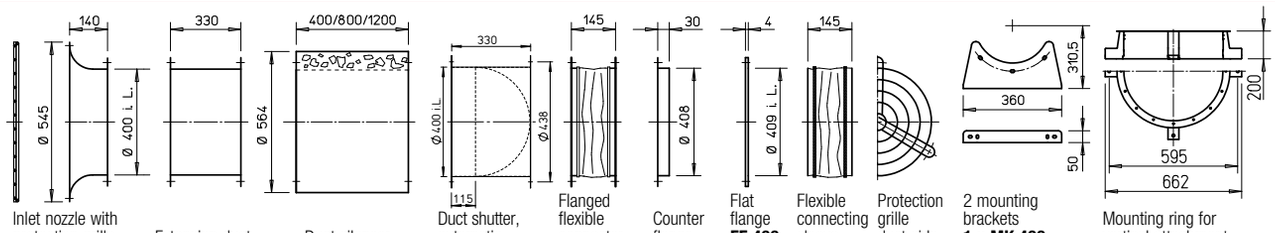

Inlet nozzle with protection grille **ASD-SGD 400** No. 01418

Extension duct **VR 400** No. 01406

Duct silencer **RSD 400/..**

Duct shutter, automatic **RVS 400** a) No. 02596

Flanged flexible connector **STS 400** b) No. 01223

Counter flange **FR 400** No. 01206

Flat flange **FF 400** No. 04945

Flexible connecting sleeve **FM 400** b) No. 01676

Protection grille duct side **SG 400** No. 01239

2 mounting brackets **1 x MK 400** (= 2 pcs) No. 01449

Mounting ring for vertical attachment **MRV 400** No. 01760

a) Shutter, motorised see Accessories product pages.

b) See below for types for explosion-proof fans.

Frequency inverter with integrated sine filter		Transformer speed controller 5-step, pole changing switch		Electronic speed controller, continuously variable flush-m./surface-m.		Motor protection circuit breaker		Reverser switch	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
—		**MWS 1.5** 2)	01947	**ESU 1 / ESA 1**	00236/00238	**MW**	01579	**WS**	01271
—		—		—		**MW**	01579	**WS**	01271
FU-BS 2.5 2)	05459	**RDS 1** 2)	01314	—		**MD**	05849	**WS**	01271
FU-BS 2.5 2)	05459	—		—		**MSA**	01289	**WS**	01271
FU-BS 5,0 2)	05460	—		—		**MSA**	01289	**WS**	01271
		Pole changing switch							
—		—		—		**MSA**	01289	**PWDA**	01282
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	

4) Flush-m. version see Switch product page.

Other accessories — Page

b) **Access. for expl.-proof fans**

Flanged flexible connector STS 400 Ex Ref. no. 02505

Flexible connecting sleeve FM 400 Ex Ref. no. 01692

Extension sleeve for HS VH 400 Ref. no. 01346
Cylindrical pipe section, galvanised steel, 15 cm long.

Filter and silencers 483 ff.
Shutters and ventilation grilles 563 ff.
Speed controllers, controllers and switches 601 ff.

HQ 450

Also available in version:

HRF 450

Also available in version:

Dimensions HQ 450



Dim. in mm

Dimensions HRF 450



Dim. B see table
Dim. in mm

Description for all types

Casing
Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white. Explosion-proof types have no lacquer coating

Impeller
High performance characteristics with profiled blades made of plastic, dynamically balanced. Different for explosion-proof types.

Drive
Closed die-cast aluminium casing. Prot. cat. IP55. Ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature. Different for explosion-proof types.

Motor protection
All types (except for explosion-proof, see page 190) are equipped with thermal contacts or PTC thermistor. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Electrical connection
Standard terminal box (IP55) on back of motor. Additionally on outside of duct for HRF types. Different for explosion-proof types.

Protection grille
Made of powder-coated steel for HQ and HW (HQ Ex galvanised). In accordance with DIN EN ISO 13857.

Power control
The voltage-controllable types are identified in the “Current consumption max. with control” column with a value which must be observed when determining the controller (see speed controller column). Possible assignments of frequency inverters to fans are shown in the type table. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. The flow rates are shown in the performance diagram.

Reverse operation
All types are reversible using a reverser switch. Performance reduction of approx. 1/3 in abnormal flow direction.

Installation
Installation possible in any position, but be aware of any condensate drain holes depending on usage.

Dimensions
Pole-changeable and explosion-proof types may differ from the above information.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.
Different for explosion-proof types.

Speed	Flow rate free-blowing	Power consump.	Current consump. at rated voltage	Current consump. max. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net aprx.	Design type: HQ incl. protection grille	Ref. no.	Design type: HRF	Ref. no.	Dim. B Motor protrusion in mm
min⁻¹	V̇ m³/h	W	A	A	No.	+ °C	+ °C	kg					
Single-phase alternating current.230 Volt, 50 Hz, Capacitor motor, protection category IP55													
915	3890	136	0.63	0.63	475[1]	60	40	19.0	**HQW 450/6**	00991	**HRFW 450/6**[1]	00208	—
1410	5930	550	3.20	—	1638	60	—	14.0	**HQW 450/4**	00992	**HRFW 450/4**	00209	40
Three-phase current, 400 Volt, 50 Hz, Squirrel-cage rotor, protection category IP55													
960	3920	137	0.38	0.42	469	60	40	18.0	**HQD 450/6**	00993	**HRFD 450/6**	00230	—
1390	5810	384	0.81	0.92	469	50	40	17.0	**HQD 450/4**	00994	**HRFD 450/4**	00231	—
2910	10600	2200*	7,56*	—	776	60	—	32.0	—		**HRFD 450/2**	00484	100
Pole-changeable, 2 speeds, three-phase current, Dahlander winding, 400 Volt, 50 Hz, protection category IP55													
705/1410	2860/5810	91/404	0.36/0.92	—	472	50	—	20.0	**HQD 450/8/4**	00996	**HRFD 450/8/4**	00403	—
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55													
925	4090	250*	0.80*	—	470	40	—	15.5	**HQD 450/6 Ex**	01473	—		—
1420	6240	370*	1.15*	—	470	40	—	15.5	**HQD 450/4 Ex**	01154	**HRFD 450/4 Ex**	00481	—

* Motor ratings, Ex see information on page 20. [1] Type HRFW: Connection according to wiring diagram no. 965. [2] Incl. motor protection circuit breaker. [3] Flush-m. version see Switch product page.

Performance curves 450/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	98	72	89	91	96	90	87	79
$L_{PA,4m}$	Air noise	dB(A)	78	52	69	71	76	70	67	59

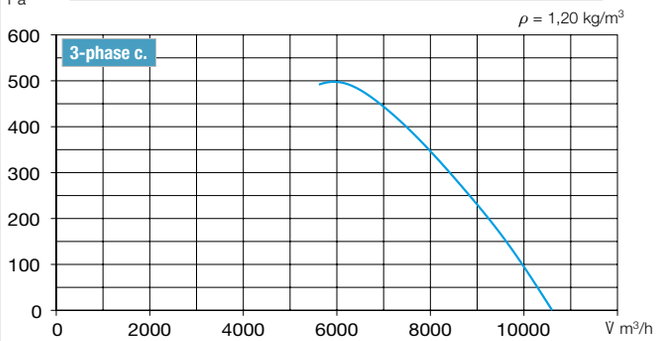

Performance curves 450/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	78	52	69	72	73	72	67	60
$L_{PA,4m}$	Air noise	dB(A)	58	32	49	52	53	52	47	40

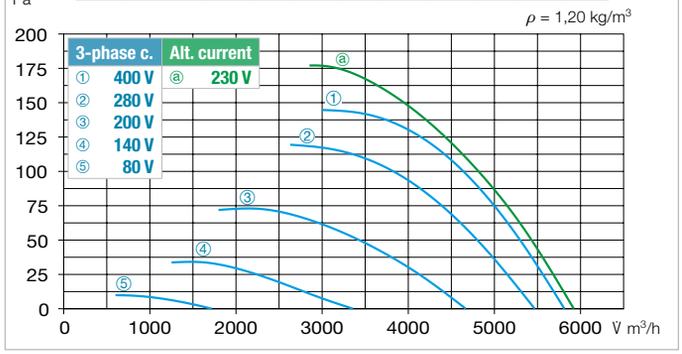

Performance curves 450/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	68	52	58	62	63	61	56	47
$L_{PA,4m}$	Air noise	dB(A)	48	32	38	42	43	41	36	27

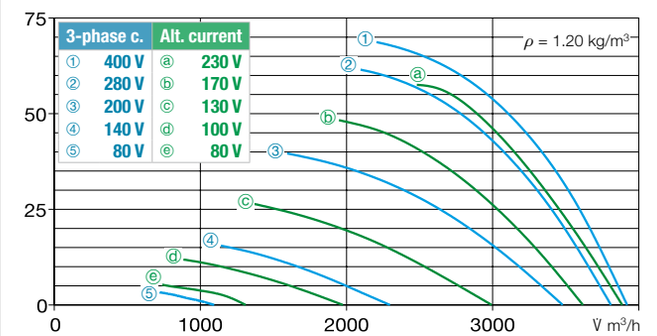

Performance curves 450/8

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	63	37	54	57	58	57	52	45
$L_{PA,4m}$	Air noise	dB(A)	43	17	34	37	38	37	32	25

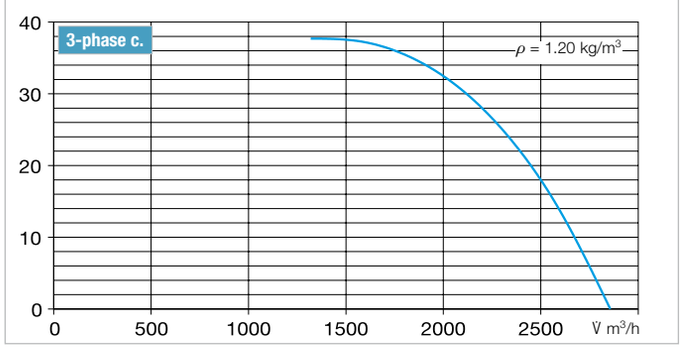

Accessories for HRF 450 Description see page 278 ff.

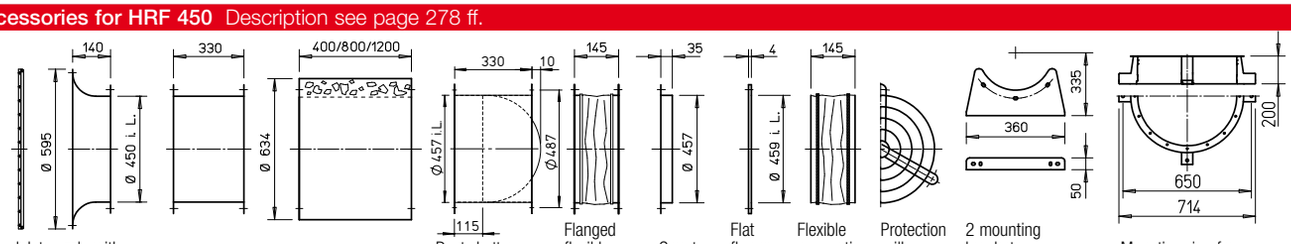

Inlet nozzle with protection grille **ASD-SGD 450** No. 01419

Extension duct **VR 450** No. 01407

Duct silencer **RSD 450/..**

Duct shutter, automatic **RVS 450** a) No. 02597

Flanged flexible connector **STS 450** b) No. 01224

Counter flange **FR 450** No. 01207

Flat flange **FF 450** No. 04946

Flexible connecting sleeve **FM 450** b) No. 01677

Protection grille duct side **SG 450** No. 01240

2 mounting brackets **1 x MK 450** (= 2 pcs) No. 01449

Mounting ring for vertical attachment **MRV 450** No. 01761

a) Shutter, motorised see Accessories product pages.

b) See below for types for explosion-proof fans.

Frequency inverter with integrated sine filter		Transformer speed controller 5-step, pole changing switch		Electronic speed controller, continuously variable flush-m./surface-m.		Motor protection circuit breaker		Reverser switch	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
—		**MWS 1.5** 2)	01947	**ESU 3 / ESA 3**	00237/00239	**MW**	01579	**WS**	01271
—		—		—		**MW**	01579	**WS**	01271
FU-BS 2.5 2)	05459	**RDS 1** 2)	01314	—		**MD**	05849	**WS**	01271
FU-BS 2.5 2)	05459	**RDS 2** 2)	01315	—		**MSA**	01289	**WS**	01271
FU-BS 8 2)	05461	—		—		**MSA**	01289	**WS**	01271
		Pole changing switch							
—		**PDA 12** 3)	05081	—		**M 3** 4)	01293	**PWDA**	01282
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	

4) Incl. speed pole changing switch. 5) Speed changeover switch.

Other accessories	Page
b) Access. for expl.-proof fans	
Flanged flexible connector STS 450 Ex	Ref. no. 02506
Flexible connecting sleeve FM 450 Ex	Ref. no. 01693
Filter and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

HQ 500

Also available in version:

HRF 500

Also available in version:

Dimensions HQ 500



Dim. in mm

Dimensions HRF 500



Dim. B see table
Dim. in mm

Description for all types

Casing
Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white. Explosion-proof types have no lacquer coating

Impeller
High performance characteristics with profiled blades made of plastic, dynamically balanced. Different for explosion-proof types.

Drive
Closed die-cast aluminium casing. Prot. cat. IP55. Ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature. Different for explosion-proof types.

Motor protection
All types (except for explosion-proof, see page 190) are equipped with thermal contacts or PTC thermistor. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Electrical connection
Standard terminal box (IP55) on back of motor. Additionally on outside of duct for HRF types. Different for explosion-proof types.

Protection grille
Made of powder-coated steel for HQ and HW (HQ Ex galvanised). In accordance with DIN EN ISO 13857.

Power control
The voltage-controllable types are identified in the "Current consumption max. with control" column with a value which must be observed when determining the controller (see speed controller column). Possible assignments of frequency inverters to fans are shown in the type table. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. The flow rates are shown in the performance diagram.

Reverse operation
All types are reversible using a reverser switch. Performance reduction of approx. 1/3 in abnormal flow direction.

Installation
Installation possible in any position, but be aware of any condensate drain holes depending on usage.

Dimensions
Pole-changeable and explosion-proof types may differ from the above information.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.
Different for expl.-proof types.

Reference	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, protection category, air flow direction, higher air flow temperature, acid protection and impeller made of cast aluminium upon request.

Speed	Flow rate free-blowing	Power consump.	Current consump. at rated voltage	Current consump. max. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net aprx.	Design type HQ incl. protection grille	Ref. no.	HRF	Ref. no.	Dim. B Motor protrusion in mm
min⁻¹	V̇ m³/h	W	A	A	No.	+ °C	+ °C	kg					
Single-phase alternating current.230 Volt, 50 Hz, Capacitor motor, protection category IP55													
935	5500	233	1.05	1.25	475[1]	60	40	19.0	**HQW 500/6**	01112	**HRFW 500/6[1]**	00210	—
1375	8320	1100*	5.90*	4.94	475[1]	40	40	25.0	**HQW 500/4**	01113	**HRFW 500/4[1]**	00211	60
Three-phase current, 400 Volt, 50 Hz, Squirrel-cage rotor, protection category IP55													
920	5480	218	0.48	0.55	469	60	40	19.0	**HQD 500/6**	01126	**HRFD 500/6**	00232	—
1345	8200	620	1.22	1.32	469	40	40	19.5	**HQD 500/4**	01127	**HRFD 500/4**	00233	—
2940	13280	3000*	5.71*	—	776	60	—	27.0	—		**HRFD 500/2**	00485	170
Two-speed, three-phase current, 400 V, 50 Hz, ⅄/△ connection, protection category IP55													
1030/1350	6720/8150	416/617	0.76/1.19	—	520	60	—	24.0	—		**HRFD 500/4/4**	01470	120
Pole-changeable, 2 speeds, three-phase current, Dahlander winding, 400 Volt, 50 Hz, protection category IP55													
700/1385	3890/8280	137/688	0.52/1.48	—	472	40	—	22.0	**HQD 500/8/4**	01142	**HRFD 500/8/4**	00407	—
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55													
925	5610	250*	0.80*	—	470	40	—	18.0	**HQD 500/6 Ex**	01050	**HRFD 500/6 Ex**	00489	10
1430	8330	550*	1.75*	—	470	40	—	18.0	**HQD 500/4 Ex**	01157	**HRFD 500/4 Ex**	00483	45

* Motor ratings, Ex see information on page 20. [1] Type HRFW: Connection according to wiring diagram no. 965. [2] Incl. motor protection circuit breaker. [3] Incl. speed pole changing switch.

Performance curves 500/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	101	75	92	94	99	93	90	82
$L_{PA,4m}$	Air noise	dB(A)	81	55	72	74	79	73	70	62

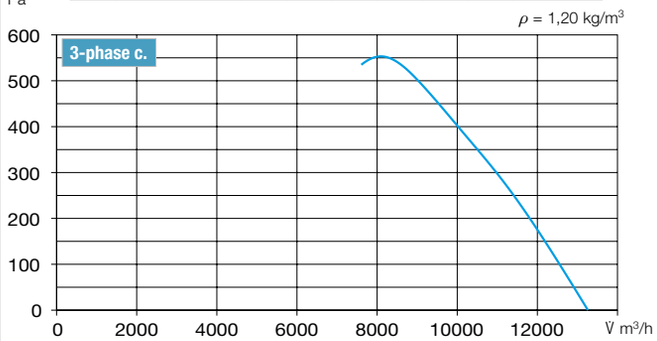

Performance curves 500/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	81	56	74	75	75	74	69	63
$L_{PA,4m}$	Air noise	dB(A)	61	36	54	55	55	54	49	43

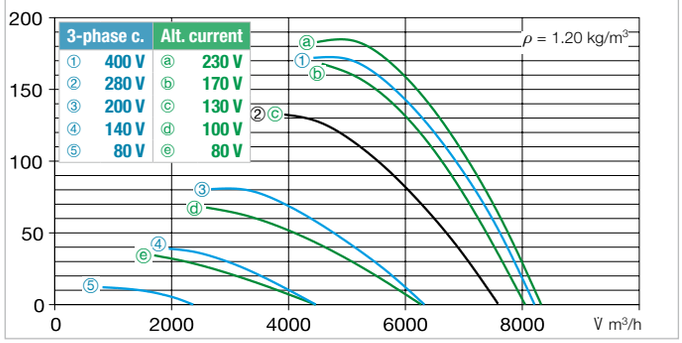

Performance curves 500/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	71	55	62	65	65	64	59	51
$L_{PA,4m}$	Air noise	dB(A)	51	35	42	45	45	44	39	31

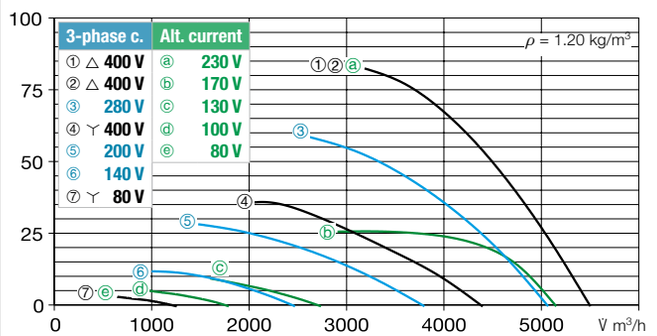

Performance curve 500/8

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	66	41	59	60	60	59	54	48
$L_{PA,4m}$	Air noise	dB(A)	46	21	39	40	40	39	34	28

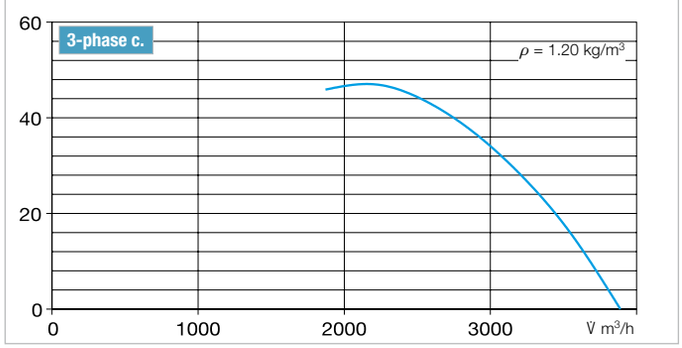

Accessories for HRF 500 Description see page 278 ff.

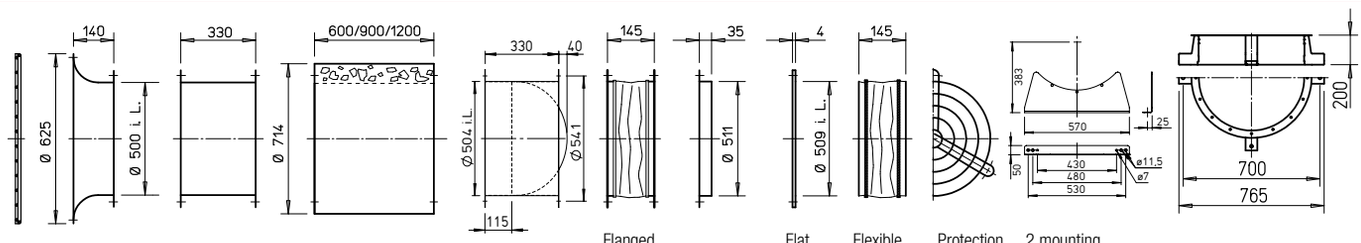

Intake nozzle with prot. grille **ASD-SGD 500** No. 01420

Extension duct **VR 500** No. 01408

Duct silencer **RSD 500/..**

Duct shutter, automatic **RVS 500** a) No. 02598

Flanged flexible connector **STS 500** b) No. 01225

Counter flange **FR 500** No. 01208

Flat flange **FF 500** No. 04947

Flexible connecting sleeve **FM 500** b) No. 01678

Protection grille duct side **SG 500** No. 01241

2 mounting brackets **1 x MK 500** (= 2 pcs) No. 00674

Mounting ring for vertical attachment **MRV 500** No. 01740

a) Shutter, motorised see Accessories product pages.

b) See below for types for explosion-proof fans.

Frequency inverter with integrated sine filter		Transformer speed controller 5-step, pole changing switch		Electronic speed controller, continuously variable flush-m./surface-m.		Motor protection circuit breaker		Reverser switch	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
—		**MWS 1.5** 2)	01947	**ESU 3 / ESA 3**	00237/00239	**MW**	01579	**WS**	01271
—		**MWS 5** 2)	01949	—		**MW**	01579	**WS**	01271
FU-BS 2.5 2)	05459	**RDS 1** 2)	01314	**ESD 5** 2)	00501	**MD**	05849	**WS**	01271
FU-BS 2.5 2)	05459	**RDS 2** 2)	01315	**ESD 5** 2)	00501	**MD**	05849	**WS**	01271
FU-BS 8 2)	05461	—		—		**MSA**	01289	**WS**	01271
		Speed changeover switch							
FU-BS 2.5 2)	05459	**DS 2** 5)	01351	**ESD 5** 2)	00501	**M 4** 4) **/ MD**	01571/05849	**WS**	01271
		Pole changing switch							
—		**PDA 12** 4)	05081	—		**M 3** 3)	01293	**PWDA**	01282
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	

4) Flush-m. version see Switch product page. 5) Speed changeover switch.

Other accessories **Page**

b) **Access. for expl.-proof fans**

Flanged flexible connector STS 500 Ex Ref. no. 02507

Flexible connecting sleeve FM 500 Ex Ref. no. 01694

Extension sleeve for HS VH 500 Ref. no. 01348
Cylindrical pipe section, galvanised steel, 15 cm long.

Filter and silencers 483 ff.
Shutters and ventilation grilles 563 ff.
Speed controllers, controllers and switches 601 ff.

HQ 560

Also available in version:

HRF 560

Also available in version:

Dimensions HQ 560



Dim. in mm

Dimensions HRF 560



Dim. in mm

Description for all types

Casing
Made of galvanised steel sheet. Type HQ has additional two layer lacquer coating in papyrus white. Explosion-proof types have no lacquer coating.

Impeller
High performance characteristics with profiled blades made of plastic, dynamically balanced. Different for explosion-proof types.

Drive
Closed die-cast aluminium casing. Protection category IP55. Ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature. Different for explosion-proof types.

Motor protection
All types (except for explosion-proof, see page 190) are equipped with thermal contacts or PTC thermistor. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Electrical connection
Standard terminal box (IP55) on back of motor. Additionally on outside of duct for HRF types. Different for explosion-proof types.

Protection grille
Made of powder-coated steel wire for HQ (Ex types galvanised). In accordance with DIN EN ISO 13857.

Power control
The voltage-controllable types are identified in the "Current consumption max. with control" column with a value which must be observed when determining the controller (see speed controller column). Possible assignments of frequency inverters to fans are shown in the type table. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. The flow rates are shown in the performance diagram.

Reverse operation
All types are reversible using a reverser switch. Performance reduction of approx. 1/3 in abnormal flow direction.

Installation
Installation possible in any position, but be aware of any condensate drain holes depending on usage.

Dimensions
Pole-changeable and explosion-proof types may differ from the above information.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.
Different for explosion-proof types.

Speed	Flow rate free-blowing	Power consump.	Current consump. at rated voltage	Current consump. max. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net aprx.	Design type: HQ incl. prot. grille	Ref. no.	Design type: HRF	Ref. no.	Frequency inverter with integrated sine filter: Type	Ref. no.	Transformer speed controller 5-step, pole changing switch, speed ch., pole changing switch: Type	Ref. no.
min⁻¹	V̇ m³/h	kW	A	A	No.	+ °C	+ °C	kg								
Single-phase alternating current.230 Volt, 50 Hz, Capacitor motor, protection category IP55																
935	7700	0.27	0.27	—	1638	60	—	23.0	**HQW 560/6**	00385	**HRFW 560/6**	00380	—		—	
1420	11550	1.10	6.00	—	1638	60	—	31.0	**HQW 560/4**	05054	**HRFW 560/4**	05055	—		—	
Three-phase current, 400 Volt, 50 Hz, Squirrel-cage rotor, protection category IP55																
885	7200	0.37	1.81	—	776	60	—	22.0	**HQD 560/6**	00386	**HRFD 560/6**	00381	**FU-BS 5** [1]	05460	—	
1440	11700	1.10	4.32	—	776	60	—	23.0	**HQD 560/4**	00387	**HRFD 560/4**	00382	**FU-BS 2.5** [1]	05459	—	
Pole-changeable, 2 speeds, three-phase current, Dahlander winding, 400 Volt, 50 Hz, protection category IP55															Pole changing switch	
645/1390	6400/11300	0.3/1.5	1.55/3.3	—	777	60	—	35.0	**HQD 560/8/4**	00388	**HRFD 560/8/4**	00383	—		—	
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55																
925	8090	0.25*	0.80*	—	470	40	—	23.0	**HQD 560/6 Ex**	00378	**HRFD 560/6 Ex**	00376	—		Not permitted	
1445	12890	0.75*	3.20*	—	470	40	—	24.0	**HQD 560/4 Ex**	00379	**HRFD 560/4 Ex**	00377	—		Not permitted	

* For Ex types: Motor ratings see information on page 20. [1] Incl. motor protection circuit breaker.

Performance curves 560/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	82	66	68	74	78	78	74	68
$L_{PA,4m}$	Air noise	dB(A)	62	46	48	54	58	58	54	48

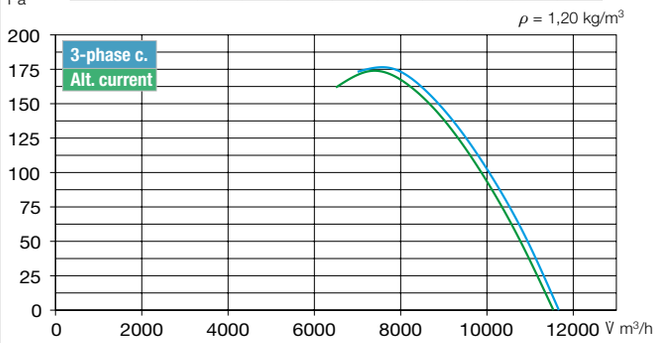

Performance curves 560/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	72	52	59	66	68	67	63	53
$L_{PA,4m}$	Air noise	dB(A)	52	32	39	46	48	47	43	33

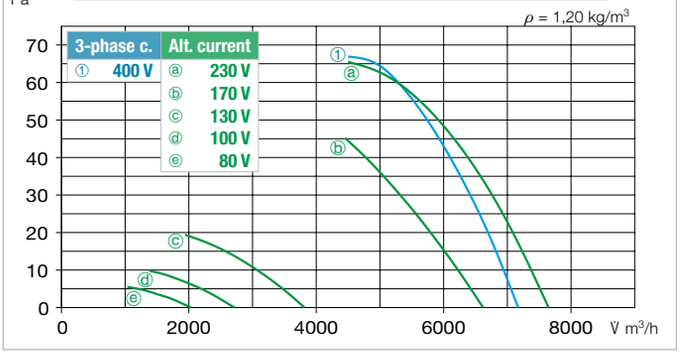

Performance curve 560/8

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	66	47	53	60	62	61	57	48
$L_{PA,4m}$	Air noise	dB(A)	46	27	33	40	42	41	37	28

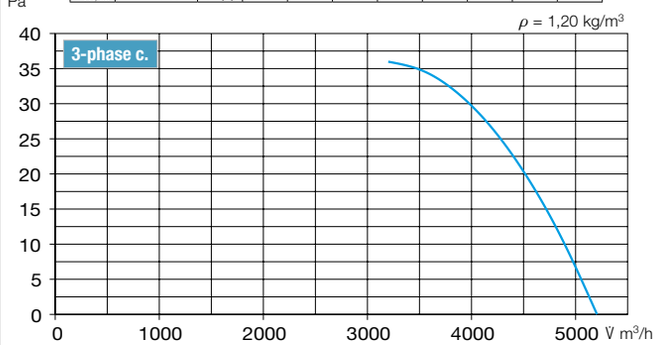

Accessories for HRF 560 Description see page 278 ff.

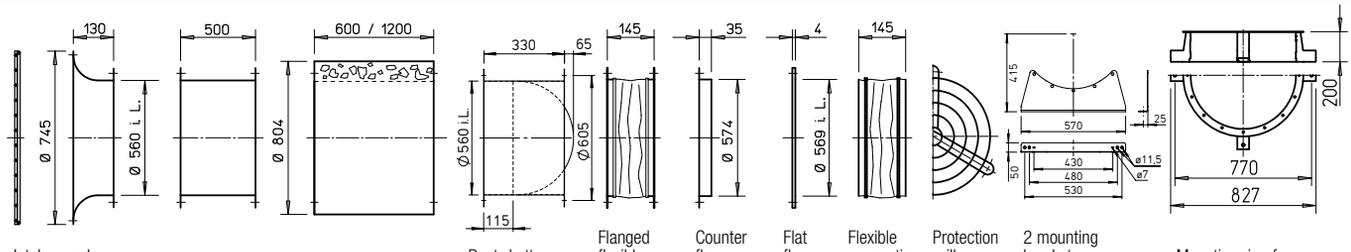

Intake nozzle with prot. grille **ASD-SGD 560** No. 01421

Extension duct **VR 560** No. 01409

Duct silencer **RSD 560/..**

Duct shutter, automatic **RVS 560** a) No. 02599

Flanged flexible connector **STS 560** b) No. 01226

Counter flange **FR 560** No. 01209

Flat flange **FF 560** No. 04948

Flexible connecting sleeve **FM 560** b) No. 01679

Protection grille duct side **SG 560** No. 01242

2 mounting brackets **1 x MK 560** (= 2 pcs) No. 00675

Mounting ring for vertical attachment **MRV 560** No. 01741

a) Shutter, motorised see Accessories product pages.

b) See below for types for explosion-proof fans.

	Electronic speed controller, continuously variable flush-m./surface-m.		Motor protection circuit breaker		Reverser switch	
	Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
	—		**MW**	01579	**WS**	01271
	—		**MW**	01579	**WS**	01271
	—		**MSA**	01289	—	
	—		**MSA**	01289	**WS**	01271
	—		**MSA**	01289	**PWDA**	01282
	not permitted		—		—	
	not permitted		—		—	

3) Incl. speed pole changing switch.

Reference	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, protection category, air flow direction, higher air flow temperature, acid protection and impeller made of cast aluminium upon request.

The technical information on p. 19 ff. must be observed.

Other accessories	Page
b) **Access. for expl.-proof fans**	
Flanged flexible connector STS 560 Ex	Ref. no. 02508
Silencers	496 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.
Flexible connecting sleeve FM 560 Ex	Ref. no. 01695

HQ 630

Also available in version:

HRF 630

Also available in version:

Dimensions HQ 630



Dim. in mm

Dimensions HRF 630



Dim. B see table
Dim. in mm

Description for all types

- **Casing**
  Made of galvanised steel sheet.

- **Impeller**
  High performance characteristics with profiled blades made of plastic, dynamically balanced. Different for explosion-proof types.

- **Drive**
  Closed die-cast aluminium casing. Protection category IP55. Ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature. Different for explosion-proof types.

- **Motor protection**
  All types (except for explosion-proof types, see page 190) are equipped with thermal contacts or PTC thermistor. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

- **Electrical connection**
  Standard terminal box (IP55) on back of motor. Additionally on outside of duct for HRF types. Different for explosion-proof types.

- **Protection grille**
  Made of powder-coated steel for HQ and HW (HQ.. Ex galvanised). In accordance with DIN EN ISO 13857.

- **Power control**
  The voltage-controllable types are identified in the "Current consumption max. with control" column with a value which must be observed when determining the controller (see speed controller column). Possible assignments of frequency inverters to fans are shown in the type table. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. The flow rates are shown in the performance diagram.

- **Reverse operation**
  All types are reversible using a reverser switch. Performance reduction of approx. 1/3 in abnormal flow direction.

- **Installation**
  Installation possible in any position, but be aware of any condensate drain holes depending on usage.

- **Dimensions**
  Pole-changeable and explosion-proof types may differ from the above information.

- **Noise levels**
  See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.
  Different for explosion-proof types.

Reference	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design
Different voltage, protection category, air flow direction, higher air flow temperature, acid protection and impeller in other materials upon request.

The technical information on p. 19 ff. must be observed.

Speed	Flow rate free-blowing	Power consump.	Current consump. at rated voltage	Current consump. max. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net aprx.	Design type HQ incl. protection grille	Ref. no.	HRF	Ref. no.	Dim. B Motor protrusion in mm
min⁻¹	V̇ m³/h	kW	A	A	No.	+ °C	+ °C	kg					
Single-phase alternating current.230 Volt, 50 Hz, Capacitor motor, protection category IP55													
950	10870	0.44	2.16	3.20	475	60	40	28.0	**HQW 630/6**	05037	—		—
1420	15600	1.50*	8.20*	7.00	1638	60	—	31.0	**HQW 630/4**	05056	**HRFW 630/4**	05057	—
Three-phase current, 400 Volt, 50 Hz, Squirrel-cage rotor, protection category IP55													
708	7950	0.20	0.65	—	469	40	40	27.0	**HQD 630/8**	05029	—		—
960	10560	0.44	1.22	—	469	60	40	30.5	**HQD 630/6**	05027	**HRFD 630/6**	00244	—
1440	15700	1.50	5.73	—	776	60	—	47.0	**HQD 630/4**	05030	**HRFD 630/4**	00245	—
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55													
945	10480	0.55*	1.60*		470	40	—	30.0	**HQD 630/6 Ex**	05035	**HRFD 630/6 Ex**	00494	—
1440	17730	1.50*	3.40*		470	40	—	35.0	**HQD 630/4 Ex**	05036	**HRFD 630/4 Ex**	00495	—

* For Ex types: Motor ratings see information on page 20. [1] Incl. motor protection circuit breaker. [2] Flush-m. version see Switch product page.

Performance curves 630/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	85	69	71	77	81	77	70	65
$L_{PA,4m}$	Air noise	dB(A)	65	49	51	57	61	61	57	50

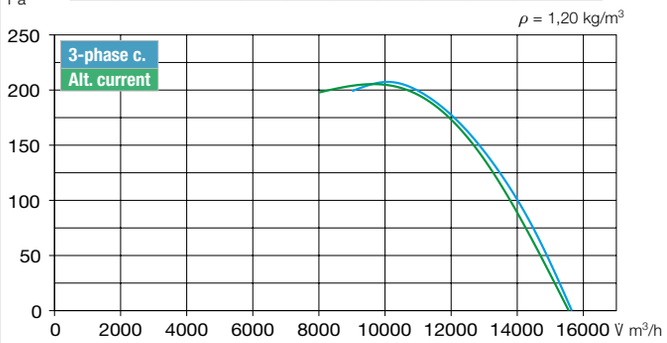

Performance curves 630/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	75	55	62	69	71	70	66	56
$L_{PA,4m}$	Air noise	dB(A)	55	35	41	49	51	50	46	36

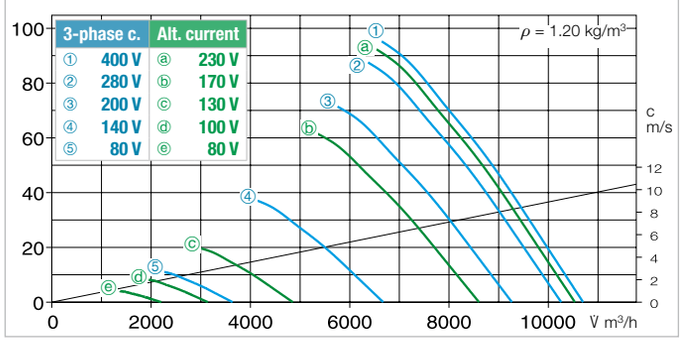

Performance curves 630/8

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	68	48	55	62	64	63	59	50
$L_{PA,4m}$	Air noise	dB(A)	48	28	35	42	44	43	39	30

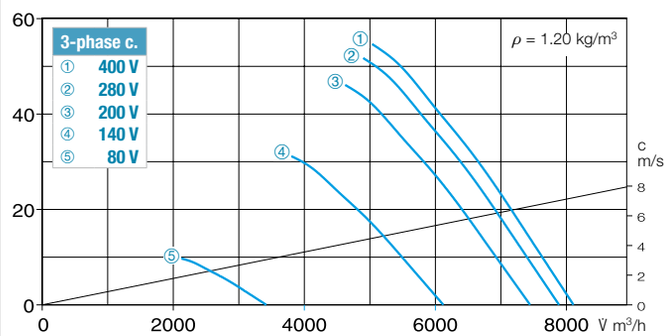

Accessories for HRF 630 Description see page 278 ff.

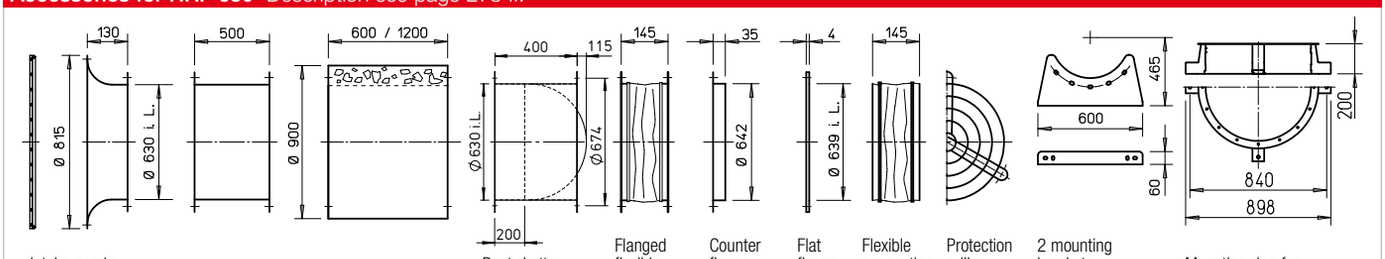

Intake nozzle with prot. grille **ASD-SGD 630** No. 01422

Extension duct **VR 630** No. 01410

Duct silencer **RSD 630/..**

Duct shutter, automatic **RVS 630** a) No. 02600

Flanged flexible connector **STS 630** b) No. 01228

Counter flange **FR 630** No. 01211

Flat flange **FF 630** No. 04949

Flexible connecting sleeve **FM 630** b) No. 01680

Protection grille duct side **SG 630** No. 01243

2 mounting brackets **1 x MK 630** (= 2 pcs) No. 01333

Mounting ring for vertical attachment **MRV 630** No. 017420

a) Shutter, motorised see Accessories product pages.

b) See below for types for explosion-proof fans.

Frequency inverter with integrated sine filter		Transformer speed controller 5-step, pole changing switch		Electronic speed controller, continuously variable flush-m./surface-m.		Motor protection circuit breaker		Reverser switch	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
—		**MWS 3** 1)	01948	—		**MW**	01579	**WS**	01271
—		—		—		**MW**	01579	**WS**	01271
FU-BS 2.5 1)	05459	**RDS 2** 1)	01315	**ESD 5** 1)	00501	**MD**	05849	**WS**	01271
FU-BS 2.5 1)	05459	**RDS 2** 1)	01315	**ESD 5** 1)	00501	**MD**	05849	**WS**	01271
FU-BS 8 1)	05461	—		—		—		**WS**	01271
—		not permitted		not permitted		—		—	
—		not permitted		not permitted		—		—	

3) Incl. speed pole changing switch.

Other accessories	Page
b) **Access. for expl.-proof fans**	
Flanged flexible connector STS 630 Ex	Ref. no. 02509
Silencers	496 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.
Flexible connecting sleeve FM 630 Ex	Ref. no. 01696

Medium pressure axial fans. **Maximum performance for a range of applications.**

With diameter sizes from 225 to 630 mm, flow rates up to 32000 m³/h and very high pressure rates up to 1400 Pa, the Helios medium pressure axial fans provide for maximum volume flows in the smallest of spaces.

Universal installation options in horizontal and vertical positions allow flexible use in a variety of applications.

Innovative

A coordinated concept comprising a plastic impeller with integrated inflow geometry, an innovative downstream guide vane for high pressure recovery and specially matched motors enables high efficiency. The AMD / AMW is designed to meet demanding technical requirements.

Energy-efficient

- High pressure and volume rates with very small dimensions.
- Maximum pressure recovery due to innovative guide wheel.
- Very low residual torque.
- Low impact and outlet losses.

Universal

The complete AMD range with more than 300 types in 12 sizes (NS 315 – 1120) and V. > 113000 m^3/h is included in the Helios TGA Catalogue. Includes B AMD types for mechanical smoke extraction systems (MRA) in temperature classes F300 and F400 as well as installation kits for two level serial Z or parallel P designs.

See TGA-catalogue Ref. no. 86 979

F300 F400

This information supplements the "General technical information".

Features
AMD/AMW is a series of medium pressure fans in compact design with excellent power density in relation to its size. The axial impeller, optimised for pressure and efficiency, achieves high levels of efficiency, high pressure levels and large flow rates in combination with the fixed guide wheel.

Casing
Tubular casing with flanges on both sides in accordance with DIN 24155 p. 3 with integrated guide wheel and motor mount made of galvanised steel. Terminal box on outside of duct.

Impeller
Axial impeller made of plastic with 14 spatially curved blades as well as perfectly integrated flow geometry in the impeller. Maximum pressure recovery in combination with the innovative guide wheel, high level of efficiency, low operating noise level, high corrosion resistance, low-vibration operation through dynamic balancing in accordance with DIN ISO 21940-11 – quality grade 6.3.

Air flow temperatures
The standard version can be used in the range from –30 up to at least +60 °C. See information on product page. Approval for higher continuous temperatures is possible upon request.

Air flow direction
The air flow direction cannot be changed, but it can be set by the installation method. The correct motor rotation direction and air flow direction is marked by arrows on the fan.

Installation position, installation, condensate outlets
A duct section with length = 2.5 x pipe diameter for free discharge and a corresponding straight duct section for intermediate positioning in a pipeline are required (Figure 1) to achieve the specified performance values.
The ideal flow through the fan is only ensured if there is an upstream intake nozzle with sufficient intake space or a 2.5 x Ø long straight duct section in the duct installation with the same diameter.

- ☐ The installation site and mounting should be such that the fan can be mounted securely and without warping.
  AMD/AMW can be installed and operated in any position. In case of equipment with condensate drain holes, please be aware of their position.

- ☐ The fans must not be operated in contact with water and effective weather protection must be provided in case of outdoor installation.

- ☐ In case of operation under more difficult conditions, such as high humidity, excessive strain due to climatic, technical, electronic influences, consultation and approval are required because the standard version is not suitable for this.

Positioning
The use of vibration dampers is recommended (accessories SDD, SDZ) to prevent vibration transmission. Larger motors may protrude from the back and cause uneven distribution due to their high weight. An extension duct VR (accessories) should be provided to adjust the centre of gravity!

Installation examples
☐ **Horizontal**

– **Figure 2**
Free intake, outlet-side operation with silencer provided with intermediate flanges.
Duct silencers can be provided with intermediate flanges to reduce the inlet-side or outlet-side sound power.

– **Figure 3**
Ceiling suspension
Figure 3 shows a typical installation in a ventilation application. The installation of AMD/AMW systems is possible through direct ceiling suspension via mounting bracket (MK) and vibration damper (accessories SDD, SDZ).
The tubular casing with double-sided flanges (according to DIN 24155 p. 3) is designed for direct installation in the pipeline.

Figure 1

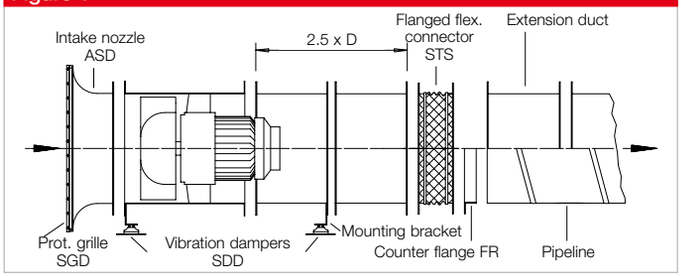

Figure 2

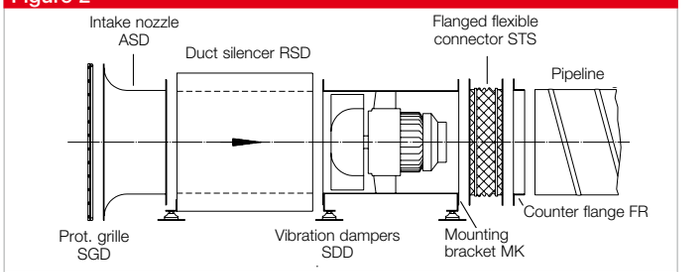

Figure 3

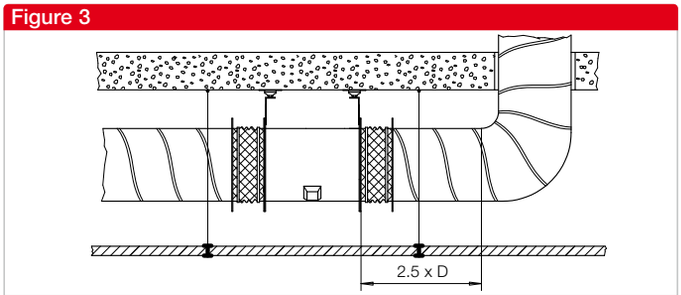

☐ **Vertical**

– **Figure 4**
Integrated in the pipeline with inlet-side silencer.
Wall mounted with brackets or through the ceiling. The elements must be suspended separately according to weight.
Do not mount the fan with combined loads for inspection.
Mounting rings MRV are available for the vertical attachment of the fan for size 315 and above.
The fan weight including the attached accessories must not exceed the load-bearing capacity of the MRV.

Figure 4

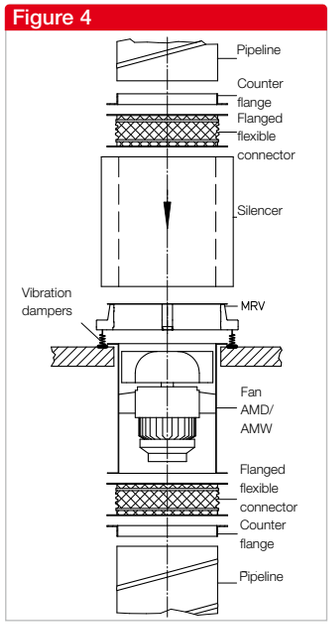

Reference	Page
Planning information, Acoustics	14 ff.
General techn. information, power control	19 ff.

By combining the parameters of static pressure increase Δp_{fa}, flow rate $\dot{V}$, speed min^{-1}, sound pressure level dB(A) and impeller diameter DN mm, the following table facilitates the selection of AMD/AMW medium pressure fans.

Diameter	Speed	Sound press. inlet side	Flow rate $\dot{V}$ m^3/h depending on static pressure = N / m^2 = freely available pressure												
mm	min^{-1}	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
		at 4 m dist.	**0**	**25**	**50**	**75**	**100**	**150**	**200**	**300**	**400**	**500**	**600**	**700**	**800**
225	2800	53	1950	1900	1860	1780	1720	1590	1400						
225	1400	38	950	840	710										
250	2800	56	2620	2550	2480	2410	2340	2180	1980						
250	1400	42	1360	1250	1080										
280	2800	59	3970	3910	3850	3760	3690	3540	3360	3020					
280	1400	44	1930	1810	1650	1450									
315	2800	63	5440	5360	5300	5240	5160	4970	4810	4450	4020				
315	1400	48	2870	2730	2590	2390	2210								
355	2800	68	8610	8540	8470	8390	8310	8140	7970	7600	7180	6760	6260	5490	
355	1400	52	4170	4040	3860	3660	3470	3070							
400	2800	73	12420	12330	12250	12160	12060	11870	11700	11310	10870	10420	9890	9260	8450
400	1400	56	6000	5810	5600	5400	5200	4740	3940						

AMD and AMW 225

Dimensions AMD and AMW 225

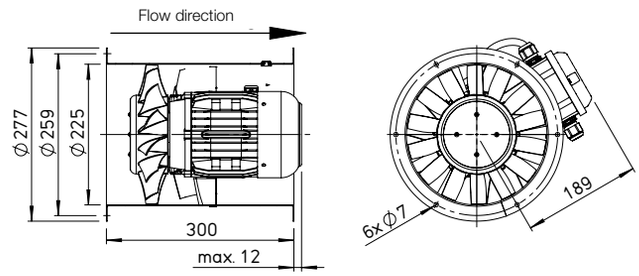

Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller / guide wheel
Impeller with 3D profiled blades and integrated flow geometry made of high-quality plastic. An optimised guide wheel made of galvanised steel is connected to the impeller. The impeller and guide wheel are efficiency-optimised and pressure-optimised for high volume flows by means of CFD. Dynamically balanced in accordance with ISO 21940-11. Operating range –30 to +60 °C.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins. Radio interference-free, sealed ball bearings. With condensate drain holes upon request and the installation method must be indicated when placing the order. Tropicalised winding with moisture proof coating upon request.

Power control
The voltage-controllable types are identified in the “Current consumption with control mode” column with a value which must be observed when determining the controller (see “speed controller” column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position. Condensate drain holes in the motor depending on usage are possible upon request.

Motor protection
All types are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.

Reference	Page
Selection table	231
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	496 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Flow rate free blowing	Power consump.	Voltage	Current consumption at rated voltage	Current consumption with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Speed controller 5-step Type	Speed controller 5-step Ref. no.	Frequency inverter with integrated sine filter Type	Frequency inverter with integrated sine filter Ref. no.
		min⁻¹	V̇ m³/h	kW	V	A	A	No.	+ °C	+ °C	aprx. kg				
Single-phase alternating current.50 Hz, protection category IP54															
AMW 225/4	02242	1425	965	0.06	230	0.3	0.3	966.1	60	40	8.7	**MWS 1.5** [1]	01947	—	
AMW 225/2	02243	2750	1955	0.26	230	1.2	1.4	966.1	60	40	9.0	**MWS 1.5** [1]	01947	—	
Three-phase current, 50 Hz, protection category IP54															
AMD 225/4	02244	1430	960	0.06	400	0.2	0.25	469	60	40	8.3	**RDS 1** [1]	01314	—	
AMD 225/2	02245	2760	1950	0.25	400	0.6	0.65	469	60	40	8.8	**RDS 1** [1]	01314	—	

[1] incl. motor protection circuit breaker.

Performance curves AMD and AMW 225/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	74	45	57	67	69	69	65	58
$L_{PA,\ 4m}$	Air noise	dB(A)	54	25	37	47	49	49	45	38

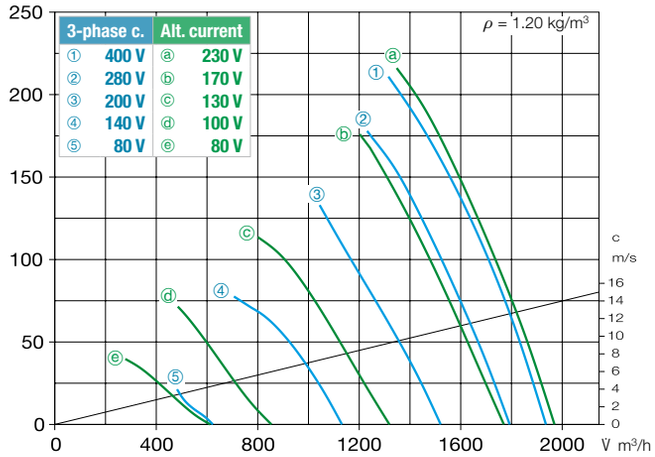

Performance curves AMD and AMW 225/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	59	35	49	53	54	52	45	35
$L_{PA,\ 4m}$	Air noise	dB(A)	39	15	29	33	34	32	25	15

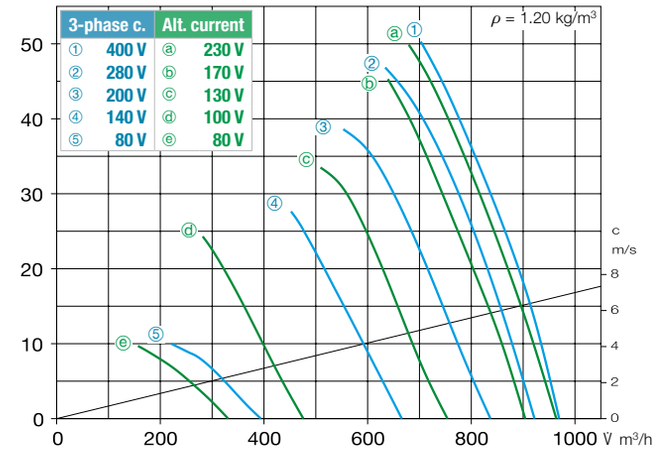

* Three-phase current noise data. Alternating current noise data see www.HeliosSelect.de.

Accessories AMD and AMW 225

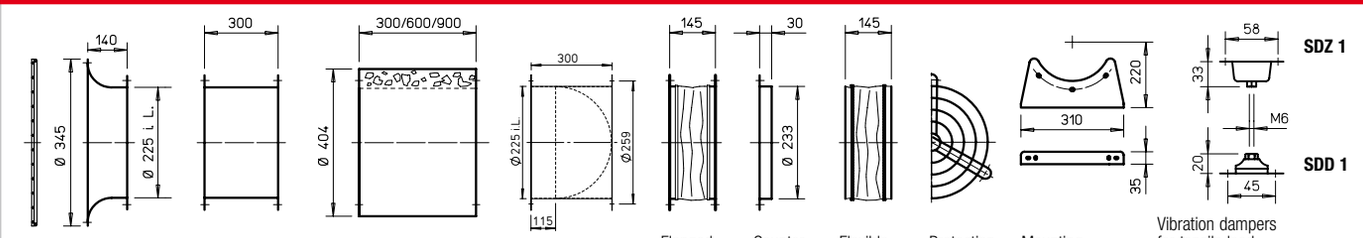

Intake nozzle with prot. grille **ASD-SGD 225** No. 01413

Extension duct **VR 225** No. 01401

Duct silencer **RSD 225/..**

Duct shutter, automatic **RVS 225** No. 02591

Flanged flexible connector **STS 225** No. 01218

Counter flange **FR 225** No. 01201

Flexible connecting sleeve **FM 225** No. 01671

Protection grille duct side **SG 225** No. 01215

Mounting brackets **MK 225** (1 Set = 2 pcs) No. 01446

Vibration dampers for tensile load **SDZ 1*** (1 set = 4 Pc) No. 01454
Vibration dampers for compression load **SDD 1*** (1 set = 4 Pc) No. 01452

[a] Shutter, motorised see Accessories product pages. * Type assignment see table, last column.

	Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers			
			Compression		Tension	
	Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
	MW	01579	**SDD 1**	01452	**SDZ 1**	01454
	MW	01579	**SDD 1**	01452	**SDZ 1**	01454
	MD	05849	**SDD 1**	01452	**SDZ 1**	01454
	MD	05849	**SDD 1**	01452	**SDZ 1**	01454

AMD and AMW 250

Dimensions AMD and AMW 250

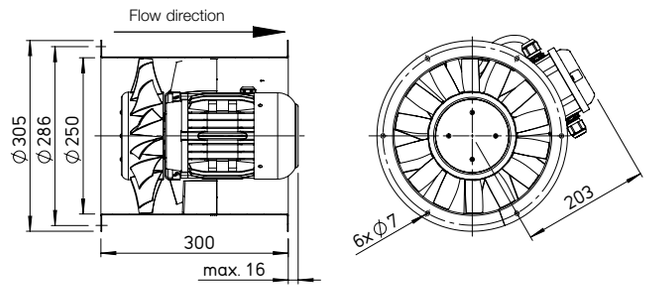

Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller / guide wheel
Impeller with 3D profiled blades and integrated flow geometry made of high-quality plastic. An optimised guide wheel made of galvanised steel is connected to the impeller. The impeller and guide wheel are efficiency-optimised and pressure-optimised for high volume flows by means of CFD. Dynamically balanced in accordance with ISO 21940-11. Operating range –30 to +60 °C.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins. Radio interference-free, sealed ball bearings. With condensate drain holes upon request and the installation method must be indicated when placing the order. Tropicalised winding with moisture proof coating upon request.

Power control
The voltage-controllable types are identified in the “Current consumption with control mode” column with a value which must be observed when determining the controller (see “speed controller” column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position. Condensate drain holes in the motor depending on usage are possible upon request.

Motor protection
All types are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.

Reference	Page
Selection table	231
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	496 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Flow rate free blowing	Power consump.	Voltage	Current consumption at rated voltage	Current consumption with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Speed controller 5-step Type	Speed controller 5-step Ref. no.	Frequency inverter with integrated sine filter Type	Frequency inverter Ref. no.
		min⁻¹	V̇ m³/h	kW	V	A	A	No.	+ °C	+ °C	aprx. kg				
Single-phase alternating current.50 Hz, protection category IP54															
AMW 250/4	02248	1435	1360	0.1	230	0.6	0.6	966.1	60	40	9.0	**MWS 1.5** [1]	01947	—	
AMW 250/2	02249	2630	2620	0.4	230	1.9	1.9	966.1	60	40	9.5	**MWS 3** [1]	01948	—	
Three-phase current, 50 Hz, protection category IP54															
AMD 250/4	02250	1430	1380	0.08	400	0.3	0.3	469	60	40	9.2	**RDS 1** [1]	01314	—	
AMD 250/2	02251	2830	2790	0.43	400	1	1	469	60	40	11.0	**RDS 2** [1]	01315	**FU-BS 2.5**	05459

[1] incl. motor protection circuit breaker.

Performance curves AMD and AMW 250/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	78	49	61	71	72	72	70	64
$L_{PA,\ 4m}$	Air noise	dB(A)	58	29	41	51	52	52	50	44

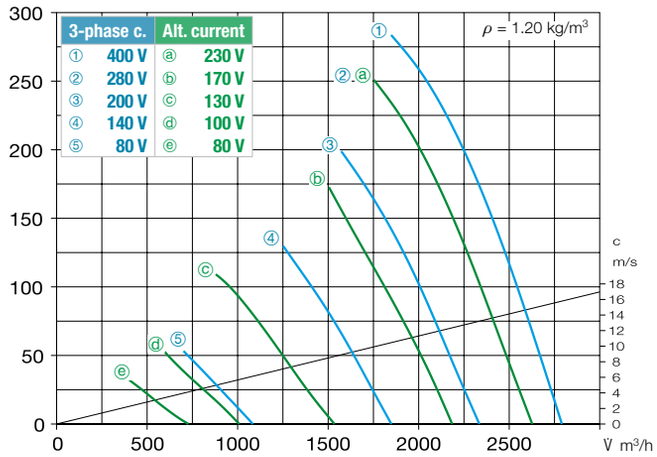

Performance curves AMD and AMW 250/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	66	45	56	61	62	57	51	40
$L_{PA,\ 4m}$	Air noise	dB(A)	46	25	36	41	42	37	31	20

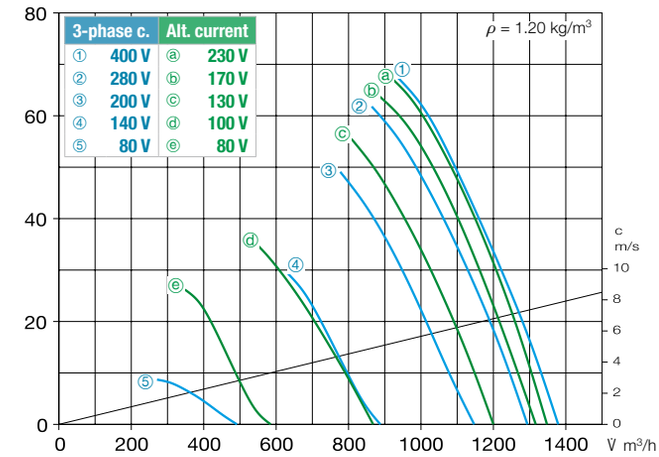

* Three-phase current noise data. Alternating current noise data see www.HeliosSelect.de.

Accessories AMD and AMW 250

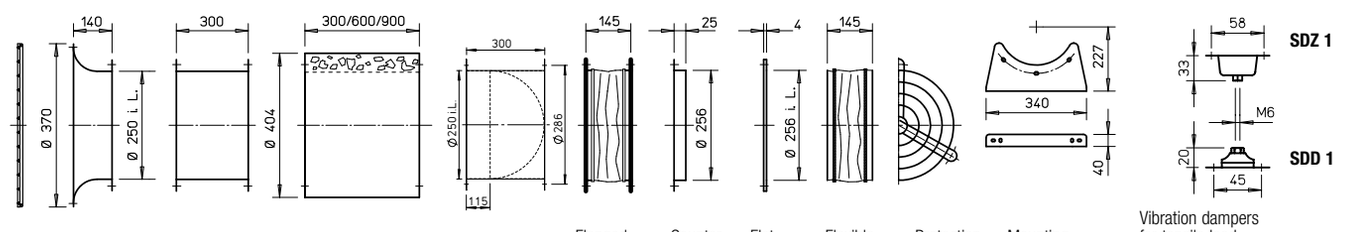

Intake nozzle with prot. grille **ASD-SGD 250** No. 01414

Extension duct **VR 250** No. 01402

Duct silencer **RSD 250/..**

Duct shutter, automatic **RVS 250** [a] No. 02592

Flanged flexible connector **STS 250** No. 01220

Counter flange **FR 250** No. 01203

Flat flange **FF 250** No. 04941

Flexible connecting sleeve **FM 250** No. 01672

Protection grille duct side **SG 250** No. 01236

Mounting brackets **MK 250** (1 Set = 2 pcs) No. 01447

Vibration dampers for tensile load **SDZ 1*** (1 set = 4 Pc) No. 01454
Vibration dampers for compression load **SDD 1*** (1 set = 4 Pc) No. 01452

[a] Shutter, motorised see Accessories product pages. * Type assignment see table, last column.

	Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers			
			Compression		Tension	
	Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
	MW	01579	**SDD 1**	01452	**SDZ 1**	01454
	MW	01579	**SDD 1**	01452	**SDZ 1**	01454
	MD	05849	**SDD 1**	01452	**SDZ 1**	01454
	MD	05849	**SDD 1**	01452	**SDZ 1**	01454

AMD and AMW 280

Dimensions AMD and AMW 280

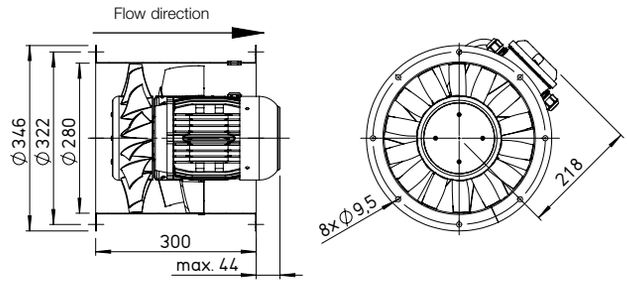

Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller / guide wheel
Impeller with 3D profiled blades and integrated flow geometry made of high-quality plastic. An optimised guide wheel made of galvanised steel is connected to the impeller. The impeller and guide wheel are efficiency-optimised and pressure-optimised for high volume flows by means of CFD. Dynamically balanced in accordance with ISO 21940-11. Operating range –30 to +60 °C.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins. Radio interference-free, sealed ball bearings. With condensate drain holes upon request and the installation method must be indicated when placing the order. Tropicalised winding with moisture proof coating upon request.

Power control
The voltage-controllable types are identified in the “Current consumption with control mode” column with a value which must be observed when determining the controller (see “speed controller” column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position. Condensate drain holes in the motor depending on usage are possible upon request.

Motor protection
All types are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.

Reference	Page
Selection table	231
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	496 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Flow rate free blowing	Power consump.	Voltage	Current consumption at rated voltage	Current consumption with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Speed controller 5-step		Frequency inverter with integrated sine filter	
		min⁻¹	V̇ m³/h	kW	V	A	A	No.	+ °C	+ °C	aprx. kg	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current.50 Hz, protection category IP54															
AMW 280/4	02254	1345	1930	0.1	230	0.5	0.5	966.1	60	40	11.5	**MWS 1.5** [1]	01947	—	
AMW 280/2	02255	2755	3970	0.7	230	3.2	4.3	976.1	60	40	15.5	**MWS 5** [1]	01949	—	
Three-phase current, 50 Hz, protection category IP54															
AMD 280/4	02256	1385	2000	0.1	400	0.3	0.3	469	60	40	10.5	**RDS 1** [1]	01314	—	
AMD 280/2	02257	2745	3960	0.7	400	1.4	1.5	469	60	40	13.8	**RDS 2** [1]	01315	**FU-BS 2.5**	05459

[1] incl. motor protection circuit breaker.

Performance curves AMD and AMW 280/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	80	52	60	72	74	74	72	65
$L_{PA,\ 4m}$	Air noise	dB(A)	60	32	40	52	54	54	52	45

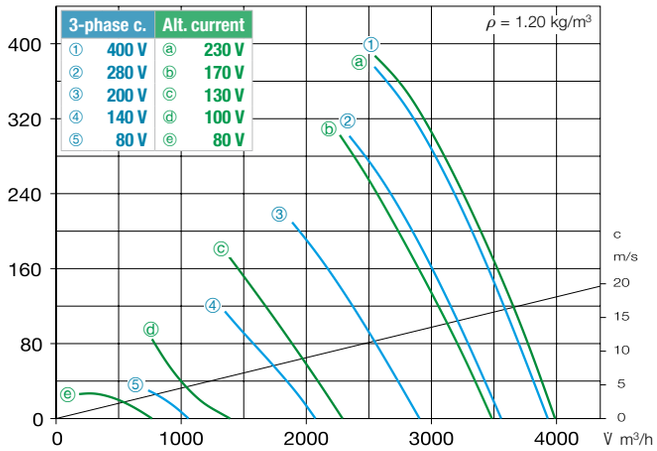

Performance curves AMD and AMW 280/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	64	36	52	57	59	58	54	45
$L_{PA,\ 4m}$	Air noise	dB(A)	44	16	32	37	39	38	34	25

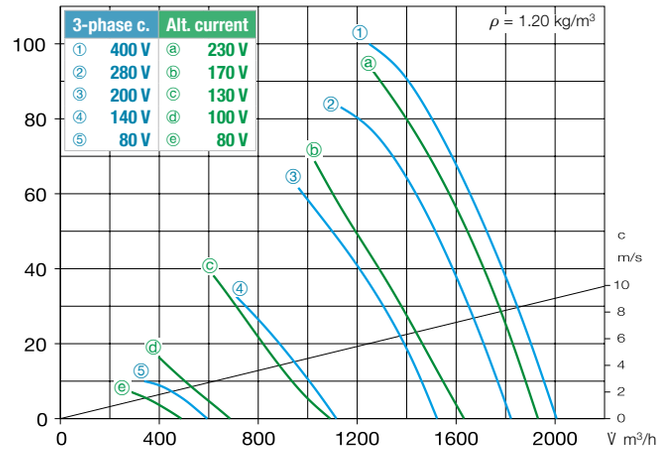

* Three-phase current noise data. Alternating current noise data see www.HeliosSelect.de.

Accessories AMD and AMW 280

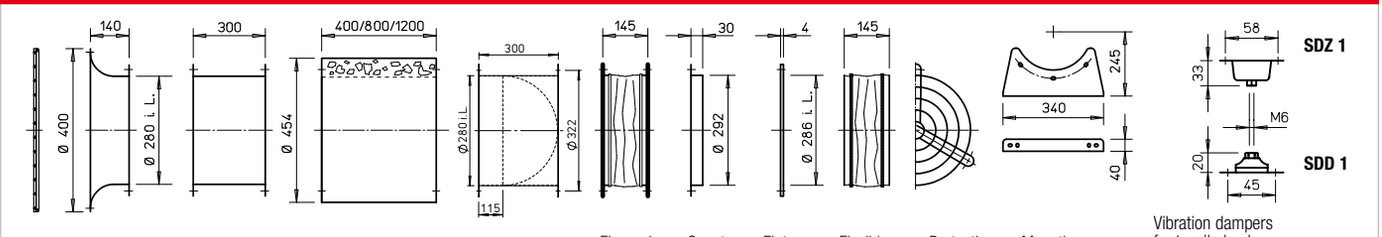

Intake nozzle with prot. grille **ASD-SGD 280** No. 01415

Extension duct **VR 280** No. 01403

Duct silencer **RSD 280/..**

Duct shutter, automatic **RVS 280** [a] No. 02593

Flanged flexible connector **STS 280** No. 01231

Counter flange **FR 280** No. 01214

Flat flange **FF 280** No. 04942

Flexible connecting sleeve **FM 280** No. 01673

Protection grille duct side **SG 280** No. 01428

Mounting brackets **MK 280** (1 Set = 2 pcs) No. 01447

Vibration dampers for tensile load **SDZ 1*** (1 set = 4 Pc) No. 01454
Vibration dampers for compression load **SDD 1*** (1 set = 4 Pc) No. 01452

[a] Shutter, motorised see Accessories product pages. * Type assignment see table, last column.

	Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers			
			Compression		Tension	
	Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
	MW	01579	**SDD 1**	01452	**SDZ 1**	01454
	MW	01579	**SDD 1**	01452	**SDZ 1**	01454
	MD	05849	**SDD 1**	01452	**SDZ 1**	01454
	MD	05849	**SDD 1**	01452	**SDZ 1**	01454

AMD and AMW 315

Dimensions AMD and AMW 315

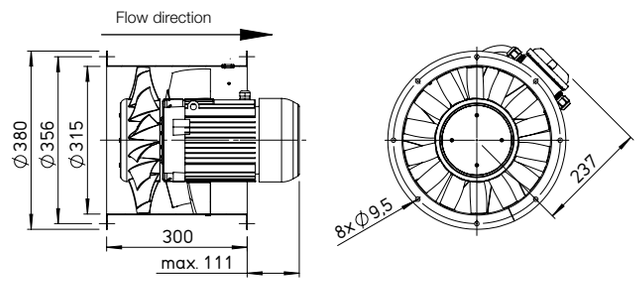

Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller / guide wheel
Impeller with 3D profiled blades and integrated flow geometry made of high-quality plastic. An optimised guide wheel made of galvanised steel is connected to the impeller. The impeller and guide wheel are efficiency-optimised and pressure-optimised for high volume flows by means of CFD. Dynamically balanced in accordance with ISO 21940-11. Operating range –30 to +60 °C.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins. Radio interference-free, sealed ball bearings. With condensate drain holes upon request and the installation method must be indicated when placing the order. Tropicalised winding with moisture proof coating upon request.

Power control
The voltage-controllable types are identified in the “Current consumption with control mode” column with a value which must be observed when determining the controller (see “speed controller” column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position. Condensate drain holes in the motor depending on usage are possible upon request.

Motor protection
All types are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.

Reference	Page
Selection table	231
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	496 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Flow rate free blowing	Power consump.	Voltage	Current consumption at rated voltage	Current consumption with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Speed controller 5-step		Frequency inverter with integrated sine filter	
		min⁻¹	V̇ m³/h	kW	V	A	A	No.	+ °C	+ °C	aprx. kg	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current.50 Hz, protection category IP54															
AMW 315/4	02265	1395	2860	0.2	230	1	1.1	966.1	60	40	13.1	**MWS 1.5** [1]	01947	—	
Three-phase current, 50 Hz, protection category IP54															
AMD 315/4	02266	1455	2950	0.2	400	0.6	0.6	469	60	40	12.2	**RDS 1** [1]	01314	—	
Two-speed, three-phase current, 50 Hz, ⅄/△ connection, protection category IP54															
AMD 315/2/2	02267	2200/2650	4450/5450	0.7/1.1	400/400	1.6/2.5	2.3	520	60	40	18.5	**RDS 4** [1]	01316	**FU-BS 5**	05460

[1] incl. motor protection circuit breaker.

Performance curves AMD 315/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	83	57	67	77	78	78	75	68
$L_{PA,\ 4m}$	Air noise	dB(A)	63	37	47	57	58	58	55	48

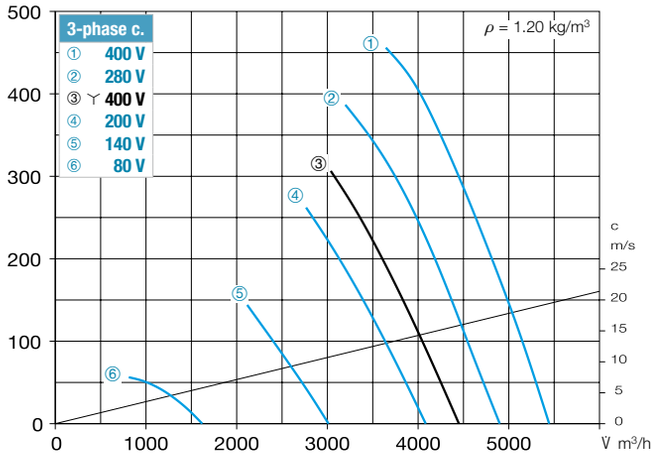

Performance curves AMD and AMW 315/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	70	42	58	63	64	64	61	53
$L_{PA,\ 4m}$	Air noise	dB(A)	50	22	38	43	44	44	41	33

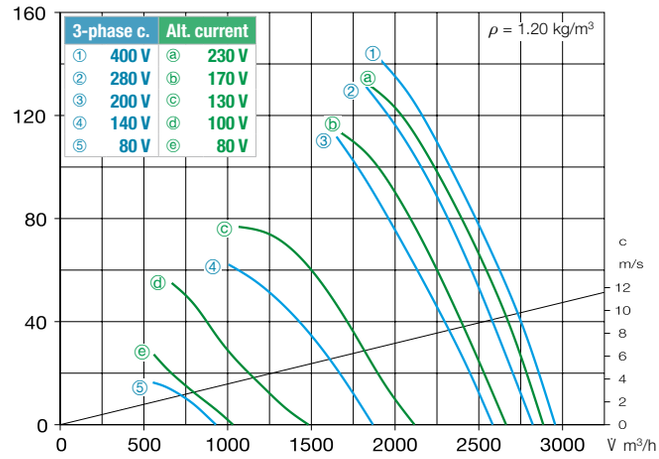

* Three-phase current noise data. Alternating current noise data see www.HeliosSelect.de.

Accessories AMD and AMW 315

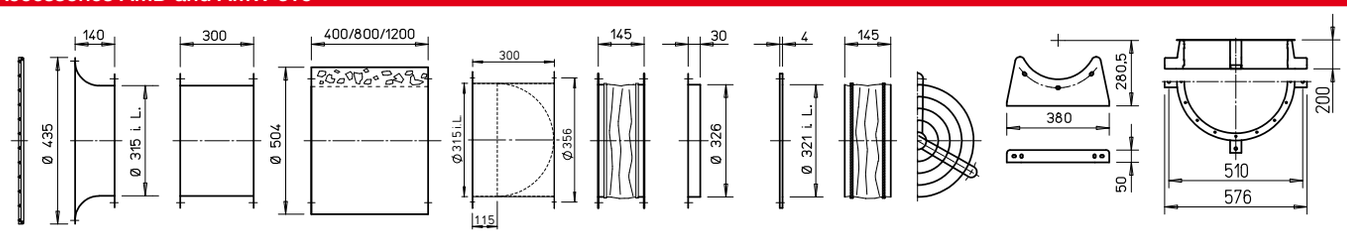

Intake nozzle with prot. grille **ASD-SGD 315** No. 01416

Extension duct **VR 315** No. 01404

Duct silencer **RSD 315/..**

Duct shutter, automatic **RVS 315** [a] No. 02594

Flanged flexible connector **STS 315** No. 01221

Counter flange **FR 315** No. 01204

Flat flange **FF 315** No. 04943

Flexible connecting sleeve **FM 315** No. 01674

Protection grille duct side **SG 315** No. 01237

Mounting brackets **MK 315** (1 Set = 2 pcs) No. 01448

Mounting ring for vertical attachment **MRV 315** No. 01755

[a] Shutter, motorised see Accessories product pages. * Type assignment see table, last column.

	Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers			
			Compression		Tension	
	Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
	MW	01579	**SDD 1**	01452	**SDZ 1**	01454
	MD	05849	**SDD 1**	01452	**SDZ 1**	01454
	M 4	01571	**SDD 1**	01452	**SDZ 1**	01454

AMD and AMW 355

Dimensions AMD and AMW 355

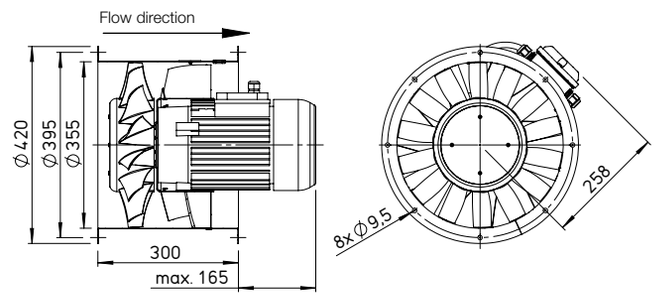

Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller / guide wheel
Impeller with 3D profiled blades and integrated flow geometry made of high-quality plastic. An optimised guide wheel made of galvanised steel is connected to the impeller. The impeller and guide wheel are efficiency-optimised and pressure-optimised for high volume flows by means of CFD. Dynamically balanced in accordance with ISO 21940-11. Operating range –30 to +60 °C.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins. Radio interference-free, sealed ball bearings. With condensate drain holes upon request and the installation method must be indicated when placing the order. Tropicalised winding with moisture proof coating upon request.

Power control
The voltage-controllable types are identified in the “Current consumption with control mode” column with a value which must be observed when determining the controller (see “speed controller” column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position. Condensate drain holes in the motor depending on usage are possible upon request.

Motor protection
All types are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.

Reference	Page
Selection table	231
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	496 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Flow rate free blowing	Power consump.	Voltage	Current consumption at rated voltage	Current consumption with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Speed controller 5-step		Frequency inverter with integrated sine filter	
		min⁻¹	V̇ m³/h	kW	V	A	A	No.	+ °C	+ °C	aprx. kg	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current.50 Hz, protection category IP54															
AMW 355/4	02275	1430	4170	0.4	230	1.8	2.4	968.1	60	40	16.9	**MWS 3** [1]	01948	—	
Three-phase current, 50 Hz, protection category IP54															
AMD 355/4	02276	1445	4300	0.35	400	0.9	1.1	469	60	40	15.7	**RDS 2** [1]	01315	**FU-BS 2.5**	05459
Two-speed, three-phase current, 50 Hz, ⅄/△ connection, protection category IP54															
AMD 355/2/2	02277	2200/2775	8610/7640	1.3/2.3	400/400	3.0/5.4	5.6	520	60	40	30.3	**RDS 7** [1]	01578	**FU-BS 8**	05461

[1] incl. motor protection circuit breaker.

Performance curves AMD 355/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	88	63	71	81	82	83	80	74
$L_{PA,\ 4m}$	Air noise	dB(A)	68	43	51	61	62	63	60	54

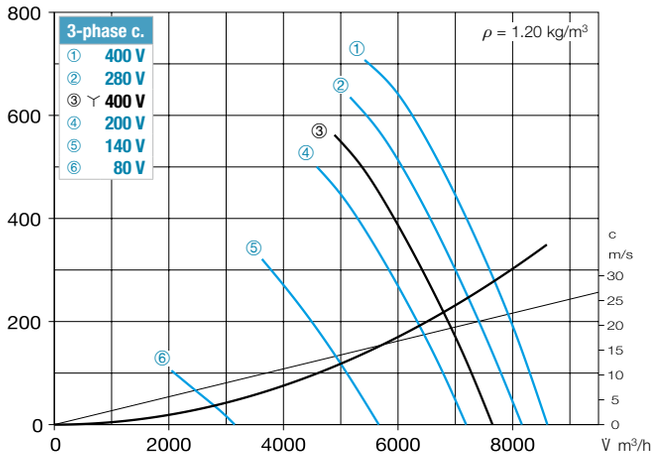

Performance curves AMD and AMW 355/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	73	48	61	66	67	66	65	56
$L_{PA,\ 4m}$	Air noise	dB(A)	53	28	41	46	47	46	45	36

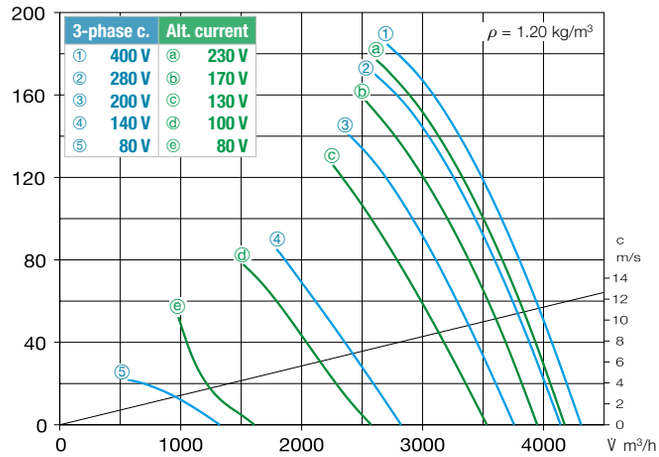

* Three-phase current noise data. Alternating current noise data see www.HeliosSelect.de.

Accessories AMD and AMW 355

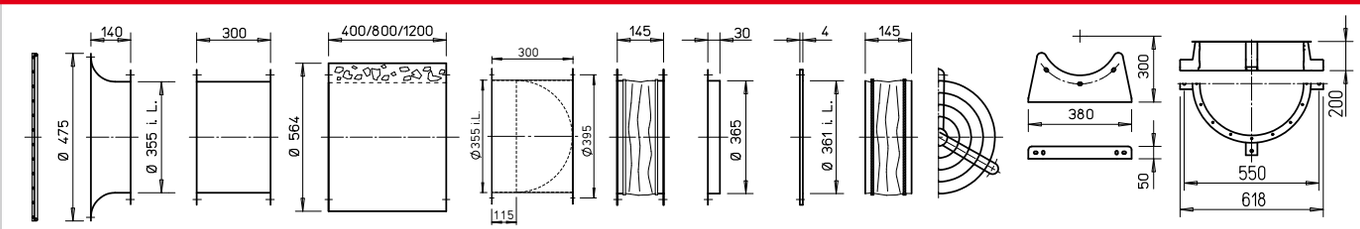

Intake nozzle with prot. grille **ASD-SGD 355** No. 01417

Extension duct **VR 355** No. 01405

Duct silencer **RSD 355/..**

Duct shutter, automatic **RVS 355** [a] No. 02595

Flanged flexible connector **STS 355** No. 01222

Counter flange **FR 355** No. 01205

Flat flange **FF 355** No. 04944

Flexible connecting sleeve **FM 355** No. 01675

Protection grille duct side **SG 355** No. 01238

Mounting brackets **MK 355** (1 Set = 2 pcs) No. 01448

Mounting ring for vertical attachment **MRV 355** No. 01759

[a] Shutter, motorised see Accessories product pages. * Type assignment see table, last column.

	Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers			
			Compression		Tension	
	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
	MW	01579	SDD 1	01452	SDZ 1	01454
	MD	05849	SDD 1	01452	SDZ 1	01454
	M 4	01571	SDD 1	01452	SDZ 1	01454

AMD and AMW 400

Dimensions AMD and AMW 400

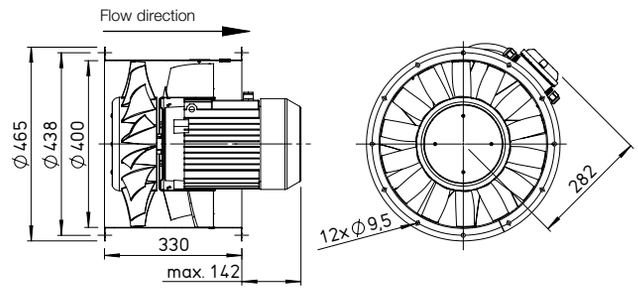

Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller / guide wheel
Impeller with 3D profiled blades and integrated flow geometry made of high-quality plastic. An optimised guide wheel made of galvanised steel is connected to the impeller. The impeller and guide wheel are efficiency-optimised and pressure-optimised for high volume flows by means of CFD. Dynamically balanced in accordance with ISO 21940-11. Operating range –30 to +60 °C.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins. Radio interference-free, sealed ball bearings. With condensate drain holes upon request and the installation method must be indicated when placing the order. Tropicalised winding with moisture proof coating upon request.

Power control
The voltage-controllable types are identified in the “Current consumption with control mode” column with a value which must be observed when determining the controller (see “speed controller” column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position. Condensate drain holes in the motor depending on usage are possible upon request.

Motor protection
All types are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

Noise levels
See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics.

Reference	Page
Selection table	231
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	496 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Flow rate free blowing	Power consump.	Voltage	Current consumption at rated voltage	Current consumption with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Speed controller 5-step		Frequency inverter with integrated sine filter	
		min⁻¹	V̇ m³/h	kW	V	A	A	No.	+ °C	+ °C	aprx. kg	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current.50 Hz, protection category IP54															
AMW 400/4	02280	1395	6000	0.6	230	2.6	3.1	967.1	60	40	23.2	**MWS 5** [1]	01949	—	
Three-phase current, 50 Hz, protection category IP54															
AMD 400/4	02281	1420	5980	0.6	400	1.9	2	469	60	40	22.0	**RDS 4** [1]	01316	**FU-BS 2.5**	05459
Two-speed, three-phase current, 50 Hz, Y/△ connection, protection category IP54															
AMD 400/2/2	02282	2280/2780	10880/12430	2.4/4.4	400/400	5.5/9.5	9.5	520	50	30	44.9	**RDS 11** [1]	01332	**FU-BS 16**	05463

[1] incl. motor protection circuit breaker.

Performance curves AMD 400/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	93	65	74	88	88	88	83	75
$L_{PA,\ 4m}$	Air noise	dB(A)	73	45	54	68	68	68	63	55

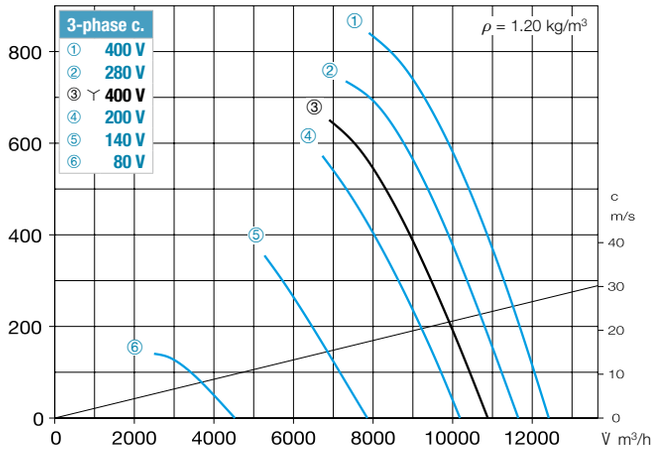

Performance curves AMD and AMW 400/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	76	55	66	70	70	70	68	58
$L_{PA,\ 4m}$	Air noise	dB(A)	56	35	46	50	50	50	48	38

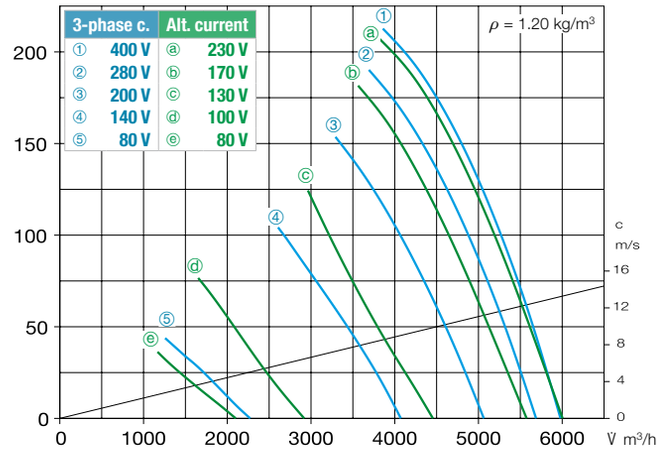

* Three-phase current noise data. Alternating current noise data see www.HeliosSelect.de.

Accessories AMD and AMW 400

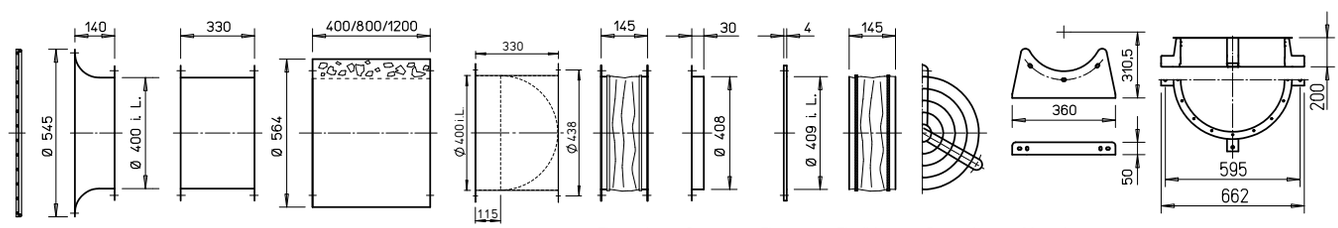

Intake nozzle with prot. grille **ASD-SGD 400** No. 01418

Extension duct **VR 400** No. 01406

Duct silencer **RSD 400/..**

Duct shutter, automatic **RVS 400** [a] No. 02596

Flanged flexible connector **STS 400** No. 01223

Counter flange **FR 400** No. 01206

Flat flange **FF 400** No. 04945

Flexible connecting sleeve **FM 400** No. 01676

Protection grille duct side **SG 400** No. 01239

Mounting brackets **MK 400** (1 Set = 2 pcs) No. 01449

Mounting ring for vertical attachment **MRV 400** No. 01760

[a] Shutter, motorised see Accessories product pages. * Type assignment see table, last column.

	Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers			
			Compression		Tension	
	Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
	MW	01579	**SDD 1**	01452	**SDZ 1**	01454
	MD	05849	**SDD 1**	01452	**SDZ 1**	01454
	M 4	01571	**SDD 1**	01452	**SDZ 1**	01454

Discover the Helios TGA catalogue.

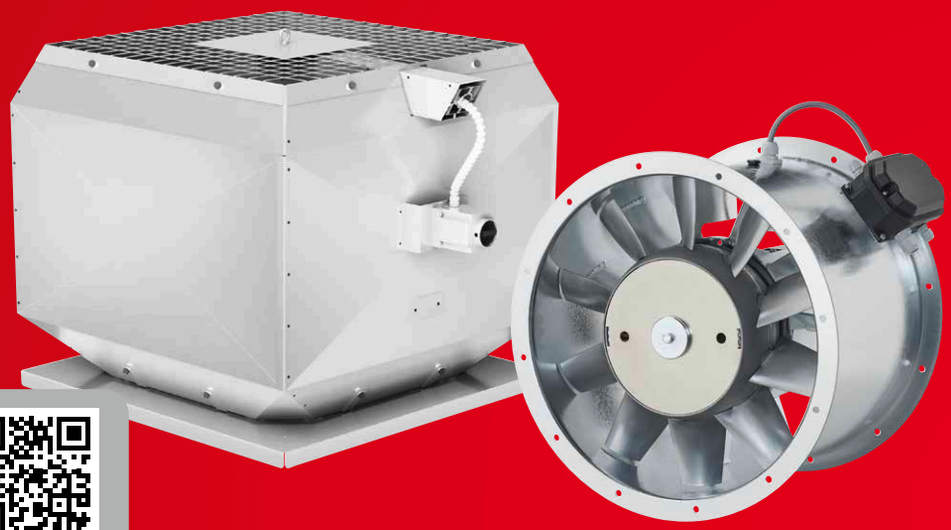

Simply scan the QR code:

Axial and RADAX® VAR fans

The Helios TGA range includes low pressure and medium pressure axial fans as well as RADAX® VAR high pressure round duct fans in ND 280 to 1250 mm, $\dot{V}$ = 1000 – 150 000 m³/h for smoke extraction applications with air flow temperatures of 300 °C, 400 °C and 600 °C over 120 min. (F300, F400, F600) or 40 °C for continuous ventilation.

40 °C F300 F400 F600

Jet fans

Jet fans are used in parking garages for supply and extract ventilation and they ensure smoke extraction in case of fire.

Low-noise and universally applicable, the Helios axial jet fans set new standards in terms of thrust and weight. The centrifugal models excel on account of their ultra-flat, compact lightweight design and they are ideal when space is limited.

60 °C EC F300 F400

Smoke extraction roof fans and rectangular duct fans

Smoke extraction roof fans are available in ND 315 to 900 mm with flow rates from 1000 to 70 000 m³/h. The versions in temperature class F400 and F600 allow use in mechanical smoke extraction systems.
These fans can also be used for daily ventilation. Smoke extraction rectangular duct fans for rectangular ducts and connectors are ideal for applications with air flow temperatures of 400 °C / 120 min.

60 °C F400 F600

Smoke protection pressure systems

In case of fire, smoke protection pressure systems (RDA) and stairway scavenging air systems (TSA) ensure life-saving smoke extraction in stairways and fire service lifts. The Helios RDA/TSA concept has a modular structure. The entire system is assembled in just a few steps with pre-configured packages. This guarantees smooth planning, installation and commissioning as well as completely secure system operation.

Request TGA catalogue
Ref. no. 86 979

Casing
- Tubular casing with welded-in motor support plate and guide wheel made of steel sheet. Flanges pressed on both sides according to DIN 24155, p. 3, for direct intermediate flanges in pipelines.
- Surface protection from hot-dip galvanising.

Impeller
- Hub and blades made of corrosion-resistant aluminium alloy.
- Dynamically balanced according to DIN ISO 21940-11, quality grade 6.3 for low-vibration operation.
- Ten aerodynamically profiled blades achieve high efficiency and pressure rates in combination with the guide wheel.
- The angle of attack of the blades can be adjusted in the factory according to the ordered, optimal operating point.

Drive
- With regard to single-speed fans with a three-phase current motor and rated motor power ≤ 2.20 kW, the connection for direct start-up is provided (star-delta start-up for fans with rated motor power ≥ 3.00 kW.

AMD series
Directly through efficient IE 3 three-phase current standard motor. Pole-changeable fans with IEC standard motor. Protection category IP55, insulation class F.

Power control
Continuously variable (0-100 %) through the use of a frequency inverter. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Motor protrusion
- The motor protrudes over the casing for some types. The protrusion dim. B in mm pursuant to the type table must be taken into account.

Motor protection
- All AMD types come with PTC thermistors as standard motor protection. Effective motor protection is possible by means of motor protection circuit breaker (type MSA, Ref. no. 01289, accessories) or FU (accessories).

Electrical connection
- Standard terminal box (protection category IP55) made of plastic, mounted on the outside of the fan casing.

Order data
The desired angle of attack must be specified when ordering.
Example:
AMD 355/2 1.5 kW 34°

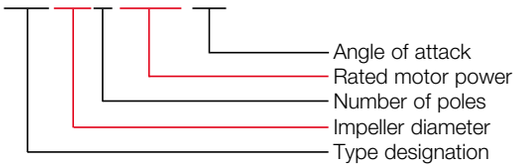

Air flow temperatures
- For supply and extract ventilation from –20 °C to +60 °C continuous temperature. Types for higher air flow temperatures upon request.

Air flow direction
- The fans are designed with air flow direction B = outlet over motor (Figure 1).

Noise levels
- The sound power values are specified over the frequency and as total levels for various angles of attack above the performance curves on the product pages.

Installation
- Horizontal and vertical installation depending on installation location.
- The use of vibration dampers (accessories) is recommended to prevent vibration transmission.

Duct installation (tipping over)
An extension duct (type VR, accessories) must be provided (Figure 2) to prevent the tendency of tipping over when installing medium pressure axial fans with inlet-side and outlet-side flanged flexible connectors (type STS, accessories).

Duct installation
Arrangement of mounting brack-ets (type MK) for horizontal attachment or a mounting ring (type MRV) for vertical attachment to the fan with vibration dampers. Use of vibration dampers for compression (type SDD, accessories) or tensile loads (type SDZ, accessories, for ceiling suspension). Inlet-side and outlet-side flanged flexible connectors (type STS, accessories) must be provided (Figure 3) to prevent the transmission of noise and vibrations.

Duct installation with inlet-side and outlet-side silencers
On-site brackets are necessary for attaching the silencers and supporting the weight depending on the local conditions. The inlet-side silencer must be provided with flanged flexible connectors (type STS, accessories) at the inlet (Figure 4) and the outlet-side silencer must be provided with these at the outlet.

Figure 1



Figure 2

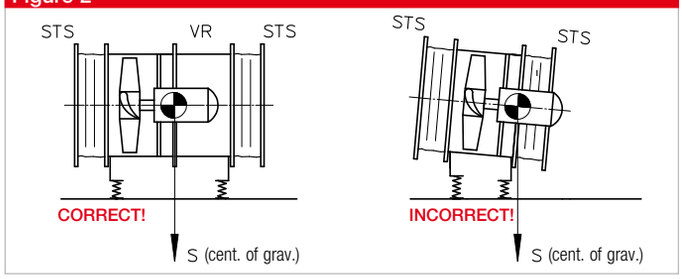

Figure 3

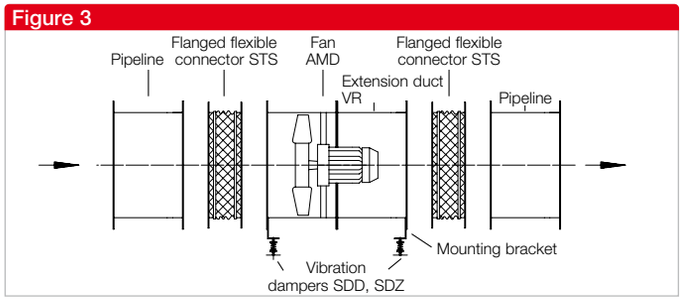

Figure 4

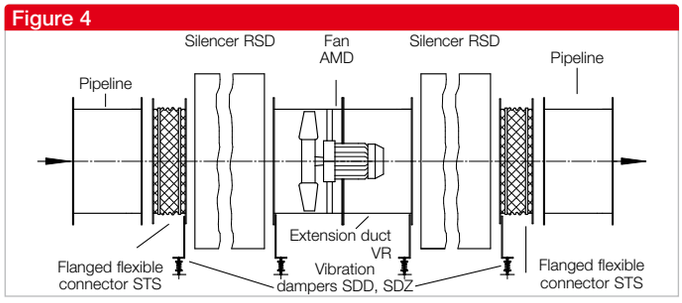

Figure 5

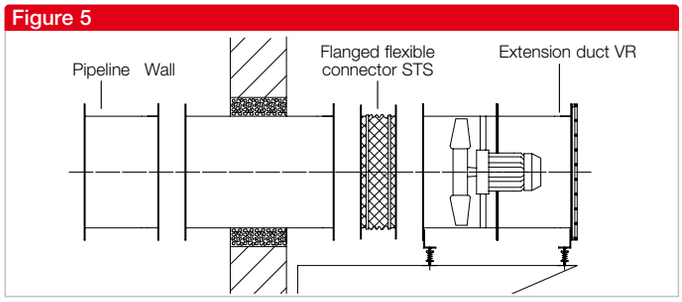

Wall installation (horizontal)
On on-site bracket. Wall outlet with round duct or rectangular duct, wall with mineral wool. Inlet-side and outlet-side flanged flexible connector (type STS, accessories) with extension duct (type VR, accessories) and protection grille (type SG, accessories) (Figure 5).

Reference	Page
Planning information	14 ff.
Installation accessories	278 ff.
Silencers	496
Speed controllers, pole changing switches	601 ff.

AMD 450

Dimensions AMD 450

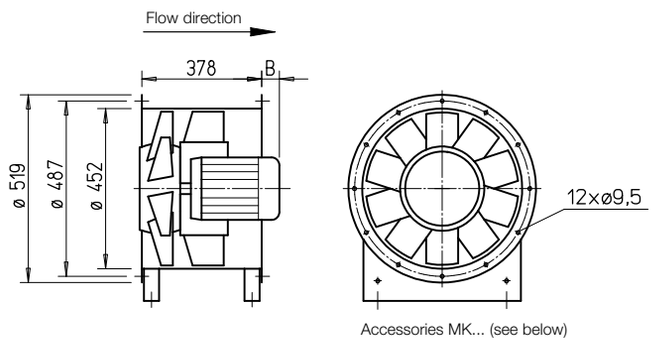

Dim. in mm

Dim. B see table

Casing
Tubular casing with welded-in motor support plate and guide wheel made of steel sheet. Flanges pressed on both sides according to DIN 24155, p. 3, for direct intermediate flanges in pipelines. Surface protection from hot-dip galvanising.

Impeller
Hub and blades made of corrosion-resistant aluminium alloy. Dynamically balanced according to DIN ISO 21940-11, quality grade 6.3 for low-vibration operation.
Ten aerodynamically profiled blades achieve high efficiency and pressure rates in combination with the guide wheel. The angle of attack of the blades can be adjusted in the factory according to the ordered, optimal operating point.

Drive
Directly through efficient IE 3 three-phase current standard motor.
Pole-changeable fans with IEC standard motor. Protection category IP55, insulation class F.

Power control
Continuously variable (0-100 %) through the use of a frequency inverter.
The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) made of plastic, mounted on the outside of the fan casing.

Motor protection
All AMD types come with PTC thermistors as standard motor protection. Effective motor protection is possible by means of motor protection circuit breaker (type MSA, Ref. no. 01289, accessories) or FU (accessories).

Dimensions
The motor protrudes over the casing for some types. The protrusion dim. B in mm pursuant to the type table must be taken into account.

Noise levels
The sound power values are specified over the frequency and as total levels for various angles of attack above the performance curves on the product pages.

Reference	Page
Planning information	14 ff.

Special design
Special design w/ inspect. opening (extra charge) upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	498 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Rated motor power (output)	Voltage	Current consump. nominal	Dim. B Motor protrusion	Wiring diagram	Max. air flow temp.	Weight net	Frequency inverter with integrated sine filter		Motor protection circuit breaker or pole changing switch	
		min⁻¹	kW	V	A	mm	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Three-phase current, 400 V, 50 Hz, protection category IP55													
AMD 450/4 0.75 kW	03109	1430	0.75	400	1.8	15	796	60	40	**FU-BS 2.5**	05459	**MSA**	01289
AMD 450/4 1.1 kW	03110	1440	1.1	400	2.5	40	796	60	44	**FU-BS 5**	05460	**MSA**	01289
AMD 450/2 2.2 kW	03106	2890	2.2	400	4.3	65	796	60	47	**FU-BS 5**	05460	**MSA**	01289
AMD 450/2 3 kW	03107	2880	3	400*	5.7	105	776	60	54	**FU-BS 8**	05461	**MSA**	01289
AMD 450/2 4 kW	03108	2910	4	400*	7.4	155	776	60	57	**FU-BS 8**	05461	**MSA**	01289
Pole-changeable, 2 speeds, three-phase current, Dahlander winding ⅄/⅄⅄, 400 V, 50 Hz, protection category IP55												Surface-mounted pole changing switch	
AMD 450/4/2 0.65/2.5 kW	03121	1380/2855	0.65/2.5	400	1.9/5.0	40	777	60	61	—	—	**PDA 12**[1]	05081
AMD 450/4/2 0.8/3.1 kW	03111	1380/2860	0.8/3.1	400	2.1/6.1	65	777	60	61	—	—	**PDA 12**[1]	05081
AMD 450/4/2 1.1/4.4 kW	03113	1390/2860	1.1/4.4	400	3.0/8.7	155	777	60	67	—	—	**PDA 12**[1]	05081

The angle of attack must be specified when ordering. [1] Flush-m. version see Switch product page. * ⅄/△ Start-up.

Performance curves AMD 450/2

n=2900 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	10°	dB(A)	100	77	90	95	99	99	94	85
L_{WA}	20°	dB(A)	101	79	91	99	100	100	96	87
L_{WA}	30°	dB(A)	104	81	93	101	103	102	98	89

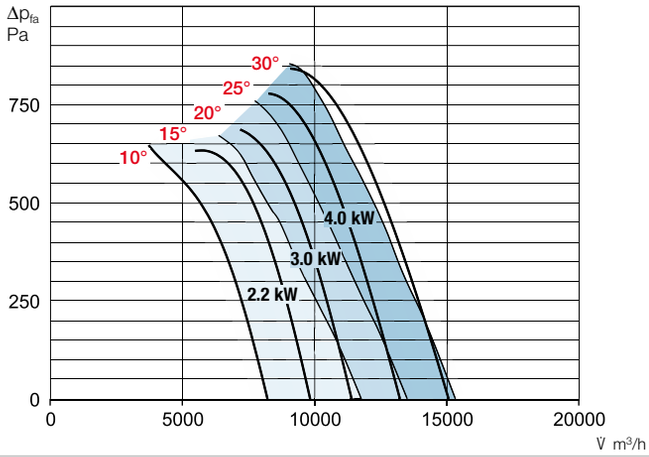

Performance curves AMD 450/4

n=1420 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	10°	dB(A)	83	68	78	81	82	80	73	61
L_{WA}	20°	dB(A)	85	69	79	84	84	82	74	63
L_{WA}	30°	dB(A)	86	71	81	83	85	82	76	65

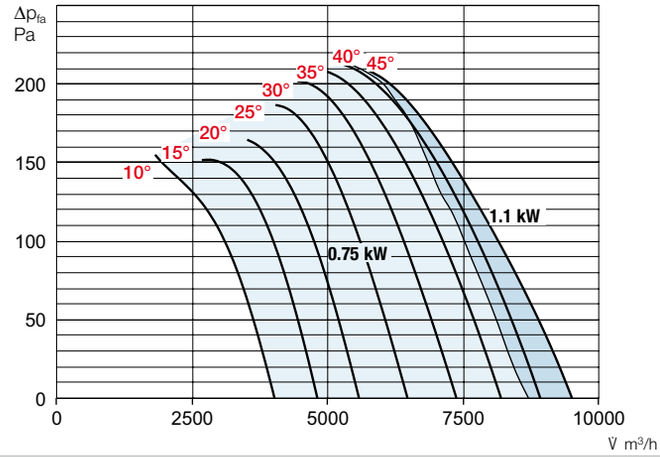

Accessories AMD 450

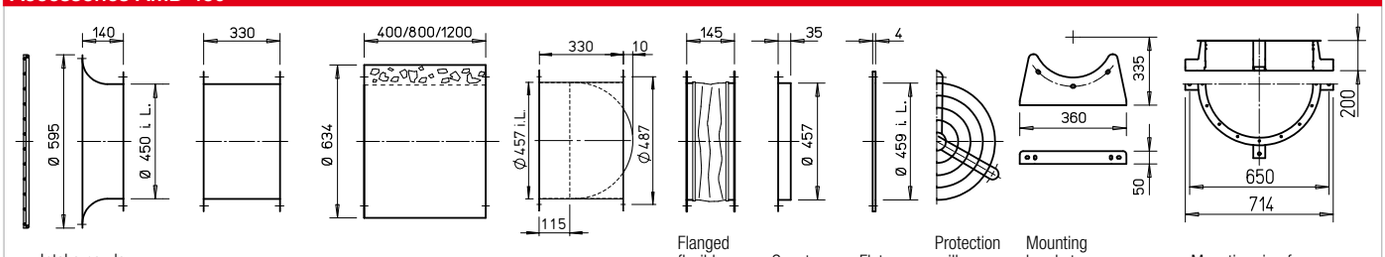

Intake nozzle with prot. grille **ASD-SGD 450** No. 01419

Extension duct **VR 450** No. 01407

Duct silencer **RSD 450/..**

Duct shutter **RVS 450** [a] No. 02597

Flanged flexible connector **STS 450** No. 01224

Counter flange **FR 450** No. 01207

Flat flange **FF 450** No. 04946

Protection grille duct side **SG 450** No. 01240

Mounting brackets **MK 400-450** (1 Set = 2 pcs) No. 01449

Mounting ring for vertical attachment **MRV 450** No. 01761

[a] Shutter, motorised, see Accessories product page.

	Vibration dampers			
	Compression		**Tension**	
	Type	Ref. no.	**Type**	Ref. no.
	SDD 1	01452	**SDZ 1**	01454
	SDD 1	01452	**SDZ 1**	01454
	SDD 1	01452	**SDZ 1**	01454
	SDD 1	01452	**SDZ 1**	01454
	SDD 1	01452	**SDZ 1**	01454
	SDD 1	01452	**SDZ 2**	01455
	SDD 1	01452	**SDZ 2**	01455
	SDD 1	01452	**SDZ 2**	01455

AMD 500

Dimensions AMD 500

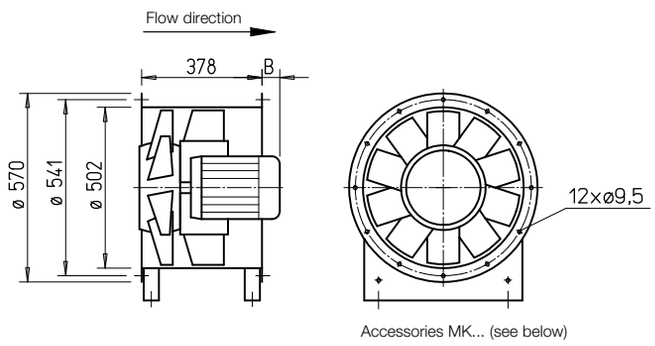

Dim. in mm

Dim. B see table

Casing
Tubular casing with welded-in motor support plate and guide wheel made of steel sheet. Flanges pressed on both sides according to DIN 24155, p. 3, for direct intermediate flanges in pipelines. Surface protection from hot-dip galvanising.

Impeller
Hub and blades made of corrosion-resistant aluminium alloy. Dynamically balanced according to DIN ISO 21940-11, quality grade 6.3 for low-vibration operation.
Ten aerodynamically profiled blades achieve high efficiency and pressure rates in combination with the guide wheel. The angle of attack of the blades can be adjusted in the factory according to the ordered, optimal operating point.

Drive
Directly through efficient IE 3 three-phase current standard motor.
Pole-changeable fans with IEC standard motor. Protection category IP55, insulation class F.

Power control
Continuously variable (0-100 %) through the use of a frequency inverter.
The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) made of plastic, mounted on the outside of the fan casing.

Motor protection
All AMD types come with PTC thermistors as standard motor protection. Effective motor protection is possible by means of motor protection circuit breaker (type MSA, Ref. no. 01289, accessories) or FU (accessories).

Dimensions
The motor protrudes over the casing for some types. The protrusion dim. B in mm pursuant to the type table must be taken into account.

Noise levels
The sound power values are specified over the frequency and as total levels for various angles of attack above the performance curves on the product pages.

Reference	Page
Planning information	14 ff.

Special design
Special design w/ inspect. opening (extra charge) upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	496 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Rated motor power (output)	Voltage	Current consump. nominal	Dim. B Motor protrusion	Wiring diagram	Max. air flow temp.	Weight net	Frequency inverter with integrated sine filter		Motor protection circuit breaker or pole changing switch	
		min⁻¹	kW	V	A	mm	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Three-phase current, 400 V, 50 Hz, protection category IP55													
AMD 500/4 0.75 kW	03118	1430	0.75	400	1.8	35	796	60	46	**FU-BS 2.5**	05459	**MSA**	01289
AMD 500/4 1.1 kW	03119	1440	1.1	400	2.5	60	796	60	50	**FU-BS 5**	05460	**MSA**	01289
AMD 500/4 1.5 kW	03122	1440	1.5	400	3.3	85	796	60	53	**FU-BS 5**	05460	**MSA**	01289
AMD 500/2 4 kW	03115	2910	4	400*	7.4	175	776	60	83	**FU-BS 8**	05461	**MSA**	01289
AMD 500/2 5.5 kW	03116	2940	5.5	400*	10.1	180	776	60	97	**FU-BS 16**	05463	**MSA**	01289
AMD 500/2 7.5 kW	03117	2930	7.5	400*	14.1	220	776	60	102	**FU-BS 16**	05463	**MSA**	01289
Pole-changeable, 2 speeds, three-phase current, Dahlander winding ⅄/⅄⅄, 400 V, 50 Hz, protection category IP55												Surface-mounted pole changing switch	
AMD 500/8/4 0.22/1 kW [3]	03275	645/1390	0.22/1.0	400	0.9/2.4	60	777	60	55	—	—	**PDA 12** [1]	05081
AMD 500/8/4 0.3/1.5 kW [3]	03276	645/1390	0.3/1.5	400	1.1/3.0	85	777	60	58	—	—	**PDA 12** [1]	05081
AMD 500/8/4 1.4/5.9 kW [3]	03273	1400/2900	1.4/5.9	400	3.6/11.4	180	777	60	118	—	—	**PDA 12** [1]	05081
AMD 500/8/4 2/8 kW [3]	03274	1410/2900	2.0/8.0	400	4.7/14.9	220	777	60	129	—	—	**PDA 25**	05060

The angle of attack must be specified when ordering.
* ⅄/△ Start-up.
[1] Flush-m. version see Switch product page.
[2] Extension duct VR over motor protrusion required.
[3] Performance curves for low speed available on request.

Performance curves AMD 500/2

n=2930 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	10°	dB(A)	103	80	93	99	102	100	97	88
L_{WA}	20°	dB(A)	105	82	94	100	104	102	99	90
L_{WA}	30°	dB(A)	107	84	96	104	106	104	101	92

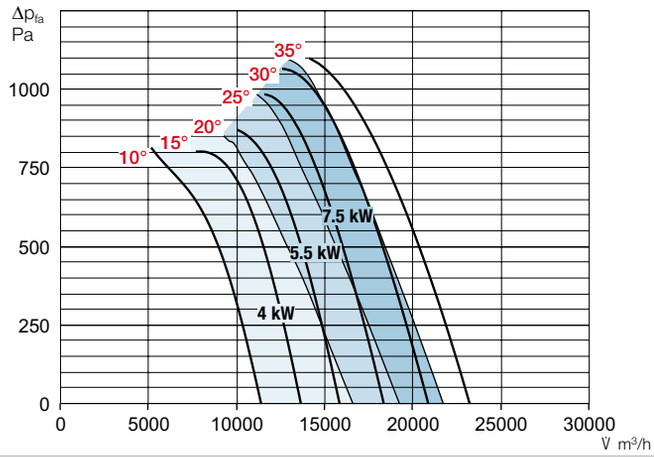

Performance curves AMD 500/4

n=1430 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	10°	dB(A)	87	71	81	86	86	83	76	64
L_{WA}	20°	dB(A)	88	72	82	86	87	85	77	66
L_{WA}	30°	dB(A)	90	74	84	88	89	87	79	68

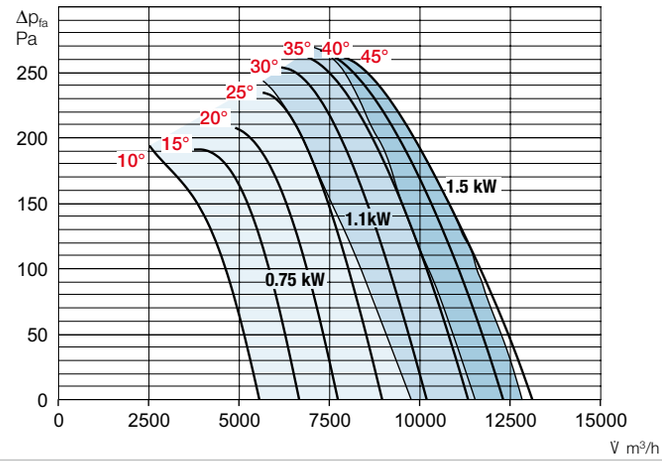

Accessories AMD 500

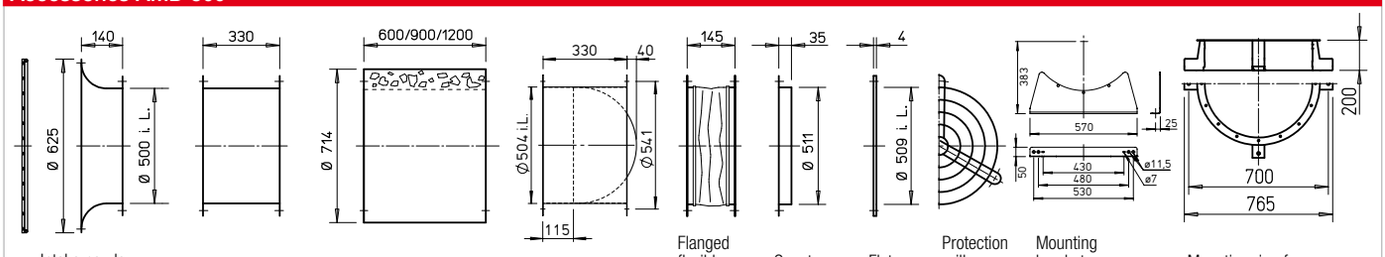

Intake nozzle with prot. grille **ASD-SGD 500** No. 01420

Extension duct **VR 500** No. 01408

Duct silencer **RSD 500/..**

Duct shutter **RVS 500** [a] No. 02598

Flanged flexible connector **STS 500** No. 01225

Counter flange **FR 500** No. 01208

Flat flange **FF 500** No. 04947

Protection grille duct side **SG 500** No. 01241

Mounting brackets **MK 500** (1 Set = 2 pcs) No. 00674

Mounting ring for vertical attachment **MRV 500** No. 01740

[a] Shutter, motorised, see Accessories product page.

	Vibration dampers			
	Compression		**Tension**	
	Type	Ref. no.	**Type**	Ref. no.
	SDD 1	01452	**SDZ 1**	01454
	SDD 1	01452	**SDZ 1**	01454
	SDD 1	01452	**SDZ 1**	01454
	SDD 2	01453	**SDZ 2**	01455
	SDD 2 [2)]	01453	**SDZ 2** [2)]	01455
	SDD 2 [2)]	01453	**SDZ 2** [2)]	01455
	SDD 1	01452	**SDZ 1**	01454
	SDD 1	01452	**SDZ 2**	01455
	SDD 2 [2)]	01453	**SDZ 2** [2)]	01455
	SDD 2 [2)]	01453	**SDZ 2** [2)]	01455

AMD 560

Dimensions AMD 560

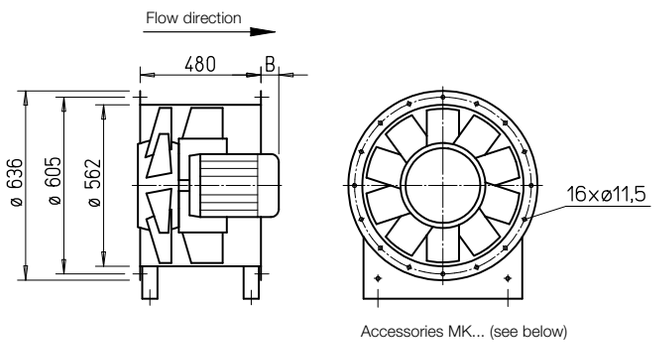

Dim. in mm

Dim. B see table

Casing
Tubular casing with welded-in motor support plate and guide wheel made of steel sheet. Flanges pressed on both sides according to DIN 24155, p. 3, for direct intermediate flanges in pipelines. Surface protection from hot-dip galvanising.

Impeller
Hub and blades made of corrosion-resistant aluminium alloy. Dynamically balanced according to DIN ISO 21940-11, quality grade 6.3 for low-vibration operation.
Ten aerodynamically profiled blades achieve high efficiency and pressure rates in combination with the guide wheel. The angle of attack of the blades can be adjusted in the factory according to the ordered, optimal operating point.

Drive
Directly through efficient IE 3 three-phase current standard motor.
Pole-changeable fans with IEC standard motor. Protection category IP55, insulation class F.

Power control
Continuously variable (0-100 %) through the use of a frequency inverter.
The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) made of plastic, mounted on the outside of the fan casing.

Motor protection
All AMD types come with PTC thermistors as standard motor protection. Effective motor protection is possible by means of motor protection circuit breaker (type MSA, Ref. no. 01289, accessories) or FU (accessories).

Dimensions
The motor protrudes over the casing for some types. The protrusion dim. B in mm pursuant to the type table must be taken into account.

Noise levels
The sound power values are specified over the frequency and as total levels for various angles of attack above the performance curves on the product pages.

Reference	Page
Planning information	14 ff.

Special design
Special design w/ inspect. opening (extra charge) upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	496 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Rated motor power (output)	Voltage	Current consump. nominal	Dim. B Motor protrusion	Wiring diagram	Max. air flow temp.	Weight net	Frequency inverter with integrated sine filter		Motor protection circuit breaker or pole changing switch	
		min⁻¹	kW	V	A	mm	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Three-phase current, 400 V, 50 Hz, protection category IP55													
AMD 560/4 1.1 kW	03281	1440	1.1	400	2.5	0	796	60	61	**FU-BS 5**	05460	**MSA**	01289
AMD 560/4 1.5 kW	03282	1440	1.5	400	3.3	0	796	60	64	**FU-BS 5**	05460	**MSA**	01289
AMD 560/4 2.2 kW	03285	1455	2.2	400	4.5	40	796	60	74	**FU-BS 5**	05460	**MSA**	01289
AMD 560/4 3 kW	03286	1440	3	400*	6.0	40	776	60	80	**FU-BS 8**	05461	**MSA**	01289
AMD 560/2 7.5 kW	03279	2930	7.5	400*	14.1	100	776	60	123	**FU-BS 16**	05463	**MSA**	01289
Pole-changeable, 2 speeds, three-phase current, Dahlander winding ⅄/⅄⅄, 400 V, 50 Hz, protection category IP55												Surface-mounted pole changing switch	
AMD 560/8/4 0.55/2 kW [2]	03272	680/1410	0.55/2.0	400	2.0/4.5	0	777	60	79	—	—	**PDA 12** [1]	05081
AMD 560/8/4 0.65/2.4 kW [2]	03290	680/1410	0.65/2.4	400	2.5/5.5	40	777	60	79	—	—	**PDA 12** [1]	05081
AMD 560/4/2 2/8 kW	03287	1410/2900	2.0/8.0	400	4.7/14.9	100	777	60	149	—	—	**PDA 25**	05060

The angle of attack must be specified when ordering. [1] Flush-m. version see Switch product page. [2] Performance curves for low speed available on request. * ⅄/△ Start-up.

Performance curves AMD 560/2

n=2930 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	10°	dB(A)	107	84	96	104	106	105	101	91
L_{WA}	20°	dB(A)	108	85	97	105	107	105	102	93
L_{WA}	30°	dB(A)	111	87	100	107	110	109	105	95

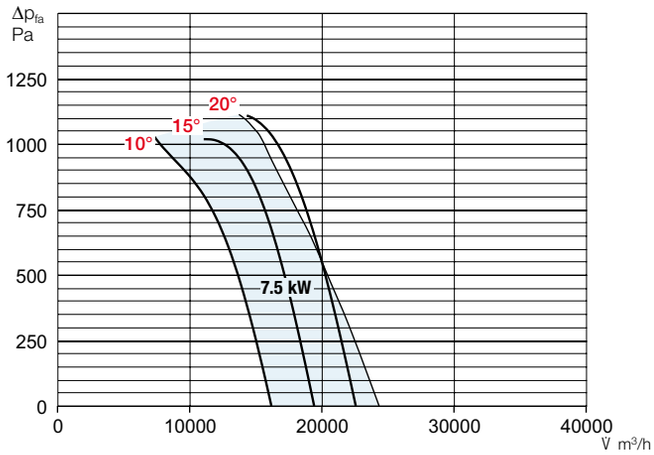

Performance curves AMD 560/4

n=1440 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	10°	dB(A)	90	74	84	89	89	87	79	68
L_{WA}	20°	dB(A)	92	76	85	91	91	88	81	69
L_{WA}	30°	dB(A)	93	77	87	91	92	90	82	71

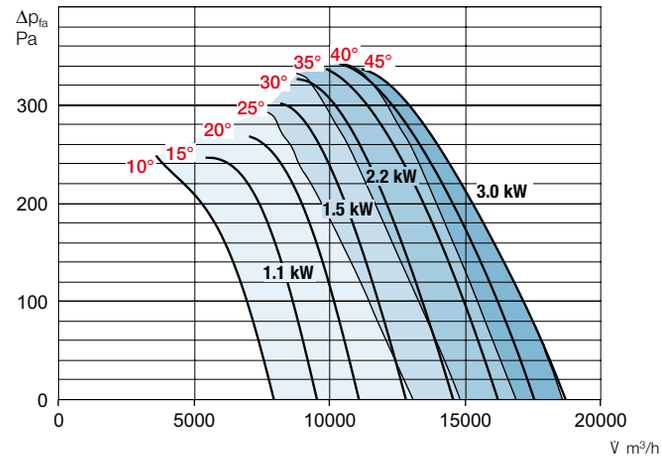

Accessories AMD 560

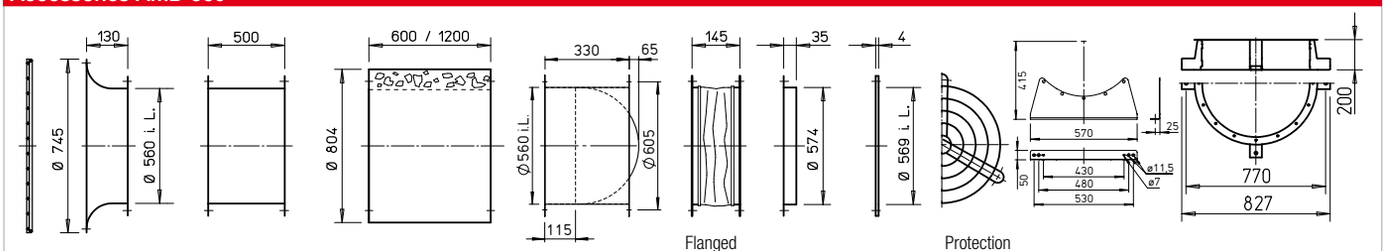

Intake nozzle with prot. grille **ASD-SGD 560** No. 01421

Extension duct **VR 560** No. 01409

Duct silencer **RSD 560/..**

Duct shutter **RVS 560** [a] No. 02599

Flanged flexible connector **STS 560** No. 01226

Counter flange **FR 560** No. 01209

Flat flange **FF 560** No. 04948

Protection grille duct side **SG 560** No. 01242

Mounting brackets **MK 560** (1 Set = 2 pcs) No. 00675

Mounting ring for vertical attachment **MRV 560** No. 01741

[a] Shutter, motorised, see Accessories product page.

	Vibration dampers			
	Compression		**Tension**	
	Type	Ref. no.	**Type**	Ref. no.
	SDD 1	01452	**SDZ 2**	01455
	SDD 1	01452	**SDZ 2**	01455
	SDD 1	01452	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455

AMD 630

Dimensions AMD 630

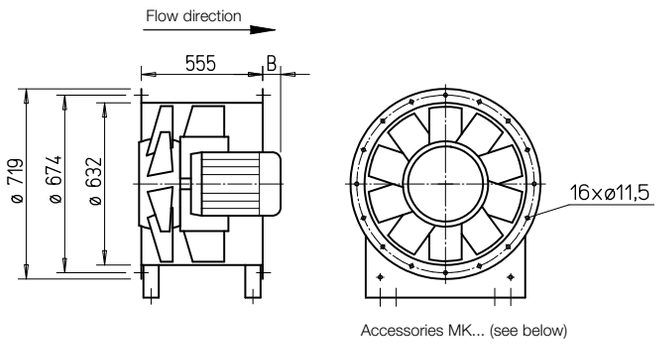

Dim. in mm

Dim. B see table

Casing
Tubular casing with welded-in motor support plate and guide wheel made of steel sheet. Flanges pressed on both sides according to DIN 24155, p. 3, for direct intermediate flanges in pipelines. Surface protection from hot-dip galvanising.

Impeller
Hub and blades made of corrosion-resistant aluminium alloy. Dynamically balanced according to DIN ISO 21940-11, quality grade 6.3 for low-vibration operation.
Ten aerodynamically profiled blades achieve high efficiency and pressure rates in combination with the guide wheel. The angle of attack of the blades can be adjusted in the factory according to the ordered, optimal operating point.

Drive
Directly through efficient IE 3 three-phase current standard motor.
Pole-changeable fans with IEC standard motor. Protection category IP55, insulation class F.

Power control
Continuously variable (0-100 %) through the use of a frequency inverter.
The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary.

Electrical connection
Standard terminal box (protection category IP55) made of plastic, mounted on the outside of the fan casing.

Motor protection
All AMD types come with PTC thermistors as standard motor protection. Effective motor protection is possible by means of motor protection circuit breaker (type MSA, Ref. no. 01289, accessories) or FU (accessories).

Dimensions
The motor protrudes over the casing for some types. The protrusion dim. B in mm pursuant to the type table must be taken into account.

Noise levels
The sound power values are specified over the frequency and as total levels for various angles of attack above the performance curves on the product pages.

Reference	Page
Planning information	14 ff.

Special design
Special design w/ inspect. opening (extra charge) upon request.

Other accessories	Page
Installation accessories	278 ff.
Silencers	496 ff.
Switching and control technology	601 ff.

Type	Ref. no.	Speed	Rated motor power (output)	Voltage	Current consump. nominal	Dim. B Motor protrusion	Wiring diagram	Max. air flow temp.	Weight net	Frequency inverter with integrated sine filter		Motor protection circuit breaker or pole changing switch	
		min⁻¹	kW	V	A	mm	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Three-phase current, 400 V, 50 Hz, protection category IP55													
AMD 630/4 1.5 kW	03291	1440	1.5	400	3.3	0	796	60	84	**FU-BS 5**	05460	**MSA**	01289
AMD 630/4 2.2 kW	03292	1455	2.2	400	4.5	0	796	60	84	**FU-BS 5**	05460	**MSA**	01289
AMD 630/4 3 kW	03293	1440	3.0	400*	6.0	0	776	60	99	**FU-BS 8**	05461	**MSA**	01289
AMD 630/4 4 kW	03294	1500	4.0	400*	7.4	30	776	60	94	**FU-BS 10**	05462	**MSA**	01289
AMD 630/4 5.5 kW	03295	1470	5.0	400*	10.7	40	776	60	115	**FU-BS 16**	05463	**MSA**	01289
AMD 630/2 11 kW	03376	2945	11.0	400*	20.0	145	776	60	210	**FU-CS 22**	05470	**MSA**	01289
Pole-changeable, 2 speeds, three-phase current, Dahlander winding ⅄/⅄⅄, 400 V, 50 Hz, protection category IP55												Surface-mounted pole changing switch	
AMD 630/8/4 0.55/2 kW [2]	03297	680/1410	0.55/2.0	400	2.0/4.5	0	777	60	98	—	—	**PDA 12** [1]	05081
AMD 630/8/4 0.9/3.2 kW [2]	03298	680/1420	0.9/3.2	400	3.2/7.1	30	777	60	104	—	—	**PDA 12** [1]	05081
AMD 630/8/4 1.1/4.5 kW [2]	03299	680/1435	1.1/4.5	400	3.6/9.3	40	777	60	130	—	—	**PDA 12** [1]	05081

The angle of attack must be specified when ordering. [1] Flush-m. version see Switch product page. [2] Performance curves for low speed available on request. * ⅄/△ Start-up.

Performance curves AMD 630/2

n=2940 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	10°	dB(A)	112	84	97	104	108	106	101	92
L_{WA}	20°	dB(A)	114	87	99	107	110	109	104	95
L_{WA}	30°	dB(A)	116	89	101	109	112	111	106	97

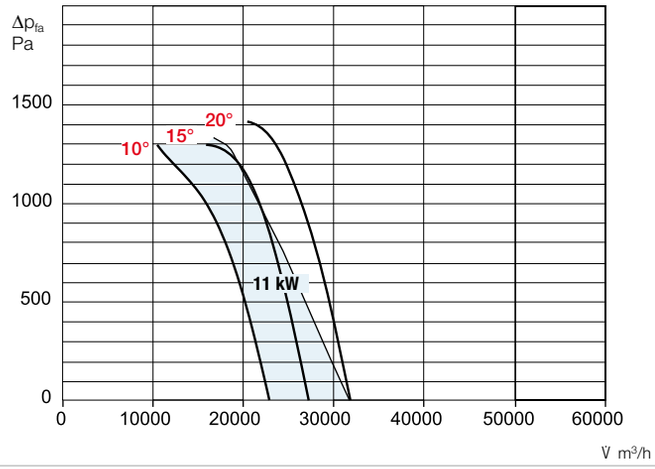

Performance curves AMD 630/4

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	10°	dB(A)	94	78	87	93	93	90	83	71
L_{WA}	20°	dB(A)	95	79	89	92	94	91	84	72
L_{WA}	30°	dB(A)	97	81	91	95	96	93	86	74

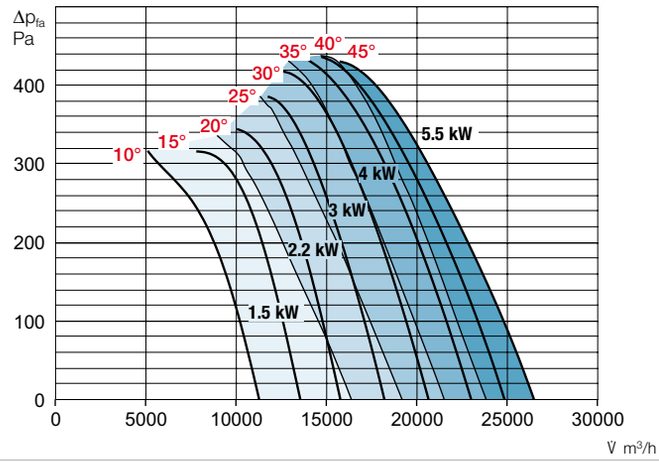

Accessories AMD 630

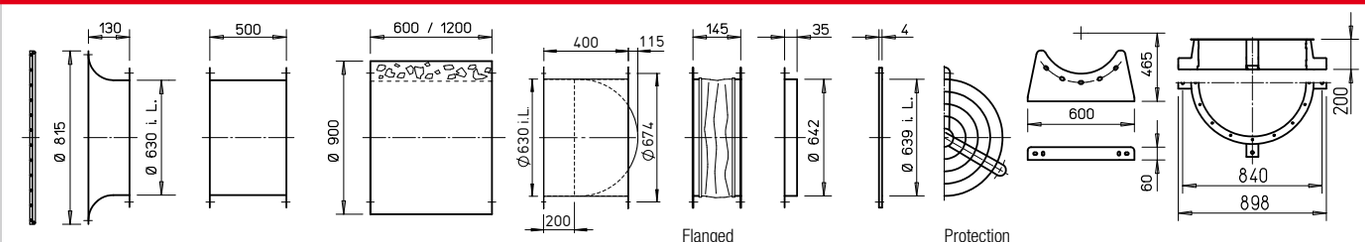

Intake nozzle with prot. grille **ASD-SGD 630** No. 01422

Extension duct **VR 630** No. 01410

Duct silencer **RSD 630/..**

Duct shutter **RVS 630** [a] No. 02600

Flanged flexible connector **STS 630** No. 01228

Counter flange **FR 630** No. 01211

Flat flange **FF 630** No. 04949

Protection grille duct side **SG 630** No. 01243

Mounting brackets **MK 630** (1 Set = 2 pcs) No. 01333

Mounting ring for vertical attachment **MRV 630** No. 01742

[a] Shutter, motorised, see Accessories product page.

	Vibration dampers			
	Compression		**Tension**	
	Type	Ref. no.	**Type**	Ref. no.
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455
	SDD 3	01367	**SDZ 3**	01366
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455
	SDD 2	01453	**SDZ 2**	01455

The ideal solution for commercial and industrial applications: RADAX® VAR.

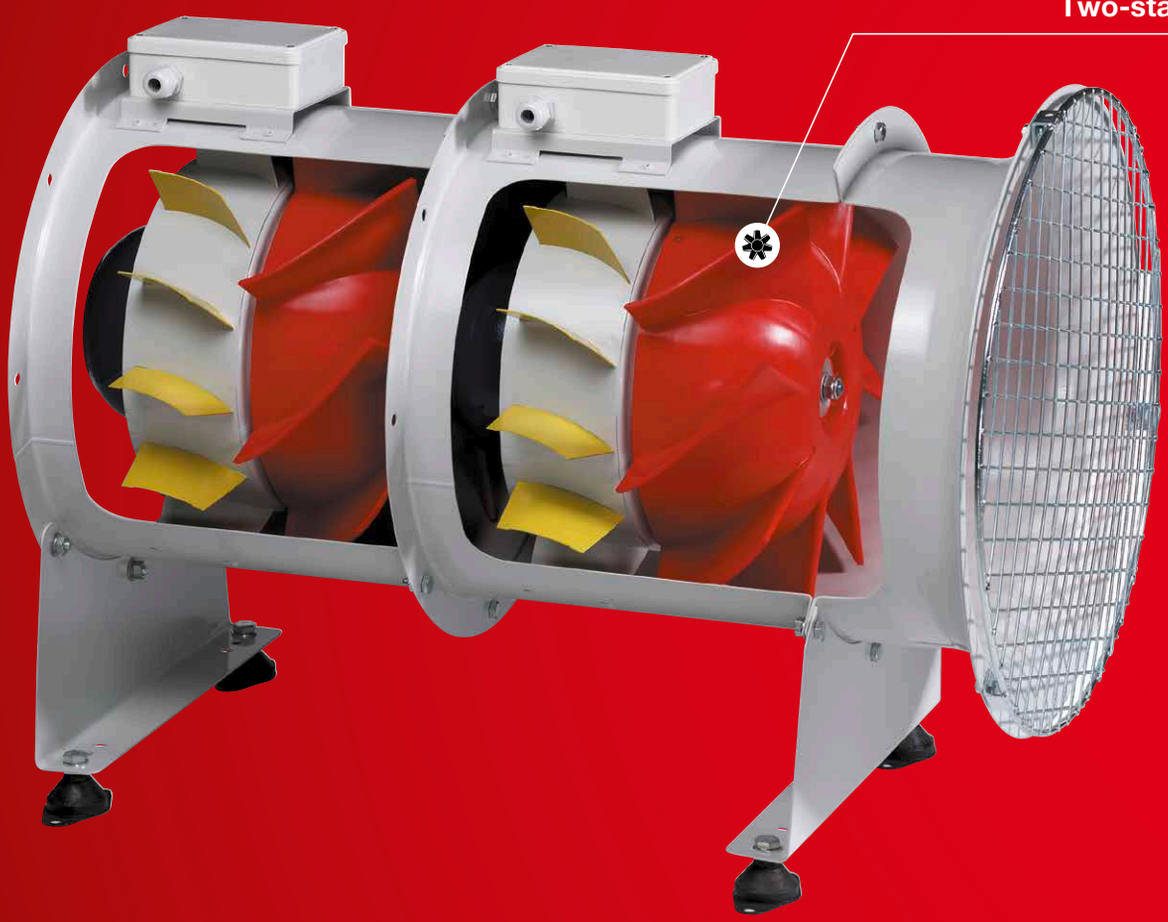

High pressure round duct fans RADAX® VAR are suitable for various commercial and industrial applications. **Almost 150 types in 14 sizes** impress with small and large volume flows and high resistances.

Helios offers the right system for practically any building in combination with perfectly tuned accessory components.

■ Compact

RADAX® VAR impellers offer high pressure and high flow rates, despite their extremely compact casing.

The winning VAR formula lies in the combination of centrifugal fan performance characteristics with an axial flow pattern.
The linear air flow improves efficiency and provides a clear reduction in space requirement as well as pipe system savings.

■ High pressure

The synergy of performance and axial flow pattern results in enormous benefits:

- High performance with efficient energy use.
- Low noise levels.
- High pressure and volume rates with very small dimensions.
- Universal applications.
- Planning freedom.
- No need for on-site deflectors and fittings with associated resistances.
- Low installation costs.

■ Universal

In addition to single-stage types, the RADAX® VAR range offers:

- Other Ø up to 1000 mm.
- B VAR types for smoke extraction according to DIN 12101-3 F300 (60 min.) and F400, F600 (120 min.).
- Parallel units with high volumes and high pressures specifically for the ventilation of garages (VDI 2053).
- Two-stage TwinVent® with the highest pressure rates.

Request TGA catalogue
Ref. no. 86 979

This information supplements the "General technical information".

Features
RADAX® VAR is a series of high pressure round duct fans which ideally combine the advantageous properties of axial and centrifugal fans.
The semiaxial impeller is matched to the fixed guide wheel so that high performance is achieved in pressure and volume flow with a good level of efficiency.

Flow pattern
The axial flow pattern enables a low-loss linear air flow and thus improves the efficiency of the fan. There is no need for the on-site fittings and deflectors required for centrifugal fans and their resistances. This saves installation costs and energy.



Casing
Tubular casing with double-sided flanges in accordance with DIN 24155, p.3 with integrated guide wheel and motor mount made of galvanised steel. Types with n = 2800 min^{-1} in nominal sizes 400, 450, 500 and all types in nominal size 630, welded casing, hot-dip galvanised. Terminal box (IP55) on outside of duct.

Impeller
Semiaxial impeller with 8 spatially curved blades. Made of plastic up to nominal size 355; made of hot-dip galvanised steel for types with n = 2800 min^{-1} in nominal size 355 as well as all types in nominal size 400 to 630. Aluminium (extra charge) available upon request. High level of efficiency, low operating noise, high corrosion resistance, low-vibration operation through dynamic balancing in accordance with DIN ISO 21940-11 – quality grade 6.3.

Air flow temperatures
The standard version can be used in the range from –30 °C up to at least +40 °C. See information on product page. Approval for higher continuous temperatures is possible upon request.

Reference	Page
Planning information, acoustics, expl. protection	14 ff.
General techn. information, power control	19 ff.

Explosion protection
The explosion-proof types correspond to unit group II, category 2G for operation in zone 1 and 2. Larger air gaps which result in a performance reduction of approx. 10% are stipulated in accordance with Directive 2014/34/EU (ATEX).

Air flow direction
The air flow direction cannot be changed, but it can be set by the installation method. The correct motor rotation direction and air flow direction is marked by arrows on the fan.

Installation position, installation, condensate outlets
A duct section with length = 2 x pipe diameter for free discharge and a corresponding straight duct section for intermediate positioning in a pipeline are required (Figure 1) to achieve the specified performance values.
- RADAX® VAR can be installed and operated in any position. In case of equipment with condensate drain holes, please be aware of their position.
- In case of outdoor installation, installation in permanently humid or wet environments or in case of installation with a vertical shaft, this must be indicated when placing the order.

The installation site and mounting should be such that the fan can be mounted securely and without warping.

Positioning
The use of vibration dampers is recommended (accessories SDD, SDZ) to prevent vibration transmission). Larger motors may protrude from the back and cause uneven distribution due to their high weight. An extension duct VR (accessories) should be provided to adjust the centre of gravity!

Installation examples
Horizontal
– **Figure 2**
Free intake, outlet-side operation. Mounting to ceiling, wall or floor.

– **Figure 3**
Free intake, outlet-side operation with silencer provided with intermediate flanges.
Duct silencers can be provided with intermediate flanges to reduce the inlet-side or outlet-side sound power.

– **Figure 4**
Ceiling suspension
Figure 4 shows a typical installation in a ventilation application. The installation of VAR systems is possible through direct ceiling or wall suspension without any additional expenditure. The tubular casing with double-sided flanges (according to DIN 24155 p. 3) is designed for direct installation in the pipeline.

Vertical
– **Figure 5**
Integrated in the pipeline with inlet-side silencer.
Wall mounted with brackets or through the ceiling. The elements must be suspended separately according to weight. Do not mount the fan with combined loads for inspection. Mounting rings MRV are available for the vertical attachment of the fan for size 315 and above. The fan weight including the attached accessories must not exceed the load-bearing capacity of the MRV.

Figure 1

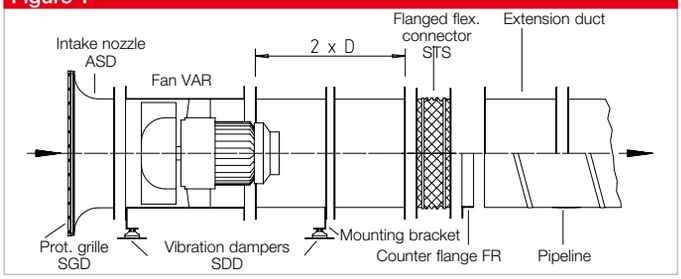

Figure 2

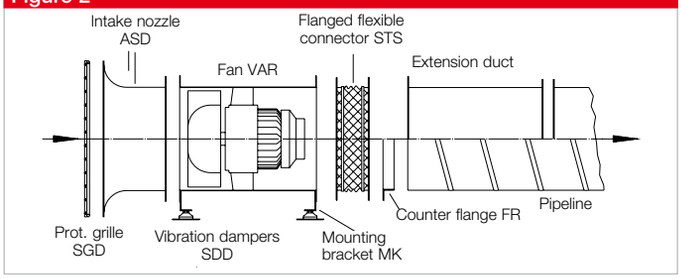

Figure 3

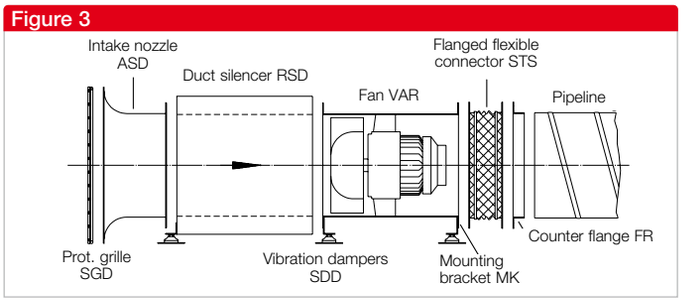

Figure 4

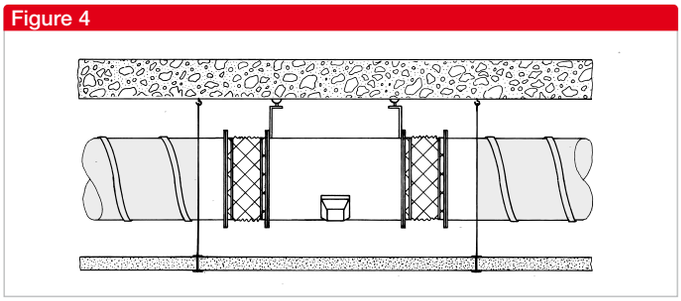

Figure 5

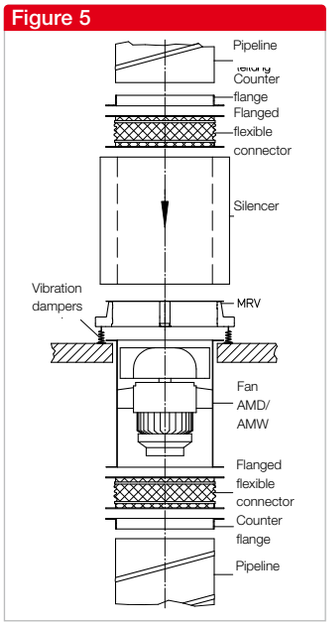

By combining the parameters of static pressure increase Δp_{fa}, flow rate $\dot{V}$, speed min^{-1}, sound pressure level dB(A) and impeller diameter DN mm, the following table facilitates the selection of RADAX®-VAR high pressure fans.
Sizes from Ø 710 mm as well as two-stage and parallel VAR systems are available in the TGA catalogue, Ref. no. 86 979.

Diameter	Speed	Sound pressure inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure = N / m² = freely available pressure												
mm	min^{-1}	L_{PA} dB(A)	(Δp_{fa}) in Pa												
		at 4 m distance	**0**	**50**	**100**	**150**	**200**	**300**	**400**	**500**	**600**	**700**	**800**	**900**	**1000**
225	2800	61	1770	1700	1600	1510	1400								
225	1450	46	900	730											
250	2800	64	2540	2450	2350	2250	2150	1910							
250	1450	49	1250	1050											
280	2800	68	3320	3220	3110	3010	2900	2670	2360						
280	1450	52	1630	1400	1000										
315	2800	71	4670	4550	4430	4310	4200	3930	3650	3280					
315	1450	56	2510	2300	2060	1730									
355	2800	75	7220	7080	6980	6850	6700	6450	6150	5850	5500	5050			
355	1450	60	3540	3300	3050	2750	2200								
400	2800	78	10150	10000	9850	9700	9600	9300	9000	8700	8350	7950	7500	7100	6400
400	1450	63	5260	4950	4650	4310	3930								
400	930	52	3500	3060	2290										
450	2800	83	14200	14100	13900	13750	13600	13300	12900	12500	12200	11800	11400	10800	10350
450	1450	67	7280	6950	6650	6300	5900	4800							
450	930	56	4990	4520	3870										

Diameter	Speed	Sound pressure inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure = N / m² = freely available pressure												
mm	min^{-1}	L_{PA} dB(A)	(Δp_{fa}) in Pa												
		at 4 m distance	**0**	**50**	**100**	**150**	**200**	**300**	**400**	**500**	**600**	**700**	**800**	**900**	**1000**
500	2800	86	22310	21800	21400	20800	20300	19750	19200	18600	17900	16000	13500		
500	1450	70	9700	8640	7300										
500	930	59	6860	5150											
560	1450	73	13550	12500	11300	9850									
560	930	63	9850	8110											
560	725	56	7510												
630	1450	77	21460	20410	19110	17610	15760								
630	930	67	14040	12190	8740										
630	725	60	10690	7810											
	Please request separate catalogue for the following performance variables.														
710	1480	81	31350	30210	28920	27370	25680	23710	20790						
710	950	70	20110	18120	15390										
710	725	64	15330	12380											
800	1480	85	44870	43580	42210	40610	38810	36910	34780	32130	26670				
800	950	74	28770	26640	23850	19970									
800	725	67	21940	18810											
900	1480	88	63890	62450	60940	59300	57440	55410	53310	50990	48420	39610			
900	950	78	40990	38650	35710	32250	26830								
900	725	71	31260	27910	23160										
1000	1480	92	87640	86050	84410	82590	80770	78650	76400	74110	71650	66090	57450		
1000	950	81	56220	53690	50670	47080	42960	36050							
1000	725	74	42880	39330	34590	25090									

VAR 225

Also available in version:

Dimensions VAR 225

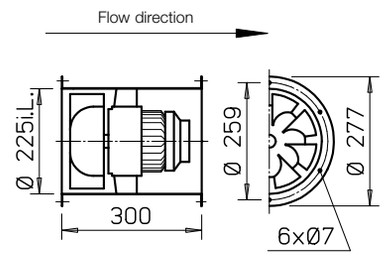

Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of high-quality plastic.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins.
Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
All types (except for 3~ explosion-proof) are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. For 1~ explosion-proof types, the thermal contacts are wired in series with the winding, automatic deactivation and reactivation after cool down. Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram.
The lower sound pressure value can be determined using the diagram on the "Technical information" page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Speed controller 5-step Pole chang. switch Type	Ref. no.	Motor protection circuit breaker for connecting built-in thermal contacts Type	Ref. no.	Vibration dampers Compr.	Vibration dampers Tens.
		min⁻¹	V m³/h	kW	V	A	A	No.	+°C	+°C	ca. kg						
Single-phase alternating current.50 Hz, protection category IP54																	
VARW 225/4	06660	1450	900	0.10	230	0.50	0.55	966	60	40	10.5	**MWS 1.5**[1]	01947	**MW**	01579	**SDD 1**	**SDZ 1**
VARW 225/2	06661	2770	1778	0.35	230	1.56	2.50	966	60	40	10.5	**MWS 3**[1]	01948	**MW**	01579	**SDD 1**	**SDZ 1**
Three-phase current, 50 Hz, protection category IP54																	
VARD 225/4	06662	1420	880	0.10	400Y	0.20	0.20	469	60	40	10.5	**RDS 1**[1) 4)]	01314	**MD**	05849	**SDD 1**	**SDZ 1**
VARD 225/2	06663	2720	1750	0.28	400Y	0.60	0.60	469	60	40	10.5	**RDS 1**[1) 4)]	01314	**MD**	05849	**SDD 1**	**SDZ 1**
Pole-changeable, 2 speeds (Dahlander winding Y/YY), Three-phase current, 50 Hz, protection category IP54												Pole chang. switch					
VARD 225/4/2	06771	1460/2800	880/1800	0.06/0.30	400	0.22/0.57	–	472	60	–	10.5	**PDA 12**[3]	05081	**M 3**[2]	01293	**SDD 1**	**SDZ 1**
Ex Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex d, alternating current 230 Volt, 50 Hz, protection category IP55																	
VARW 225/4 Ex	06733	1400	950	0.06	230	0.70	–	757	40	–	12.0	not permitted		–	–	**SDD 1**	**SDZ 1**
VARW 225/2 Ex	06734	2650	1780	0.18	230	1.23	–	757	40	–	12.5	not permitted		–	–	**SDD 1**	**SDZ 1**
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55																	
VARD 225/4 Ex	06664	1400	940	0.12	400	0.41	–	470	40	–	12.5	not permitted		not permitted		**SDD 1**	**SDZ 1**
VARD 225/2 Ex	06665	2850	1930	0.25	400	0.72	–	470	40	–	12.5	not permitted		not permitted		**SDD 1**	**SDZ 1**

* For Ex types: Motor ratings see information on page 20. 1) incl. motor protection circuit breaker. 2) includes operating and speed switch. 3) Flush-m. version see Switch product page.
4) Frequency inverter with integrated sine filter, Type FU-BS 2.5, No. 05459, see FU product page.

Performance curves VAR 225/2

n=2800 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	81	51	62	74	76	76	72	63
$L_{PA, 4m}$	Air noise	dB(A)	61	31	42	54	56	56	52	43

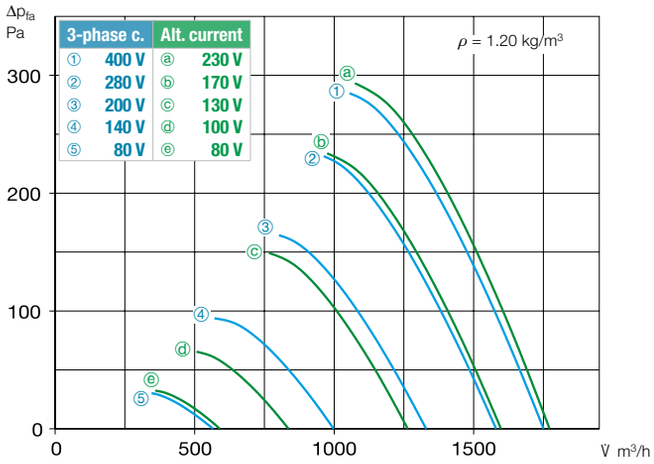

Performance curves VAR 225/4

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	66	41	55	60	62	59	52	43
$L_{PA, 4m}$	Air noise	dB(A)	46	21	35	40	42	39	32	23

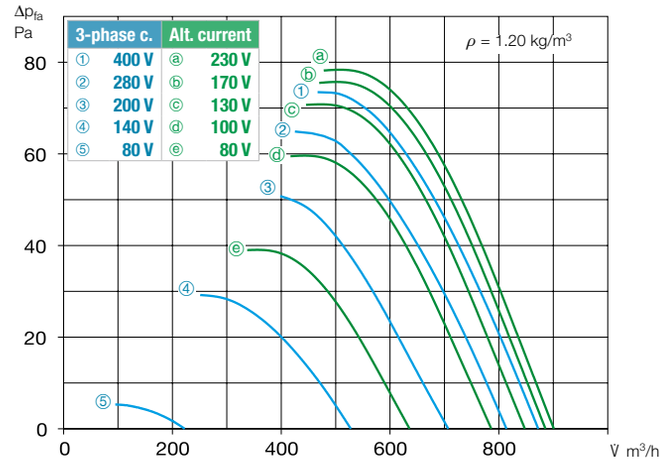

Accessories VAR 225 Description see page 278 ff.

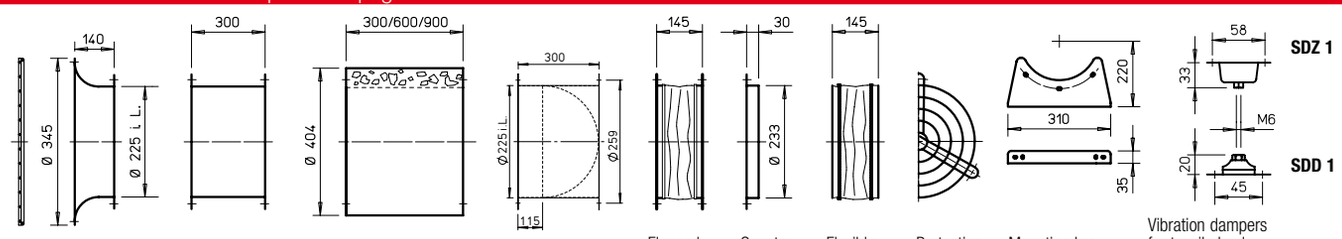

Intake nozzle with prot. grille **ASD-SGD 225** No. 01413

Extension duct **VR 225** No. 01401

Duct silencer- **RSD 225/..**

Duct shutter, automatic **RVS 225** a) No. 02591

Flanged flexible connector **STS 225** b) No. 01218

Counter flange **FR 225** No. 01201

Flexible connecting sleeve **FM 225** b) No. 01671

Protection grille duct side **SG 225** No. 01215

Mounting brackets **MK 225** (1 Set = 2 pcs) No. 01446

Vibration dampers for tensile load **SDZ 1** (1 set = 4 Pc) No. 01454
Vibration dampers for compression load **SDD 1** (1 set = 4 Pc) No. 01452

a) Shutter, motorised see Accessories product pages. b) Types for explosion-proof fans see above.

Other accessories	Page
b) **Access. for expl.-proof fans**	
Flanged flexible connector STS 225 Ex	Ref. no. 02500
Flexible connecting sleeve FM 225 Ex	Ref. no. 01687
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

VAR 250

Also available in version:

Dimensions VAR 250

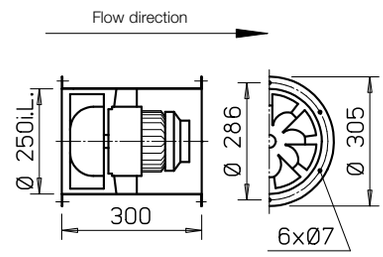

Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of high-quality plastic.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins.
Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
All types (except for 3~ explosion-proof) are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. For 1~ explosion-proof types, the thermal contacts are wired in series with the winding, automatic deactivation and reactivation after cool down. Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram. The lower sound pressure value can be determined using the diagram on the "Technical information" page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Speed controller 5-step Pole chang. switch Type	Ref. no.	Motor protection circuit breaker for connecting built-in thermal contacts Type	Ref. no.	Vibration dampers Compr.	Vibration dampers Tens.
		min⁻¹	V m³/h	kW	V	A	A	No.	+°C	+°C	ca. kg						
Single-phase alternating current.50 Hz, protection category IP54																	
VARW 250/4	06666	1420	1210	0.12	230	0.46	0.60	966	60	40	11.5	**MWS 1.5**[1]	01947	**MW**	01579	**SDD 1**	**SDZ 1**
VARW 250/2	06667	2840	2540	0.55	230	2.60	3.90	966	60	40	13.0	**MWS 5**[1]	01949	**MW**	01579	**SDD 1**	**SDZ 1**
Three-phase current, 50 Hz, protection category IP54																	
VARD 250/4	06668	1410	1250	0.09	400	0.30	0.30	469	60	40	11.5	**RDS 1**[1) 4)]	01314	**MD**	05849	**SDD 1**	**SDZ 1**
VARD 250/2	06669	2800	2450	0.47	400	1.10	1.10	469	60	40	11.5	**RDS 2**[1) 4)]	01315	**MD**	05849	**SDD 1**	**SDZ 1**
Pole-changeable, 2 speeds (Dahlander winding ⅄/⅄⅄), Three-phase current, 50 Hz, protection category IP54												Pole chang. switch					
VARD 250/4/2	06773	1425/2750	1200/2400	0.75/0.49	400	0.24/0.94	–	472	60	–	13.0	**PDA 12**[3]	05081	**M 3**[2]	01293	**SDD 1**	**SDZ 1**
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex d, alternating current 230 Volt, 50 Hz, protection category IP55**																	
VARW 250/4 Ex	06735	1400	1290	0.06	230	0.70	–	757	40	–	13.0	not permitted		–	–	**SDD 1**	**SDZ 1**
Ex **Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																	
VARD 250/4 Ex	06670	1355	1300	0.12	400	0.37	–	470	40	–	13.0	not permitted		not permitted		**SDD 1**	**SDZ 1**
VARD 250/2 Ex	06671	2890	2590	0.25	400	1.13	–	470	40	–	15.5	not permitted		not permitted		**SDD 1**	**SDZ 1**

* For Ex types: Motor ratings see information on page 20. [1] incl. motor protection circuit breaker. [2] includes operating and speed switch. [3] Flush-m. version see Switch product page.
[4] Frequency inverter with integrated sine filter, Type FU-BS 2.5, No. 05459, see product page FU.

Performance curves VAR 250/2

n=2800 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	84	55	65	77	79	80	75	67
$L_{PA,\ 4m}$	Air noise	dB(A)	64	35	45	57	59	60	55	47

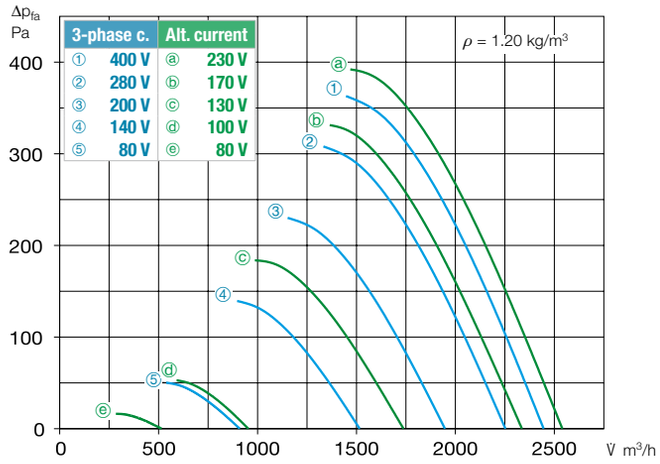

Performance curves VAR 250/4

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	69	44	58	63	65	63	56	46
$L_{PA,\ 4m}$	Air noise	dB(A)	49	24	38	43	45	43	36	26

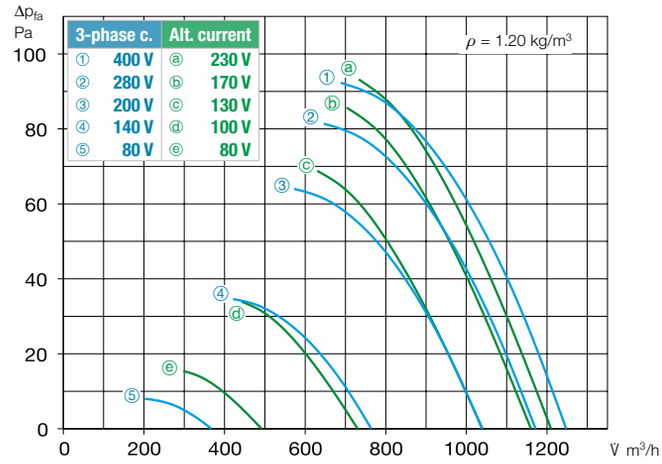

Accessories VAR 250 Description see page 278 ff.

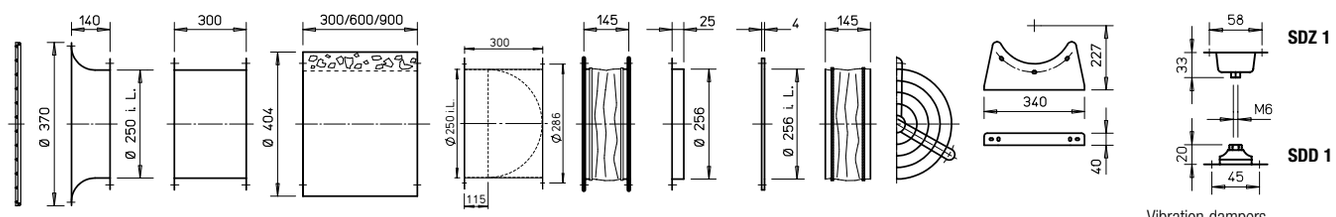

Intake nozzle with prot. grille **ASD-SGD 250** No. 01414

Extension duct **VR 250** No. 01402

Duct silencer- **RSD 250/..**

Duct shutter, automatic **RVS 250** a) No. 02592

Flanged flexible connector **STS 250** b) No. 01220

Counter flange **FR 250** No. 01203

Flat flange **FF 250** No. 04941

Flexible connecting sleeve **FM 250** b) No. 01672

Protection grille duct side **SG 250** No. 01236

Mounting brackets **MK 250** (1 Set = 2 pcs) No. 01447

Vibration dampers for tensile load **SDZ 1** (1 set = 4 Pc) No. 01454
Vibration dampers for compression load **SDD 1** (1 set = 4 Pc) No. 01452

a) Shutter, motorised see Accessories product pages. b) Types for explosion-proof fans see above.

Other accessories	Page
b) Access. for expl.-proof fans	
Flanged flexible connector STS 250 Ex	Ref. no. 02501
Flexible connecting sleeve FM 250 Ex	Ref. no. 01688
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

VAR 280

Also available in version:

Dimensions VAR 280

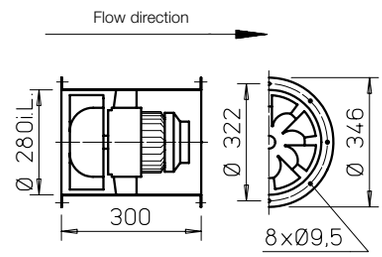

Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of high-quality plastic.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins.
Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
All types (except for 3~ explosion-proof) are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. For 1~ explosion-proof types, the thermal contacts are wired in series with the winding, automatic deactivation and re-activation after cool down. Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram. The lower sound pressure value can be determined using the diagram on the "Technical information" page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Speed controller 5-step Pole chang. switch Type	Ref. no.	Motor protection circuit breaker for connecting built-in thermal contacts Type	Ref. no.	Vibration dampers Compr.	Vibration dampers Tens.
		min⁻¹	V m³/h	kW	V	A	A	No.	+°C	+°C	ca. kg						
Single-phase alternating current.50 Hz, protection category IP54																	
VARW 280/4	06672	1330	1600	0.11	230	0.50	0.60	966	60	40	12.0	**MWS 1.5**[1]	01947	**MW**	01579	**SDD 1**	**SDZ 1**
VARW 280/2	06659	2715	3350	0.79	230	3.70	4.90	967	60	40	14.0	**MWS 7.5**[1]	01950	**MW**	01579	**SDD 1**	**SDZ 1**
Three-phase current, 50 Hz, protection category IP54																	
VARD 280/4	06673	1370	1650	0.12	400	0.35	0.35	469	60	40	12.0	**RDS 1**[1) 4)]	01314	**MD**	05849	**SDD 1**	**SDZ 1**
VARD 280/2	06674	2705	3315	0.80	400	1.52	1.64	469	60	40	13.5	**RDS 2**[1) 4)]	01315	**MD**	05849	**SDD 1**	**SDZ 1**
Pole-changeable, 2 speeds (Dahlander winding ⅄/⅄⅄), Three-phase current, 50 Hz, protection category IP54												Pole chang. switch					
VARD 280/4/2	06775	1405/2810	1760/3500	0.14/0.91	400	0.44/1.78	–	472	60	–	16.0	**PDA 12**[3]	05081	**M 3**[2]	01293	**SDD 1**	**SDZ 1**
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex d, alternating current 230 Volt, 50 Hz, protection category IP55**																	
VARW 280/4 Ex	06737	1330	1720	0.18	230	1.25	–	757	40	–	14.0	not permitted		–	–	**SDD 1**	**SDZ 1**
Ex **Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																	
VARD 280/4 Ex	06675	1355	1820	0.12	400	0.37	–	470	40	–	16.0	not permitted		not permitted		**SDD 1**	**SDZ 1**
VARD 280/2 Ex	06676	2885	3720	0.75	400	1.59	–	470	40	–	18.0	not permitted		not permitted		**SDD 1**	**SDZ 1**

* For Ex types: Motor ratings see information on page 20. [1] incl. motor protection circuit breaker. [2] includes operating and speed switch. [3] Flush-m. version see Switch product page.
[4] Frequency inverter with integrated sine filter, Type FU-BS 2.5, No. 05459, see product page FU.

Performance curves VAR 280/2

n=2800 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	88	58	69	80	83	83	79	70
$L_{PA,\ 4m}$	Air noise	dB(A)	68	38	49	60	63	63	59	50

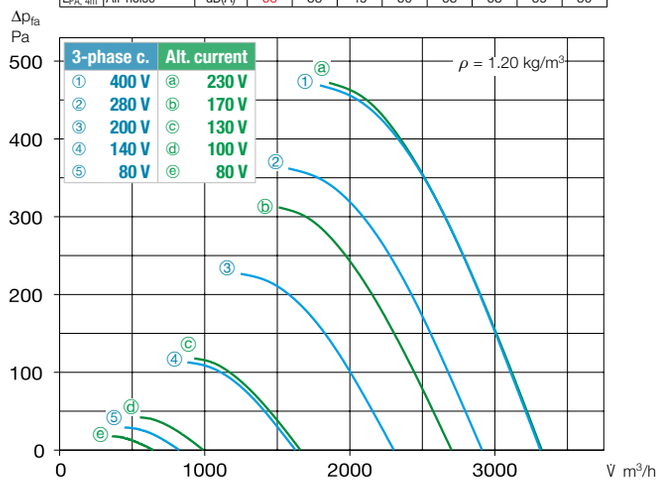

Performance curves VAR 280/4

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	72	48	62	66	69	66	59	49
$L_{PA,\ 4m}$	Air noise	dB(A)	52	28	42	46	49	46	39	29

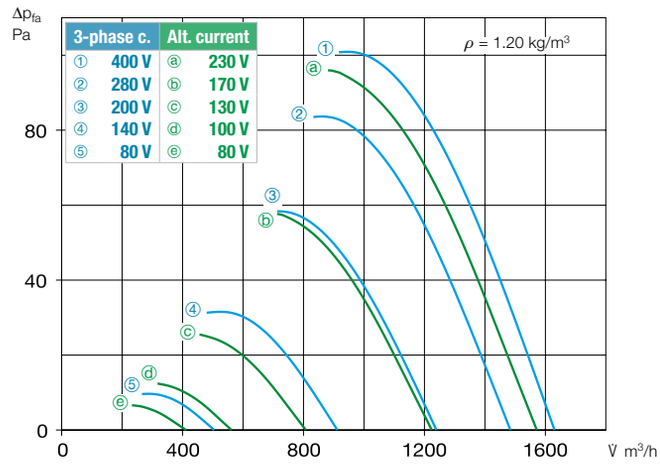

Accessories VAR 280 Description see page 278 ff.

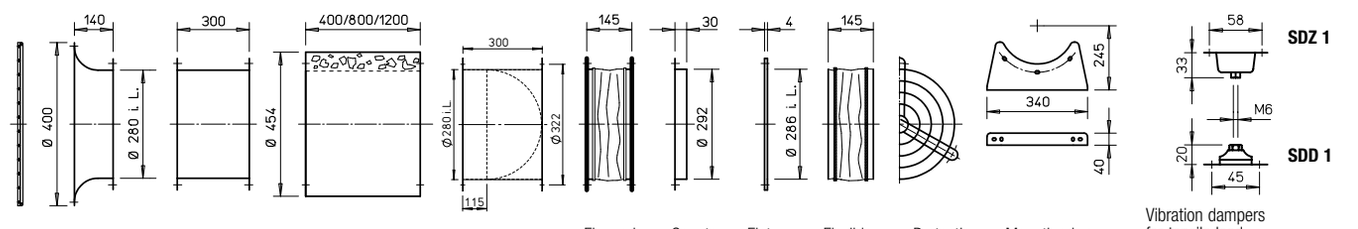

Intake nozzle with prot. grille **ASD-SGD 280** No. 01415

Extension duct **VR 280** No. 01403

Duct silencer- **RSD 280/..**

Duct shutter, automatic **RVS 280** a) No. 02593

Flanged flexible connector **STS 280** b) No. 01231

Counter flange **FR 280** No. 01214

Flat flange **FF 280** No. 04942

Flexible connecting sleeve **FM 280** b) No. 01673

Protection grille duct side **SG 280** No. 01428

Mounting brackets **MK 280** (1 Set = 2 pcs) No. 01447

Vibration dampers for tensile load **SDZ 1** (1 set = 4 Pc) No. 01454
Vibration dampers for compression load **SDD 1** (1 set = 4 Pc) No. 01452

a) Shutter, motorised see Accessories product pages. b) Types for explosion-proof fans see above.

Other accessories	Page
b) Access. for expl.-proof fans	
Flanged flexible connector STS 280 Ex	Ref. no. 02502
Flexible connecting sleeve FM 280 Ex	Ref. no. 01689
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

VAR 315

Also available in version:

Dimensions VAR 315

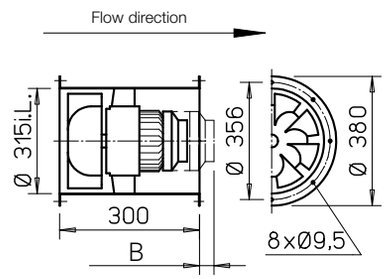

Dim. B see table
Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of high-quality plastic.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins.
Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
All types (except for 3~ explosion-proof) are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. For 1~ explosion-proof types, the thermal contacts are wired in series with the winding, automatic deactivation and reactivation after cool down.
Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram.
The lower sound pressure value can be determined using the diagram on the "Technical information" page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Dim. B Motor protrusion	Speed controller 5-step Pole chang. switch Type	Ref. no.	Motor protection circuit breaker for connecting built-in thermal contacts Type	No.	Vibration dampers Compr.	Vibration dampers Tens.
		min⁻¹	V m³/h	kW	V	A	A	No.	+°C	+°C	ca. kg	mm	Type	Ref. no.	Type	No.	Type	Type
Single-phase alternating current, 50 Hz, protection category IP54																		
VARW 315/4	06677	1440	2480	0.23	230	1.10	1.17	966	60	40	13.0	–	**MWS 3**[1]	01948	**MW**	01579	**SDD 1**	**SDZ 1**
Three-phase current, 50 Hz, protection category IP54																		
VARD 315/4	06678	1450	2510	0.22	400	0.60	0.70	469	60	40	13.0	–	**RDS 1**[1) 4)]	01314	**MD**	05849	**SDD 1**	**SDZ 1**
Two-speed, three-phase current, 50 Hz, ⅄/△ connection, protection category IP54																		
VARD 315/2/2	06679	2150/2650	3580/4670	0.9/1.35	400⅄/△	1.5/2.4	2.5	520	60	40	20.5	66	**RDS 4**[1)]	01316	**M 4**[2)]	01571	**SDD 1**	**SDZ 1**
Pole-changeable, 2 speeds (Dahlander winding ⅄/⅄⅄), Three-phase current, 50 Hz, protection category IP54													Pole chang. switch					
VARD 315/4/2	06777	1480/2890	2730/5340	0.42/1.83	400	1.2/3.3	–	472	60	–	20.5	54	**PDA 12**[3)]	05081	–	–	**SDD 1**	**SDZ 1**
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex d, alternating current 230 Volt, 50 Hz, protection category IP55**																		
VARW 315/4 Ex	06738	1450	2680	0.18	230	1.25	–	757	40	–	15.0	6	not permitted		–	–	**SDD 1**	**SDZ 1**
Ex **Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																		
VARD 315/4 Ex	06680	1420	2610	0.37	400	1.15	–	470	40	–	17.0	–	not permitted		not permitted		**SDD 1**	**SDZ 1**
VARD 315/2 Ex	06681	2885	5260	1.50	400	3.16	–	470	40	–	23.0	44	not permitted		not permitted		**SDD 1**	**SDZ 1**

* For Ex types: Motor ratings see information on page 20. [1)] incl. motor protection circuit breaker. [2)] includes operating and speed switch. [3)] Flush-m. version see Switch product page.
[4)] Frequency inverter with integrated sine filter, Type FU-BS 2.5, No. 05459, see product page FU.

Performance curves VAR 315/2

n=2700 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	91	62	73	84	86	87	82	74
$L_{PA,\ 4m}$	Air noise	dB(A)	71	42	53	64	66	67	62	54

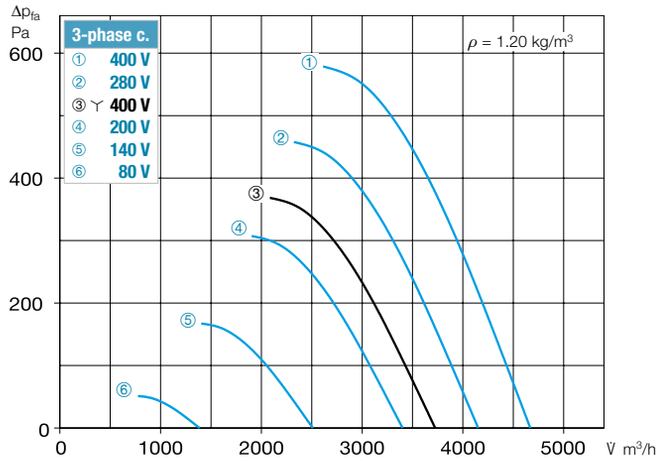

Performance curves VAR 315/4

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	76	52	65	70	72	70	63	53
$L_{PA,\ 4m}$	Air noise	dB(A)	56	32	45	50	52	50	43	33

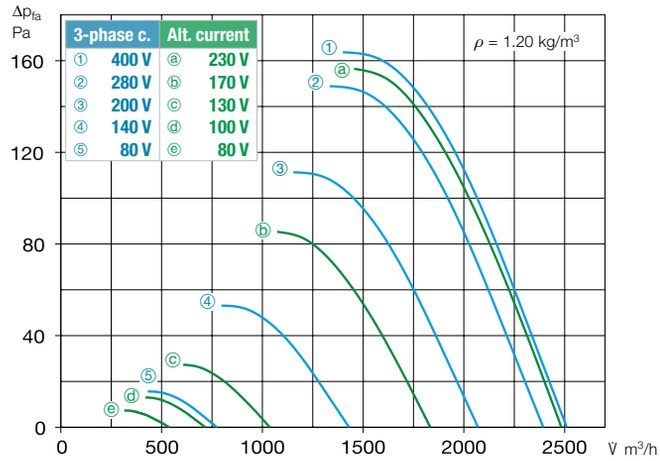

Accessories VAR 315 Description see page 278 ff.

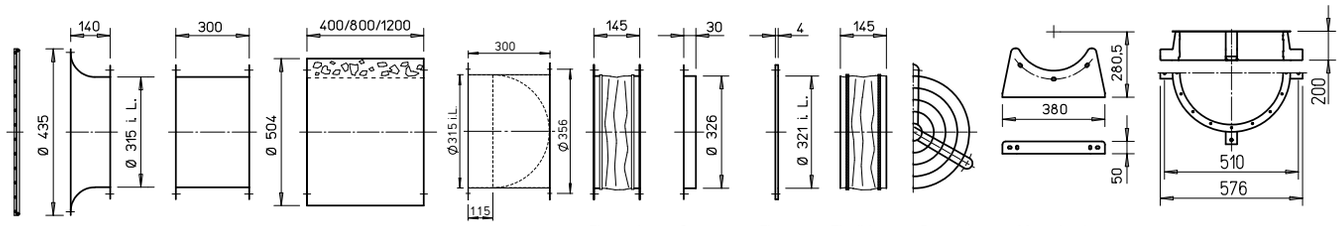

Intake nozzle with prot. grille **ASD-SGD 315** No. 01416

Extension duct **VR 315** No. 01404

Duct silencer- **RSD 315/..**

Duct shutter, automatic **RVS 315** [a] No. 02594

Flanged flexible connector **STS 315** [b] No. 01221

Counter flange **FR 315** No. 01204

Flat flange **FF 315** No. 04943

Flexible connecting sleeve **FM 315** [b] No. 01674

Protection grille duct side **SG 315** No. 01237

Mounting brackets **MK 315** (1 Set = 2 pcs) No. 01448

Mounting ring for vertical attachment **MRV 315** No. 01755

[a] Shutter, motorised see Accessories product pages. [b] Types for explosion-proof fans see above.

Axial and VAR fans

Other accessories	Page
[b] **Access. for expl.-proof fans**	
Flanged flexible connector STS 315 Ex	Ref. no. 02503
Flexible connecting sleeve FM 315 Ex	Ref. no. 01690
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

VAR 355

Also available in version:

Dimensions VAR 355

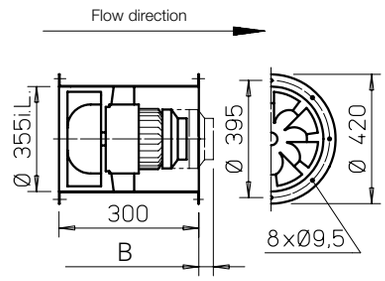

Dim. B see table
Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of high-quality plastic; made of hot-dip galvanised steel for types with n = 2800 min^{-1}.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium casing with cooling fins.
Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
All types (except for explosion-proof models and type VARD 355/4/2) are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram.
The lower sound pressure value can be determined using the diagram on the "Technical information" page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Dim. B Motor protrusion	Speed controller 5-step Pole chang. switch		Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers Compr.	Vibration dampers Tens.
		min⁻¹	V̇ m³/h	kW	V	A	A	No.	+°C	+°C	ca. kg	mm	Type	Ref. no.	Type	No.	Type	Type
Single-phase alternating current.50 Hz, protection category IP54																		
VARW 355/4	06682	1380	3470	0.37	230	3.30	2.35	966	60	40	21.0	22	**MWS 3**[1]	01948	**MW**	01579	**SDD 1**	**SDZ 1**
Three-phase current, 50 Hz, protection category IP54																		
VARD 355/4	06683	1440	3550	0.40	400	0.87	1.20	469	60	40	15.5	12	**RDS 1**[1) 5)]	01314	**MD**	05849	**SDD 1**	**SDZ 1**
Two-speed, three-phase current, 50 Hz, ⅄/△ connection, protection category IP54																		
VARD 355/2/2	06684	2415/2790	6040/7220	2.06/2.81	400⅄/△	3.40/5.40	–	520	60	30	30.3	94	**RDS 7**[1)]	01578	**M 4**[2)]	01571	**SDD 1**	**SDZ 1**
Pole-changeable, 2 speeds (Dahlander winding ⅄/⅄⅄), Three-phase current, 50 Hz, protection category IP54													Pole chang. switch					
VARD 355/4/2	06779	1470/2870	3830/7500	0.48/3.11	400	1.35/5.50	–	471	40	–	29.0	80	**PDA 12**[3)]	05081	–	–	**SDD 1**	**SDZ 1**
Ex **Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																		
VARD 355/4 Ex	06685	1420	3740	0.37	400	1.15	–	470	40	–	19.0	–	not permitted		not permitted		**SDD 1**	**SDZ 1**
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																		
VARD 355/2 Ex[4)]	06686	2910	7580	2.50	400	4.90	–	498	40	–	33.0	77	not permitted		not permitted		**SDD 1**	**SDZ 1**

* For Ex types: Motor ratings see information on page 20. [1)] incl. motor protection circuit breaker. [2)] includes operating and speed switch. [3)] Flush-m. version see Switch product page.
[4)] A vibration monitoring system (on-site) must be provided according to DIN EN 14986. [5)] Frequency inverter with integrated sine filter, Type FU-BS 2.5, No. 05459, see product page FU.

Performance curves VAR 355/2

n=2800 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	95	65	76	88	90	90	86	77
$L_{PA,\ 4m}$	Air noise	dB(A)	75	45	56	68	70	70	66	57

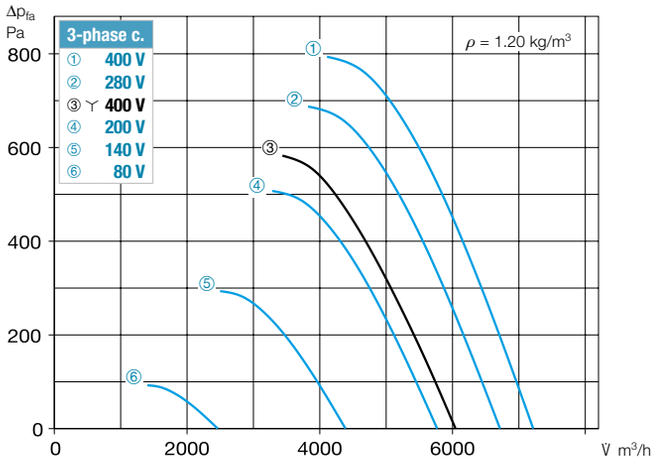

Performance curves VAR 355/4

n=1400 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	80	55	69	73	76	73	66	56
$L_{PA,\ 4m}$	Air noise	dB(A)	60	35	49	53	56	53	46	36

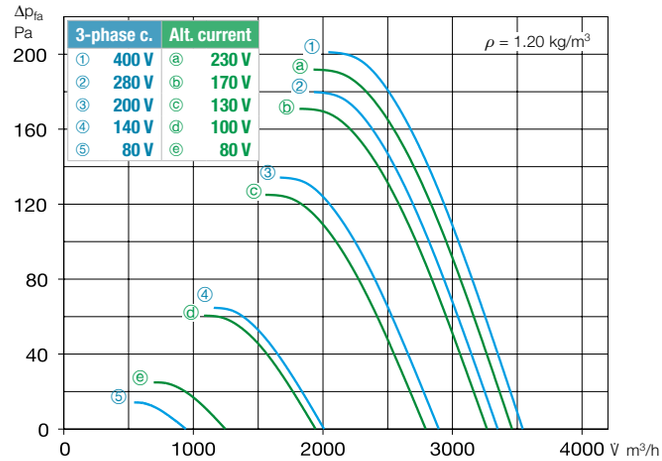

Accessories VAR 355 Description see page 278 ff.

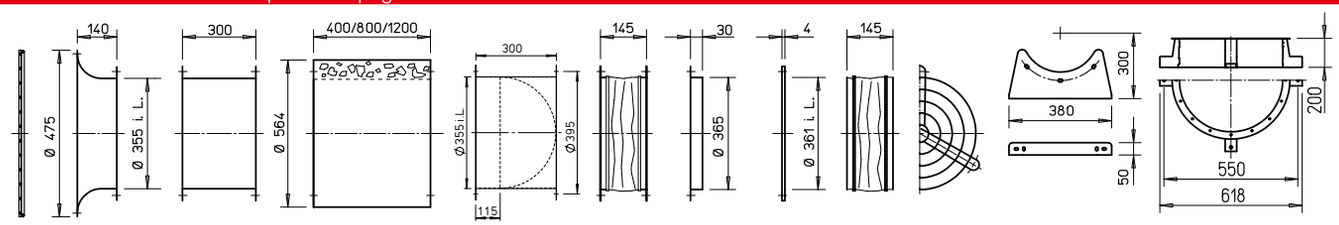

Intake nozzle with prot. grille **ASD-SGD 355** No. 01417

Extension duct **VR 355** No. 01405

Duct silencer- **RSD 355/..**

Duct shutter, automatic **RVS 355** a) No. 02595

Flanged flexible connector **STS 355** b) No. 01222

Counter flange **FR 355** No. 01205

Flat flange **FF 355** No. 04944

Flexible connecting sleeve **FM 355** b) No. 01675

Protection grille duct side **SG 355** No. 01238

Mounting brackets **MK 355** (1 Set = 2 pcs) No. 01448

Mounting ring for vertical attachment **MRV 355** No. 01759

a) Shutter, motorised see Accessories product pages. b) Types for explosion-proof fans see above.

Other accessories	Page
b) Access. for expl.-proof fans	
Flanged flexible connector STS 355 Ex	Ref. no. 02504
Flexible connecting sleeve FM 355 Ex	Ref. no. 01691
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

VAR 400

Also available in version:

Dimensions VAR 400

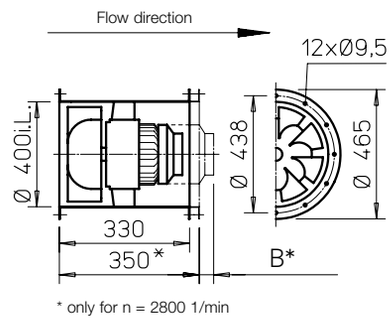

Dim. B see table
Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.
Types with n = 2800 min^{-1} welded casing, hot-dip galvanised.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of hot-dip galvanised steel.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium or grey cast iron casing with cooling fins. Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
All types (except for explosion-proof models and type VARD 400/4/2) are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram.
The lower sound pressure value can be determined using the diagram on the "Technical information" page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Dim. B Motor protrusion	Speed controller 5-step Pole chang. switch		Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers Compr.	Vibration dampers Tens.
		min^{-1}	V m³/h	kW	V	A	A	No.	+°C	+°C	ca. kg	mm	Type	Ref. no.	Type	No.	Type	Type
Single-phase alternating current.50 Hz, protection category IP54																		
VARW 400/4	06688	1375	5130	0.70	230	3.00	3.35	967	60	40	22.5	–	**MWS 5**[1]	01949	**MW**	01579	**SDD 1**	**SDZ 1**
Three-phase current, 50 Hz, protection category IP54																		
VARD 400/4	06690	1400	5240	0.72	400	1.95	2.00	469	60	40	22.5	–	**RDS 4**[1) 5)]	01316	**MD**	05849	**SDD 1**	**SDZ 1**
Two-speed, three-phase current, 50 Hz, ⅄/△ connection, protection category IP54																		
VARD 400/2/2	06691	2475/2800	8320/10610	3.63/4.95	400⅄/△	5.75/7.95	–	520	60	40	74.0	202	**RDS 11**[1)]	01332	**M 4**[2)]	01571	**SDD 1**	**SDZ 2**
Pole-changeable, 2 speeds (Dahlander winding ⅄/⅄⅄), Three-phase current, 50 Hz, protection category IP54													Pole chang. switch					
VARD 400/4/2	06782	1400/2890	5220/10700	0.80/5.90	400	3.03/8.69	–	471	40	–	74.0	207	**PDA 12**[3)]	05081	–	–	**SDD 1**	**SDZ 2**
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																		
VARD 400/6 Ex	06692	925	3465	0.25	400	0.80	–	470	40	–	21.0	–	not permitted		not permitted		**SDD 1**	**SDZ 1**
VARD 400/4 Ex	06693	1440	5360	0.55	400	1.32	–	470	40	–	25.0	–	not permitted		not permitted		**SDD 1**	**SDZ 1**
VARD 400/2 Ex[4)]	06694	2920	10950	4.60	400	9,10	–	498	40	–	83.0	255	not permitted		not permitted		**SDD 2**	**SDZ 2**

* For Ex types: Motor ratings see information on page 20. [1)] incl. motor protection circuit breaker. [2)] includes operating and speed switch. [3)] Flush-m. version see Switch product page.
[4)] A vibration monitoring system (on-site) must be provided according to DIN EN 14986. [5)] Frequency inverter with integrated sine filter, Type FU-BS 2.5, No. 05459, see product page FU.

Performance curves VAR 400/2

n=2800 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	98	69	80	91	94	94	90	81
$L_{PA,\ 4m}$	Air noise	dB(A)	78	49	60	71	74	74	70	61

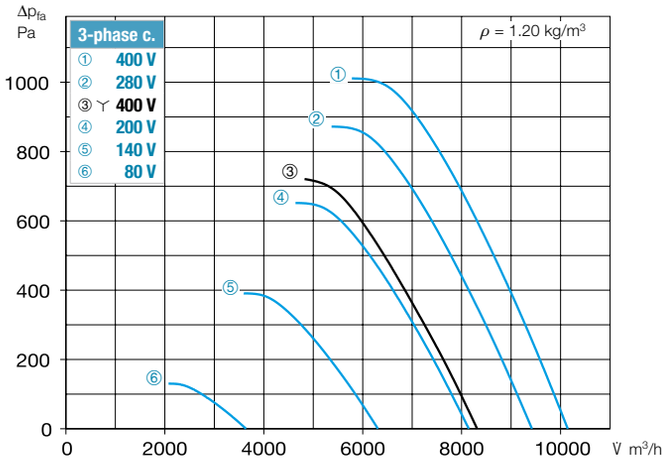

Performance curves VAR 400/4

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	83	59	72	77	79	77	70	60
$L_{PA,\ 4m}$	Air noise	dB(A)	63	39	52	57	59	57	50	40

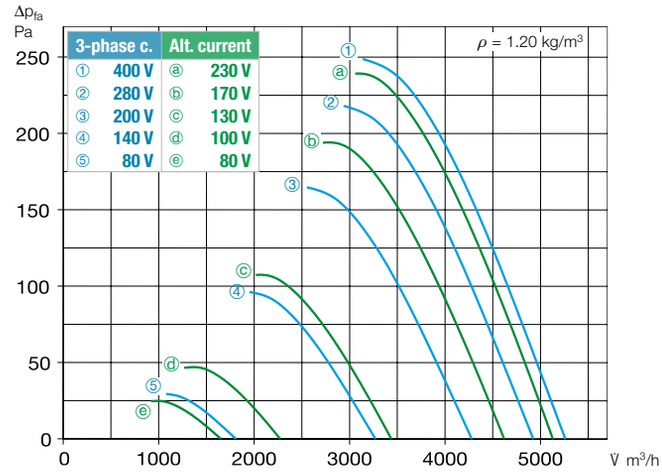

Performance curve VAR 400/6

n=930 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	72	56	62	68	68	64	56	47
$L_{PA,\ 4m}$	Air noise	dB(A)	52	36	42	48	48	44	36	27

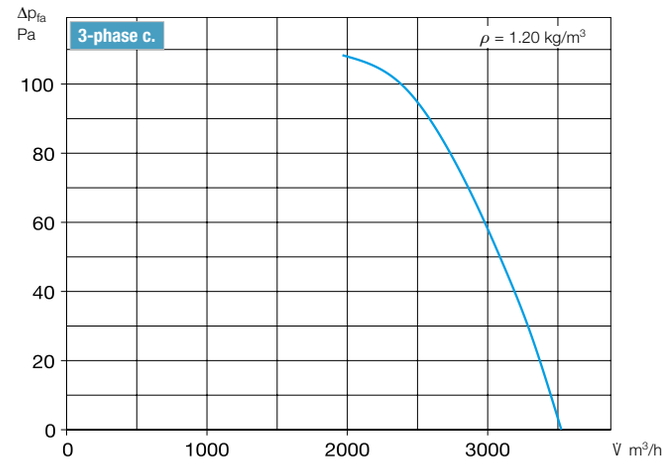

Other accessories	Page
[b]Access. for expl.-proof fans	
Flanged flexible connector STS 400 Ex	Ref. no. 02505
Flexible connecting sleeve FM 400 Ex	Ref. no. 01692
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

Accessories VAR 400 Description see page 278 ff.

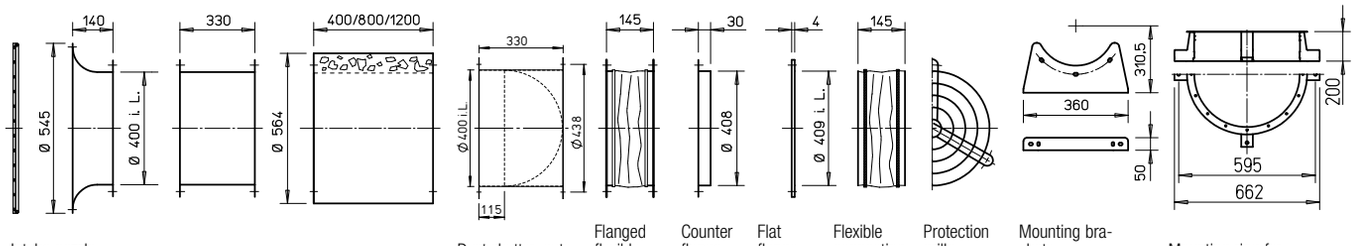

Intake nozzle with prot. grille **ASD-SGD 400** No. 01418

Extension duct **VR 400** No. 01406

Duct silencer- **RSD 400/..**

Duct shutter, automatic **RVS 400** [a] No. 02596

Flanged flexible connector **STS 400** [b] No. 01223

Counter flange **FR 400** No. 01206

Flat flange **FF 400** No. 04945

Flexible connecting sleeve **FM 400** [b] No. 01676

Protection grille duct side **SG 400** No. 01239

Mounting brackets **MK 400** (1 Set = 2 pcs) No. 01449

Mounting ring for vertical attachment **MRV 400** No. 01760

[a] Shutter, motorised see Accessories product pages. [b] Types for explosion-proof fans see left page.

VAR 450

Also available in version:

Dimensions VAR 450

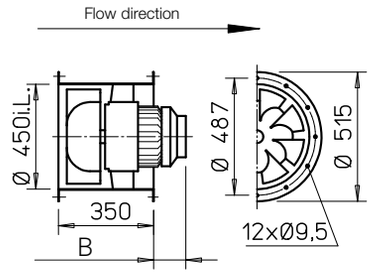

Dim. B see table
Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.
Types with n = 2800 min^{-1} welded casing, hot-dip galvanised.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of hot-dip galvanised steel.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium or grey cast iron casing with cooling fins. Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
All types (except for explosion-proof models) are equipped with thermal contacts or PTC thermistors. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram.
The lower sound pressure value can be determined using the diagram on the "Technical information" page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Dim. B Motor protrusion	Speed controller 5-step Pole chang. switch		Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers Compr.	Vibration dampers Tens.
		min^{-1}	V m^3/h	kW	V	A	A	No.	+°C	+°C	ca. kg	mm	Type	Ref. no.	Type	No.	Type	Type
Single-phase alternating current.50 Hz, protection category IP54																		
VARW 450/4	06736	1330	7180	1.47	230	6.50	7.00	968	60	40	45.0	145	**MWS 7.5**[1]	01950	**MW**	01579	**SDD 1**	**SDZ 1**
Three-phase current, 50 Hz, protection category IP54																		
VARD 450/2	06698	2950	14210	8.03	400	13.8	–	776	60	–	95.0	252	**FU-CS 18**[1) 5)]	05469	**MSA**[3]	01289	**SDD 2**	**SDZ 2**
Two-speed, three-phase current, 50 Hz, Y/△ connection, protection category IP54																		
VARD 450/4/4	06697	1100/1370	5930/7390	0.74/1.00	400Y/△	1.2/2.3	2.3	520	60	40	45.0	145	**RDS 4**[1]	01316	**M 4**[2]	01571	**SDD 1**	**SDZ 1**
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**													Pole chang. switch					
VARD 450/6 Ex	06699	925	5020	0.25	400	0.80	–	470	40	–	48.0	97	not permitted		not permitted		**SDD 1**	**SDZ 1**
VARD 450/4 Ex	06700	1450	7640	1.00	400	2.25	–	470	40	–	51.0	173	not permitted		not permitted		**SDD 1**	**SDZ 1**
VARD 450/2 Ex[4]	06701	2935	15810	7.50	400	14.20	–	498	40	–	155.0	259	not permitted		not permitted		**SDD 2**	**SDZ 2**

* For Ex types: Motor ratings see information on page 20. [1] incl. motor protection circuit breaker. [2] includes operating and speed switch. [3] for PTC thermistor temperature sensor.
[4] A vibration monitoring system (on-site) must be provided according to DIN EN 14986. [5] with integrated sine filter, see product page FU.

Performance curve VAR 450/2

n=2800 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	103	73	84	95	98	98	94	85
$L_{PA,\ 4m}$	Air noise	dB(A)	83	53	64	75	78	78	74	65

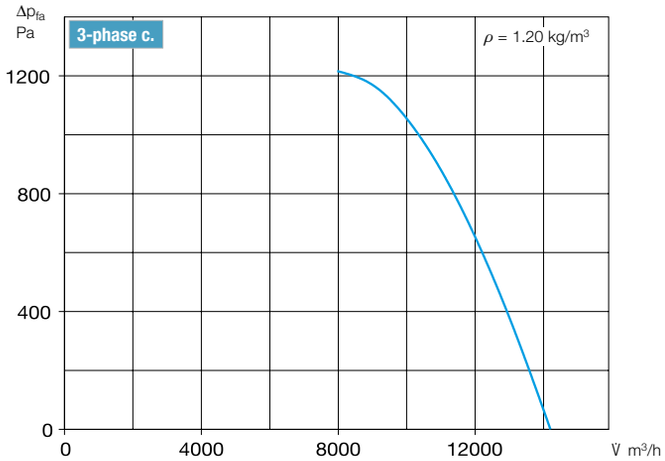

Performance curves VAR 450/4

n=1400 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	87	62	76	81	83	80	74	64
$L_{PA,\ 4m}$	Air noise	dB(A)	67	42	56	61	63	60	54	44

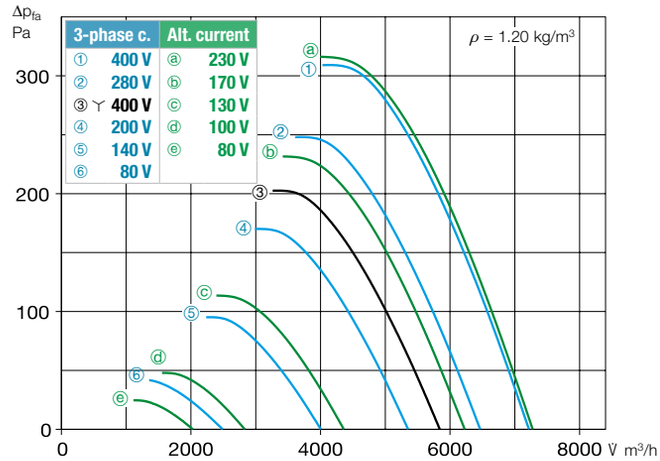

Performance curve VAR 450/6

n=930 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	76	60	65	71	72	67	59	51
$L_{PA,\ 4m}$	Air noise	dB(A)	56	40	45	51	52	47	39	31

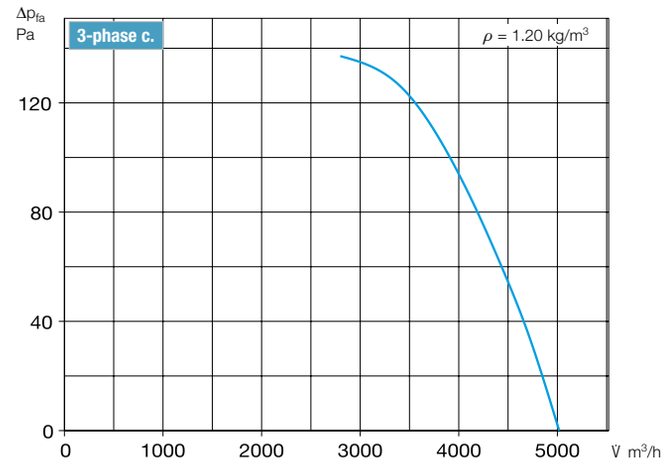

Other accessories	Page
[b]Access. for expl.-proof fans	
Flanged flexible connector STS 450 Ex	Ref. no. 02506
Flexible connecting sleeve FM 450 Ex	Ref. no. 01693
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

Accessories VAR 450 Description see page 278 ff.

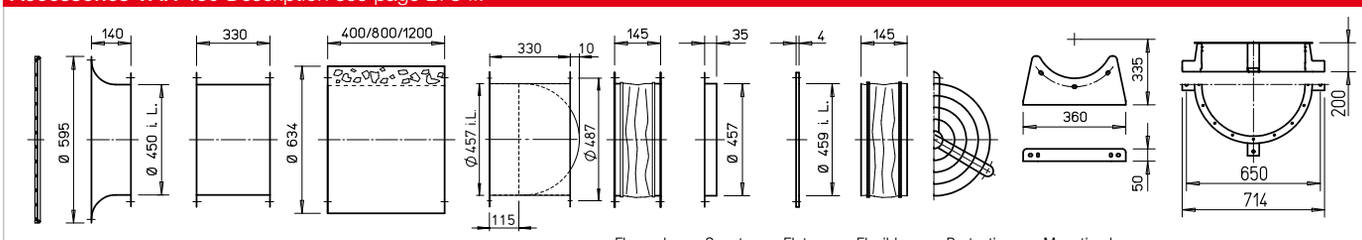

Intake nozzle with prot. grille **ASD-SGD 450** No. 01419

Extension duct **VR 450** No. 01407

Duct silencer- **RSD 450/..**

Duct shutter, automatic **RVS 450** [a] No. 02597

Flanged flexible connector **STS 450** [b] No. 01224

Counter flange **FR 450** No. 01207

Flat flange **FF 450** No. 04946

Flexible connecting sleeve **FM 450** [b] No. 01677

Protection grille duct side **SG 450** No. 01240

Mounting brackets **MK 450** (1 Set = 2 pcs) No. 01449

Mounting ring for vertical attachment **MRV 450** No. 01761

[a] Shutter, motorised see Accessories product pages. [b] Types for explosion-proof fans see left page.

VAR 500

Also available in version:

Dimensions VAR 500

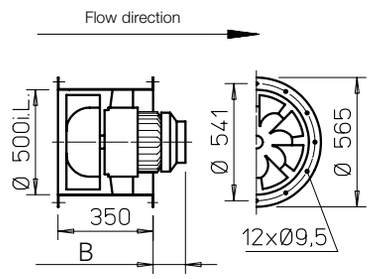

Dim. B see table
Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.
Types with n = 2800 min^{-1} welded casing, hot-dip galvanised.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of hot-dip galvanised steel.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium or grey cast iron casing with cooling fins. Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
All types (except for explosion-proof models) are equipped with thermal contacts or PTC thermistors. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram. The lower sound pressure value can be determined using the diagram on the "Technical information" page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Dim. B Motor protrusion	Speed controller 5-step Pole chang. switch		Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers Compr.	Vibration dampers Tens.
		min^{-1}	V m³/h	kW	V	A	A	No.	+°C	+°C	ca. kg	mm	Type	Ref. no.	Type	No.	Type	Type
Single-phase alternating current.50 Hz, protection category IP5																		
VARW 500/4	06739	1340	9920	2.02	230	9.10	9.10	968	60	40	70.0	181	**MWS 10**[1]	01946	**MW**	01579	**SDD 2**	**SDZ 2**
Three-phase current, 50 Hz, protection category IP54																		
VARD 500/2	06705	2935	21730	15.70	400	29.00	–	776	40	–	180.0	367	**FU-CS 32**[1) 5)]	05471	**MSA**[3)]	01289	**SDD 2**	**SDZ 3**
Two-speed, three-phase current, 50 Hz, ⋎/△ connection, protection category IP54																		
VARD 500/4/4	06704	1120/1370	8360/10070	1.2/1.8	400⋎/△	2.1/3.9	3.9	520	60	40	70.0	126	**RDS 7**[1)]	01578	**M 4**[2)]	01571	**SDD 2**	**SDZ 2**
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**													Pole chang. switch					
VARD 500/6 Ex	06706	945	6810	0.55	400	1.60	–	470	40	–	70.0	121	not permitted		not permitted		**SDD 2**	**SDZ 2**
VARD 500/4 Ex	06707	1445	10470	2.00	400	4,20	–	470	40	–	75.0	235	not permitted		not permitted		**SDD 2**	**SDZ 2**

* For Ex types: Motor ratings see information on page 20. 1) incl. motor protection circuit breaker. 2) includes operating and speed switch. 3) for PTC thermistor temperature sensor.
4) A vibration monitoring system (on-site) must be provided according to DIN EN 14986. 5) with integrated sine filter, see product page FU.

Performance curve VAR 500/2

n=2900 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	106	76	87	99	101	101	97	89
$L_{PA,\ 4m}$	Air noise	dB(A)	86	56	67	79	81	81	77	69

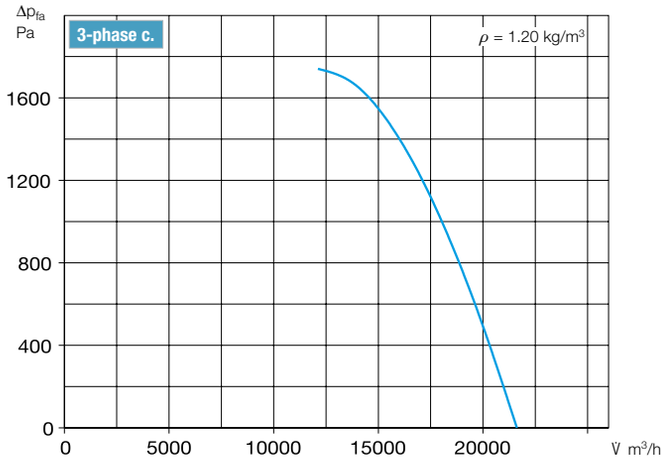

Performance curves VAR 500/4

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	90	66	79	84	86	84	77	67
$L_{PA,\ 4m}$	Air noise	dB(A)	70	46	59	64	66	64	57	47

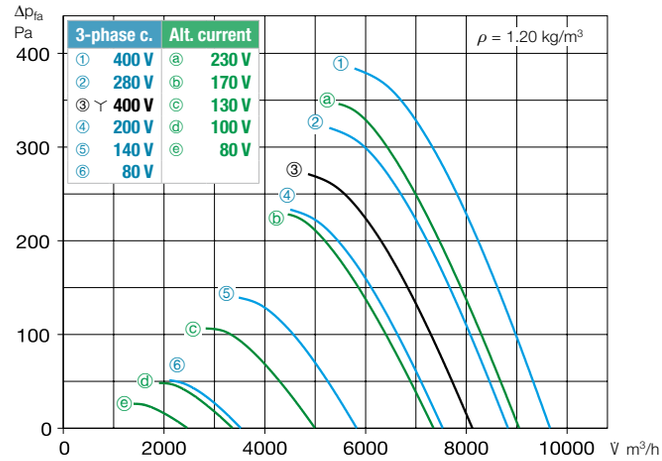

Performance curve VAR 500/6

n=930 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	79	63	69	74	75	71	63	54
$L_{PA,\ 4m}$	Air noise	dB(A)	59	43	49	54	55	51	43	34

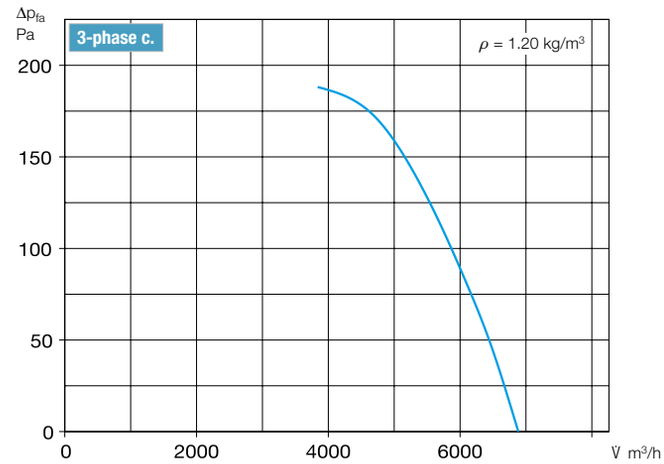

Other accessories	Page
b)Access. for expl.-proof fans	
Flanged flexible connector STS 500 Ex	Ref. no. 02507
Flexible connecting sleeve FM 500 Ex	Ref. no. 01694
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

Accessories VAR 500 Description see page 278 ff.

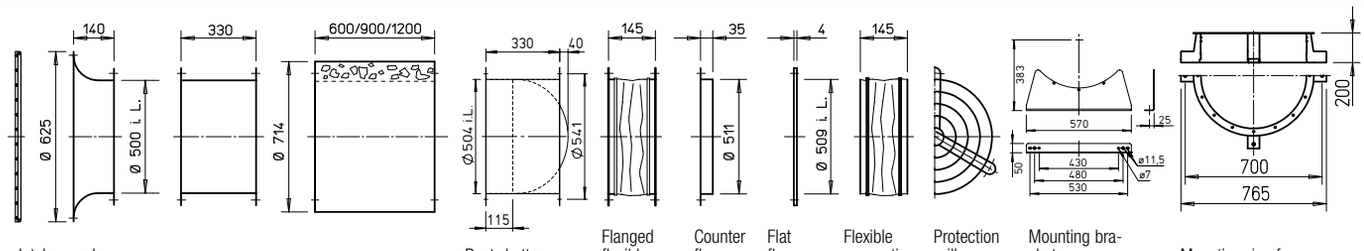

Intake nozzle with prot. grille **ASD-SGD 500** No. 01420

Extension duct **VR 500** No. 01408

Duct silencer- **RSD 500/..**

Duct shutter, automatic **RVS 500** a) No. 02598

Flanged flexible connector **STS 500** b) No. 01225

Counter flange **FR 500** No. 01208

Flat flange **FF 500** No. 04947

Flexible connecting sleeve **FM 500** b) No. 01678

Protection grille duct side **SG 500** No. 01241

Mounting brackets **MK 500** (1 Set = 2 pcs) No. 00674

Mounting ring for vertical attachment **MRV 500** No. 01740

a) Shutter, motorised see Accessories product pages. b) Types for explosion-proof fans see left page.

VAR 560

Also available in version:

Dimensions VAR 560

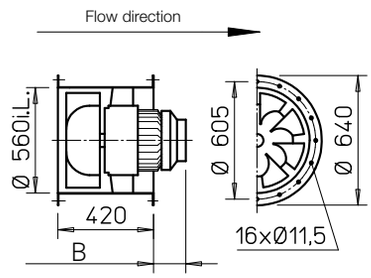

Dim. B see table
Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of hot-dip galvanised steel.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium or grey cast iron casing with cooling fins. Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram.
Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
All types (except for explosion-proof models) are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.
Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram.
The lower sound pressure value can be determined using the diagram on the "Technical information" page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Dim. B Motor protrusion	Speed controller 5-step Pole chang. switch Type	Ref. no.	Motor protection circuit breaker for connecting built-in thermal contacts Type	No.	Vibration dampers Compr.	Vibration dampers Tens.
		min⁻¹	V̇ m³/h	kW	V	A	A	No.	+°C	+°C	ca. kg	mm						
Two-speed, three-phase current, 50 Hz, ⋎/△ connection, protection category IP54																		
VARD 560/4/4	06711	1130/1380	10780/12810	2.20/3.00	400⋎/△	3.5/5.9	6.5	520	60	40	95.0	159	**RDS 7**[1]	01578	**M 4**[2]	01571	**SDD 2**	**SDZ 2**
Pole-changeable, 2 speeds (Dahlander winding ⋎/⋎⋎), Three-phase current, 50 Hz, protection category IP54													Pole chang. switch					
VARD 560/8/4	06790	705/1440	6590/13570	0.90/3.60	400	2.9/8.3	–	471	60	–	100.0	175	**PDA 12**[3]	05081	–	–	**SDD 2**	**SDZ 2**
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																		
VARD 560/8 Ex	06712	700	7120	0.37	400	1.61	–	470	40	–	85.0	84	not permitted		not permitted		**SDD 2**	**SDZ 2**
VARD 560/6 Ex	06713	950	9360	1.10	400	2.70	–	470	40	–	90.0	180	not permitted		not permitted		**SDD 2**	**SDZ 2**
VARD 560/4 Ex[4]	06714	1440	14980	3.60	400	6.90	–	470	40	–	135.0	305	not permitted		not permitted		**SDD 2**	**SDZ 2**

* For Ex types: Motor ratings see information on page 20. [1] incl. motor protection circuit breaker. [2] includes operating and speed switch. [3] Flush-m. version see Switch product page.
[4] A vibration monitoring system (on-site) must be provided according to DIN EN 14986.

Performance curves VAR 560/4

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	93	69	83	87	90	87	80	70
$L_{PA,\ 4m}$	Air noise	dB(A)	73	49	63	67	70	67	60	50

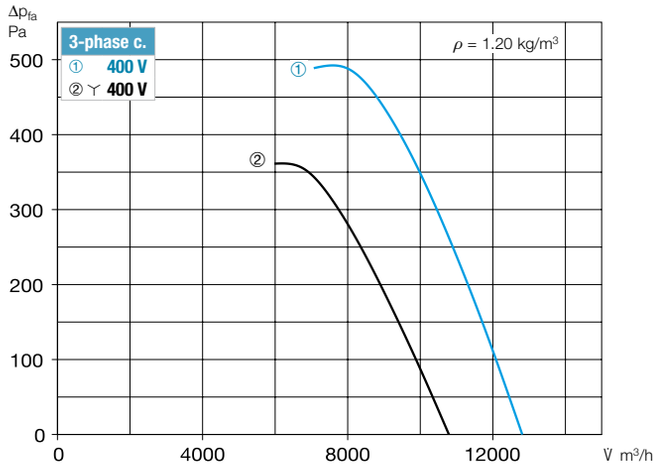

Performance curve VAR 560/6

n=950 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	83	67	72	78	79	75	67	58
$L_{PA,\ 4m}$	Air noise	dB(A)	63	47	52	58	59	55	47	38

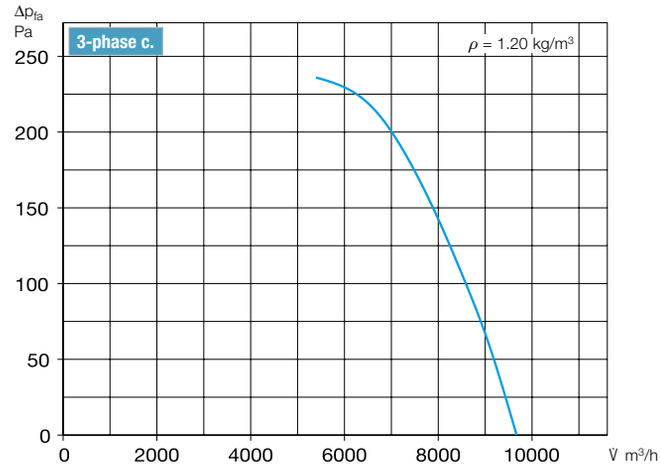

Performance curve VAR 560/8

n=725 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	76	61	68	72	72	66	58	51
$L_{PA,\ 4m}$	Air noise	dB(A)	56	41	48	52	52	46	38	31

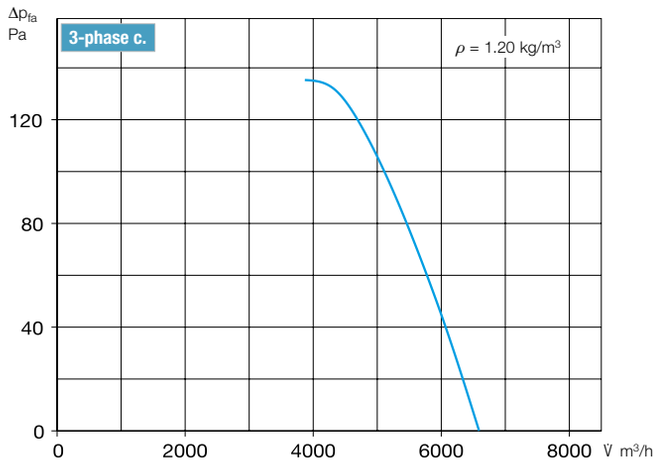

Other accessories	Page
[b]Access. for expl.-proof fans	
Flanged flexible connector STS 560 Ex	Ref. no. 02508
Flexible connecting sleeve FM 560 Ex	Ref. no. 02508
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

Accessories VAR 560 Description see page 278 ff.

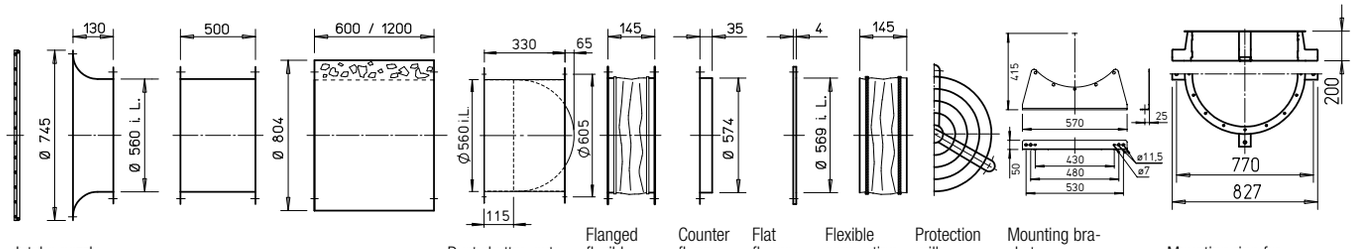

Intake nozzle with prot. grille **ASD-SGD 560** No. 01421

Extension duct **VR 560** No. 01409

Duct silencer- **RSD 560/..**

Duct shutter, automatic **RVS 560** [a] No. 02599

Flanged flexible connector **STS 560** [b] No. 01226

Counter flange **FR 560** No. 01209

Flat flange **FF 560** No. 04948

Flexible connecting sleeve **FM 560** [b] No. 01679

Protection grille duct side **SG 560** No. 01242

Mounting brackets **MK 560** (1 Set = 2 pcs) No. 00675

Mounting ring for vertical attachment **MRV 560** No. 01741

[a] Shutter, motorised see Accessories product pages. [b] Types for explosion-proof fans see left page.

VAR 630

Also available in version:

Dimensions VAR 630

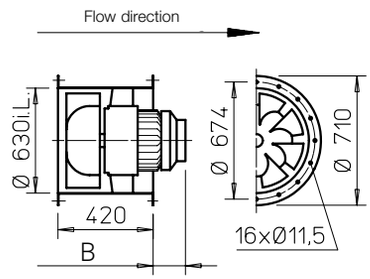

Dim. B see table
Dim. in mm

Casing
Duct with double-sided flange DIN 24155 p. 3. welded construction, hot-dip galvanised. Welded-in guide wheel with inner hub for mounting the flange motor, hot-dip galvanised.

Impeller
Optimised for high pressure and volume performance.
Special development with spatially curved blades made of hot-dip galvanised steel.

Drive
Directly through maintenance-free flange motor. Closed design type IP54. Aluminium or grey cast iron casing with cooling fins.
Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

Power control
Continuously variable (0-100 %) through the use of a frequency inverter (except for pole-changeable models). The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

Electrical connection
Standard terminal box (protection category IP55) on outside of duct.

Installation
Installation possible in any position; but be aware of any condensate drain holes depending on usage.

Motor protection
Type VARD 630/4 is equipped with PTC thermistors. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.
Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

Noise levels
See sound power information above performance diagram.
The lower sound pressure value can be determined using the diagram on the “Technical information” page.
See page 14 f for noise emissions and room acoustics.

Reference	Page
Techn. description	256
Selection table	257
Planning information	14 ff.

Special design
Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow.	Power consump.*	Voltage	Current consumption* at rated voltage	Current consumption* with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Dim. B Motor protrusion	Speed controller 5-step Pole chang. switch Type	Ref. no.	Motor protection circuit breaker for connecting built-in thermal contacts Type	No.	Vibration dampers Compr.	Vibration dampers Tens.
		min⁻¹	V̇ m³/h	kW	V	A	A	No.	+°C	+°C	ca. kg	mm						
Three-phase current, 50 Hz, protection category IP5																		
VARD 630/4	06717	1400	21320	6.20	400	12.0/6.9	–	776	60	–	145.0	230	**FU-BS 16**[1]	05463	**MSA**[4]	01289	**SDD 2**	**SDZ 2**
Pole-changeable, 2 speeds (Dahlander winding ⅄/⅄⅄), Three-phase current, 50 Hz, protection category IP54													Pole chang. switch					
VARD 630/8/4	06792	715/1430	10590/21170	1.40/5.50	400	5.0/12.0	–	471	60	–	145.0	255	**PDA 12**[3]	05081	–	–	**SDD 2**	**SDZ 2**
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																		
VARD 630/8 Ex	06718	705	10220	0.95	400	2.75	–	470	40	–	110.0	148	not permitted		not permitted		**SDD 2**	**SDZ 2**
VARD 630/6 Ex	06719	965	13990	1.90	400	5.1	–	470	40	–	130.0	210	not permitted		not permitted		**SDD 2**	**SDZ 2**
VARD 630/4 Ex[5]	06720	1460	21400	6.80	400	13.4	–	498	40	–	165.0	251	not permitted		not permitted		**SDD 2**	**SDZ 3**

* For Ex types: Motor ratings see information on page 20. [1] incl. motor protection circuit breaker and sine filter. [2] includes operating and speed switch.
[3] Flush-m. version see Switch product page. [4] for PTC thermistor temperature sensor. [5] A vibration monitoring system (on-site) must be provided according to DIN EN 14986.

Performance curve VAR 630/4

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	97	73	89	91	93	91	84	74
$L_{PA,\ 4m}$	Air noise	dB(A)	77	53	69	71	73	71	64	54

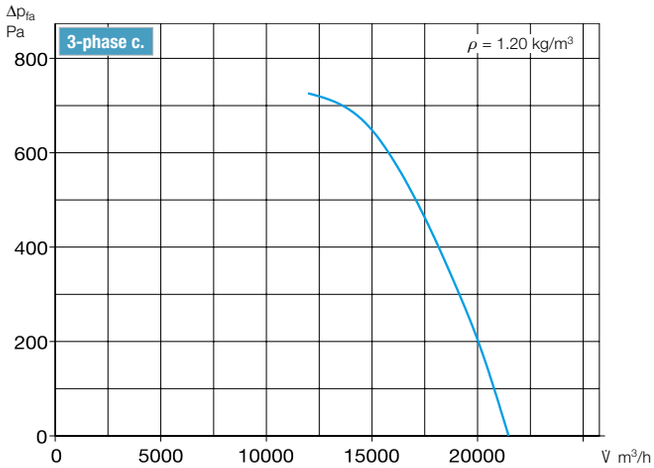

Performance curve VAR 630/6

n=1450 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	87	70	76	82	83	78	70	62
$L_{PA,\ 4m}$	Air noise	dB(A)	67	50	56	62	63	58	50	42

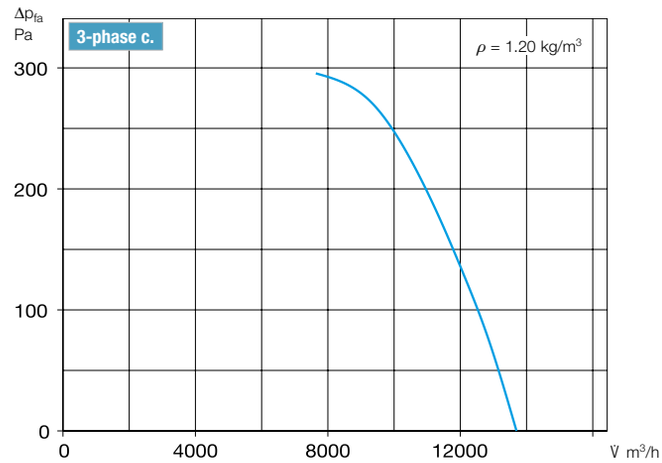

Performance curve VAR 630/8

n=725 1/min

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Air noise	dB(A)	80	65	71	76	75	70	62	55
$L_{PA,\ 4m}$	Air noise	dB(A)	60	45	51	56	55	50	42	35

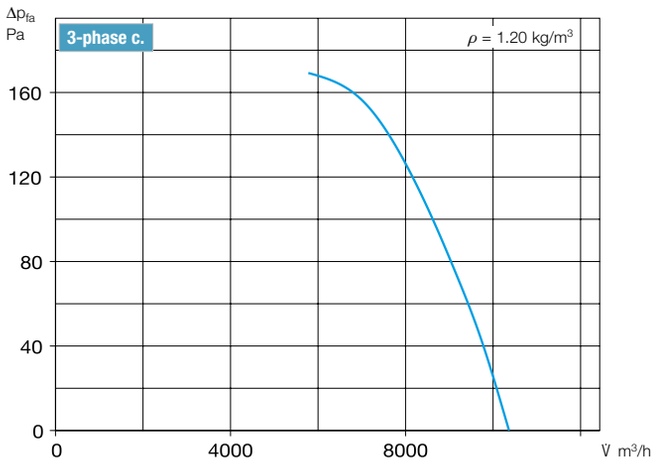

Other accessories	Page
[b]Access. for expl.-proof fans	
Flanged flexible connector STS 630 Ex	Ref. no. 02509
Flexible connecting sleeve FM 630 Ex	Ref. no. 01696
Filters and silencers	483 ff.
Shutters and ventilation grilles	563 ff.
Speed controllers, controllers and switches	601 ff.

Accessories VAR 630 Description see page 278 ff.

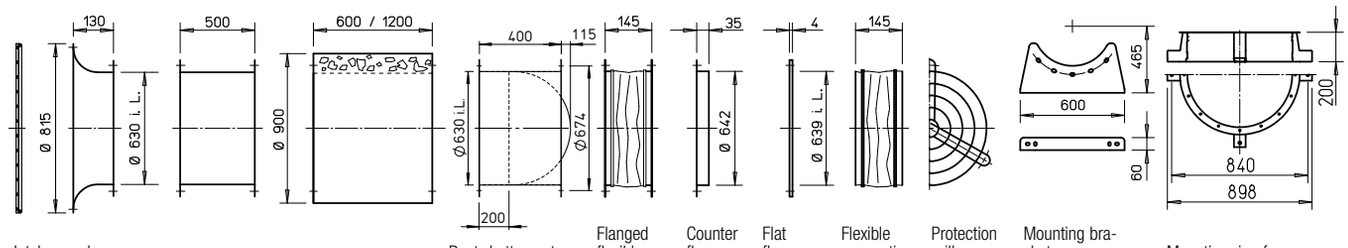

Intake nozzle with prot. grille **ASD-SGD 630** No. 01422

Extension duct **VR 630** No. 01410

Duct silencer- **RSD 630/..**

Duct shutter, automatic **RVS 630** [a] No. 02600

Flanged flexible connector **STS 630** [b] No. 01228

Counter flange **FR 630** No. 01211

Flat flange **FF 630** No. 04949

Flexible connecting sleeve **FM 630** [b] No. 01680

Protection grille duct side **SG 630** No. 01243

Mounting brackets **MK 630** (1 Set = 2 pcs) No. 01333

Mounting ring for vertical attachment **MRV 630** No. 01742

[a] Shutter, motorised see Accessories product pages. [b] Types for explosion-proof fans see left page.

Smooth installation guaranteed – **like clockwork.**

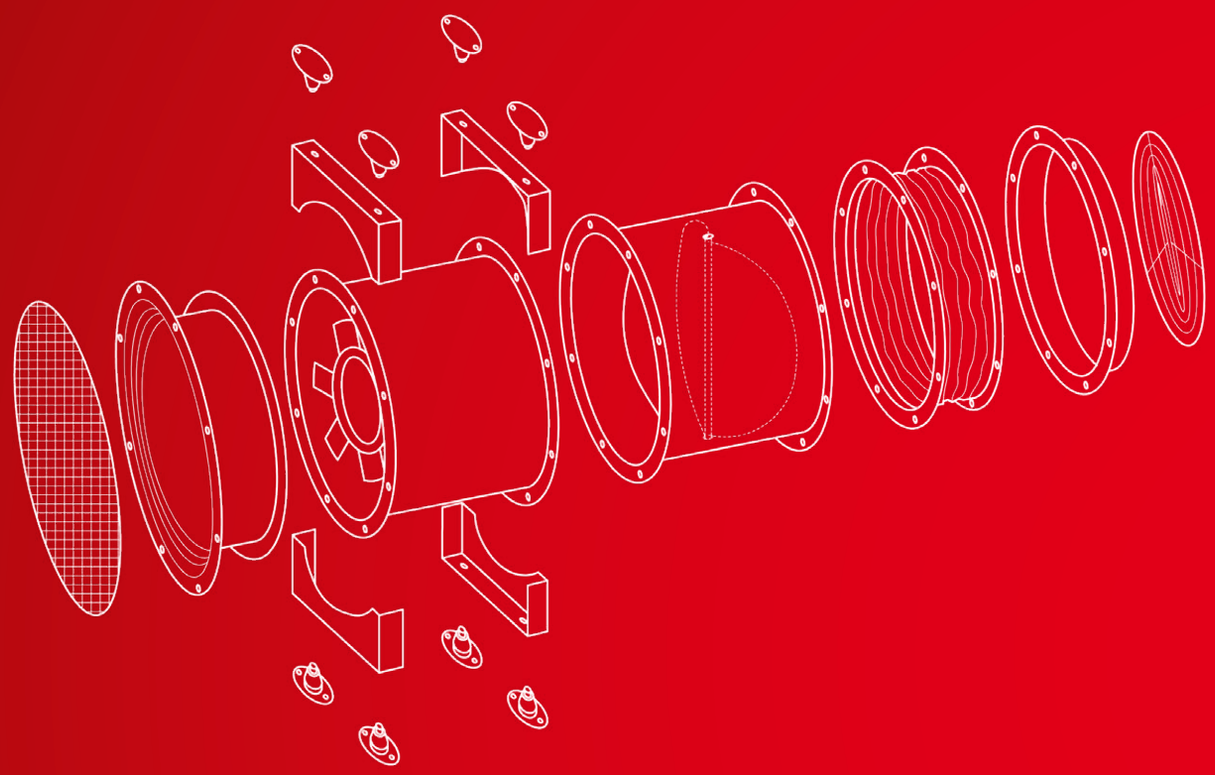

Installation accessories circular duct fans

Whatever the installation and duct connection requirements:
Helios' wide range includes the right system components. From the intake nozzle to the electric duct shutter and vibration dampers.

279ff

Silencers, air filters, heating elements

Helios air treatment components provide for clean, warm and calm air. The extensive range includes all sizes and capacities, perfectly tailored to Helios fans. This provides the necessary flexibility for planning and installation.

483ff

Shutters, ventilation grilles

Weather-proof and corrosion-free.
Made of break-resistant, UV-resistant plastic with a long service life. Helios shutters and weather protection grilles stand out due to their appealing design, robustness and ease of installation.

563ff

Speed controllers, frequency inverters, controllers, switches

In addition to the specific installation accessories for round duct fans, Helios offers a wide range of control and switching devices which are perfectly tailored to round duct fans.

601ff

ASD-SGD





Dim. in mm

Intake nozzle with protection grille and large entry radius. Made sheet. With flange on connection side in accordance with DIN 24155, p. 2. Protection grille for inlet side coverage in accordance with DIN EN ISO 13857.
ASD-RL version with ring line and protective grille prepared for volumetric flow measurement.
Accessories EDR, Ref. no. 01437.

Type	Ref. no.	Type	Ref. no.	Ø D	L	Ø D i.L.	Ø LK	Weight**
ASD 200*	01388	—	—	310	140	203	235	0.9
ASD-SGD 225	01413	—	—	345	140	225	259	2.5
ASD-SGD 250	01414	—	—	370	140	250	286	2.8
ASD-SGD 280	01415	**ASD-RL 280**	40622	400	140	280	322	3.2
ASD-SGD 315	01416	**ASD-RL 315**	40623	435	140	315	356	3.5
ASD-SGD 355	01417	**ASD-RL 355**	40624	475	140	355	395	4.0
ASD-SGD 400	01418	**ASD-RL 400**	40625	545	140	400	438	4.5
ASD-SGD 450	01419	**ASD-RL 450**	40626	595	140	450	487	5.7
ASD-SGD 500	01420	**ASD-RL 500**	40627	625	140	500	541	6.3
ASD-SGD 560	01421	**ASD-RL 560**	40628	745	130	560	605	7.0
ASD-SGD 630	01422	**ASD-RL 630**	40629	815	130	630	674	7.6
ASD-SGD 710	01423	**ASD-RL 710**	40630	955	200	710	751	19.5
ASD-SGD 800	01424	**ASD-RL 800**	40631	1060	200	800	837	22.3
ASD-SGD 900	01309	**ASD-RL 900**	40632	1140	200	900	934	25.0
ASD-SGD 1000	01310	**ASD-RL 1000**	40633	1240	200	1000	1043	28.5

* without protection grille. ** Weight aprx. kg

SG



Dim. in mm

Protection grille for outlet side coverage. Powder-coated, colour: silver metallic (galvanised from Ø 800).

Dimensions and mounting clips tailored to fan/flange pipe nominal size in accordance with DIN 24155, p. 2. DIN EN ISO 13857.

Type	Ref. no.	Ø D	Ø LK	Weight aprx. kg	Number of attachment points
SG 200	01216	190	235	0.1	3
SG 225	01215	224	259	0.2	3
SG 250	01236	241	286	0.2	3
SG 280	01428	270	322	0.3	4
SG 315	01237	310	356	0.4	4
SG 355	01238	350	395	0.4	4
SG 400	01239	390	438	0.5	3
SG 450	01240	450	487	0.6	3
SG 500	01241	490	541	0.7	3
SG 560	01242	550	605	0.9	4
SG 630	01243	630	674	1.5	4
SG 710	01244	710	751	1.8	4
SG 800	01245	790	837	2.2	4
SG 900	01246	890	934	2.7	4
SG 1000	01290	990	1043	3.5	4

RVS



Dim. in mm

Automatic duct shutter with spring return[1)]
Can be installed horizontally in any direction, vertically with through-flow from bottom to top. Shutter opening in flow direction; automatic function through fan operation. Spring mechanism outside of air flow. Locking force depends on fan power and installation position can be changed. Shutter and casing made of galvanised steel sheet, shutter made of aluminium for nominal size 225 – 560 mm. Double-sided flange. Holes pursuant to DIN 24155, p. 2.

Type [2)]	Ref. no.	Ø D i.L.	A	E	L	Ø LK	Weight aprx. kg
RVS 225	02591	225	—	115	300	259	3.0
RVS 250	02592	250	—	115	300	286	3.4
RVS 280	02593	280	—	115	300	322	3.9
RVS 315	02594	315	—	115	300	356	4.3
RVS 355	02595	355	—	115	300	395	5.0
RVS 400	02596	400	—	115	330	438	7.2
RVS 450	02597	454	10	115	330	487	10.4
RVS 500	02598	504	40	115	330	541	11.7
RVS 560	02599	560	65	115	330	605	16.1
RVS 630	02600	630	115	200	400	674	19.5
RVS 710	02601	710	155	200	400	751	26.5
RVS 800	02602	800	200	210	420	837	37.3
RVS 900	02603	900	250	210	420	934	41.8
RVS 1000	02604	1000	300	210	420	1043	47.3

[1)] Pressure loss diagram see page 566. [2)] Ambient temperature –30 to +100 °C.

RVM



Dim. in mm

Motorised duct shutter[1)]
like RVS, but can be installed horizontally and vertically in any direction and with a mounted spring return motor (outside of air flow). Elec. control parallel with fan; cable length 0.9 m, normally closed.

Ambient temperature	–30 to +60 °C
Protection category	IP54
Voltage/Frequency	230 V AC, 50/60 Hz
Power consumption	
– up to Ø 560 / from Ø 630	14 W/6.5 W
Shutter opening time, approx.	75 sec.
Wiring diagram no.	380.1

Type [3)]	Ref. no.	Ø D i.L.	B	C	L	A	Ø LK	Weight aprx. kg
RVM 225	02575	225	95	130	300	—	259	3.3
RVM 250	02576	250	95	130	300	—	286	3.7
RVM 280	02577	280	95	130	300	—	322	4.2
RVM 315	02578	315	95	130	300	—	356	4.6
RVM 355	02579	355	95	130	300	—	395	5.3
RVM 400	02580	400	95	130	330	—	438	7.5
RVM 450	02581	454	95	130	330	15	487	10.7
RVM 500	02582	504	95	130	330	40	541	12.0
RVM 560	02583	560	95	130	330	65	605	16.4
RVM 630	02609	630	150	225	400	115	674	21.0
RVM 710	02610	710	150	225	400	155	751	28.0
RVM 800	02614	800	150	225	420	200	837	37.8
RVM 900	02615	900	150	225	420	250	934	42.3
RVM 1000*	02616	1000	150	225	420	300	1043	47.8

[3)] Types RVM not for use in potentially explosive areas. * RVM 1000 only for horizontal throughflow.

VR



Dim. in mm

Extension duct

Pipe section with double-sided flanges and holes according to DIN 24155, p. 2. Made of hot-dip galvanised steel sheet for the extension of the fan shaft.
For types with protruding motor, for installation in pipeline. Prevents power losses in case of free outlet.

Type	Ref. no.	Ø D i.L.	L	Ø LK	Weight aprx. kg
VR 225	01401	225	300	259	2.5
VR 250	01402	250	300	286	2.8
VR 280	01403	280	300	322	3.2
VR 315	01404	315	300	356	3.5
VR 355	01405	355	300	395	4.0
VR 400	01406	400	330	438	6.0
VR 450	01407	454	330	487	9.0
VR 500	01408	504	330	541	10.0
VR 560	01409	560	500	605	14.0
VR 630	01410	630	500	674	15.5
VR 710	01411	710	500	751	21.5
VR 800	01412	800	420	837	31.0
VR 900	01311	900	420	934	34.0
VR 1000	01312	1000	420	1043	37.6

STS



Dim. in mm

Also suitable for: Ex

Flanged flexible connector

Flexible connector for installation between the fan and duct system. Prevents structure-borne noise transmission, bridges installation tolerances. Elastic sleeve made of silicone-free PVC fabric (max. +80 °C). With galvanised angle flange rings on both sides, dimensions according to DIN 24155 p. 2.

Type	Ref. no.	Ex Type*	Ref. no.	Ø D i.L.	Ø LK	Weight aprx. kg
STS 200	01219	—	—	205	235	1.3
STS 225	01218	**STS 225 Ex**	02500	229	259	1.1
STS 250	01220	**STS 250 Ex**	02501	252	286	1.3
STS 280	01231	**STS 280 Ex**	02502	288	322	1.5
STS 315	01221	**STS 315 Ex**	02503	322	356	1.8
STS 355	01222	**STS 355 Ex**	02504	361	395	2.3
STS 400	01223	**STS 400 Ex**	02505	404	438	2.5
STS 450	01224	**STS 450 Ex**	02506	453	487	3.8
STS 500	01225	**STS 500 Ex**	02507	507	541	3.4
STS 560	01226	**STS 560 Ex**	02508	570	605	4.5
STS 630	01228	**STS 630 Ex**	02509	638	674	4.6
STS 710	01229	**STS 710 Ex**	02510	711	751	7.0
STS 800	01233	**STS 800 Ex**	02511	801	837	7.5
STS 900	01234	**STS 900 Ex**	02512	898	934	7.5
STS 1000	01235	**STS 1000 Ex**	02513	1004	1043	15.0

* for explosion-proof fans.

FR / FF

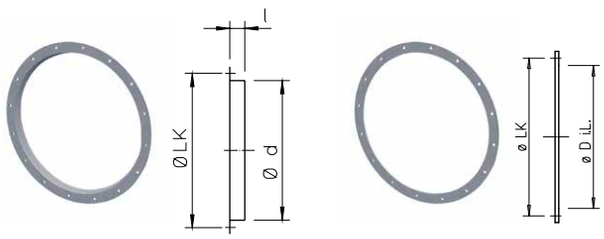

Dim. in mm

Counter flange FR/ Flat flange FF

Angle flange ring/flat flange ring made of galvanised steel sheet. Dimensions/holes according to DIN 24155 p. 2.

Type	Ref. no.	Type	Ref. no.	Ø LK	l	Ø D	Ø D i.L.	Weight aprx. kg
FR 200	01202	—	—	235	25	209	—	0.5
FR 225	01201	—	—	259	30	233	—	0.5
FR 250	01203	**FF 250**	04941	286	25	256	256	0.7
FR 280	01214	**FF 280**	04942	322	30	292	286	0.9
FR 315	01204	**FF 315**	04943	356	30	326	321	1.0
FR 355	01205	**FF 355**	04944	395	30	365	361	1.1
FR 400	01206	**FF 400**	04945	438	30	408	409	1.2
FR 450	01207	**FF 450**	04946	487	35	457	459	1.3
FR 500	01208	**FF 500**	04947	541	35	511	509	1.5
FR 560	01209	**FF 560**	04948	605	35	574	569	2.1
FR 630	01211	**FF 630**	04949	674	35	642	639	2.3
FR 710	01212	**FF 710**	04950	751	35	715	719	3.1
FR 800	01198	**FF 800**	04951	837	35	806	809	3.9
FR 900	01199	**FF 900**	04952	934	35	903	909	4.4
FR 1000	01210	**FF 1000**	04953	1043	35	1012	1009	9.5

FM



Dim. in mm

Also suitable for: Ex T120

Flexible connecting sleeve

incl. 2 hose clamps. Installation between fan and duct system. Prevents structure-borne noise transmission, bridges installation tolerances. Elastic sleeve made of silicone-free PVC fabric (+80 °C) or glass fabric (+120 °C).
UV- and weather resistant.
Dimensions according to DIN 24155, p. 2.

Type	Ref. no.	Ex Type*	No.	T120 Type**	No.	Ø D	Ø L	Weight aprx. kg
—	—	**FM 180 Ex**	01685	—	—	190	145	0.15
FM 200	01670	**FM 200 Ex**	01686	**FM 200 T120**	01654	213	145	0.2
FM 225	01671	**FM 225 Ex**	01687	—	—	235	145	0.2
FM 250	01672	**FM 250 Ex**	01688	**FM 250 T120**	01655	260	145	0.2
FM 280	01673	**FM 280 Ex**	01689	**FM 280 T120**	01656	296	145	0.2
FM 315	01674	**FM 315 Ex**	01690	**FM 315 T120**	01660	330	145	0.2
FM 355	01675	**FM 355 Ex**	01691	**FM 355 T120**	01658	369	145	0.3
FM 400	01676	**FM 400 Ex**	01692	**FM 400 T120**	01659	412	145	0.3
FM 450	01677	**FM 450 Ex**	01693	—	—	461	145	0.3
FM 500	01678	**FM 500 Ex**	01694	—	—	515	145	0.4
FM 560	01679	**FM 560 Ex**	01695	—	—	577	145	0.4
FM 630	01680	**FM 630 Ex**	01696	—	—	646	145	0.4
FM 710	01666	—	—	—	—	720	145	0.5

* for explosion-proof fans.
** predestined for process air up to +120 °C. Compliant with VDI 2052.

FVR



Dim. in mm

Flexible connector, round

Flexible connector, round (uninsulated), with lip seals on both sides, for connection to pipe systems. Prevents the transmission of structure-borne noise and bridges assembly tolerances. Elastic fabric sleeve (VDI 6022 compliant). Operating temperature range from -30 °C to +80 °C.

Type	Ref. no.	Ø A	B	C
FVR 100	40827	100	100	203
FVR 125	40828	125	100	203
FVR 160	40829	160	100	203
FVR 200	40830	200	100	203
FVR 250	40831	250	100	203
FVR 315	40832	315	100	203
FVR 355	40833	355	100	203
FVR 400	40834	400	100	203

PAK

Potential equalisation

Potential equalisation 10 mm² in green-yellow. With crimping cable lug M6/M8/M10 on both sides. Length 300 mm.

Type	Ref. no.	Crimping cable lug	Length in mm
PAK M6	40811	M6	300
PAK M8	40812	M8	300
PAK M10	40813	M10	300

DIF



Dim. in mm

Diffusor DIF

Aerodynamically optimised diffusor for high pressure recovery. Delays air flow due to size step to convert dynamic pressure to static pressure. Additional application as an adapter for an optimised transition to the next size. Specially developed for application directly behind a fan and at the end of a pipeline as an outdoor outlet with reduced outlet losses. In case of a free outlet at the diffusor, the protection grille (type SG) can be used in the next larger dimension.
High-quality design made of hot-dip galvanised steel sheet with double-sided welded flange, hole pattern according to DIN 24155.

Type	Ref. no.	Size step	L	Ø D.i.L 1	Ø LK 1	Ø D.i.L 2	Ø LK 2	Weight aprx. kg
DIF 250	40230	250 to 400	200	250	286	400	438	5.5
DIF 280	03551	280 to 315	140	280	322	315	356	4.1
DIF 315	03552	315 to 355	160	315	356	355	395	4.9
DIF 355	03553	355 to 400	180	355	395	400	438	5.9
DIF 400	03554	400 to 450	200	400	438	450	487	7.0
DIF 450	03555	450 to 500	225	450	487	500	541	8.4
DIF 500	03556	500 to 560	250	500	541	560	605	11.5
DIF 560	03565	560 to 630	280	560	605	630	674	15.4
DIF 630	03566	630 to 710	315	630	674	710	751	19.0
DIF 710	03567	710 to 800	355	710	751	800	837	24.1
DIF 800	03568	800 to 900	400	800	837	900	934	37.8
DIF 900	03569	900 to 1000	450	900	934	1000	1043	45.7
DIF 1000	03570	1000 to 1120	500	1000	1043	1120	1174	54.9
DIF 1120	03571	1120 to 1250	560	1120	1174	1250	1311	66.5
DIF 1250	03572	1250 to 1400	630	1250	1311	1400	1465	81.3

MRV



Dim. in mm

Mounting ring MRV

The mounting ring MRV is intended for the vertical attachment of fans (e.g. Helios types AMD, VAR etc.). Four mounting brackets for direct attachment or mounting vibration dampers (SDZ or SDD) ensure the secure vertical installation of fans. Made of hot-dip galvanised steel sheet.

Type	Ref. no.	Ø A	B	Ø D	Ø LK	Ø LD	Weight aprx. kg	Load capacity kg
MRV 315	01755	510	576	315	356	9.5 (8x)	6.5	280
MRV 355	01759	550	618	355	395	9.5 (8x)	6.9	280
MRV 400	01760	595	662	400	438	9.5 (12x)	7.4	280
MRV 450	01761	650	714	450	487	9.5 (12x)	7.9	280
MRV 500	01740	700	765	500	541	9.5 (12x)	8.3	280
MRV 560	01741	770	827	560	605	11.5 (16x)	12.9	390
MRV 630	01742	840	898	630	674	11.5 (16x)	13.9	390
MRV 710	01743	920	980	710	751	11.5 (16x)	15.7	390
MRV 800	01744	1030	1101	800	837	11.5 (24x)	24.8	1050
MRV 900	01745	1130	1201	900	934	11.5 (24x)	27.0	1050
MRV 1000	01749	1230	1301	1000	1043	11.5 (24x)	29.1	1050

MK



Dim. in mm

Mounting bracket

For attaching the fan flange casing to ceilings, walls or floors. Made of hot-dip galvanised steel. Hole matches the hole circle of the fan flange. Delivered as pair including screws and nuts.

Reference

In case of heavy motors, an extension duct VR (accessories) should be provided to place the centre of gravity. Attach the brackets to both external flanges.

Type	Ref. no.	A	B	C	D	E	F	Weight aprx. kg
MK 200-225	01446	310	208/220	20	—	220	265	1.5
MK 250-280	01447	340	227/245	20	—	240	285	1.7
MK 315-355	01448	380	281/300	25	250	295	340	2.2
MK 400-450	01449	360	311/335	25	240	280	320	2.6
MK 500	00674	570	383	25	430	480	530	5.3
MK 560	00675	570	415	25	430	480	530	5.3
MK 630	01333	600	465	30	460	510	560	8.5
MK 710	01372	670	515	35	515	565	620	10.5
MK 800	01373	680	565	35	500	550	—	15.5
MK 900	01374	760	625	35	580	630	—	18.0
MK 1000	01375	840	690	35	710	—	—	19.5

SDD-U



Dim. in mm

Vibration damper mounts

The elastic rubber elements SDD-U are suitable as mounts for the free-standing indoor installation of ventilation units on flat, horizontal surfaces. They prevent the direct transmission of vibrations and structure-borne noise to other parts of buildings.
A set consists of four elements which are placed under the corners of the ventilation unit.
Maximum pressure load:
40 kg/element = total 160 kg.

SDD-U Ref. no. 05627

SDD



Dim. in mm

Vibration dampers for compression load

For vibration and noise-insulating installation of fans on horizontal surfaces. Easy installation in combination with MK (accessories). Selection according to fan weight, see table.

Rubber bonded metal elements must be used for small and medium weight loads and temperatures up to max. +60 °C, and spring-type vibration dampers must be used for high loads and temperatures above +60 °C (e.g. smoke extraction).

Type	Ref. no.	Max. fan weight kg	H Height in mm	Spring-type vibration damper	Delivery unit 1 set = 4 pcs
SDD 1	01452	80	*		
SDD 1 F	01942	80	112 – 87	•	
SDD 2	01453	180	*		
SDD 3	01367	750	*		
SDD 4	01944	130	112 – 87	•	
SDD 5	01924	210	112 – 86	•	
SDD 6	01926	350	112 – 85	•	
SDD 7	01928	520	112 – 85	•	
SDD 8	01930	900	112 – 82	•	
SDD 9	01934	1300	112 – 85	•	
SDD 10	01951	1800	112 – 88	•	

* specified in dimensional drawing.

SDZ



Dim. in mm

Vibration dampers for tensile load

For vibration and noise-insulating fan suspension (ceiling mounting). Design, description and delivery according to SDD series.

Important installation note for vibration dampers:

A uniform load distribution (balance centre of gravity in case of heavy motor) must be ensured during installation.

Type	Ref. no.	Max. fan weight kg	H Height in mm	Spring-type vibration damper	Delivery unit 1 set = 4 pcs
SDZ 1	01454	60	*		
SDZ 1 F	01943	80	190 – 215	•	
SDZ 2	01455	160	*		
SDZ 3	01366	300	*		
SDZ 4	01945	130	190 – 215	•	
SDZ 5	01925	210	190 – 216	•	
SDZ 6	01927	350	190 – 217	•	
SDZ 7	01929	520	190 – 217	•	
SDZ 8	01931	900	190 – 220	•	
SDZ 9	01935	1300	190 – 217	•	

* specified in dimensional drawing.

Helios box fans.
Powerful. Flexible. Compact.

Helios box fans are true all-rounders, offering almost unlimited flexibility in various applications. The compact design and the easy-to-install accessories allow optimal adaptation to the structural conditions of your project at any time.

GigaBox centrifugal fans

Efficient EC version.
Also available in T120 version up to max. 120 °C.

Ø 250 – 710 mm
V̇ = 2010 – 18 940 m³/h

T120
EC
288ff

GigaBox centrifugal fans

Standard AC version.
Also available in T120 version up to max. 120 °C.

Ø 250 – 710 mm
V̇ = 1410 – 20 280 m³/h

Also available in version:
T120
306ff

GigaBox centrifugal fans

Product-specific information, selection table.

284ff

Fresh air boxes

Efficient EC version.
With electric or warm water heating and air filter.

EC
342ff

MegaBox centrifugal fans

Efficient EC version.

Ø 225 – 400 mm
V̇ = 1350 – 6550 m³/h

EC
324ff

MegaBox centrifugal fans

Standard AC version.

Ø 160 – 400 mm
V̇ = 960 – 7500 m³/h

Also available in version:
Ex
333ff

MegaBox centrifugal fans

Product-specific information, selection table.

322f

GigaBox and accessories

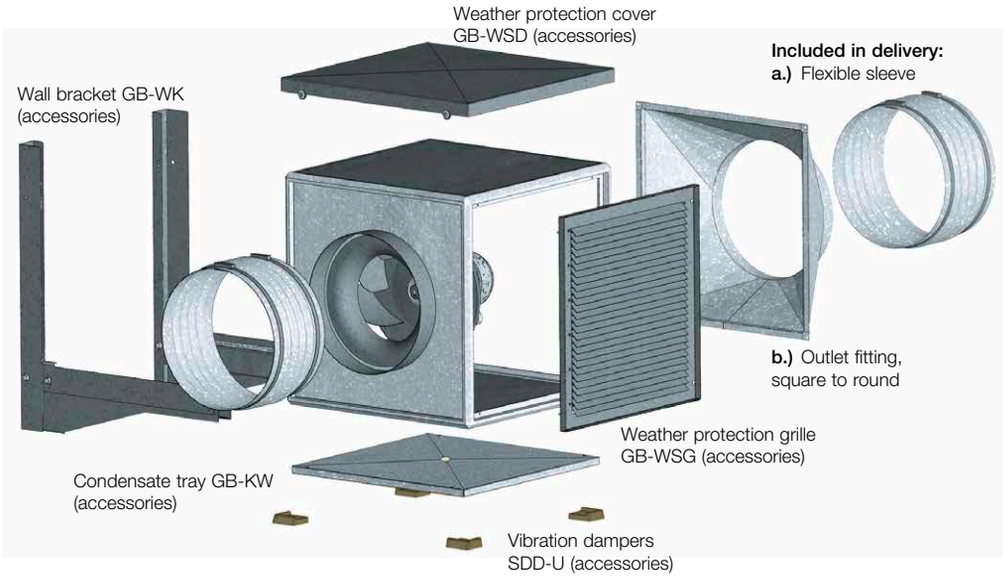

Reference	Page
Planning information, acoustics	14 ff.
General techn. information, power control	19 ff.

Application
Multifunctional fan box for the transportation of medium to large volume flows against high resistances in ventilation systems of all kinds. The compact frame design and easy-to-install accessories allow variable and thus optimal adaptation to structural conditions by simply repositioning the casing panels.

GB T120 and GB EC T120
The GigaBox T120 types are designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as extract air fans in commercial kitchens and many process technology applications.
GigaBox T120 types with EC drive technology are optionally available for energy-saving applications and low operating costs.

GB EC
GigaBox types with EC drive technology are optionally available for energy-saving applications and low operating costs.

Casing
Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. The flexible connecting sleeves included in the scope of delivery correspond to a maximum permissible air flow temperature of +70 °C or +120 °C for types GB T120 and GB EC T120. Simple positioning with standard crane hook.

The drive motor is located outside of the air flow for GB T120 and GB EC T120. The thermally insulated partition is also the support plate for the motor-impeller unit and it can be completely removed for inspection without dismantling the system components.

Power control
GB and GB T120
All types (excluding GBD 630/4 T120, GBD 710/4 and GBD 710/4 T120) are speed-controllable using 5-step transformer controllers. The 3~ GB types can also be inexpensively operated at two speeds using a ⅄/△ switch (accessory DS 2 or motor protection circuit breaker M 4).
Performance levels are shown in the performance diagram.
Control by means of frequency converter with integrated sine filter (FU-BS, accessories) is possible for 3~ types;
GBD 630/4 T120, GBD 710/4 and GBD 710/4 T120 can only be controlled by frequency converter FU-BS.

GB EC and GB EC T120
All EC types have continuously variable speed control with internal (delivery) or external via speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. Performance levels are shown on the performance curve as examples.

Positioning, installation
GB and GB EC
Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. Removable side panels allow inspection access from all sides.

GB T120 and GB EC T120
Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Inspection cover with handle, easily removable for cleaning and maintenance. Simple positioning with crane hook as standard. The transmission of structure-borne noise to buildings is minimised by vibration dampers (type SDD-U, accessories). The transmission of vibrations to the duct system is prevented by the standard flexible connecting sleeves.

Impeller
Free-running high performance centrifugal impeller with backward curved plastic blades (nominal size 250 made of steel) on galvanised steel plate, directly driven. Series GB EC, GB from nominal size 500 and GB T120 and GB EC T120 with aluminium impellers. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 6.3 or 2.5.

Drive
GB and GB T120
IEC standard motor or maintenance-free external rotor motor in protection category IP54 or 44. Thermal overload protection through thermal contacts in the winding. Suitable for continuous operation S1. Insulation class F. The ball bearings have a sufficient lubricant supply for their service life.

GB EC
Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

Electrical connection
GB and GB T120
Standard terminal box, only for alternating currents.

Air flow direction
The air flow direction cannot be changed for centrifugal fans, but it can be set by the corresponding positioning. The throughflow can also be individually adapted to structural conditions by converting the outlet fitting and panels. The correct motor rotation direction and air flow direction is marked by arrows on the fan and must be checked during commissioning.

Incorrect direction of rotation
Operation in the incorrect direction of rotation overloads the AC motor and causes the thermal contacts to respond. Typical concomitant features include: Low flow rate, vibration and abnormal noise.

Air flow temperature
The maximum permissible air flow temperature is shown in the type table.

Ambient temperature
From –40 °C to +40 °C.

VDI 2052 "Ventilation equipment for kitchens – Planning, design, inspection" is applied for the planning of extract air systems in commercial kitchens. The following applies for extract air fans:

- Fans in extraction systems must be designed and installed so that they can be easily accessed, easily controlled and cleaned. It must be possible to deactivate them from the kitchen. The drive motors must be located outside of the extract air volume flow. Connected extraction hoods must separate solid and liquid components as far as possible. Flame propagation to downstream components must be prevented.

These specific requirements are remarkably fulfilled by the GigaBoxes GB T120 and GB EC T120. The freely accessible casing and double-walled side panels allow problem-free cleaning with degreasing agents and steam.

The guideline on fire protection requirements pertaining to ventilation systems (LüAR ventilation system guideline) of September 2006 has been largely introduced nationwide by law.
This resulted in additional requirements for extract air systems in commercial and comparable kitchens:

- Extract air ducts must also be made of non-combustible materials (building material class A1 or A2 pursuant to DIN 4102). From the point of exit from the kitchen, they must have fire resistance class L90 at least or be equipped with a damper with proof of use for this purpose.

- Kitchen extract air ducts must not be interconnected or connected to other ventilation ducts. The combination of room air with the cooking zone extraction within the kitchen as well as the connection of multiple kitchen extraction hoods to one shared extract air duct is permitted.

- Suitable grease filters or separating elements made of non-combustible materials must be connected to or directly behind the extraction systems (hoods or ventilation ceilings). It must be possible to easily install and remove these for cleaning.

- The extract air ducts must have smooth inner surfaces which are easy to clean. Profiled walls such as e.g. flexible ducts and porous or absorbent building materials are not permitted. Grease and condensate must not leak through the walls.

- The extract air ducts must have inspection openings at distances of max. 3 m after each change of direction and in horizontal, straight sections. Their dimensions must correspond to the duct cross-section or at least 3600 cm2. Devices for catching and draining condensate and cleaning agents must be provided at suitable points in the pipeline.

- **Fire protection for neighbouring buildings**
  If a ventilation system is located on the building envelope (wall), the ventilation system parts must have a fire-resistant lining L90. This also applies to fans and their extract air ducts which lead outside (up to the roof).

- **Fire protection in the attic**
  Ventilation system (fan) parts in the attic must have a fire-resistant lining L90.
  Ducts which lead outside must be lined up to the roofing.
  Ventilation ducts (in the building and attic) must have a fire-resistant lining.

- With regard to the GigaBox T120 series, the motor is located outside of the air flow and it is separated from the impeller by a thermally insulated wall.
  The motor-impeller unit can be removed without dismantling the duct system.

- Installation of outlet-side fitting for GB T120 and GB EC T120 radially upwards or laterally.

- GB T120 and GB EC T120 with easily removable inspection cover.

By combining the parameters of static pressure increase Δp_{fa}, case-radiated noise and inlet side air noise as sound pressure at 4 m (free field conditions), the following table facilitates the selection of GigaBox EC centrifugal fans.

EC	Sound press. Radiation	Sound press. Inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure												
	L_{PA} dB(A)	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
Type	at 4 m dist.	at 4 m dist.	**0**	**50**	**100**	**150**	**200**	**250**	**300**	**350**	**400**	**500**	**600**	**700**	**800**
GBW EC 250	31	43	2010	1880	1750	1600	1360	1010							
GBW EC 315	32	44	2620	2460	2310	2130	1830	1500							
GBW EC 355	30	49	3440	3270	3120	2950	2740	2500	2135	1630					
GBW EC 400 A	36	48	4050	3860	3600	3350	3050	2670	1880						
GBW EC 400 B	37	52	5160	4970	4730	4550	4210	4100	3800	3410	2900				
GBW EC 450	38	55	6460	6280	6100	5890	5660	5450	5190	4870	4600	3810			
GBD EC 450	39	56	7450	7240	7010	6760	6520	6270	6000	5690	5340	4420	390		
GBD EC 500 A	43	55	8450	8070	7740	7420	7030	6570	6140	5650	4890				
GBD EC 500 B	46	59	10680	10440	10210	9960	9700	9450	9200	8930	8620	7990	7210	5990	560
GBD EC 560	49	60	14040	13720	13460	13180	12880	12560	12240	11910	11540	10670	9680	8090	5150
GBD EC 630	44	60	15570	15170	14760	14360	13950	13520	13050	12560	11990	10450	8160		
GBD EC 710 A	42	53	15680	15030	14350	13680	12950	11880	10880	9450	6560				
GBD EC 710 B	48	61	18940	18370	17920	17400	16830	16220	15570	14850	14040	11880	6930		

EC T120	Sound press. Radiation	Sound press. Inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure												
	L_{PA} dB(A)	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
Type	at 4 m dist.	at 4 m dist.	**0**	**100**	**200**	**300**	**400**	**500**	**600**	**700**	**800**	**900**	**1000**	**1100**	**1200**
GBW EC 250 T120	40	52	2340	2140	1890	1630	1320	800							
GBW EC 315A T120	39	52	3050	2750	2390	1920	800								
GBW EC 355 T120	40	53	3840	3470	3020	2420	1210								
GBD EC 355 T120	40	53	3840	3470	3030	2420	1210								
GBW EC 400 T120	43	56	4730	4280	3730	2870	1490								
GBD EC 400 T120	46	56	5410	5010	4510	3930	3130	1990							
GBW EC 450 T120	45	57	6250	5720	5070	4130	2610								
GBD EC 450 T120	48	60	7100	6610	6140	5460	4660	3350							
GBD EC 500 T120	51	63	9610	9110	8550	7960	7170	6180	4920	2530					
GBD EC 560 T120	53	65	11650	11140	10630	10090	9510	8870	8060	7140	5520				
GBD EC 630 T120	54	68	14540	14060	13600	13150	12660	12050	11330	10540	9530	8060	4590		
GBD EC 710 T120	51	65	18360	17910	17440	16930	16370	15730	15030	14250	13330	12210	10920	9300	6760

By combining the parameters of static pressure increase Δp_{fa}, case-radiated noise and inlet side air noise as sound pressure at 4 m (free field conditions), the following table facilitates the selection of GigaBox AC centrifugal fans.

	Sound press. Radiation	Sound press. Inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure												
	L_{PA} dB(A)	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
Type	at 4 m dist.	at 4 m dist.	**0**	**50**	**100**	**150**	**200**	**250**	**300**	**350**	**400**	**500**	**600**	**700**	**800**
GBW 250/4	27	39	1420	1160	890	500									
GBW 315/4	29	41	1760	1500	1260	970	560								
GBW 355/4	38	48	3060	2850	2640	2420	2180	1900	1510	560					
GBD 355/4/4	34	46	3090	2910	2720	2520	2290	2030	1680	1000					
GBW 400/4	38	50	4670	4430	4220	3990	3690	3390	3040	2590	1720				
GBD 400/4/4	38	50	4650	4410	4160	3920	3610	3310	2940	2450	1470				
GBW 450/4	40	49	4610	4400	4200	3990	3770	3530	3270	2970	2610				
GBD 450/4/4	33	49	6500	6220	5940	5660	5350	5000	4660	4300	3770	2060	110	6110	
GBW 500/4	47	59	8320	8020	7740	7460	7180	6910	6630	6340	6030	5330	4340	370	
GBD 500/4/4	45	57	8860	8540	8220	7880	7530	7160	6770	6350	5900	4800	2940	140	
GBW 560/4	45	57	9150	8910	8670	8420	8160	7890	7620	7330	7030	6360	5570	4500	2270
GBD 560/4/4	44	57	12610	12260	11910	11560	11200	10830	10450	10050	9630	8690	7540	5950	2940
GBD 560/6/6	35	48	8670	8160	7600	6990	6280	5410	4210	2190					
GBD 630/4/4	51	62	14430	14070	13710	13370	13040	12720	12390	12050	11710	11000	10200	9280	8110
GBD 630/6/6	42	53	9990	9430	8870	8290	7670	6980	6160	5070	3020				
GBD 710/4	46	59	20285	20020	19760	19490	19210	18930	18640	18340	18040	17400	16730	15990	15190
GBD 710/6/6	51	62	18740	17980	17190	16360	15490	14560	13550	12440	11170	7730	970		

T120	Sound press. Radiation	Sound press. Inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure												
	L_{PA} dB(A)	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
Type	at 4 m dist.	at 4 m dist.	**0**	**100**	**200**	**300**	**400**	**500**	**600**	**700**	**800**	**900**	**1000**	**1100**	**1200**
GBW 355/4 T120	36	49	3460	2990	2460	1505									
GBD 355/4/4 T120	36	49	3470	3045	2510	1690									
GBW 400/4 T120	40	53	4930	4380	3790	2900	1580								
GBD 400/4/4 T120	40	53	4870	4295	3650	2740	1370								
GBW 450/4 T120	45	57	7110	6480	5850	5135	4350	3300	1900						
GBD 450/4/4 T120	45	57	7180	6600	5950	5220	4340	3230	1340						
GBW 500/4 T120	45	59	8345	7770	7160	6480	5670	4680	3510	1840					
GBD 500/4/4 T120	45	59	8350	7765	7180	6600	5910	4970	3820	1920					
GBD 560/4/4 T120	48	62	12300	11690	11080	10475	9800	9120	8410	7430	6000				
GBD 630/4 T120	53	67	14140	13690	13200	12720	12230	11670	11150	10470	8830	7850	6820	5150	
GBD 710/4 T120	55	66	18200	17650	17200	16650	16000	15300	14500	13750	12800	11850	10850	9800	8500

GB EC 250

Any installation position and location due to five possible outlet directions.

EC

GB EC 250 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120 EC

Dimensions GB EC 250

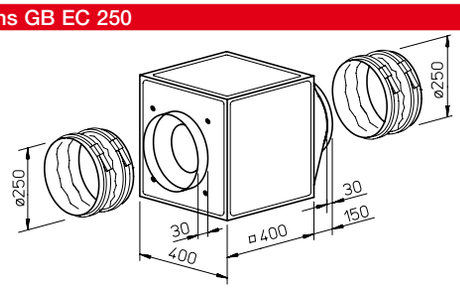

Dim. in mm

Dimensions GB EC 250 T120

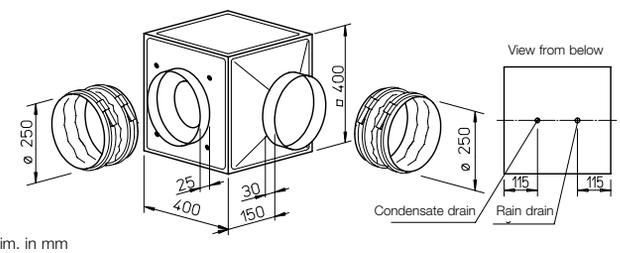

Dim. in mm

Special features of the GB EC T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as an extract air fan in commercial kitchens and many process technology applications.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) directly to the commutation electronics.

Special features of the GB EC series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) mounted to external cable.

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of plastic (Type 120 made of aluminum), directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44																
GBW EC 250	05807	250	1930	2190	33	0.18	0.78	1354	60	20.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
T120 **Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP54**																
GBW EC 250 T120	06371	250	2335	2200	40	0.27	1,20	1354	120	27.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves GBW EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	51	41	48	44	41	39	36	29
L_{WA}	Inlet side	dB(A)	63	44	54	56	58	57	52	45
L_{WA}	Outlet side	dB(A)	67	45	57	59	62	62	56	50

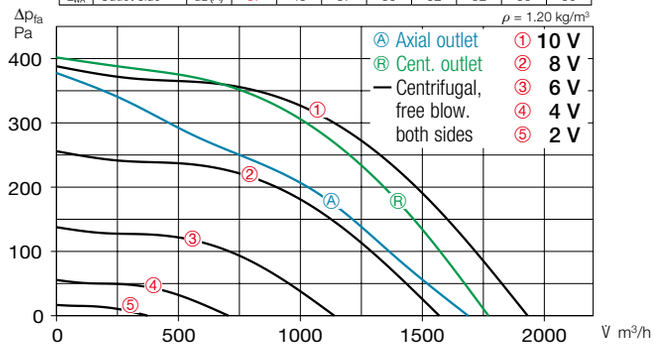

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1650	2010	120	0.53	31	0.22
8	1325	1600	70	0.31	28	0.15
6	1000	1200	35	0.16	22	0.11
4	710	830	21	0.09	17	0.09

Performance curves GBW EC 250 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	47	55	50	43	40	32	29
L_{WA}	Inlet side	dB(A)	69	51	59	62	64	65	59	49
L_{WA}	Outlet side	dB(A)	72	52	63	66	67	64	63	54

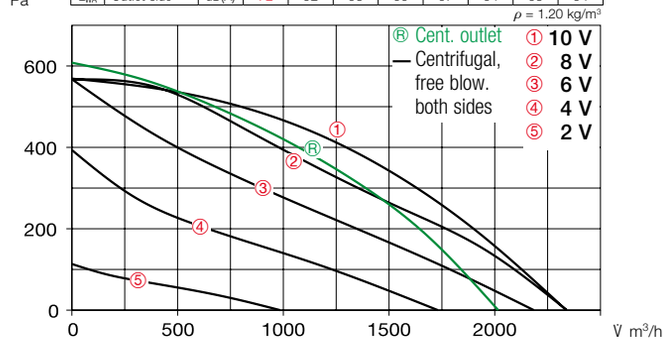

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2310	2335	169	0.76	40	0.26
8	2300	2330	167	0.75	40	0.26
6	2144	2180	140	0.63	38	0.23
4	1697	1730	73	0.35	33	0.15

Power control

Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 250 Ref. no. 05625

Weather protection grille for outlet-side coverage.
GB-WSG 250 Ref. no. 05637

Weather protection cover for protected outdoor installation.
GB-WSD 250 Ref. no. 05746

Special accessories

☐ **for GB EC series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 250 Ref. no. 05642
(a condensate tray with condensate drain is included in delivery for GB EC T120).

☐ **for GB EC T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.
Accessory details	**Page**
Universal control system, electronic controllers, speed potentiometer	615 ff.

GB EC 315

Any installation position and location due to five possible outlet directions.

EC

GB EC 315 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120 EC

Dimensions GB EC 315

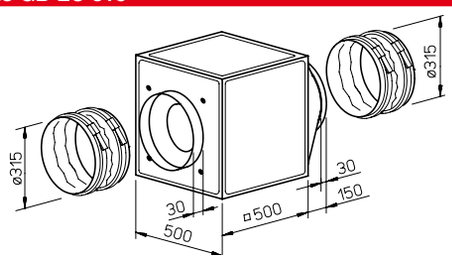

Dim. in mm

Dimensions GB EC 315 T120

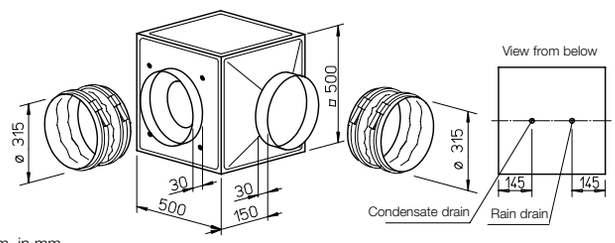

Dim. in mm

Special features of the GB EC T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as an extract air fan in commercial kitchens and many process technology applications.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) directly to the commutation electronics.

Special features of the GB EC series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) mounted to external cable.

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of plastic (Type 120 made of aluminum), directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 6.3.

- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44																
GBW EC 315	05808	315	2500	1700	33	0.22	0.99	1354	50	31.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
T120 **Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP54**																
GBW EC 315 A T120	06370	315	3050	1700	39	0.29	1.3	1223.1	120	42.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves GBW EC 315

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	38	46	46	46	45	43	32
L_{WA}	Inlet side	dB(A)	64	43	56	57	58	58	54	44
L_{WA}	Outlet side	dB(A)	69	48	58	63	65	65	59	51

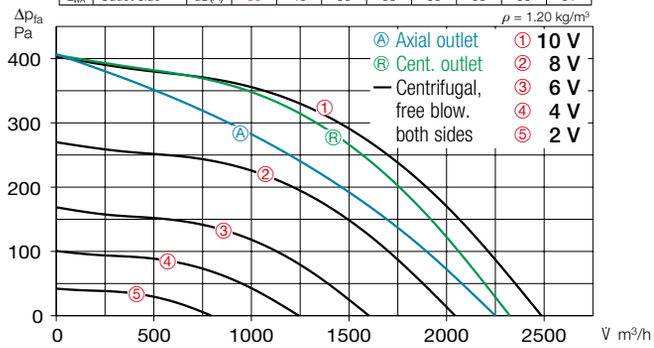

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	2620	142	0.63	32	0.20
8	1250	2200	85	0.38	29	0.14
6	930	1630	42	0.19	24	0.09
4	710	1250	25	0.11	20	0.07

Performance curves GBW EC 315 A T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	48	52	49	47	44	41	38
L_{WA}	Inlet side	dB(A)	69	56	61	63	62	63	58	48
L_{WA}	Outlet side	dB(A)	71	55	63	64	66	65	57	49

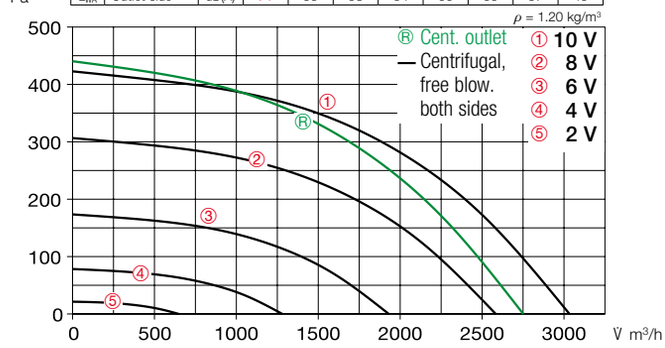

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1700	3050	190	0.90	39	0.23
8	1440	2580	125	0.60	36	0.17
6	1090	1930	60	0.38	30	0.11
4	730	1280	25	0.27	21	0.07

Power control

Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise

The total level and range are specified above the performance diagram for:

- ▢ Case-radiated sound power
- ▢ Inlet side sound power
- ▢ Outlet side sound power

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 315 Ref. no. 05625

Weather protection grille for outlet-side coverage.
GB-WSG 315 Ref. no. 05638

Weather protection cover for protected outdoor installation.
GB-WSD 315 Ref. no. 05747

Special accessories

▢ **for GB EC series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 315 Ref. no. 05643
(a condensate tray with condensate drain is included in delivery for GB EC T120).

▢ **for GB EC T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

EC box fans

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.
Accessory details	**Page**
Universal control system, electronic controllers, speed potentiometer	615 ff.

GB EC 355

Any installation position and location due to five possible outlet directions.

EC

GB EC 355 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120 EC

Dimensions GB EC 355

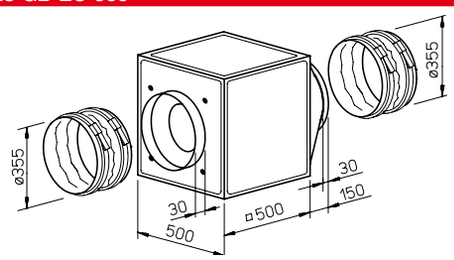

Dim. in mm

Dimensions GB EC 355 T120

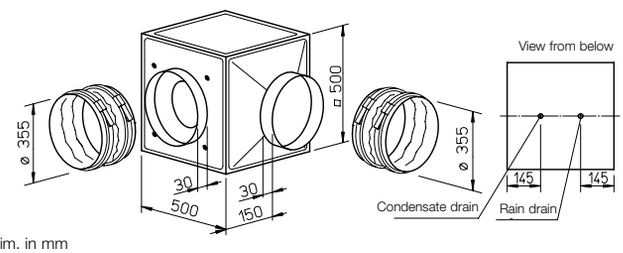

Dim. in mm

Special features of the GB EC T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as an extract air fan in commercial kitchens and many process technology applications.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) directly to the commutation electronics.

Special features of the GB EC series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) mounted to external cable.

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of aluminium, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 6.3.

- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44																
GBW EC 355	05809	355	3440	1500	30	0.35	1.55	973	50	33.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
T120 **Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP54**																
GBW EC 355 T120	06372	355	3840	1500	40	0.36	1.5	973	55	31.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735
T120 **Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP54**																
GBD EC 355 T120	06452	355	3840	1500	40	0.36	0.7	1214.1	120	44.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves GBW EC 355

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	50	45	44	39	42	41	38	29
L_{WA}	Inlet side	dB(A)	69	49	63	65	62	59	55	48
L_{WA}	Outlet side	dB(A)	72	52	64	68	66	63	58	51

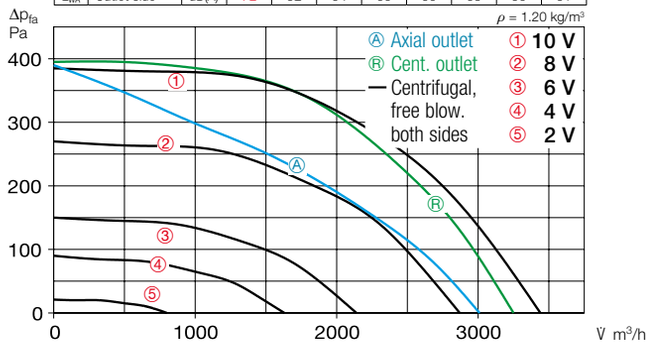

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	3440	235	1.04	30	0.25
8	1250	2870	140	0.62	27	0.17
6	930	2140	64	0.28	22	0.11
4	710	1630	34	0.15	18	0.08

Performance curves GBW EC 355 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	49	53	50	48	45	42	39
L_{WA}	Inlet side	dB(A)	70	57	62	64	63	64	59	49
L_{WA}	Outlet side	dB(A)	72	56	64	65	67	66	58	50

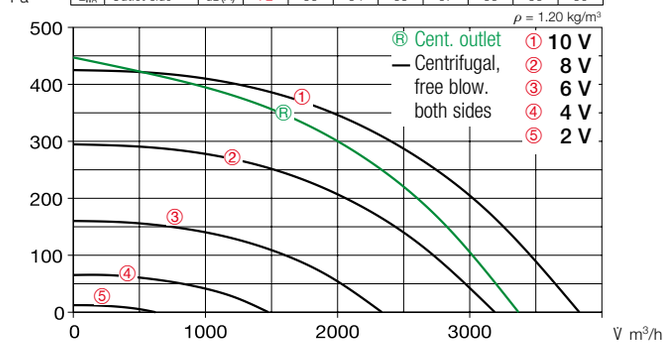

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	3840	255	1.15	40	0.24
8	1250	3190	154	0.74	36	0.17
6	920	2330	68	0.43	30	0.11
4	590	1490	26	0.28	20	0.06

Performance curves GBD EC 355 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	49	53	50	48	45	42	39
L_{WA}	Inlet side	dB(A)	70	57	62	64	63	64	59	49
L_{WA}	Outlet side	dB(A)	72	56	64	65	67	66	58	50

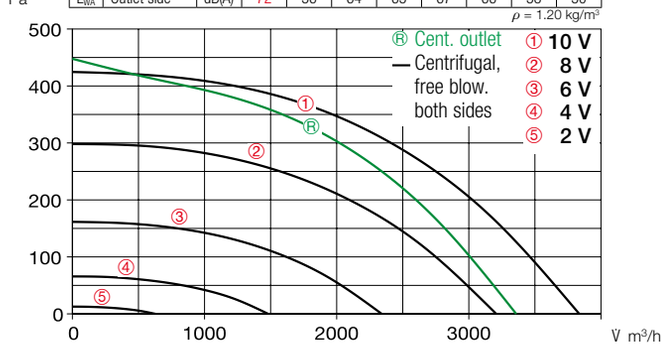

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	3840	261	0.60	40	0.24
8	1250	3220	160	0.40	36	0.18
6	920	2350	75	0.30	30	0.11
4	590	1480	32	0.20	20	0.08

Power control

Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise

The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 355 Ref. no. 05625

Weather protection grille for outlet-side coverage.
GB-WSG 355 Ref. no. 05638

Weather protection cover for protected outdoor installation.
GB-WSD 355 Ref. no. 05747

Special accessories

☐ **for GB EC series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 355 Ref. no. 05643
(a condensate tray with condensate drain is included in delivery for GB EC T120).

☐ **for GB EC T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

EC box fans

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.
Accessory details	**Page**
Universal control system, electronic controllers, speed potentiometer	615 ff.

GB EC 400

Any installation position and location due to five possible outlet directions.

EC

GB EC 400 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120 EC

Dimensions GB EC 400

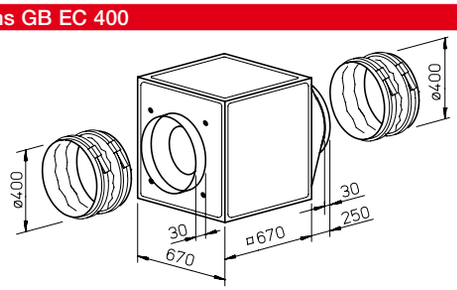

Dim. in mm

Dimensions GB EC 400 T120

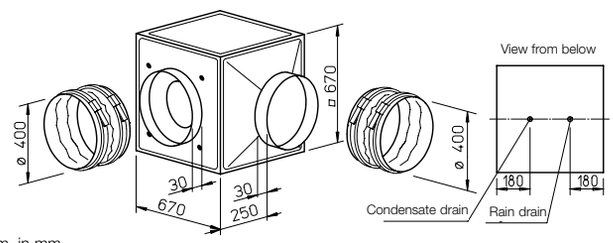

Dim. in mm

Special features of the GB EC T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as an extract air fan in commercial kitchens and many process technology applications.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

Installation
Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

Electrical connection
Standard terminal box (IP54) directly to the commutation electronics.

Special features of the GB EC series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

Electrical connection
Standard terminal box (IP54) mounted to external cable.

Description for both series

Casing
Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

Impeller
Free-running high performance centrifugal impeller made of aluminium, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44																
GBW EC 400 A	05817	400	4050	1200	36	0.34	1.52	973	50	43.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
GBW EC 400 B	05810	400	5160	1500	37	0.62	2.80	973	50	46.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
T120 Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP54																
GBW EC 400 T120	06453	400	4730	1320	43	0.43	1.80	1223.1	120	60.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735
T120 Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP54																
GBD EC 400 T120	06454	400	5410	1500	46	0.62	1,20	1214.1	120	60.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves GBW EC 400 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	52	52	47	43	40	35	27
L_{WA}	Inlet side	dB(A)	68	53	62	67	60	58	55	48
L_{WA}	Outlet side	dB(A)	71	61	62	64	67	62	57	48

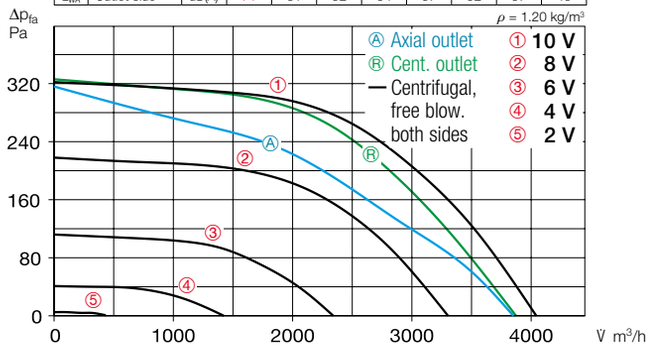

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1200	4050	210	0.93	36	0.19
8	990	3300	120	0.52	32	0.13
6	710	2340	50	0.22	25	0.08
4	430	1420	20	0.09	18	0.05

Performance curves GBW EC 400 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	46	54	49	48	46	43	39
L_{WA}	Inlet side	dB(A)	72	53	64	65	66	67	59	53
L_{WA}	Outlet side	dB(A)	76	56	67	70	71	70	62	55

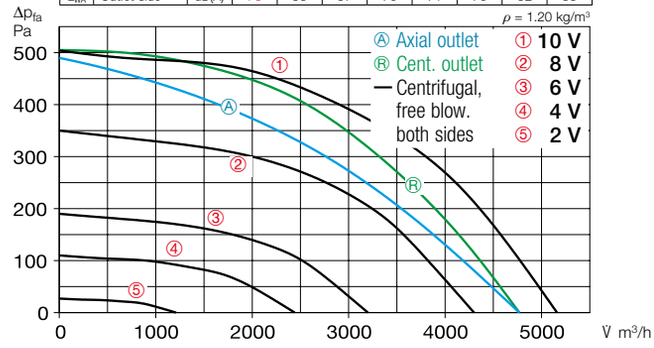

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	5160	395	1.75	37	0.28
8	1250	4300	245	1.08	34	0.21
6	930	3200	120	0.52	29	0.13
4	710	2440	65	0.28	25	0.09

Performance curves GBW EC 400 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	41	38	36	37	35	32	24
L_{WA}	Inlet side	dB(A)	73	56	58	61	66	67	61	50
L_{WA}	Outlet side	dB(A)	75	62	63	65	71	70	77	53

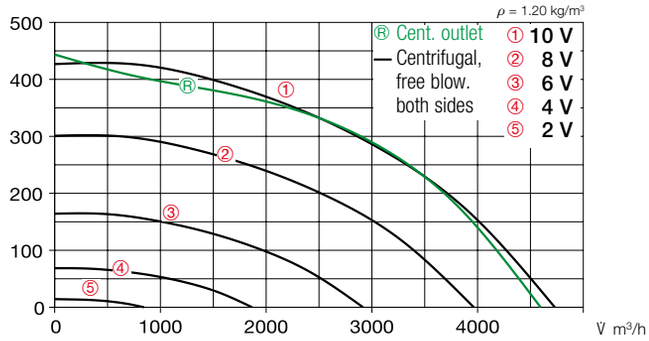

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1320	4730	280	1,24	43	0.21
8	1100	3950	170	0.80	39	0.15
6	820	2950	75	0.44	33	0.09
4	530	1880	30	0.30	23	0.06

Performance curves GBD EC 400 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	63	44	41	39	40	38	35	27
L_{WA}	Inlet side	dB(A)	76	59	61	64	69	70	64	53
L_{WA}	Outlet side	dB(A)	78	65	66	68	74	73	70	57

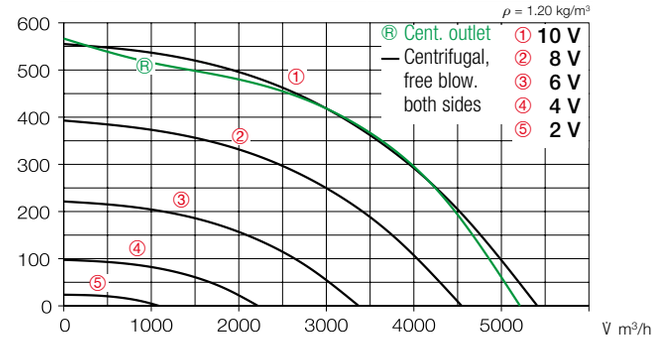

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	5410	410	1,00	46	0,27
8	1260	4550	260	0,60	42	0,21
6	950	3370	130	0,40	36	0,14
4	630	2220	60	0,20	28	0,10

Power control

Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise

The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 400 Ref. no. 05626

Weather protection grille for outlet-side coverage.
GB-WSG 400 Ref. no. 05639

Weather protection cover for protected outdoor installation.
GB-WSD 400 Ref. no. 05748

Special accessories

☐ **for GB EC series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 400 Ref. no. 05644
(a condensate tray with condensate drain is included in delivery for GB EC T120).

☐ **for GB EC T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

References	Page
Universal control system, electronic controllers, Speed potentiometer	615 ff.

GB EC 450

Any installation position and location due to five possible outlet directions.

EC

GB EC 450 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120 EC

Dimensions GB EC 450

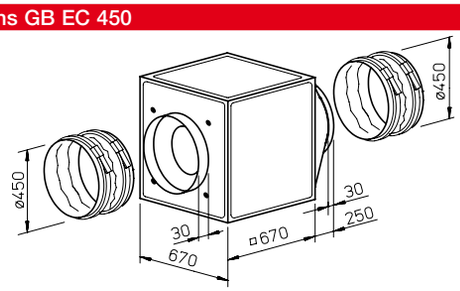

Dim. in mm

Dimensions GB EC 450 T120

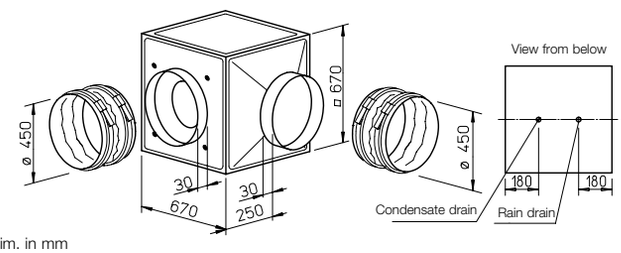

Dim. in mm

Special features of the GB EC T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as an extract air fan in commercial kitchens and many process technology applications.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) directly to the commutation electronics.

Special features of the GB EC series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  For GBW EC, standard terminal box (IP54) mounted to external cable for GBD EC, standard terminal box mounted directly on the motor.

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of aluminium, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44																
GBW EC 450	05811	450	6460	1450	38	1.00	4.5	973	50	52.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44																
GBD EC 450	05812	450	7450	1500	39	1.10	1.9	1415	55	52.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
T120 **Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP54**																
GBW EC 450 T120	06475	450	6250	1230	45	0.65	2.8	1223.1	120	66.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735
T120 **Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP54**																
GBD EC 450 T120	06476	450	7100	1400	48	0.95	1.7	1214.1	120	66.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves GBW EC 450

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	58	48	56	48	47	46	42	31
L_{WA}	Inlet side	dB(A)	75	54	66	68	70	69	64	57
L_{WA}	Outlet side	dB(A)	79	60	70	74	75	74	65	60

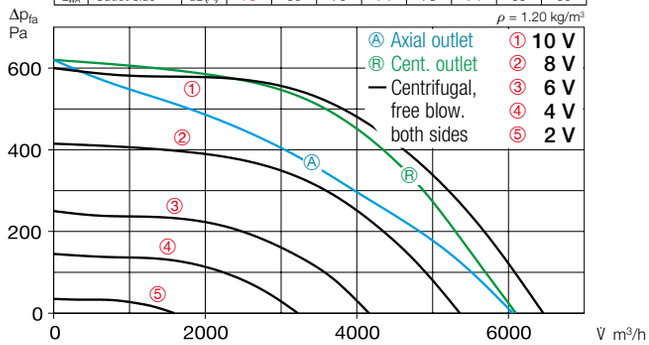

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1450	6460	614	2.72	38	0.34
8	1200	5360	363	1.61	35	0.24
6	930	4160	185	0.82	31	0.16
4	710	3220	92	0.41	26	0.10

Performance curves GBD EC 450

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	59	49	57	49	48	47	43	32
L_{WA}	Inlet side	dB(A)	76	55	67	69	71	70	65	58
L_{WA}	Outlet side	dB(A)	80	61	71	75	76	75	66	61

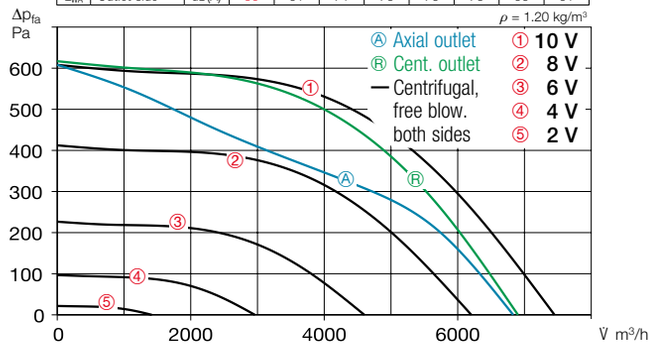

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	7450	700	1.30	39	0.34
8	1240	6200	400	0.90	36	0.23
6	920	4600	170	0.50	30	0.13
4	600	2960	60	0.24	21	0.07

Performance curves GBW EC 450 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	39	42	38	39	39	35	31
L_{WA}	Inlet side	dB(A)	74	55	62	63	64	67	60	52
L_{WA}	Outlet side	dB(A)	77	60	67	69	75	71	65	56

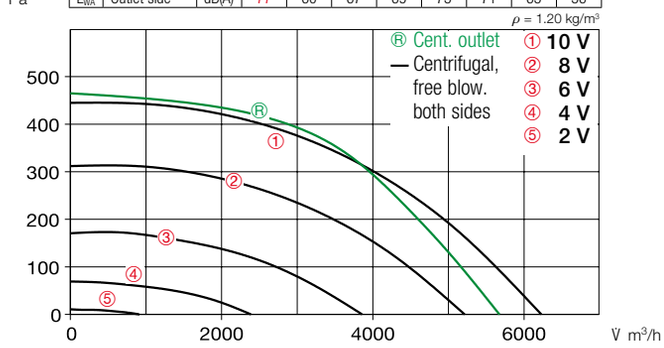

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1230	6250	380	1.67	45	0.22
8	1030	5210	230	1.04	41	0.16
6	760	3860	105	0.53	35	0.10
4	500	2480	40	0.32	25	0.05

Performance curves GBD EC 450 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	42	45	41	42	42	38	34
L_{WA}	Inlet side	dB(A)	77	58	65	66	67	70	63	55
L_{WA}	Outlet side	dB(A)	80	63	70	72	78	74	68	59

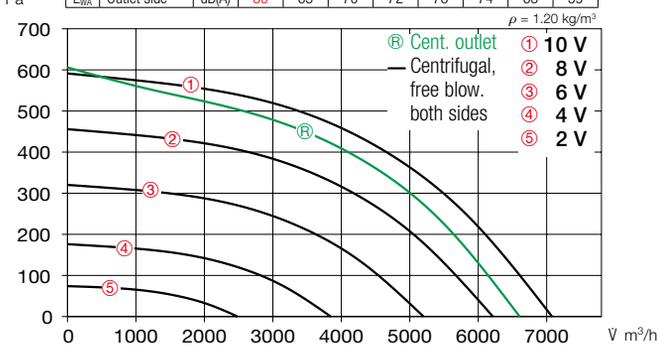

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1400	7100	560	1,70	48	0,28
8	1230	6210	380	0,72	41	0,22
6	1030	5200	230	0,53	35	0,16
4	760	3850	110	0,33	26	0,10

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 450 Ref. no. 05626

Weather protection grille for outlet-side coverage.
GB-WSG 450 Ref. no. 05639

Weather protection cover for protected outdoor installation.
GB-WSD 450 Ref. no. 05748

Special accessories

☐ **for GB EC series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 450 Ref. no. 05644
(a condensate tray with condensate drain is included in delivery for GB EC T120).

☐ **for GB EC T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

References	Page
Universal control system, electronic controllers, Speed potentiometer	615 ff.

GB EC 500

Any installation position and location due to five possible outlet directions.

EC

GB EC 500 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120 EC

Dimensions GB EC 500

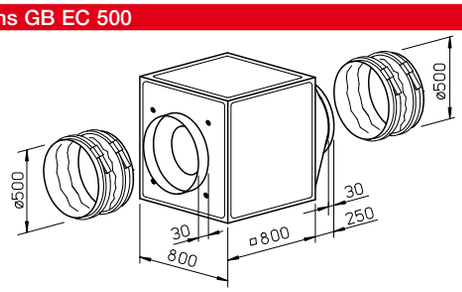

Dim. in mm

Dimensions GB EC 500 T120

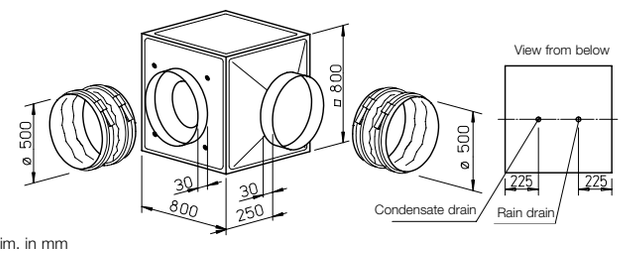

Dim. in mm

Special features of the GB EC T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as an extract air fan in commercial kitchens and many process technology applications.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) directly to the commutation electronics.

Special features of the GB EC series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box mounted directly on the motor.

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of aluminium, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44																
GBD EC 500 A	05818	500	8450	1200	43	0.95	1.60	1415	50	80.5	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
GBD EC 500 B	05813	500	10680	1500	46	2.00	3.14	1415	60	82.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
T120 **Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP54**																
GBD EC 500 A T120	06477	500	9850	1400	51	1.45	2.4	1214.1	120	96.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves GBD EC 500 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	63	57	60	55	54	45	39	31
L_{WA}	Inlet side	dB(A)	75	57	66	66	69	68	66	59
L_{WA}	Outlet side	dB(A)	78	61	66	70	74	72	68	60

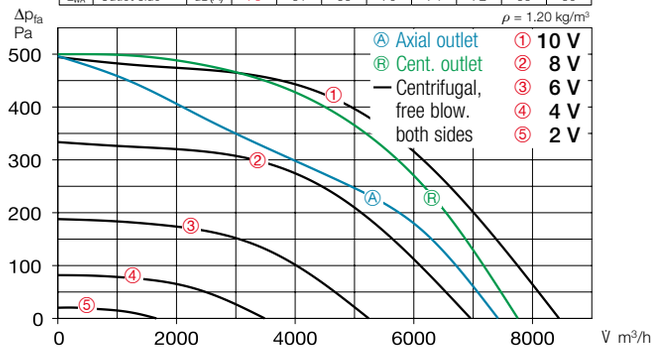

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1200	8450	620	1.14	43	0.27
8	990	6960	350	0.76	39	0.18
6	740	5240	160	0.43	33	0.11
4	490	3490	60	0.23	25	0.06

Performance curves GBD EC 500 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	66	56	65	58	57	53	50	43
L_{WA}	Inlet side	dB(A)	79	58	70	72	74	73	68	61
L_{WA}	Outlet side	dB(A)	82	62	73	76	77	75	71	64

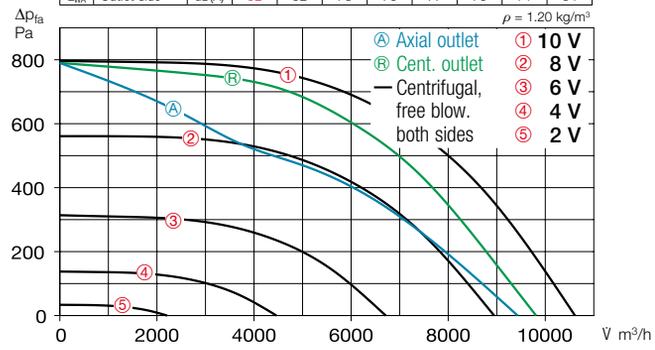

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	10680	1270	2.10	46	0.43
8	1260	9000	770	1.30	42	0.31
6	940	6740	350	0.77	36	0.19
4	630	4500	120	0.41	28	0.10

Performance curves GBD EC 500 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	42	49	66	45	44	38	30
L_{WA}	Inlet side	dB(A)	80	58	67	70	71	72	77	58
L_{WA}	Outlet side	dB(A)	83	67	75	77	78	76	70	61

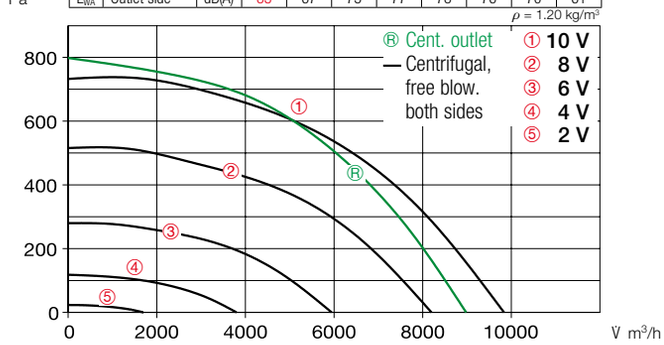

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1400	9850	856	1.50	51	0.31
8	1170	8020	520	1.10	47	0.23
6	860	5930	224	0.60	40	0.14
4	550	3800	76	0.40	31	0.07

Power control

Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise

The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 500 Ref. no. 05626

Weather protection grille for outlet-side coverage.
GB-WSG EC 500 Ref. no. 05640

Weather protection cover for protected outdoor installation.
GB-WSD EC 500 Ref. no. 05749

Special accessories

☐ **for GB EC series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW EC 500 Ref. no. 05645
(a condensate tray with condensate drain is included in delivery for GB EC T120).

☐ **for GB EC T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

References	Page
Universal control system, electronic controllers, Speed potentiometer	615 ff.

GB EC 560

Any installation position and location due to five possible outlet directions.

EC

GB EC 560 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120 EC

Dimensions GB EC 560

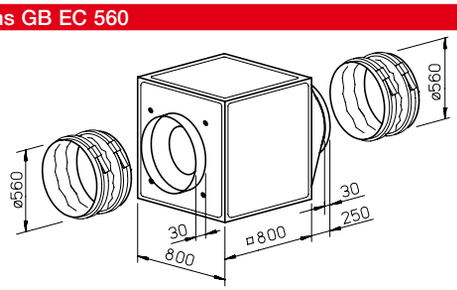

Dim. in mm

Dimensions GB EC 560 T120

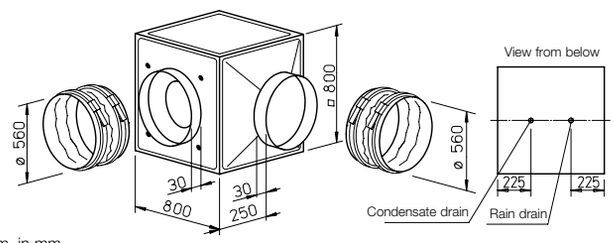

Dim. in mm

Special features of the GB EC T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as an extract air fan in commercial kitchens and many process technology applications.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) directly to the commutation electronics.

Special features of the GB EC series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box mounted directly on the motor.

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of aluminium, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44																
GBD EC 560	05814	560	14040	1375	49	2.80	4.30	1415	50	83.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
T120 **Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP54**																
GBD EC 560 T120	06481	560	12100	1400	53	2.30	3.60	1214.1	120	102.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves GBD EC 560

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	69	60	67	58	57	56	55	49
L_{WA}	Inlet side	dB(A)	79	61	71	73	74	72	66	60
L_{WA}	Outlet side	dB(A)	84	65	74	79	80	75	70	62

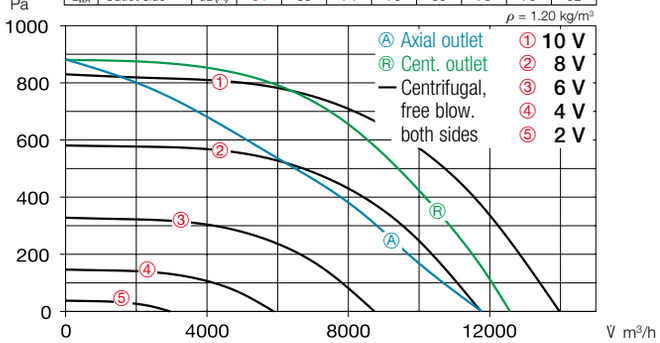

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1375	14040	1680	2.70	49	0.43
8	1150	11800	1000	1.70	45	0.31
6	870	8770	450	0.95	39	0.18
4	580	5900	160	0.48	30	0.10

Performance curves GBD EC 560 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	70	48	49	47	47	47	43	37
L_{WA}	Inlet side	dB(A)	82	66	75	72	71	70	67	59
L_{WA}	Outlet side	dB(A)	85	76	77	79	79	77	72	64

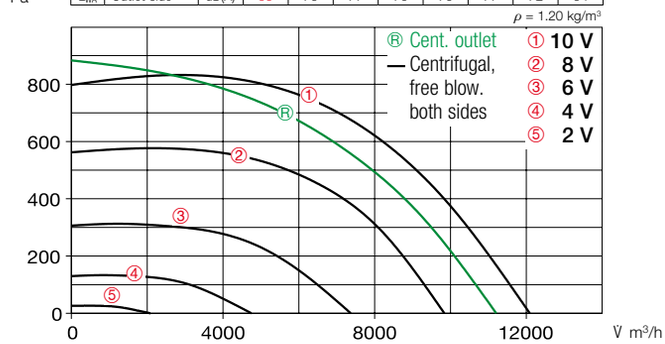

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1400	12100	1360	2.40	53	0.40
8	1160	9680	790	1.60	49	0.21
6	860	7150	340	0.90	42	0.14
4	550	4620	110	0.50	33	0.10

Power control

Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 560 Ref. no. 05626

Weather protection grille for outlet-side coverage.
GB-WSG 560 Ref. no. 05640

Weather protection cover for protected outdoor installation.
GB-WSD 560 Ref. no. 05749

Special accessories

☐ **for GB EC series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 560 Ref. no. 05645
(a condensate tray with condensate drain is included in delivery for GB EC T120).

☐ **for GB EC T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

EC box fans

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.
Accessory details	**Page**
Universal control system, electronic controllers, speed potentiometer	615 ff.

GB EC 630

Any installation position and location due to five possible outlet directions.

EC

GB EC 630 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120 EC

Dimensions GB EC 630

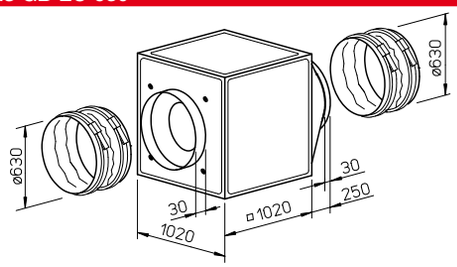

Dim. in mm

Dimensions GB EC 630 T120

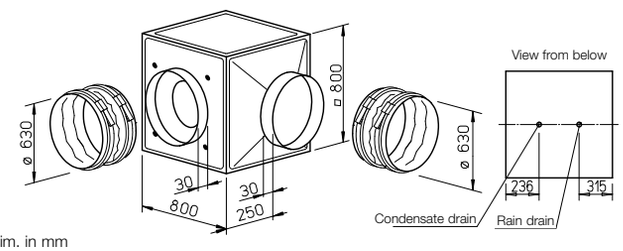

Dim. in mm

Special features of the GB EC T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as an extract air fan in commercial kitchens and many process technology applications.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box (IP54) directly to the commutation electronics.

Special features of the GB EC series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

- **Electrical connection**
  Standard terminal box mounted directly on the motor.

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of aluminium, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44																
GBD EC 630	05815	630	15570	1100	44	2.49	3.87	1415	60	113.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
T120 **Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP54**																
GBD EC 630 T120	06485	630	15300	1350	54	3.60	5.50	1214.1	120	112.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves GBD EC 630

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	64	58	61	53	53	51	49	41
L_{WA}	Inlet side	dB(A)	80	66	71	72	74	73	72	68
L_{WA}	Outlet side	dB(A)	83	69	76	77	78	75	68	61

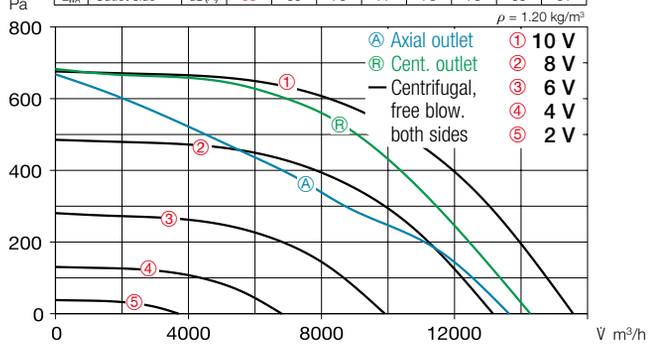

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1100	15570	1490	2.40	44	0.35
8	930	13200	910	1.60	41	0.25
6	710	9920	420	0.86	35	0.15
4	480	6800	160	0.48	27	0.08

Performance curves GBD EC 630 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	71	45	49	45	49	44	37	28
L_{WA}	Inlet side	dB(A)	85	59	70	71	76	79	74	64
L_{WA}	Outlet side	dB(A)	88	70	70	80	83	83	79	67

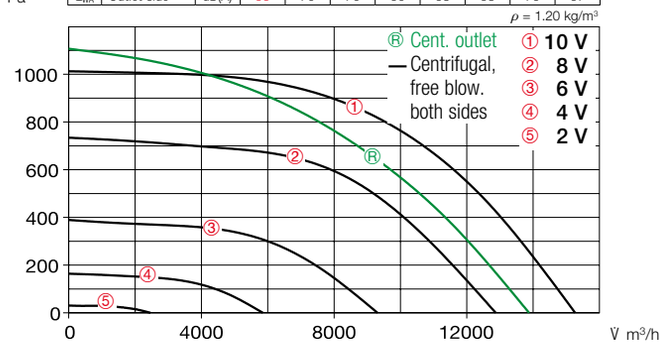

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1350	15300	2250	3,90	54	0.53
8	1130	12200	1320	2,70	50	0.39
6	830	8970	560	1,50	43	0.22
4	540	5810	180	0,77	34	0.11

Power control

Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 630 Ref. no. 05626

Weather protection grille for outlet-side coverage.
GB-WSG 630 Ref. no. 05641

Weather protection cover for protected outdoor installation.
GB-WSD 630 Ref. no. 05750

Special accessories

☐ **for GB EC series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW EC 630 Ref. no. 05646
(a condensate tray with condensate drain is included in delivery for GB EC T120).

☐ **for GB EC T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

EC box fans

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.
Accessory details	**Page**
Universal control system, electronic controllers, speed potentiometer	615 ff.

GB EC 710

Any installation position and location due to five possible outlet directions.

EC

GB EC 710 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120 EC

Dimensions GB EC 710

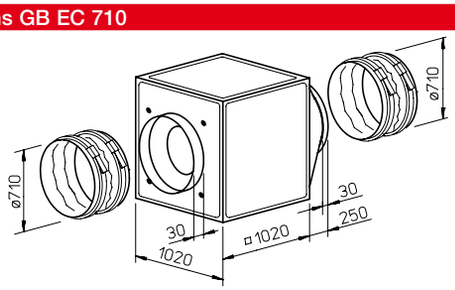

Dim. in mm

Dimensions GB EC 710 T120

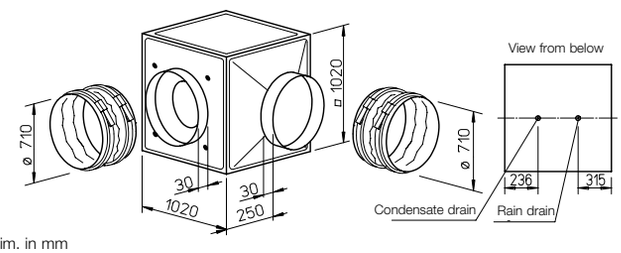

Dim. in mm

Special features of the GB EC T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C, e.g. as an extract air fan in commercial kitchens and many process technology applications.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

Installation
Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

Electrical connection
Standard terminal box (IP54) directly to the commutation electronics.

Special features of the GB EC series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

Electrical connection
Standard terminal box mounted directly on the motor.

Description for both series

Casing
Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

Impeller
Free-running high performance centrifugal impeller made of aluminium, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP54 with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surface-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44																
GBD EC 710 A	05816	710	15680	775	42	1.57	2.53	1415	60	117.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
GBD EC 710 B	05819	710	18940	940	48	2.78	4.30	1415	60	121.0	**EUR EC**[1) 2)]	01347	**PU 24**[1)]	01736	**PA 24**[1)]	01737
T120 **Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP54**																
GBD EC 710 T120	06488	710	18360	1380	51	4.63	7.80	1214.1	120	207.0	**EUR EC**[1) 2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves GBD EC 710 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	58	57	52	51	50	46	44
L_{WA}	Inlet side	dB(A)	73	60	64	66	68	66	61	59
L_{WA}	Outlet side	dB(A)	75	60	67	69	72	68	63	62

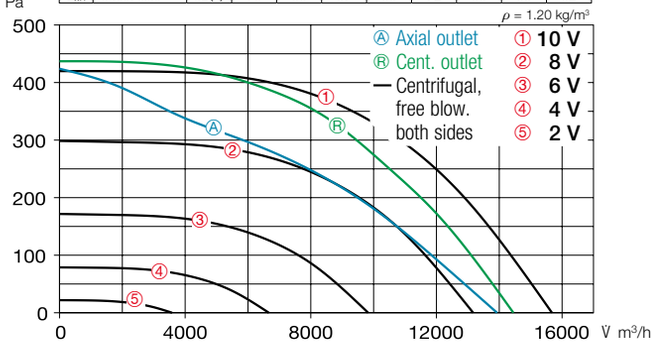

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	775	15680	980	1.70	42	0.23
8	650	13250	590	1,20	38	0.16
6	495	9840	280	0.70	33	0.10
4	340	6680	100	0.40	25	0.05

Performance curves GBD EC 710 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	65	64	54	53	51	47	41
L_{WA}	Inlet side	dB(A)	81	62	74	75	75	73	70	61
L_{WA}	Outlet side	dB(A)	85	65	74	77	82	76	72	63

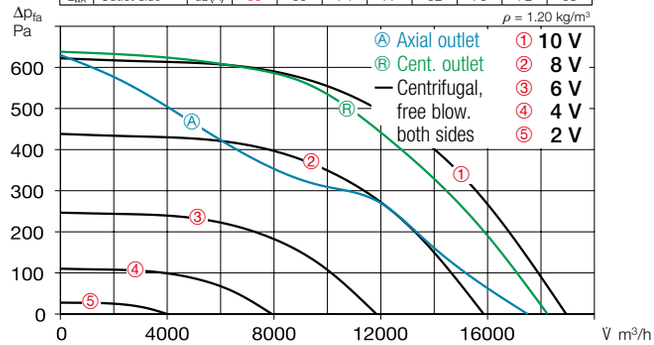

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	940	18940	1710	2.70	48	0.32
8	790	15950	1020	1.70	44	0.23
6	590	11900	450	0.94	38	0.14
4	390	8010	150	0.46	30	0.07

Performance curves GBD EC 710 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	73	68	65	63	66	63	62	59
L_{WA}	Inlet side	dB(A)	82	72	73	75	76	75	72	65
L_{WA}	Outlet side	dB(A)	85	72	75	75	80	80	75	68

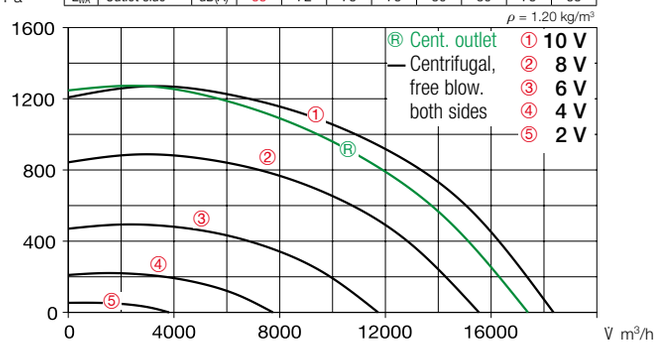

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1380	18360	2640	5.00	51	0.52
8	1160	15540	1607	3.40	47	0.37
6	870	11720	710	1.90	41	0.22
4	580	7740	240	0.80	32	0.11

Power control

Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise

The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

Special accessories

☐ **for GB EC series**

Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 710 Ref. no. 05646
(a condensate tray with condensate drain is included in delivery for GB EC T120).

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

☐ **for GB EC T120 series**

Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

Accessories for both series

Weather protection grille for outlet-side coverage.
GB-WSG 710 Ref. no. 05641

Weather protection cover for protected outdoor installation.
GB-WSD 710 Ref. no. 05750

References	Page
Universal control system, electronic controllers, Speed potentiometer	615 ff.

GB 250

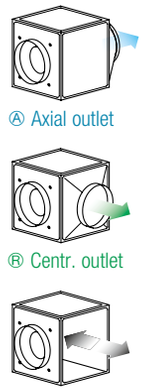

Any installation position and location due to five possible outlet directions.

Performance curves GBW 250/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	46	36	44	39	32	29	21	18
L_{WA}	Inlet side	dB(A)	58	40	48	51	53	54	48	38
L_{WA}	Outlet side	dB(A)	61	41	52	55	56	53	52	43

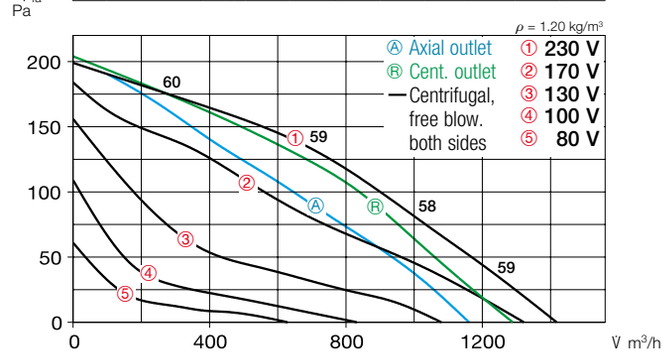

Dimensions GB 250

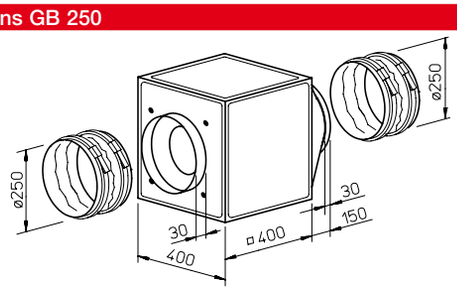

Dim. in mm

Casing
Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission.
Simple positioning with standard crane hook.

Impeller
Free-running high performance centrifugal impeller made of steel with backward curved blades on galvanised steel plate, directly driven. Energy-efficient with low noise emission.
Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

Drive
Through maintenance-free, speed-controllable external rotor motor in protection category IP44.
Ball bearing mounted, radio interference-free.

Electrical connection
Standard terminal box (IP54) on motor.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.

Power control
Speed-controllable through voltage reduction using a 5-step transformer.
Performance levels are shown in the performance curve as an example.

Installation
Any installation position and flexible installation due to five possible outlet directions of the outlet fitting.
The wall bracket (accessories) must be used for wall installation.
Protected outdoor installation possible with weather protection cover and grille (accessories).

Noise
The total level and range are specified above the performance diagram for:
- ▢ Case-radiated sound power
- ▢ Inlet side sound power
- ▢ Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.
- ▢ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Accessories

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 250 Ref. no. 05625

Weather protection grille for outlet-side coverage.
GB-WSG 250 Ref. no. 05637

Weather protection cover for protected outdoor installation.
GB-WSD 250 Ref. no. 05746

Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 250 Ref. no. 05642

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.
Accessory details	**Page**
Speed contr., controllers	601 ff.

Type	Ref. no.	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in control mode	Wiring diagram	Maximum air flow temp. at Rat. vol.	Maximum air flow temp. at control	Weight net aprx.	Transformer speed controller 5-step without motor protection circuit breaker	
		V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.
Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44													
GBW 250/4	05509	1420	1340	26	0.095	0.44	0.44	923	70	70	18.0	**TSW 1.5**	01495

GB 315

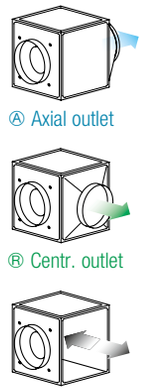

Any installation position and location due to five possible outlet directions.

Performance curves GBW 315/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	46	40	44	34	29	23	13	9
L_{WA}	Inlet side	dB(A)	58	38	51	55	52	51	47	41
L_{WA}	Outlet side	dB(A)	66	46	61	62	59	54	47	42

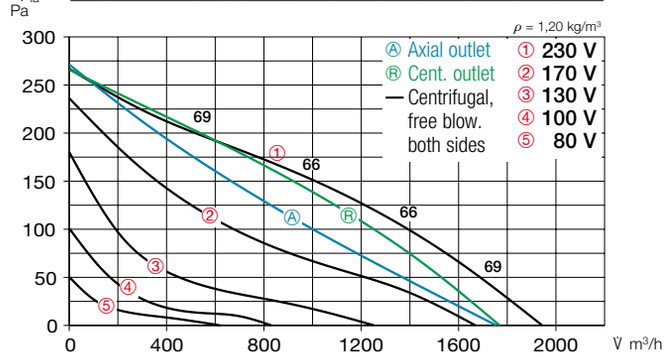

Dimensions GB 315

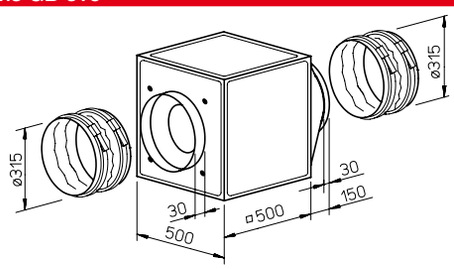

Dim. in mm

Casing
Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission.
Simple positioning with standard crane hook.

Impeller
Free-running high performance centrifugal impeller made of steel with backward curved blades, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 6.3.

Drive
Through maintenance-free, speed-controllable external rotor motor in protection category IP44.
Ball bearing mounted, radio interference-free.

Electrical connection
Standard terminal box (IP54) on motor.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.

Power control
Speed-controllable through voltage reduction using a 5-step transformer.
Performance levels are shown in the performance curve as an example.

Installation
Any installation position and flexible installation due to five possible outlet directions of the outlet fitting.
The wall bracket (accessories) must be used for wall installation.
Protected outdoor installation possible with weather protection cover and grille (accessories)

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.
- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Accessories

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 315 Ref. no. 05625

Weather protection grille for outlet-side coverage.
GB-WSG 315 Ref. no. 05638

Weather protection cover for protected outdoor installation.
GB-WSD 315 Ref. no. 05747

Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 315 Ref. no. 05643

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.

Accessory details	Page
Speed contr., controllers	601 ff.

Type	Ref. no.	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in control mode	Wiring diagram	Maximum air flow temp. at Rat. vol.	Maximum air flow temp. at control	Weight net aprx.	Transformer speed controller 5-step without motor protection circuit breaker Type	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg		
Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44													
GBW 315/4	05510	1940	1200	24	0.124	0.56	0.56	923	60	60	30.0	**TSW 1.5**	01495

GB 355

Any installation position and location due to five possible outlet directions.

GB 355 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120

Dimensions GB 355

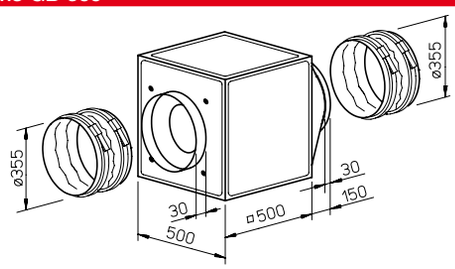

Dim. in mm

Dimensions GB 355 T120

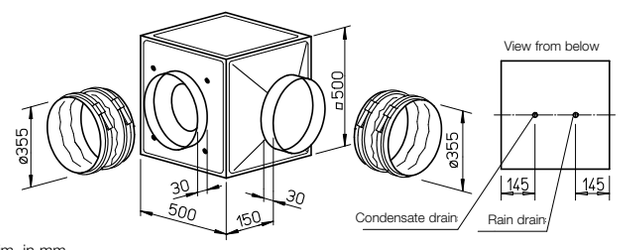

Dim. in mm

Special features of the GB T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation GB T120**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting.
  Protected outdoor installation possible with weather protection cover and grille (accessories).

Special features of the GB series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission.
  Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller with backward curved plastic blades (aluminium impellers for GB T120), directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 6.3.

- **Drive**
  Through maintenance-free, speed-controllable external rotor motor or IEC standard motor in protection category IP54. Ball bearing mounted.

Type	Ref. no.	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in control mode	Wiring diagram	Max. air flow temperature at Rat. vol.	Max. air flow temperature at Control	Weight net aprx.	Speed controller 5-step with motor prot. circuit breaker		Speed controller 5-step without motor prot. circuit breaker		Mot. prot. circ. break. for connecting built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54																	
GBW 355/4	05511	3280	1410	33	0.28	1.35	1.90	864	60	60	32.0	**MWS 3**	01948	**TSW 3.0**	01496	**MW**[1]	01579
Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54																	
GBD 355/4/4	05512	3030/3320	1200/1390	32	0.21/0.28	0.36/0.67	0.67	867	60	60	32.0	**RDS 1**	01314	**TSD 1.5**	01501	**MD**	05849
T120 **Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54**																	
GBW 355/4 T120	05770	3460	1340	36	0.32	1.55	1.75	935	120	120	38.0	**MWS 3**	01948	**TSW 3.0**	01496	**MW**[1]	01579
T120 **Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54**																	
GBD 355/4/4 T120	05771	2990/3470	1100/1360	36	0.22/0.33	0.40/0.75	0.75	947	120	120	38.0	**RDS 1**	01314	**TSD 0.8**	01500	**MD**	05849

1) Incl. operating switch

Performance curves GBW 355/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	50	44	48	38	34	28	18	14
L_{WA}	Inlet side	dB(A)	63	42	56	60	56	56	52	46
L_{WA}	Outlet side	dB(A)	70	50	66	66	64	58	52	46

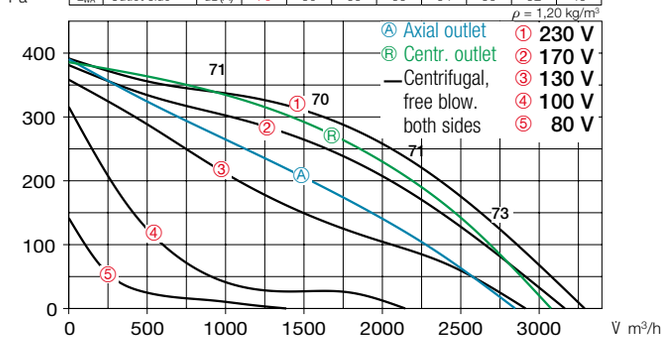

Performance curves GBD 355/4/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	48	44	36	32	30	22	18
L_{WA}	Inlet side	dB(A)	62	50	56	58	54	54	52	44
L_{WA}	Outlet side	dB(A)	69	62	62	64	64	60	50	46

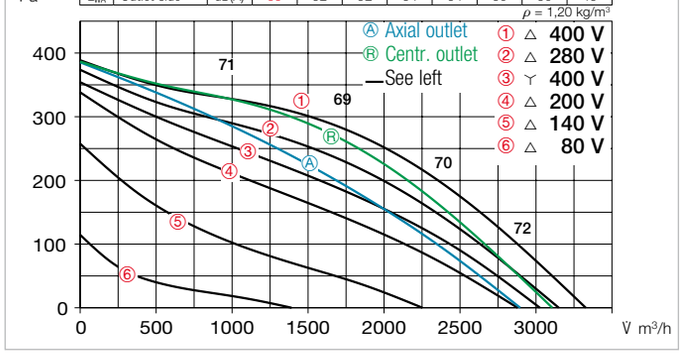

Performance curves GBW 355/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	48	52	49	47	44	41	38
L_{WA}	Inlet side	dB(A)	69	55	61	63	62	63	58	48
L_{WA}	Outlet side	dB(A)	71	55	63	64	66	65	57	49

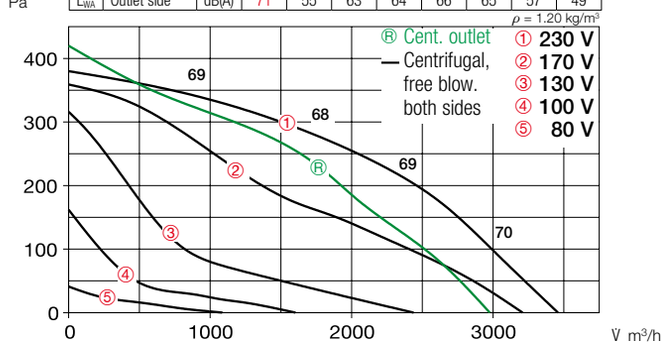

Performance curves GBD 355/4/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	48	52	49	47	44	41	38
L_{WA}	Inlet side	dB(A)	69	55	61	63	62	63	58	48
L_{WA}	Outlet side	dB(A)	71	55	63	64	66	65	57	49

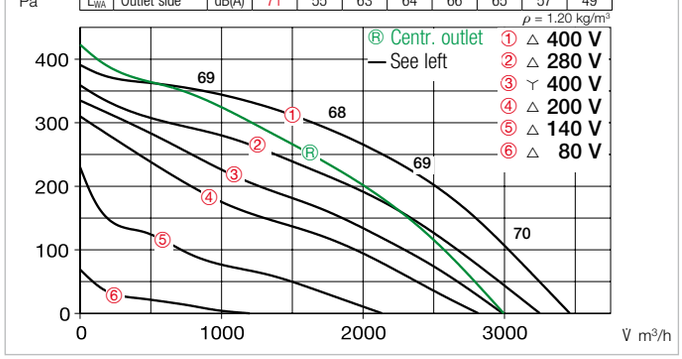

Electrical connection
Standard terminal box (IP54) on motor; on the motor support plate for GB T120.

Motor protection
With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

Power control
All types are speed-controllable using voltage reduction by means of transformer (accessories). The 3~ types can also be operated at two speeds using a ⅄/△ switch or motor protection circuit breaker M 4. Performance levels are shown in the performance diagram.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.
- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 355 Ref. no. 05625

Weather protection grille for outlet-side coverage.
GB-WSG 355 Ref. no. 05638

Weather protection cover for protected outdoor installation.
GB-WSD 355 Ref. no. 05747

Speed switch and on/off switch for two-speed ⅄/△ switchable three-phase current fans.
DS 2 [2)] Ref. no. 01351

[2)] required motor protection circuit breaker: Type MD, No. 05849.

Special accessories

☐ **for GB series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 355 Ref. no. 05643
(a condensate tray with condensate drain is included in delivery for GB T120).

☐ **for GB T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.

Accessory details	Page
Speed controllers and motor prot. circ. breakers	601 ff.

GB 400

Any installation position and location due to five possible outlet directions.

GB 400 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120

Dimensions GB 400

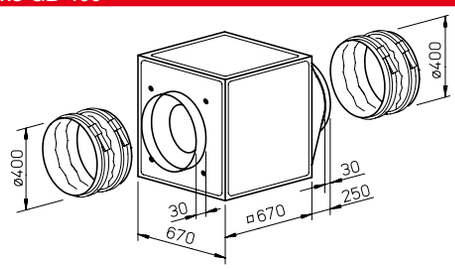

Dim. in mm

Dimensions GB 400 T120

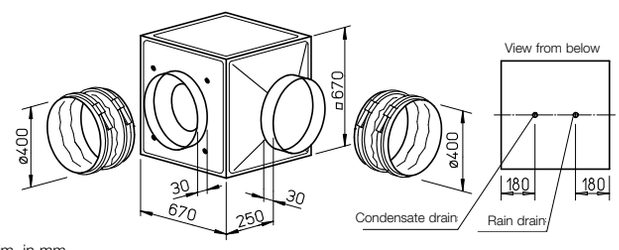

Dim. in mm

Special features of the GB T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation GB T120**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting.
  Protected outdoor installation possible with weather protection cover and grille (accessories).

Special features of the GB series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission.
  Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller with backward curved plastic blades on galvanised steel plate (aluminium impellers for GB T120), directly driven. Energy-efficient with low noise emission.
  Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Through maintenance-free, speed-controllable external rotor motor or IEC standard motor in protection category IP54. Ball bearing mounted.

Type	Ref. no.	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in control mode	Wiring diagram	Max. air flow temperature at Rat. vol.	Max. air flow temperature at Control	Weight net aprx.	Speed controller 5-step with motor prot. circuit breaker	Ref. no.	Speed controller 5-step without motor prot. circuit breaker	Ref. no.	Mot. prot. circ. break. for connecting built-in thermal contacts	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54																	
GBW 400/4	05513	4680	1400	29	0.51	2.45	3.26	864	60	60	52.0	**MWS 5**	01949	**TSW 5.0**	01497	**MW**[1]	01579
Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⋎/△ connection, protection category IP54																	
GBD 400/4/4	05514	4140/4650	1105/1355	28	0.31/0.44	0.51/0.88	0.92	867	60	60	52.0	**RDS 2**	01315	**TSD 1.5**	01501	**MD**	05849
T120 **Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54**																	
GBW 400/4 T120	05772	4930	1280	40	0.54	2.50	2.50	935	120	100	62.0	**MWS 3**	01948	**TSW 3.0**	01496	**MW**[1]	01579
T120 **Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⋎/△ connection, protection category IP54**																	
GBD 400/4/4 T120	05773	4010/4870	975/1255	40	0.29/0.48	0.50/1.10	1.10	947	120	120	62.0	**RDS 2**	01315	**TSD 1.5**	01501	**MD**	05849

1) Incl. operating switch

Performance curves GBW 400/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	46	44	37	36	28	24	20
L_{WA}	Inlet side	dB(A)	67	52	61	62	60	59	52	46
L_{WA}	Outlet side	dB(A)	71	62	64	65	65	62	57	50

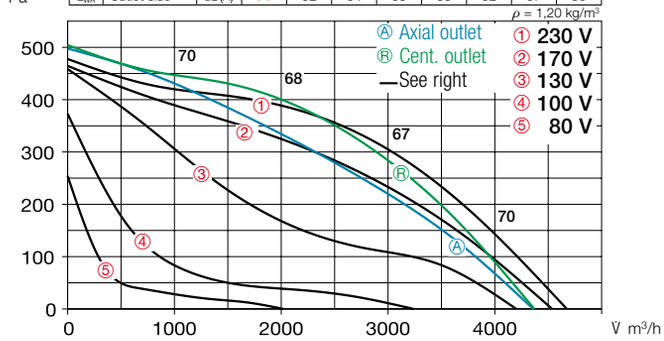

Performance curves GBD 400/4/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	53	50	48	43	39	36	33	22
L_{WA}	Inlet side	dB(A)	69	58	62	63	63	60	57	53
L_{WA}	Outlet side	dB(A)	75	64	67	69	70	67	59	57

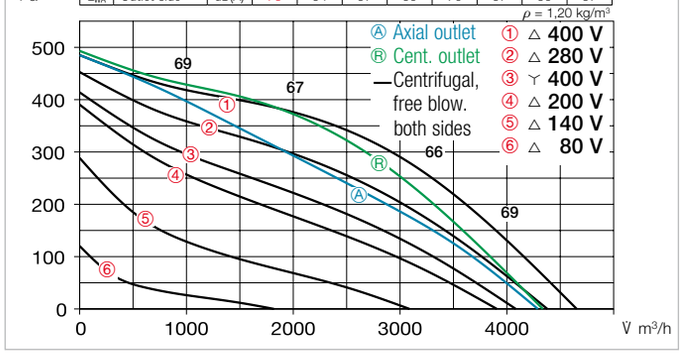

Performance curves GBW 400/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	56	53	51	52	50	47	39
L_{WA}	Inlet side	dB(A)	73	58	60	63	68	69	63	52
L_{WA}	Outlet side	dB(A)	75	62	62	65	71	70	67	54

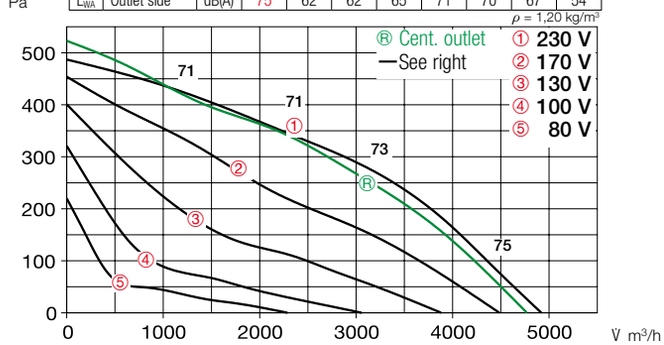

Performance curves GBD 400/4/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	56	53	51	52	50	47	39
L_{WA}	Inlet side	dB(A)	73	58	60	63	68	69	63	52
L_{WA}	Outlet side	dB(A)	75	62	62	65	71	70	67	54

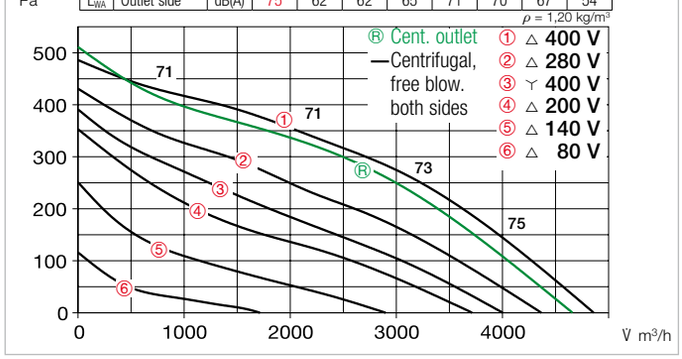

Electrical connection
Standard terminal box (IP54) on motor; on the motor support plate for GB T120.

Motor protection
With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

Power control
All types are speed-controllable using voltage reduction by means of transformer (accessories). The 3~ types can also be operated at two speeds using a ⅄/△ switch or motor protection circuit breaker M 4. Performance levels are shown in the performance diagram.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.
- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.
SDD-U Ref. no. 05627

Wall bracket for wall installation.
GB-WK 400 Ref. no. 05626

Weather protection grille for outlet-side coverage.
GB-WSG 400 Ref. no. 05639

Weather protection cover for protected outdoor installation.
GB-WSD 400 Ref. no. 05748

Speed switch and on/off switch for two-speed ⅄/△ switchable three-phase current fans.
DS 2 [2)] Ref. no. 01351

[2)] required motor protection circuit breaker: Type MD, No. 05849.

Special accessories

☐ **for GB series**
Condensate tray with drain connectors (central) for duct/hose connection.
GB-KW 400 Ref. no. 05644
(a condensate tray with condensate drain is included in delivery for GB T120).

☐ **for GB T120 series**
Rain drain for outdoor installation (Hole in casing base already provided).
GB-RA Ref. no. 09418

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.
Accessory details	**Page**
Speed controllers and motor prot. circ. breakers	601 ff.

GB 450

Any installation position and location due to five possible outlet directions.

GB 450 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120

Dimensions GB 450

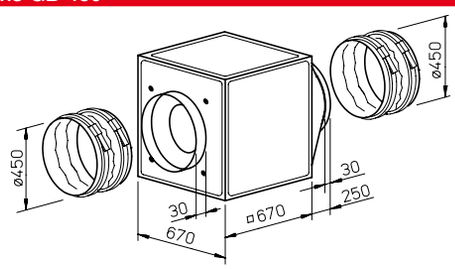

Dim. in mm

Dimensions GB 450 T120

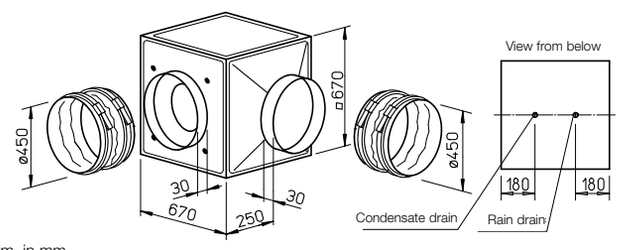

Dim. in mm

Special features of the GB T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation GB T120**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting.
  Protected outdoor installation possible with weather protection cover and grille (accessories).

Special features of the GB series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission.
  Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller with backward curved plastic blades (aluminium impellers for GB T120), directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Through maintenance-free, speed-controllable external rotor motor or IEC standard motor in protection category IP54. Ball bearing mounted.

- **Electrical connection**
  Standard terminal box (IP54) on motor; on the motor support plate for GB T120.

Type	Ref. no.	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in control mode	Wiring diagram	Max. air flow temperature at Rat. vol.	Max. air flow temperature at Control	Weight net aprx.	Speed controller 5-step with motor prot. circuit breaker		Speed controller 5-step without motor prot. circuit breaker		Mot. prot. circ. break. for connecting built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54																	
GBW 450/4	05515	4600	1380	40	0.66	2.90	4.0	864	45	45	49.0	**MWS 5**	01949	**TSW 5.0**	01497	**MW**[1]	01579
Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54																	
GBD 450/4/4	05516	5670/6500	1060/1345	42	0.50/0.73	0.87/1.47	1.52	867	55	55	50.0	**RDS 2**	01315	**TSD 1.5**	01501	**MD**	05849
T120 **Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54**																	
GBW 450/4 T120	05774	7110	1370	45	1.00	4.60	5.50	935	120	100	74.0	**MWS 7.5**	01950	**TSW 7.5**	01596	**MW**[1]	01579
T120 **Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54**																	
GBD 450/4/4 T120	05775	6210/7180	1100/1350	45	0.65/0.90	1.10/1.60	1.80	947	120	110	74.0	**RDS 2**	01315	**TSD 3.0**	01502	**MD**	05849

1) Incl. operating switch.

Performance curves GBW 450/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	56	56	51	47	44	39	31
L_{WA}	Inlet side	dB(A)	69	61	63	65	67	65	60	54
L_{WA}	Outlet side	dB(A)	75	64	66	68	70	68	63	57

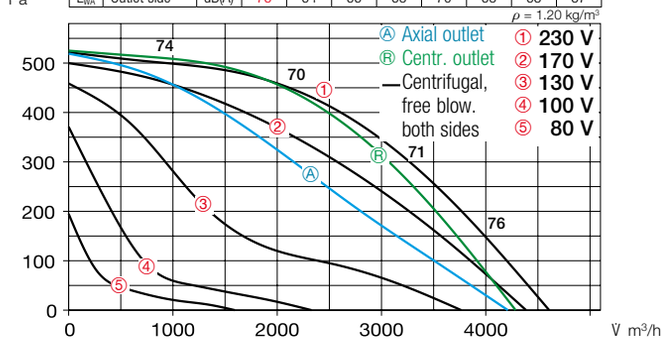

Performance curves GBD 450/4/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	59	58	48	47	45	41	35
L_{WA}	Inlet side	dB(A)	73	63	64	67	66	66	63	57
L_{WA}	Outlet side	dB(A)	79	68	72	73	73	71	66	59

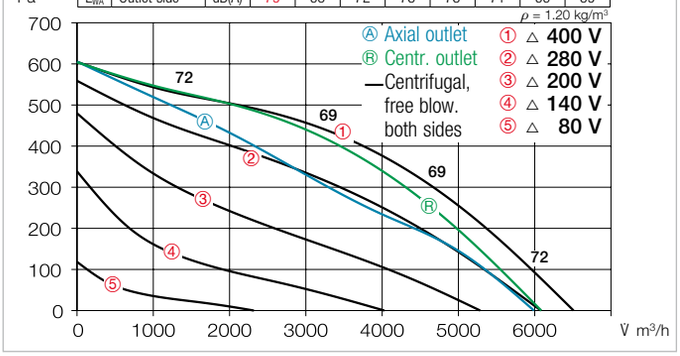

Performance curves GBW 450/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	61	58	56	57	55	52	44
L_{WA}	Inlet side	dB(A)	77	62	64	67	72	73	67	56
L_{WA}	Outlet side	dB(A)	80	67	68	70	76	75	72	59

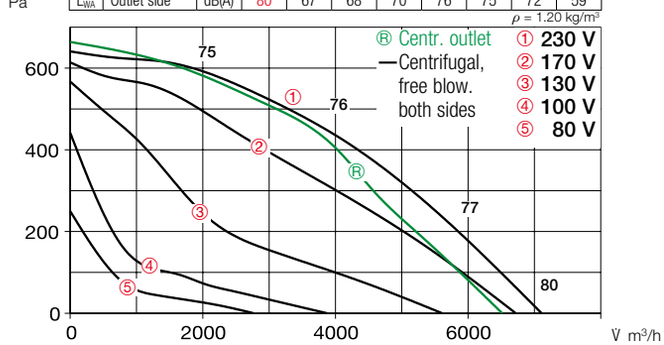

Performance curves GBD 450/4/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	61	58	56	57	55	52	44
L_{WA}	Inlet side	dB(A)	77	62	64	67	72	73	67	56
L_{WA}	Outlet side	dB(A)	80	67	68	70	76	75	72	59

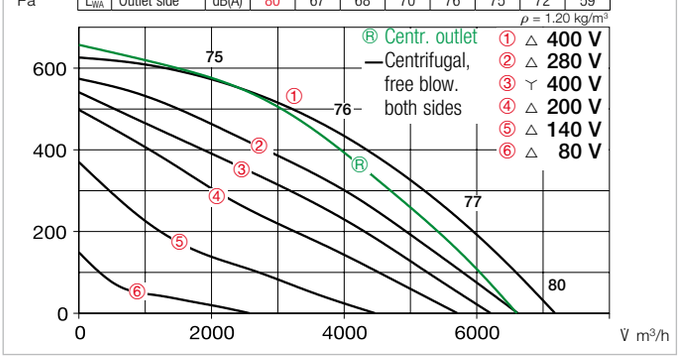

Motor protection

With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

Power control

All types are speed-controllable using voltage reduction by means of transformer (accessories). The 3~ types can also be operated at two speeds using a ⅄/△ switch or motor protection circuit breaker M 4. Performance levels are shown in the performance diagram.

Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.

- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.

SDD-U	Ref. no. 05627

Wall bracket for wall installation.

GB-WK 450	Ref. no. 05626

Weather protection grille for outlet-side coverage.

GB-WSG 450	Ref. no. 05639

Weather protection cover for protected outdoor installation.

GB-WSD 450	Ref. no. 05748

Speed switch and on/off switch for two-speed ⅄/△ switchable three-phase current fans.

DS 2 [2)]	Ref. no. 01351

[2)] required motor protection circuit breaker: Type MD, No. 05849.

Special accessories

☐ **for GB series**

Condensate tray with drain connectors (central) for duct/hose connection.

GB-KW 450	Ref. no. 05644

(a condensate tray with condensate drain is included in delivery for GB T120).

☐ **for GB T120 series**

Rain drain for outdoor installation (Hole in casing base already provided).

GB-RA	Ref. no. 09418

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.

Accessory details	Page
Speed controllers and motor prot. circ. breakers	601 ff.

GB 500

Any installation position and location due to five possible outlet directions.

GB 500 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120

Dimensions GB 500

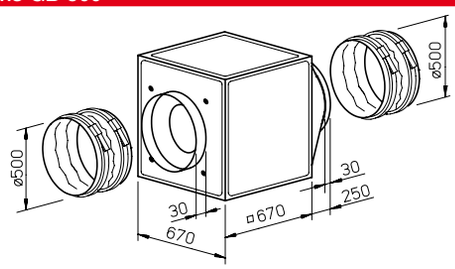

Dim. in mm

Dimensions GB 500 T120

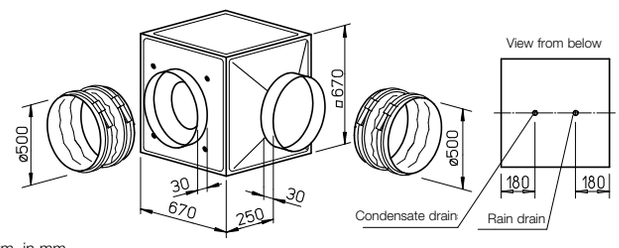

Dim. in mm

Special features of the GB T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation GB T120**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting.
  Protected outdoor installation possible with weather protection cover and grille (accessories).

Special features of the GB series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission.
  Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of aluminium with backward curved blades, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Through maintenance-free, speed-controllable external rotor motor or IEC standard motor in protection category IP54. Ball bearing mounted.

- **Electrical connection**
  Standard terminal box (IP54) on motor; on the motor support plate for GB T120.

Type	Ref. no.	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in control mode	Wiring diagram	Max. air flow temperature at Rat. vol.	Max. air flow temperature at Control	Weight net aprx.	Speed controller 5-step with motor prot. circuit breaker Type	Ref. no.	Speed controller 5-step without motor prot. circuit breaker Type	Ref. no.	Mot. prot. circ. break. for connecting built-in thermal contacts Type	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg						
Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54																	
GBW 500/4	05517	8320	1400	47	1.50	6.70	9.60	865	50	50	61	**MWS 10**	01946	**TSW 10**	01498	**MW**[1]	01579
Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54																	
GBD 500/4/4	05518	7650/8860	1075/1340	45	0.97/1.45	1.60/2.80	2.90	867	50	50	57	**RDS 7**	01578	**TSD 5.5**	01503	**MD**	05849
T120 **Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54**																	
GBW 500/4 T120	05776	8345	1340	45	1.40	6.1	7.0	301	120	100	75	**MWS 10**	01946	–		–	
T120 **Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54**																	
GBD 500/4/4 T120	05777	7320/8350	1120/1370	45	0.95/1.30	1.60/2.50	2.5	947	120	110	75	**RDS 4**	01316	**TSD 3.0**	01502	**MD**	05849

1) Incl. operating switch

Performance curves GBW 500/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	67	64	63	53	52	50	46	40
L_{WA}	Inlet side	dB(A)	79	63	72	72	74	72	66	59
L_{WA}	Outlet side	dB(A)	83	72	75	76	78	75	71	67

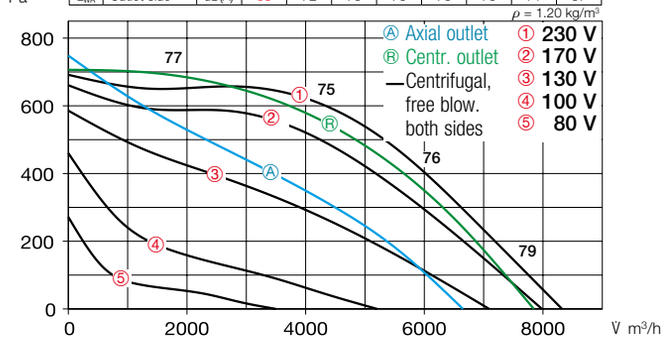

Performance curves GBD 500/4/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	59	62	57	56	47	41	33
L_{WA}	Inlet side	dB(A)	77	57	66	69	74	70	64	55
L_{WA}	Outlet side	dB(A)	80	61	73	74	74	73	69	60

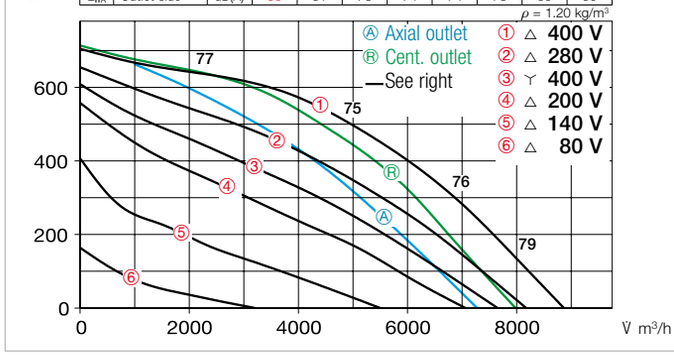

Performance curves GBW 500/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	54	61	58	57	56	50	42
L_{WA}	Inlet side	dB(A)	79	65	71	73	72	73	68	58
L_{WA}	Outlet side	dB(A)	82	66	74	75	77	76	68	60

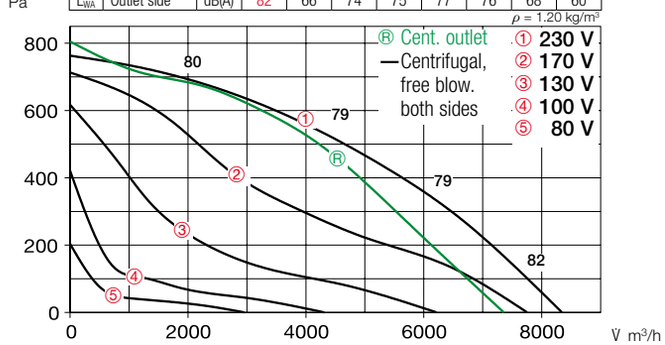

Performance curves GBD 500/4/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	54	61	58	57	56	50	42
L_{WA}	Inlet side	dB(A)	79	65	71	73	72	73	68	58
L_{WA}	Outlet side	dB(A)	82	66	74	75	77	76	68	60

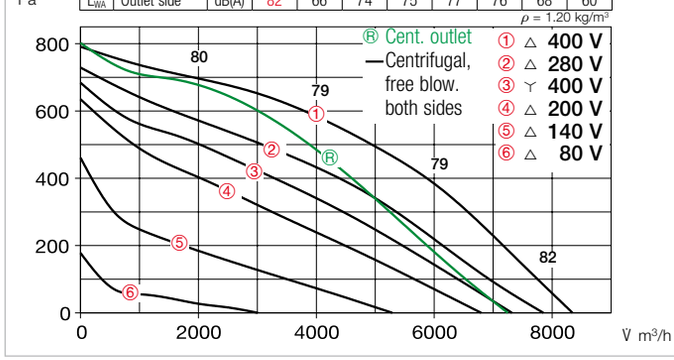

Motor protection

With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

Power control

All types are speed-controllable using voltage reduction by means of transformer (accessories). The 3~ types can also be operated at two speeds using a ⅄/△ switch or motor protection circuit breaker M 4. Performance levels are shown in the performance diagram.

Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.

- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.

SDD-U	Ref. no. 05627

Wall bracket for wall installation.

GB-WK 500	Ref. no. 05626

Weather protection grille for outlet-side coverage.

GB-WSG 500	Ref. no. 05639

Weather protection cover for protected outdoor installation.

GB-WSD 500	Ref. no. 05748

Speed switch and on/off switch for two-speed ⅄/△ switchable three-phase current fans.

DS 2 [2)]	Ref. no. 01351

[2)] required motor protection circuit breaker: Type MD, No. 05849.

Special accessories

☐ **for GB series**

Condensate tray with drain connectors (central) for duct/hose connection.

GB-KW 500	Ref. no. 05644

(a condensate tray with condensate drain is included in delivery for GB T120).

☐ **for GB T120 series**

Rain drain for outdoor installation (Hole in casing base already provided).

GB-RA	Ref. no. 09418

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.

Accessory details	Page
Speed controllers and motor prot. circ. breakers	601 ff.

GB 560

Any installation position and location due to five possible outlet directions.

GB 560 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120

Dimensions GB 560

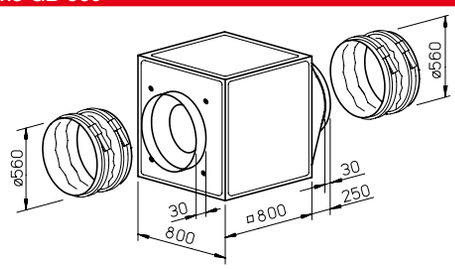

Dim. in mm

Dimensions GB 560 T120

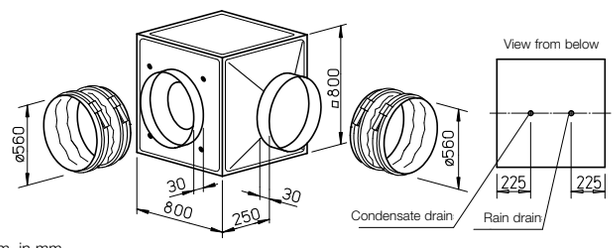

Dim. in mm

Special features of the GB T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation GB T120**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting.
  Protected outdoor installation possible with weather protection cover and grille (accessories).

Special features of the GB series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission.
  Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of aluminium with backward curved blades, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Through maintenance-free, speed-controllable external rotor motor or IEC standard motor in protection category IP54. Ball bearing mounted.

- **Electrical connection**
  Standard terminal box (IP54) on motor; on the motor support plate for GB T120.

Type	Ref. no.	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in control mode	Wiring diagram	Max. air flow temperature at Rat. vol.	Max. air flow temperature at Control	Weight net aprx.	Speed controller 5-step with motor prot. circuit breaker Type	Ref. no.	Speed controller 5-step without motor prot. circuit breaker Type	Ref. no.	Mot. prot. circ. break. for connecting built-in thermal contacts Type	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg						
Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54																	
GBW 560/4	05508	9150	1410	45	1.83	7.93	11.1	865	45	45	92	**MWS 10**	01946	**TSW 10**	01498	**MW**[1]	01579
Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54																	
GBD 560/6/6	05522	7500/8670	705/885	35	0.51/0.80	0.90/1.85	1.90	867	50	50	80	**RDS 4**	01316	**TSD 3.0**	01502	**MD**	05849
GBD 560/4/4	05521	11100/12610	1110/1350	44	1.70/2.60	2.80/4.80	4.90	867	50	40	90	**RDS 7**	01578	**TSD 7.0**	01504	**MD**	05849
T120 **Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54**																	
GBD 560/4/4 T120	05778	11520/12300	1250/1400	48	1.85/2.50	3.20/6.80	6.80	520	120	120	105	**RDS 7**	01578	**TSD 7.0**	01504	**MD**	05849

1) Incl. operating switch.

Performance curves GBD 560/6/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	55	52	51	42	40	37	32	25
L_{WA}	Inlet side	dB(A)	68	51	53	63	64	61	53	43
L_{WA}	Outlet side	dB(A)	72	60	62	69	67	66	61	50

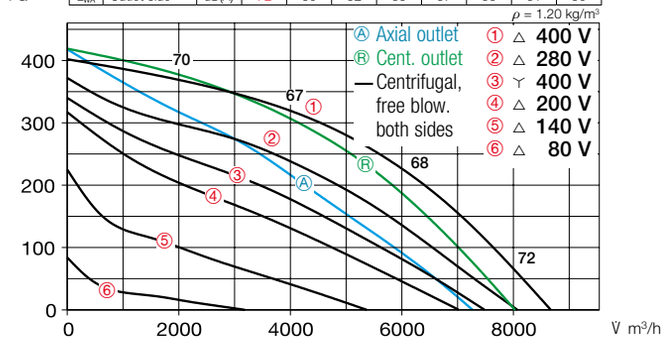

Performance curves GBD 560/4/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	64	64	64	48	50	46	43	37
L_{WA}	Inlet side	dB(A)	77	57	66	69	74	70	64	55
L_{WA}	Outlet side	dB(A)	81	62	74	75	75	74	70	61

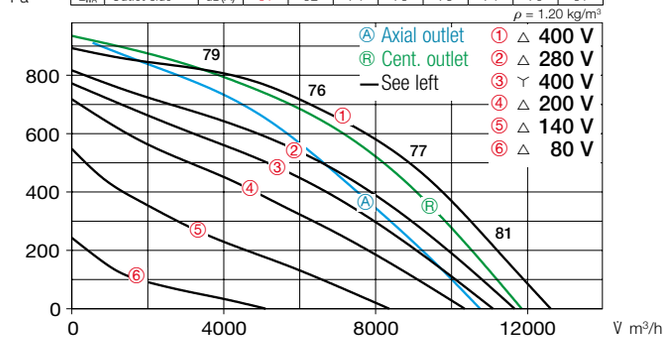

Performance curves GBD 560/4/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	61	62	60	60	60	56	50
L_{WA}	Inlet side	dB(A)	82	69	78	75	74	73	70	62
L_{WA}	Outlet side	dB(A)	85	76	77	79	79	77	72	64

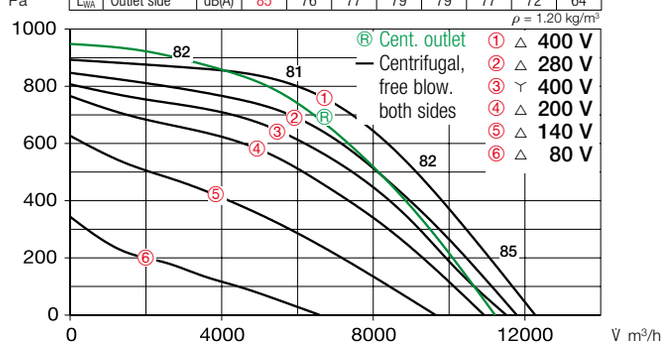

Performance curves GBW 560/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	62	61	51	50	48	44	38
L_{WA}	Inlet side	dB(A)	76	63	68	69	71	69	64	57
L_{WA}	Outlet side	dB(A)	82	71	73	76	77	74	70	61

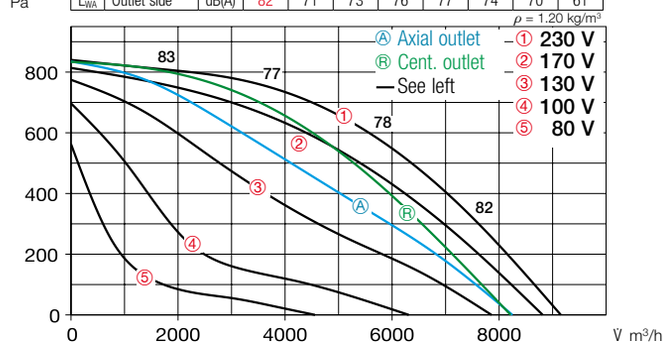

Motor protection

With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

Power control

All types are speed-controllable using voltage reduction by means of transformer (accessories). The 3~ types can also be operated at two speeds using a ⅄/△ switch or motor protection circuit breaker M 4. Performance levels are shown in the performance diagram.

Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.

- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.

SDD-U	Ref. no. 05627

Wall bracket for wall installation.

GB-WK 560	Ref. no. 05626

Weather protection grille for outlet-side coverage.

GB-WSG 560	Ref. no. 05640

Weather protection cover for protected outdoor installation.

GB-WSD 560	Ref. no. 05749

Speed switch and on/off switch for two-speed ⅄/△ switchable three-phase current fans.

DS 2 [2)]	Ref. no. 01351

[2)] required motor protection circuit breaker: Type MD, No. 05849.

Special accessories

☐ **for GB series**

Condensate tray with drain connectors (central) for duct/hose connection.

GB-KW 560	Ref. no. 05645

(a condensate tray with condensate drain is included in delivery for GB T120).

☐ **for GB T120 series**

Rain drain for outdoor installation (Hole in casing base already provided).

GB-RA	Ref. no. 09418

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.
Accessory details	**Page**
Speed controllers and motor prot. circ. breakers	601 ff.

GB 630

Any installation position and location due to five possible outlet directions.

GB 630 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120

Dimensions GB 630

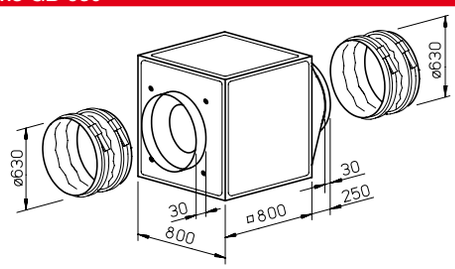

Dim. in mm

Dimensions GB 630 T120

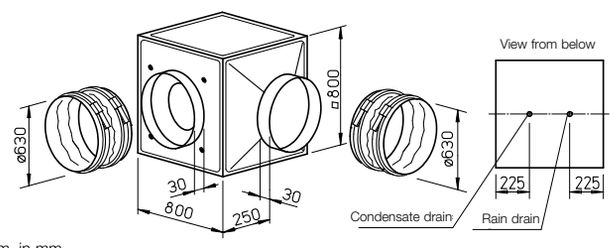

Dim. in mm

Special features of the GB T120 series

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation GB T120**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting.
  Protected outdoor installation possible with weather protection cover and grille (accessories).

Special features of the GB series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission.
  Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of aluminium with backward curved blades, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Through maintenance-free, speed-controllable external rotor motor or IEC standard motor in protection category IP54. Ball bearing mounted.

- **Electrical connection**
  Standard terminal box (IP54) on motor; on the motor support plate for GB T120.

Type	Ref. no.	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in control mode	Wiring diagram	Max. air flow temperature at Rat. vol.	Max. air flow temperature at Control	Weight net aprx.	Speed controller 5-step with motor prot. circuit breaker		Speed controller 5-step without motor prot. circuit breaker		Mot. prot. circ. break. for connecting built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54																	
GBD 630/6/6	05524	8600/9990	720/890	42	0.64/0.93	1.08/1.88	2.03	867	60	60	86	**RDS 4**	01316	**TSD 5.5**	01503	**MD**	05849
GBD 630/4/4	05523	12950/14430	1130/1380	51	2.40/3.45	4.10/6.20	7.20	867	60	60	105	**RDS 11**	01332	**TSD 11**	01513	**MD**	05849
T120 **Three-phase current motor, 3~, 400 V, 50 Hz, protection category IP54**																	
GBD 630/4 T120	05779	14140	1445	53	4.40	8.0	–	499	120	–	105	–	–	–	–	**MD**	05849

Performance curves GBD 630/6/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	59	58	48	47	45	41	35
L_{WA}	Inlet side	dB(A)	73	63	64	67	66	66	63	57
L_{WA}	Outlet side	dB(A)	79	68	72	73	73	71	66	59

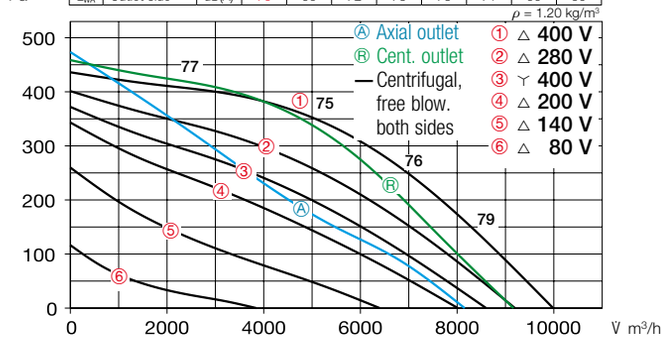

Performance curves GBD 630/4/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	71	68	57	57	56	54	50	44
L_{WA}	Inlet side	dB(A)	82	72	73	76	75	75	72	66
L_{WA}	Outlet side	dB(A)	88	77	81	82	82	80	75	68

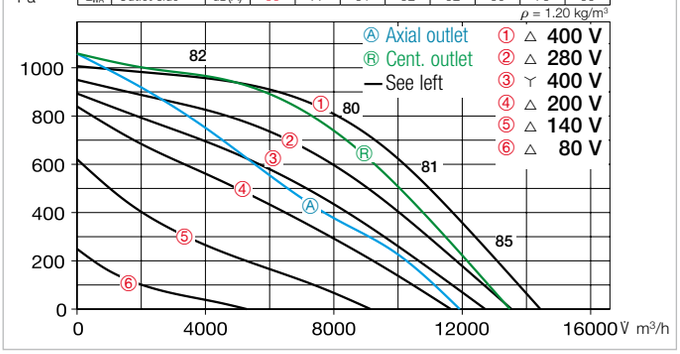

Performance curves GBD 630/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	73	66	67	65	65	65	61	55
L_{WA}	Inlet side	dB(A)	87	74	83	80	79	78	75	67
L_{WA}	Outlet side	dB(A)	90	81	82	84	84	82	77	69

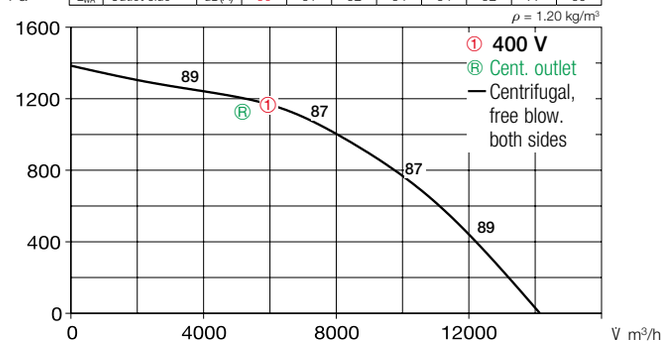

Motor protection

Types GBD with external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker. Type GBD T120 with PTC thermistors for direct wiring to the motor protection circuit breaker or the frequency converter FU-BS (see type table, accessories).

Power control

All types (except for GBD T120) are speed-controllable using voltage reduction by means of transformer (accessories).
The 3~ types can also be operated at two speeds using a ⋎/△ switch or motor protection circuit breaker M 4; Type GBD T120 can only be controlled using a frequency converter with sine filter. Performance levels are shown in the performance diagram.

Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.

- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Accessories for both series

Vibration dampers for indoor installation. 1 set = 4 pcs.

SDD-U	Ref. no. 05627

Wall bracket for wall installation.

GB-WK 630	Ref. no. 05626

Weather protection grille for outlet-side coverage.

GB-WSG 630	Ref. no. 05640

Weather protection cover for protected outdoor installation.

GB-WSD 630	Ref. no. 05749

Special accessories

☐ **for GB series**

Condensate tray with drain connectors (central) for duct/hose connection.

GB-KW 630	Ref. no. 05645

(a condensate tray with condensate drain is included in delivery for GB T120).

Speed switch and on/off switch for two-speed ⋎/△ switchable three-phase current fans.

DS 2 [1]	Ref. no. 01351

[1] required motor protection circuit breaker: Type MD, No. 05849.

☐ **for GB T120 series**

Rain drain for outdoor installation (Hole in casing base already provided).

GB-RA	Ref. no. 09418

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.

Accessory details	Page
Speed controllers and motor prot. circ. breakers	601 ff.

GB 710

Any installation position and location due to five possible outlet directions.

GB 710 T120



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.

T120

Dimensions GB 710

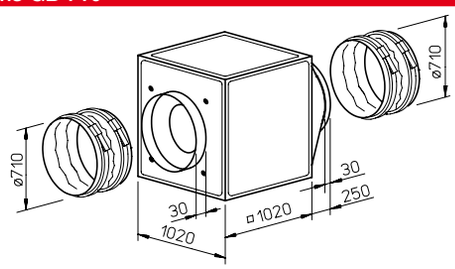

Dim. in mm

Dimensions GB 710 T120

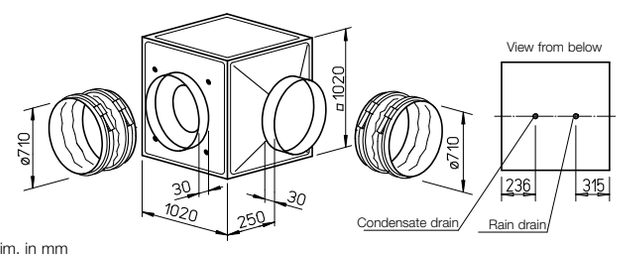

Dim. in mm

Special features of the GB T120 seriesT120

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

- **Installation GB T120**
  Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting.
  Protected outdoor installation possible with weather protection cover and grille (accessories).

Special features of the GB series

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

Description for both series

- **Casing**
  Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining.
  Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission.
  Simple positioning with standard crane hook.

- **Impeller**
  Free-running high performance centrifugal impeller made of aluminium with backward curved blades, directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.

- **Drive**
  Through maintenance-free, speed-controllable external rotor motor or IEC standard motor in protection category IP54. Ball bearing mounted.

- **Electrical connection**
  Standard terminal box (IP54/55) on motor; on the motor support plate for GB T120.

Type	Ref. no.	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in control mode	Wiring diagram	Max. air flow temperature at Rat. vol.	Max. air flow temperature at Control	Weight net aprx.	Speed controller 5-step with motor prot. circuit breaker Type	Ref. no.	Speed controller 5-step without motor prot. circuit breaker Type	Ref. no.	Mot. prot. circ. break. for connecting built-in thermal contacts Type	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg						
Three-phase current motor, 3~, 400 V, 50 Hz, protection category IP55																	
GBD 710/4	05529	20285	1465	51	5.97	10.20	–	499	75	–	170	–		–		**MD**	05849
Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, ⅄/△ connection, protection category IP54																	
GBD 710/6/6	05525	16000/18740	690/890	46	1.55/2.45	2.90/4.70	4.70	867	45	45	157	**RDS 7**	01578	**TSD 7.0**	01504	**MD**	05849
T120 **Three-phase current motor, 3~, 400 V, 50 Hz, protection category IP54**																	
GBD 710/4 T120	05756	18200	1465	55	5.89	10.4	–	499	120	–	188	–		–		**MD**	05849

Performance curves GBD 710/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	71	67	68	58	56	53	48	41
L_{WA}	Inlet side	dB(A)	82	70	73	77	76	74	71	60
L_{WA}	Outlet side	dB(A)	88	71	73	83	84	81	73	63

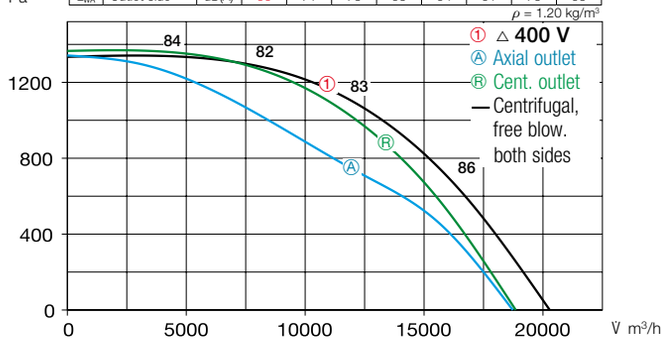

Performance curves GBD 710/6/6

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	66	63	62	53	51	48	43	36
L_{WA}	Inlet side	dB(A)	79	62	64	74	75	72	64	54
L_{WA}	Outlet side	dB(A)	83	71	75	80	78	77	72	61

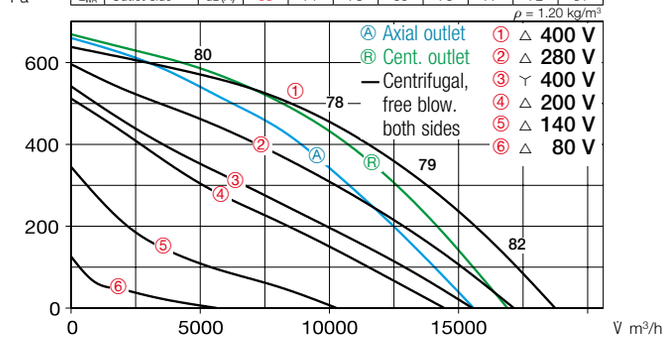

Performance curves GBD 710/4 T120

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	75	70	67	65	68	65	64	61
L_{WA}	Inlet side	dB(A)	86	73	76	76	81	81	67	69
L_{WA}	Outlet side	dB(A)	87	77	78	80	81	82	77	70

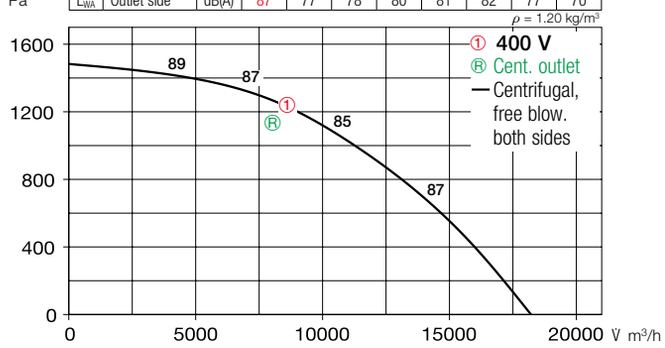

Motor protection

Types GBD with external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker. Type GBD T120 with PTC thermistors for direct wiring to the motor protection circuit breaker or the frequency converter FU-BS (see type table, accessories).

Power control

All types (except for GBD T120) are speed-controllable using voltage reduction by means of transformer (accessories). GBD 710/6/6 can also be operated at two speeds using a ⅄/△ switch or motor protection circuit breaker M 4; Type GBD T120 can only be controlled using a frequency converter with sine filter. Performance levels are shown in the performance diagram.

Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.

- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Special accessories

☐ **for GB series**

Condensate tray with drain connectors (central) for duct/hose connection.

GB-KW 710 Ref. no. 05646

(a condensate tray with condensate drain is included in delivery for GB T120).

Speed switch and on/off switch for two-speed ⅄/△ switchable three-phase current fans.

DS 2 [1] Ref. no. 01351

[1] required motor protection circuit breaker: Type MD, No. 05849.

☐ **for GBD 710/6/6**

Vibration dampers for indoor installation. 1 set = 4 pcs.

SDD-U Ref. no. 05627

☐ **for GB T120 series**

Rain drain for outdoor installation (Hole in casing base already provided).

GB-RA Ref. no. 09418

Accessories for both series

Weather protection grille for outlet-side coverage.

GB-WSG 710 Ref. no. 05641

Weather protection cover for protected outdoor installation.

GB-WSD 710 Ref. no. 05750

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.

Accessory details	Page
Speed controllers and motor prot. circ. breakers	601 ff.

Application
Noise-encapsulated centrifugal fan with retractable motor-impeller unit and motor located outside of the air flow. Suitable for harsh operating conditions and the transportation of contaminated, greasy, hot (up to +100 °C, types MBD EC up to +120 °C) and humid air against high resistances. Ideal as extract air fan for extraction hood in commercial kitchens.

MB EC
MegaBox types with EC drive technology are optionally available for energy-saving applications and low operating costs.

Casing

MB 315 – 400 and MB Ex
Double-walled, made of galvanised steel sheet. Sound insulated by lining with 50 mm thick mineral wool insulation boards. Duct connectors on inlet side and outlet side, with rubber lip seal, adapted to standard diameter. Motor-impeller unit fully retractable for inspection and cleaning, suspended on stable hinges. Includes mounting rails made of galvanised steel with screwed-on vibration dampers for easy installation.

MB 225 – 280 and MB EC
Like MB 315 – 400, but lined with 30 mm thick mineral wool insulation boards. Comes with condensate drain and drip protection with the doors open as standard.

Impeller
High performance centrifugal impeller with good level of efficiency. All types are backward curved and made of aluminium, MB EC 225 to 250 made of galvanised steel sheet. MB Ex series types are forward curved and made of galvanised steel. Dynamically balanced in accordance with DIN ISO 21940-11 – quality grade 6.3.

Drive

MB
Maintenance-free squirrel-cage rotor motor in IEC dimensions pursuant to DIN EN 60034/ VDE 0530 and DIN EN 60335-1/ VDE 0700-1 as well as other relevant standards. With flange mounting and self-ventilation. Thermal overload protection through thermal contacts in the winding. Suitable for continuous operation S1. Insulation class F. Closed casing in protection category IP55.

MB EC
Energy-saving, speed-controllable EC external rotor motor in protection category IP55 with a high level of efficiency, located outside of the air flow. Maintenance-free and ball bearing mounted.

Power control

MB
All types (except for explosion-proof types) are speed-controllable using voltage reduction by means of transformer controllers. The three-phase current types can also be operated at two speeds by star/delta connection or motor protection circuit breaker. The power level can then be set according to requirements and optimally to the desired operating point. One or more fans can be operated until the max. rated current is reached with the offered speed controllers. 10% power reserves must be provided when dimensioning the speed controller.

MB EC
All EC types have continuously variable control using via speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. Performance levels are shown on the performance curve as examples.

Electrical connection
Standard terminal box mounted to external cable, protection category IP55.
The swivelling range of the motor-impeller unit must be considered when cutting the connecting cable to length.
For MBD 315/2/2, 355/2/2 and 400/2/2, terminal box on outside of motor.

Motor protection

MB
With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

MB EC
Integrated electronic temperature monitoring system for EC motor and electronics. If the maximum permissible motor temperature is exceeded, 3~ types will automatically reduce the speed which then returns back to the originally set value after cooling down. The motors in 1~ types will be deactivated if the maximum permissible temperature is exceeded.

Explosion protection
The explosion-proof types correspond to unit group II, category 2G for operation in zone 1 and 2 in accordance with Directive 2014/34/EU (ATEX).

Air flow direction
The air flow direction cannot be changed for centrifugal fans. The correct motor rotation direction is marked by arrows on the fan and must be checked during commissioning.

Incorrect direction of rotation
Operation in the incorrect direction of rotation overloads the AC motor and causes the thermal contacts to respond. Typical concomitant features include: Low flow rate, vibration and abnormal noise.

Air flow temperature
The maximum permissible air flow temperature is shown in the type table.

Ambient temperature
From –40 °C to +40 °C.

Installation position, installation
The swivelling range and weight of the motor-impeller unit and free accessibility must be taken into account for positioning.

Structure-borne noise transmission
to buildings and duct systems must be prevented. The fan must not be rigidly connected to the pipeline; flexible connecting sleeves (type FM, accessories) must be used.

References	Page
Planning information, acoustics	14 ff.
General techn. information, power control	18 ff.

Other accessories	Page
Flexible connecting sleeve,	280
speed controller and protection circuit breakers	601 ff.
Universal control system, electronic controllers, speed potentiometer for MB EC types	615 ff.

By combining the parameters of static pressure increase Δp_{fa}, case-radiated noise and inlet side air noise as sound pressure at 1 m (free field conditions), the following table facilitates the selection of MegaBox centrifugal fans.

EC	Sound pres. Radiation	Sound pres. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure												
	L_{PA} dB(A)	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
Type	at 1 m dist.	at 1 m dist.	**0**	**50**	**100**	**200**	**300**	**400**	**500**	**600**	**700**	**800**	**1000**	**1500**	**2000**
MBW EC 225	55	66	1350	1238	1250	1123	1000	878	764	500					
MBW EC 250	56	73	1900	1815	1730	1560	1420	1270	1125	985	800				
MBW EC 280	56	71	2620	2550	2475	2320	2150	1945	1680	1380	1000	545			
MBD EC 280	58	75	3000	2940	2860	2740	2625	2440	2300	2140	1945	1625	900		
MBW EC 315	50	62	2150	2035	1915	1620	1000								
MBW EC 315 A	59	73	3400	3320	3235	3080	2920	2740	2550	2270	1900	1380			
MBW EC 315 B	65	81	4200	4140	4065	3920	3800	3670	3530	3380	3220	3090	2700		
MBW EC 355	54	69	3050	2920	2790	2470	2080	1350							
MBW EC 355 A	66	78	5000	4890	4830	4680	4550	4380	4240	4045	4100	3530	2914		
MBW EC 355 B	68	82	5600	5520	5450	5255	5130	4940	4770	4640	4470	4300	3850	2210	
MBD EC 400 A	68	80	5000	4890	4760	4565	4370	4130	3870	3520	3050	2200			
MBD EC 400 B	72	85	6550	6475	6400	6300	6160	6000	5800	5550	5350	5100	4550	2525	

	Sound pres. Radiation	Sound pres. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure												
	L_{PA} dB(A)	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
Type	at 1 m dist.	at 1 m dist.	**0**	**50**	**100**	**200**	**300**	**400**	**500**	**600**	**700**	**800**	**1000**	**1500**	**2000**
MBW 225/2	52	64	1170	1130	1090	1010	920	800	640	370					
MBD 225/2/2	52	65	1170	1130	1090	1000	900	790	650	310					
MBW 250/2	55	68	1620	1580	1530	1430	1320	1200	1040	850	510				
MBD 250/2/2	56	68	1590	1550	1510	1430	1330	1210	1050	860	250				
MBD 280/2/2	60	75	2520	2470	2420	2320	2190	2040	1880	1710	1510	1250			
MBW 315/4	41	61	1950	1820	1640	1270	820								
MBD 315/4/4	41	61	1990	1860	1720	1310	910								
MBD 315/2/2	64	80	3980	3910	3820	3660	3450	3500	3050	2750	2630	2440	2090	800	
MBW 355/4	43	60	2810	2660	2520	2070	1630	1140							
MBD 355/4/4	42	60	2850	2660	2440	2070	1650	1200							
MBD 355/2/2	68	84	5800	5770	5680	5480	5280	5030	4800	4570	4390	4160	3700	2700	
MBW 400/4	48	70	3550	3360	3170	2800	2470	2090	1640	750					
MBD 400/4/4	50	69	3440	3290	3140	2800	2460	2100	1630	720					
MBD 400/2/2	74	90	7500	7380	7270	7070	6830	6660	6480	6310	6130	5990	5610	4730	3500

Ex	Sound pres. Radiation	Sound pres. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure												
	L_{PA} dB(A)	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
Type	at 1 m dist.	at 1 m dist.	**0**	**50**	**100**	**200**	**300**	**400**	**500**	**600**	**700**	**800**	**1000**	**1500**	**2000**
MBD 160/4 Ex	48	64	960	850	730										
MBD 160/2 Ex	63	79	2020	1970	1920	1820	1700	1570	1420	1270	1110				
MBD 180/4 Ex	51	67	1390	1290	1180	860									
MBD 200/4 Ex	54	70	*	*	1840	1530	1080								
MBD 225/4 Ex	56	74	*	2720	2570	2250	1840	940							
MBD 250/4 Ex	62	78	4130	3990	3840	3520	3150	2670	1950						
MBD 280/6 Ex	56	72	*	*	3240	2740									
MBD 280/4 Ex	65	81	*	*	*	*	4800	4410	3900	3150					

* Consider required minimum system resistance.

MB EC 225

Performance curves MBW EC 225

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	75	54	67	70	70	67	66	63
L_{WA}	Inlet side	dB(A)	75	50	64	72	66	69	67	62
L_{WA}	Outlet side	dB(A)	63	47	51	52	59	58	53	42

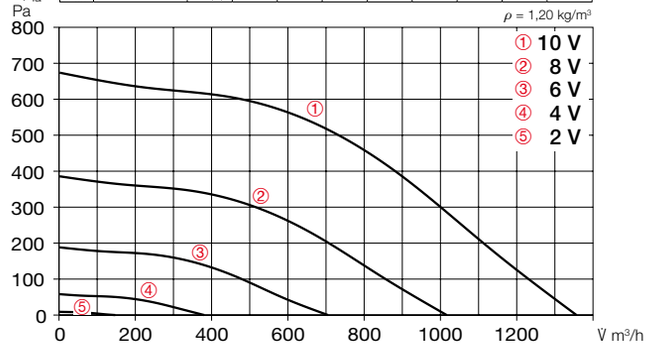

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3000	1350	200	1.62	55	0.53
8	2300	1000	100	0.88	52	0.35
6	1600	700	50	0.45	47	0.23
4	900	390	20	0.21	38	0.17

Dimensions MB EC 225

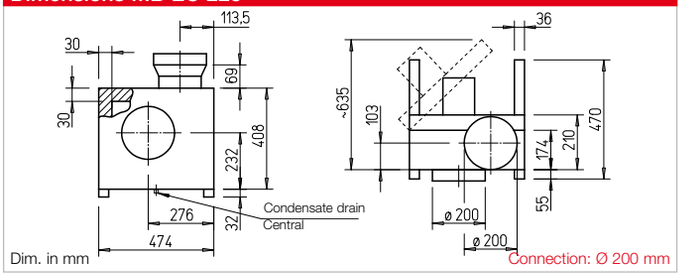

Casing
Double-walled, made of galvanised steel sheet. Sound insulated by lining with 30 mm thick mineral wool insulation boards. Duct connectors on inlet side and outlet side, with rubber lip seal, adapted to standard diameter. Motor-impeller unit fully retractable for inspection and cleaning, suspended on stable hinges. Comes with condensate drain and drip protection with the doors open as standard. Includes mounting rails made of galvanised steel with screwed-on vibration dampers for easy installation.

Impeller
Backward curved, free-running high performance centrifugal impeller made of galvanised steel, mounted directly on motor shaft. High efficiency, low noise. Dynamically balanced in accordance with DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC internal rotor motor in protection category IP55 with a high level of efficiency, located outside of the air flow. Maintenance-free and radio interference-free, ball bearing mounted.

Electrical connection
Standard terminal box (IP55) mounted to external cable.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics. The motor is deactivated if the maximum permissible temperature is exceeded.

Power control
Continuously variable speed control with potentiometer or continuously variable speed control with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories

Wall bracket made of galv. steel sheet.
MB-WK EC225 Ref. no. 05526

Weather protection cover made of galv. steel sheet, mounted above motor.
MB-WSD EC225 No. 01856

Flexible connecting sleeve for installation between fan and duct.
☐ Max. temperature +70 °C
FM 200 Ref. no. 01670
☐ Max. temperature +120 °C
FM 200 T120 Ref. no. 01654

Accessory details	Page
Universal control system, electronic controller, speed potentiometer	615 ff.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surf.-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) at 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP55																
MBW EC 225	05842	200	1350	3000	55	0.23	3.1	1568	100	25	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

MB EC 250

Performance curves MBW EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	77	61	70	72	70	68	68	64
L_{WA}	Inlet side	dB(A)	75	57	65	71	69	71	68	62
L_{WA}	Outlet side	dB(A)	58	40	48	54	51	53	49	43

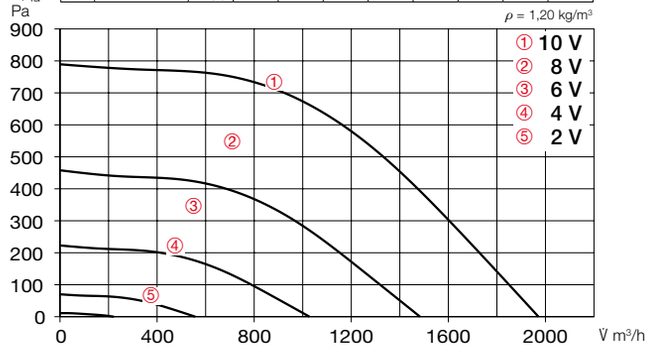

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3000	2000	300	2.22	50	0.54
8	2300	1500	150	1.16	45	0.34
6	1600	1050	60	0.55	41	0.21
4	900	550	20	0.22	36	0.13

Dimensions MB EC 250

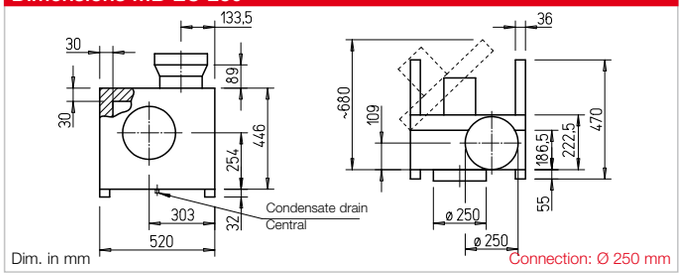

Casing
Double-walled, made of galvanised steel sheet. Sound insulated by lining with 30 mm thick mineral wool insulation boards. Duct connectors on inlet side and outlet side, with rubber lip seal, adapted to standard diameter. Motor-impeller unit fully retractable for inspection and cleaning, suspended on stable hinges. Comes with condensate drain and drip protection with the doors open as standard. Includes mounting rails made of galvanised steel with screwed-on vibration dampers for easy installation.

Impeller
Backward curved, free-running high performance centrifugal impeller made of galvanised steel, mounted directly on motor shaft. High efficiency, low noise. Dynamically balanced in accordance with DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC internal rotor motor in protection category IP55 with a high level of efficiency, located outside of the air flow. Maintenance-free and radio interference-free, ball bearing mounted.

Electrical connection
Standard terminal box (IP55) mounted to external cable.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics. The motor is deactivated if the maximum permissible temperature is exceeded.

Power control
Continuously variable speed control with potentiometer or continuously variable speed control with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessories

Wall bracket made of galv. steel sheet.
MB-WK EC250 Ref. no. 05526

Weather protection cover made of galv. steel sheet, mounted above motor.
MB-WSD EC250 Ref. no. 01856

Flexible connecting sleeve for installation between fan and duct
☐ Max. temperature +70 °C
FM 250 Ref. no. 01672
☐ Max. temperature +120 °C
FM 250 T120 Ref. no. 01655

Accessory details	Page
Universal control system, electronic controller, speed potentiometer	615 ff.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surf.-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) at 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP55																
MBW EC 250	05843	250	1900	3000	50	0.38	3.1	1568	100	28.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

MB EC 280

Dimensions MB EC 280

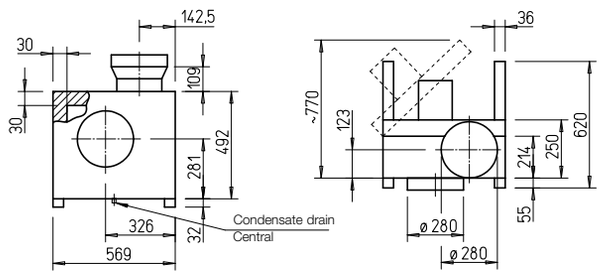

Dim. in mm

Connection: Ø 280 mm

Casing
Double-walled, made of galvanised steel sheet. Sound insulated by lining with 30 mm thick mineral wool insulation boards. Duct connectors on inlet side and outlet side, with rubber lip seal, adapted to standard diameter. Motor-impeller unit fully retractable for inspection and cleaning, suspended on stable hinges. Comes with condensate drain and drip protection with the doors open as standard. Includes mounting rails made of galvanised steel with screwed-on vibration dampers for easy installation.

Impeller
Backward curved, free-running high performance centrifugal impeller made of aluminium, mounted directly on motor shaft. High efficiency, low noise. Dynamically balanced in accordance with DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC internal rotor motor (MBD EC 280 with EC external rotor motor) in protection category IP55 with a high level of efficiency, located outside of the air flow.
Maintenance-free and ball bearing mounted.

Electrical connection
Standard terminal box (IP55) on outside of motor, mounted to external cable for 1~ type.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics. If the maximum permissible motor temperature is exceeded, 3~ types will automatically reduce the speed which then returns back to the originally set value after cooling down. The motors in 1~ types will be deactivated if the maximum permissible temperature is exceeded.

Power control
Continuously variable speed control with potentiometer or continuously variable speed control with universal control system (see table).
Performance levels are shown in the performance curve as an example.
MBD EC 280: Stepless speed control with internal push buttons (scope of delivery).

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surf.-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) at 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP55																
MBW EC 280	05850	280	2630	2450	56	0.41	3.2	1568	100	33.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP55																
MBD EC 280	05845	280	3050	3000	58	0.78	1.2	1582	120	34.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).

Performance curves MBW EC 280

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	83	63	79	80	73	72	72	68
L_{WA}	Inlet side	dB(A)	82	64	78	75	75	76	72	68
L_{WA}	Outlet side	dB(A)	66	57	63	59	56	59	54	50

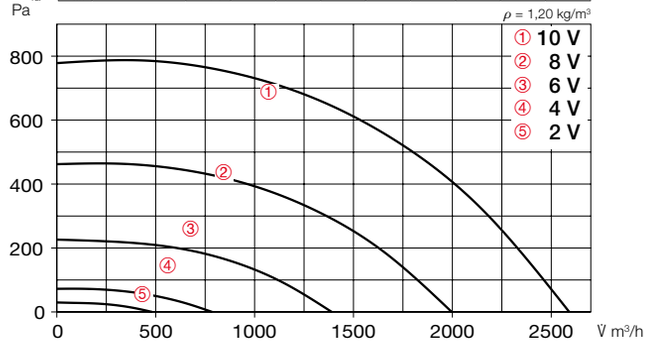

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2500	2600	410	2.71	58	0.56
8	1950	2000	190	1.46	54	0.35
6	1350	1400	80	0.70	48	0.20
4	750	800	30	0.26	42	0.11

Performance curves MBD EC 280

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	66	56	59	61	54	56	52	42
L_{WA}	Inlet side	dB(A)	85	64	74	81	78	77	78	75
L_{WA}	Outlet side	dB(A)	87	69	77	83	80	81	78	75

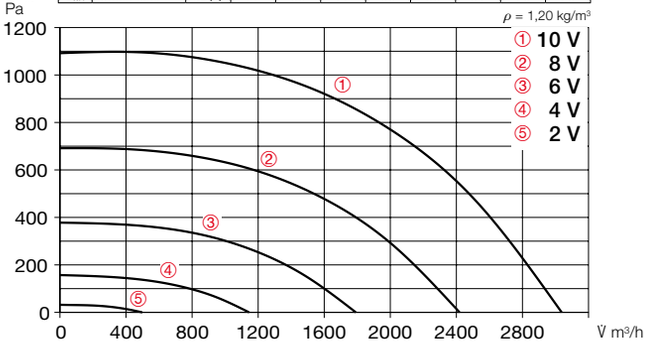

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2980	3050	640	1,00	58	0,76
8	2360	2400	330	0,55	56	0,50
6	1740	1800	150	0,31	49	0,30
4	1120	1100	60	0,18	40	0,20

Accessories

Wall bracket
Bracket for wall installation, made of galvanised steel sheet.
MB-WK EC280 Ref. no. 05527

Weather protection cover
For protected outdoor coverage. Made of galvanised steel sheet, mounted above motor.
MB-WSD EC280 No. 01856



Flexible connecting sleeve
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
– Max. temperature +70 °C
FM 280 Ref. no. 01673
– Max. temperature +120 °C
FM 280 T120 Ref. no. 01656

Universal control system
For continuously variable control or regulation of single phase and three-phase EC fans with a setpoint input of 0–10 V DC.
EUR EC Ref. no. 01347

Speed potentiometer
For direct control/setpoint setting for EC fans with potentiometer input.
PU 10 Ref. no. 01734
For flush-mounting.
PA 10 Ref. no. 01735
For surface-mounting.

Accessory details	Page
Universal control system, electronic controller, speed potentiometer	615 ff.

MB EC 315

Dimensions MB EC 315

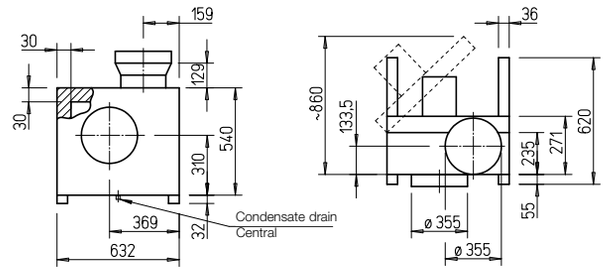

Dim. in mm

Connection: Ø 355 mm

Casing
Double-walled, made of galvanised steel sheet. Sound insulated by lining with 30 mm thick mineral wool insulation boards. Duct connectors on inlet side and outlet side, with rubber lip seal, adapted to standard diameter. Motor-impeller unit fully retractable for inspection and cleaning, suspended on stable hinges. Comes with condensate drain and drip protection with the doors open as standard. Includes mounting rails made of galvanised steel with screwed-on vibration dampers for easy installation.

Impeller
Backward curved, free-running high performance centrifugal impeller made of aluminium, mounted directly on motor shaft. High efficiency, low noise. Dynamically balanced in accordance with DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC internal rotor motor (MBD EC 315 A EC with external rotor motor) in protection category IP55 with a high level of efficiency, located outside of the air flow.
Maintenance-free and radio interference-free, ball bearing mounted.

Electrical connection
Standard terminal box (IP55) on outside of motor, mounted to external cable for 1~ type.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics. If the maximum permissible motor temperature is exceeded, 3~ types will automatically reduce the speed which then returns back to the originally set value after cooling down. The motors in 1~ types will be deactivated if the maximum permissible temperature is exceeded.

Power control
Continuously variable speed control with potentiometer or continuously variable speed control with universal control system (see table).
Performance levels are shown in the performance curve as an example.
MBD EC 315 A: Stepless speed control with internal push buttons (scope of delivery).

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surf.-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) at 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP55																
MBW EC 315	05852	355	2110	1500	50	0.18	3.1	1568	100	43.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP55																
MBD EC 315 A	05851	355	3500	2500	59	0.83	1.30	1582	120	44.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
MBD EC 315 B	05846	355	4200	3000	65	1.38	2.20	988	120	50.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267).04266/04267), see accessories.

Performance curves MBW EC 315

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	58	47	51	52	49	47	45	41
L_{WA}	Inlet side	dB(A)	70	56	64	65	62	63	59	52
L_{WA}	Outlet side	dB(A)	72	56	66	68	65	65	58	51

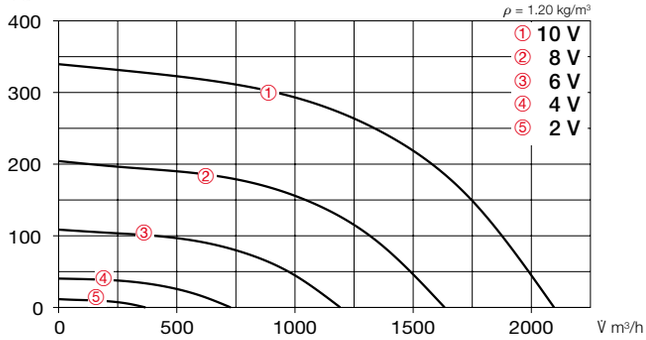

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	2150	150	0.69	50	0.25
8	1300	1850	110	0.50	46	0.21
6	1000	1450	70	0.35	40	0.17
4	700	960	30	0.24	33	0.12

Performance curves MBD EC 315 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	67	52	64	60	58	53	55	56
L_{WA}	Inlet side	dB(A)	84	66	79	79	74	75	76	73
L_{WA}	Outlet side	dB(A)	86	52	64	60	58	53	55	56

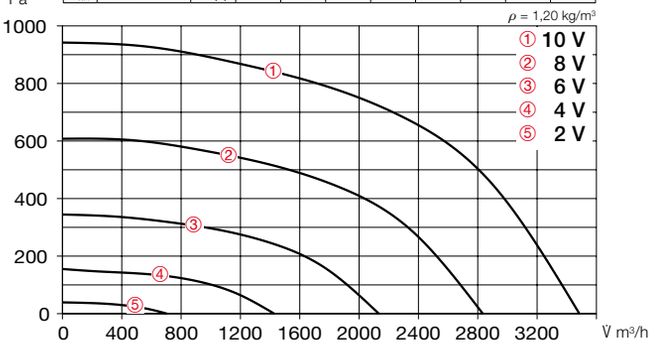

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2500	3500	660	1,00	59	0,68
8	2020	2830	350	0,59	54	0,45
6	1510	2130	160	0,33	48	0,27
4	1010	1420	60	0,18	40	0,15

Performance curves MBD EC 315 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	73	50	62	72	66	65	71	57
L_{WA}	Inlet side	dB(A)	89	66	75	86	78	80	81	76
L_{WA}	Outlet side	dB(A)	93	70	82	92	86	85	81	77

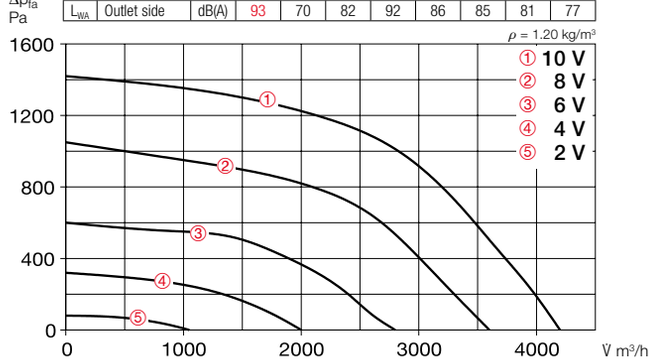

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3000	4200	1200	1.80	65	1.01
8	2600	3600	750	1,20	62	0.75
6	2000	2800	370	0.65	56	0.48
4	1400	2000	190	0.41	49	0.34

Accessories

Wall bracket
Bracket for wall installation, made of galvanised steel sheet.
MB-WK EC315 Ref. no. 05527

Weather protection cover
For protected outdoor coverage. Made of galvanised steel sheet, mounted above motor.
MB-WSD EC315 No. 01865



Flexible connecting sleeve
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
– Max. temperature +70 °C
FM 355 Ref. no. 01675
– Max. temperature +120 °C
FM 355 T120 Ref. no. 01658

Universal control system
For continuously variable control or regulation of single phase and three-phase EC fans with a setpoint input of 0–10 V DC.
EUR EC Ref. no. 01347

Speed potentiometer
For direct control/setpoint setting for EC fans with potentiometer input.
PU 10 Ref. no. 01734
For flush-mounting.
PA 10 Ref. no. 01735
For surface-mounting.

Five-step speed switch
SA-5 10 Ref. no. 40229
Five-step switch for surface mounting. For five-step control of EC fans or frequency inverters. Steps from 2 to 10 V can be set via offset. Protection class IP54.

Accessory details	**Page**
Universal control system, electronic controller, speed potentiometer	615 ff.

MB EC 355

Dimensions MB EC 355

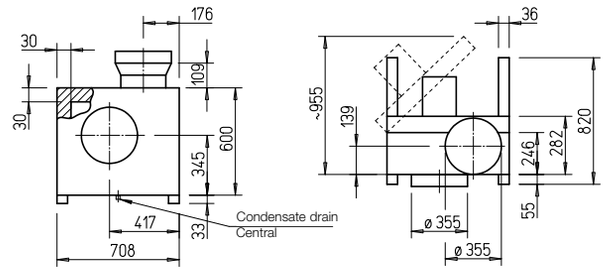

Dim. in mm

Connection: Ø 355 mm

Casing
Double-walled, made of galvanised steel sheet. Sound insulated by lining with 30 mm thick mineral wool insulation boards. Duct connectors on inlet side and outlet side, with rubber lip seal, adapted to standard diameter. Motor-impeller unit fully retractable for inspection and cleaning, suspended on stable hinges. Comes with condensate drain and drip protection with the doors open as standard. Includes mounting rails made of galvanised steel with screwed-on vibration dampers for easy installation.

Impeller
Backward curved, free-running high performance centrifugal impeller made of aluminium, mounted directly on motor shaft. High efficiency, low noise. Dynamically balanced in accordance with DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC internal rotor motor in protection category IP55 with a high level of efficiency, located outside of the air flow. Maintenance-free and radio interference-free, ball bearing mounted.

Electrical connection
Standard terminal box (IP55) on outside of motor, mounted to external cable for 1~ type.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics. If the maximum permissible motor temperature is exceeded, 3~ types will automatically reduce the speed which then returns back to the originally set value after cooling down. The motors in 1~ types will be deactivated if the maximum permissible temperature is exceeded.

Power control
Continuously variable speed control with potentiometer or continuously variable speed control with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surf.-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) at 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP55																
MBW EC 355	05854	355	2950	1500	54	0,30	3,1	1568	100	50.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP55																
MBD EC 355 A	05853	355	5000	2500	66	1.45	2.20	988	120	56.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
MBD EC 355 B	05847	355	5600	2800	68	1.90	3.10	988	120	63.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories.

Performance curves MBW EC 355

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	52	58	55	54	51	52	50
L_{WA}	Inlet side	dB(A)	75	57	72	67	64	65	64	65
L_{WA}	Outlet side	dB(A)	78	58	74	71	70	69	65	64

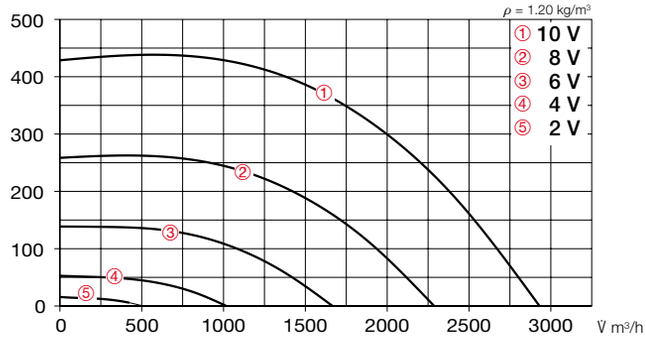

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	3050	300	1,20	54	0.35
8	1250	2550	180	0.78	52	0.25
6	1000	2100	100	0.50	47	0.17
4	700	1450	50	0.27	42	0.13

Performance curves MBD EC 355 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	74	57	69	66	65	62	62	60
L_{WA}	Inlet side	dB(A)	86	65	82	78	76	75	76	71
L_{WA}	Outlet side	dB(A)	89	67	85	82	82	80	75	72

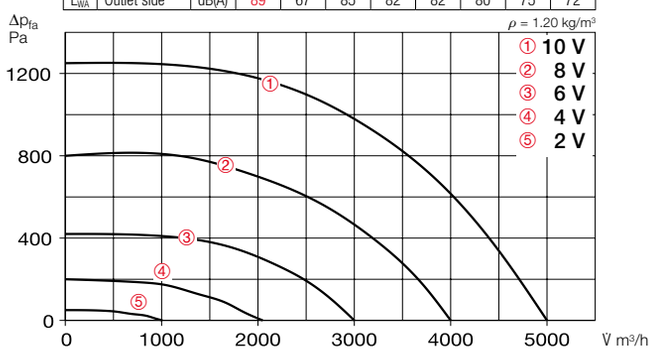

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2500	5000	1200	1.80	66	0.86
8	2000	4000	630	1.10	62	0.57
6	1500	3000	300	0.58	56	0.36
4	1000	2050	100	0.23	48	0.18

Performance curves MBD EC 355 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	76	58	69	72	68	69	67	60
L_{WA}	Inlet side	dB(A)	88	69	81	85	80	80	77	71
L_{WA}	Outlet side	dB(A)	93	71	85	89	87	86	80	73

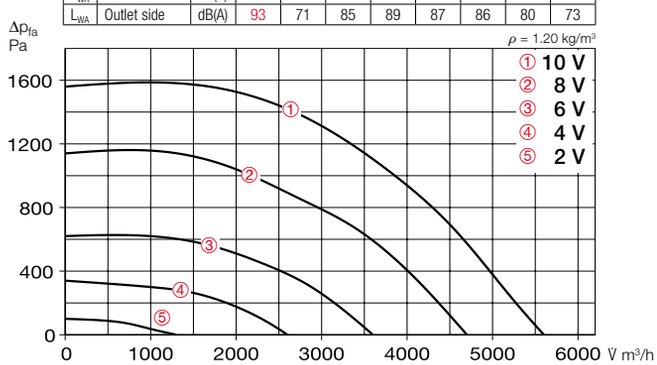

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2800	5600	1600	2.60	68	1.03
8	2350	4700	1000	1.70	65	0.75
6	1800	3600	500	0.90	59	0.50
4	1300	2600	230	0.51	52	0.31

Accessories

Wall bracket
Bracket for wall installation, made of galvanised steel sheet.
MB-WK EC355 Ref. no. 05528

Weather protection cover
For protected outdoor coverage. Made of galvanised steel sheet, mounted above motor.
MB-WSD EC355 No. 01865



Flexible connecting sleeve
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
– Max. temperature +70 °C
FM 355 Ref. no. 01675
– Max. temperature +120 °C
FM 355 T120 Ref. no. 01658

Universal control system
For continuously variable control or regulation of single phase and three-phase EC fans with a setpoint input of 0–10 V DC.
EUR EC Ref. no. 01347

Speed potentiometer
For direct control/setpoint setting for EC fans with potentiometer input.
PU 10 Ref. no. 01734
For flush-mounting.
PA 10 Ref. no. 01735
For surface-mounting.

Five-step speed switch
SA-5 10 Ref. no. 40229
Five-step switch for surface mounting. For five-step control of EC fans or frequency inverters. Steps from 2 to 10 V can be set via offset. Protection class IP54.

Accessory details	**Page**
Universal control system, electronic controller, speed potentiometer	615 ff.

MB EC 400

Performance curves MBD EC 400 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	76	55	69	70	71	68	63	60
L_{WA}	Inlet side	dB(A)	88	65	81	82	79	80	79	73
L_{WA}	Outlet side	dB(A)	90	70	89	85	84	83	79	73

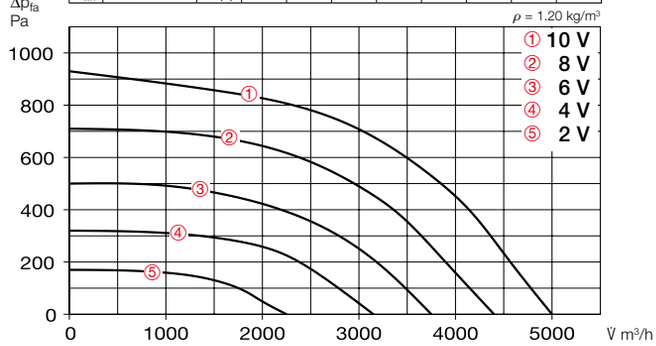

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2000	5000	1120	1.80	68	0.81
8	1750	4400	800	1.30	65	0.65
6	1500	3750	520	0.90	62	0.50
4	1250	3150	320	0.60	57	0.37

Dimensions MB EC 400

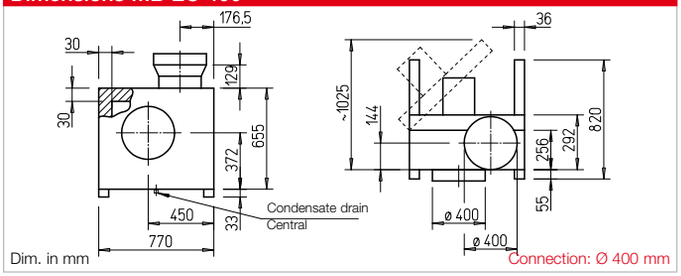

Performance curves MBD EC 400 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	80	60	73	75	76	73	67	63
L_{WA}	Inlet side	dB(A)	93	71	86	88	84	85	84	79
L_{WA}	Outlet side	dB(A)	95	75	88	90	90	88	83	77

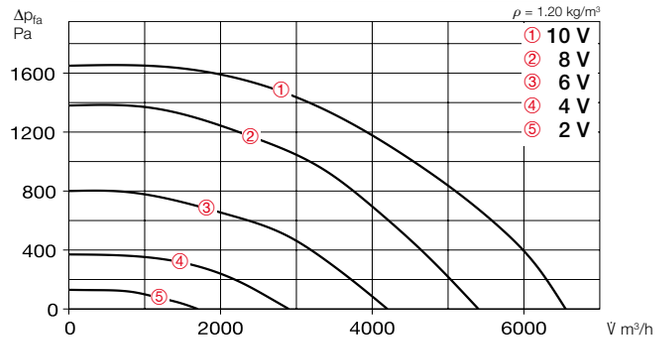

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2600	6550	2300	3.60	72	1,27
8	2300	5400	1600	2.60	69	1.06
6	1800	4200	800	1.50	64	0.68
4	1250	2900	270	0.60	57	0.35

Casing
See description on page 322 for casing, impeller, drive and noise.

Electrical connection
Standard terminal box (IP55) on outside of motor.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics. If the maximum permissible motor temperature is exceeded, the speed will be automatically reduced and then returned back to the originally set value after cooling down.

Power control
Continuously variable speed control with potentiometer or continuously variable speed control with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Accessories

Wall bracket
Made of galvanised steel sheet.
MB-WK EC400 Ref. no. 05528

Weather protection cover
Made of galvanised steel sheet, mounted above motor.
MB-WSD EC400 No. 01865

Flexible connecting sleeve
For installation between fan and duct.
– Max. temperature +70 °C
FM 400 Ref. no. 01676
– Max. temperature +120 °C
FM 400 T120 Ref. no. 01659

Accessory details	Page
Universal control system, electronic controller, speed potentiometer	615 ff.
Five-step speed switch	610

Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer flush-mounted		Speed potentiometer surf.-mounted	
		mm	V̇ m³/h	min⁻¹	dB(A) at 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP55																
MBD EC 400 A	05855	400	5000	2000	68	1.30	2.00	988	120	65.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
MBD EC 400 B	05848	400	6550	2600	72	2.65	4.10	988	120	72.0	**EUR EC** [1) 2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

MB 160 Ex

Dimensions MB 160 Ex

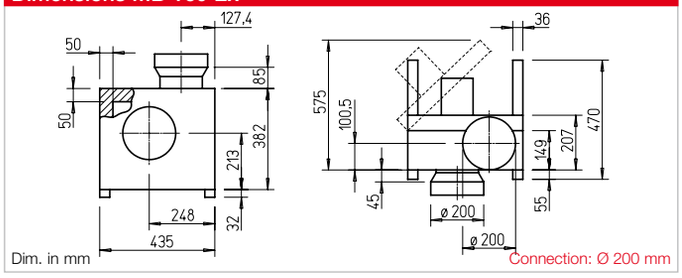

Performance curves MBD 160/4 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	54	52	48	45	41	39	35	31
L_{WA}	Inlet side	dB(A)	72	70	66	63	59	57	53	49
L_{WA}	Outlet side	dB(A)	74	72	68	65	61	59	55	51

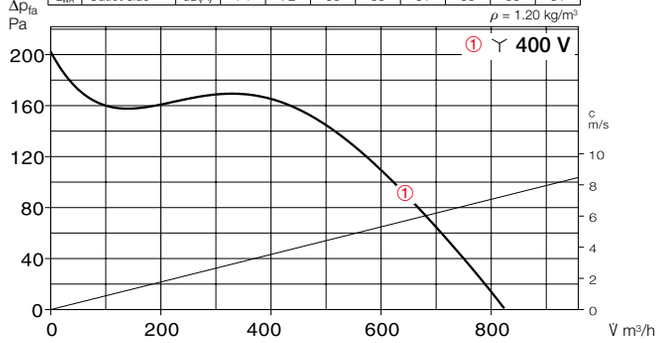

Performance curves MBD 160/2 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	69	67	63	60	56	54	50	46
L_{WA}	Inlet side	dB(A)	87	85	81	78	74	72	68	64
L_{WA}	Outlet side	dB(A)	89	87	83	80	76	74	70	66

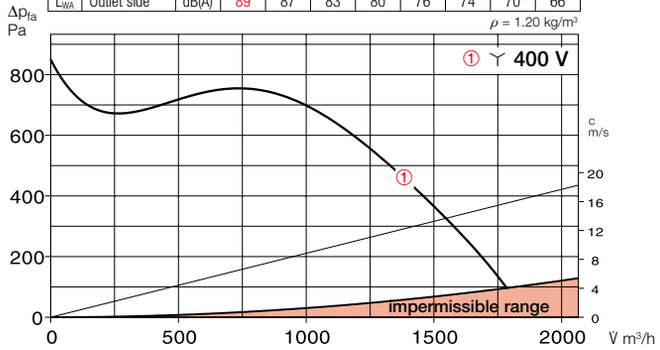

Casing
Double-walled, made of galvanised steel sheet. Sound insulated by lining with 50 mm thick mineral wool insulation boards. Duct connectors on inlet side and outlet side, with rubber lip seal, adapted to standard diameter. Motor-impeller unit fully retractable for inspection and cleaning, suspended on stable hinges. Includes mounting rails made of galvanised steel with screwed-on vibration dampers for easy installation.

Impeller
Forward curved high performance centrifugal impeller made of galvanised steel, dynamically balanced together with the motor.
High efficiency, low noise, aerodynamically optimised volute casing.

Drive
Through maintenance-free IEC flange motor in protection category IP55.
Ball bearing mounted, radio interference-free.

Electrical connection
Standard terminal box (IP55) on outside of motor.

Accessories

Wall bracket
Made of galvanised steel sheet.
MB-WK 160 Ref. no. 05526

Weather protection cover
Made of galvanised steel sheet, mounted above motor.
MB-WSD Ref. no. 01856

Flexible connecting sleeve
For installation between fan and duct.
FM 200 Ex Ref. no. 01686

Reference	Page
Techn. description, selection table	322 ff.

Type	Ref. no.	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption*	Current consumption* at rated voltage	Current consumption* in contr. mode	Wiring diagram	Max. air flow temperature Rat. vol..	Max. air flow temperature Control	Weight net aprx.	Transformer speed controller 5-step with motor prot. circuit breaker Type	Ref. no.	w/o motor prot. circuit breaker Type	Ref. no.	Mot. prot. circ. break. for connecting built-in thermal contacts Type	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) at 1m	kW	A	A	No.	+ °C	+ °C	kg						
Explosion-proof, II 2G Ex h IIB T3 Gb, motor Ex e, three-phase current 400 V, 50 Hz, protection category IP55																	
MBD 160/4 Ex	06001	970	1420	48	0.37	1.15	–	470	40	–	25.0	Not permitted		Not permitted		–	
MBD 160/2 Ex	06002	2020	2885	63	1.50	3.16	–	470	40	–	34.0	Not permitted		Not permitted		–	

* For ex-proof types: Motor ratings, see info p. 20.

MB 180 Ex

Performance curves MBD 180/4 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	55	51	58	44	42	38	34
L_{WA}	Inlet side	dB(A)	75	73	69	66	62	60	56	52
L_{WA}	Outlet side	dB(A)	77	75	71	68	64	62	58	54

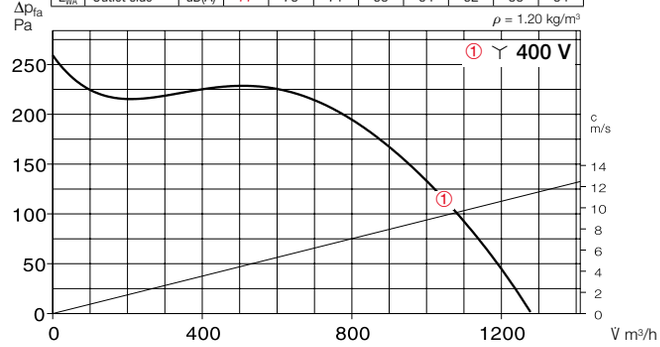

Dimensions MB 180 Ex

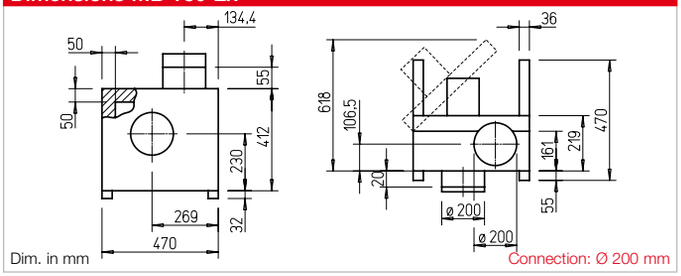

Casing
Double-walled, made of galvanised steel sheet. Sound insulated by lining with 50 mm thick mineral wool insulation boards. Duct connectors on inlet side and outlet side, with rubber lip seal, adapted to standard diameter. Motor-impeller unit fully retractable for inspection and cleaning, suspended on stable hinges. Includes mounting rails made of galvanised steel with screwed-on vibration dampers for easy installation.

Impeller
Forward curved high performance centrifugal impeller made of galvanised steel, dynamically balanced together with the motor.
High efficiency, low noise, aerodynamically optimised volute casing.

Drive
Through maintenance-free IEC flange motor in protection category IP55.
Ball bearing mounted, radio interference-free.

Electrical connection
Standard terminal box (IP55) on outside of motor.

Accessories

Wall bracket
Made of galvanised steel sheet.
MB-WK 180 Ref. no. 05526

Weather protection cover
Made of galvanised steel sheet, mounted above motor.
MB-WSD Ref. no. 01856

Flexible connecting sleeve
For installation between fan and duct.
FM 200 Ex Ref. no. 01686

Reference	Page
Techn. description, selection table	322 ff.

Type	Ref. no.	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption*	Current consumption* at rated voltage	Current consumption* in contr. mode	Wiring diagram	Max. air flow temperature Rat. vol..	Max. air flow temperature Control	Weight net aprx.	Transformer speed controller 5-step with motor prot. circuit breaker Type	Ref. no.	w/o motor prot. circuit breaker Type	Ref. no.	Mot. prot. circ. break. for connecting built-in thermal contacts Type	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) at 1m	kW	A	A	No.	+ °C	+ °C	kg						
Explosion-proof, II 2G Ex h IIB T3 Gb, motor Ex e, three-phase current 400 V, 50 Hz, protection category IP55																	
MBD 180/4 Ex	06004	1370	1420	51	0.37	1.15	–	470	40	–	29.0	Not permitted		Not permitted		–	

* For Ex types: Motor ratings, see info p. 20.

MB 200 Ex

Performance curves MBD 200/4 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	58	54	51	47	45	41	37
L_{WA}	Inlet side	dB(A)	78	76	72	69	65	63	59	55
L_{WA}	Outlet side	dB(A)	80	78	74	71	67	65	61	57

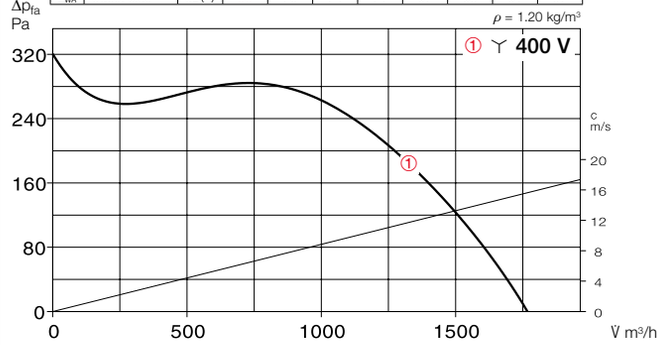

Dimensions MB 200 Ex

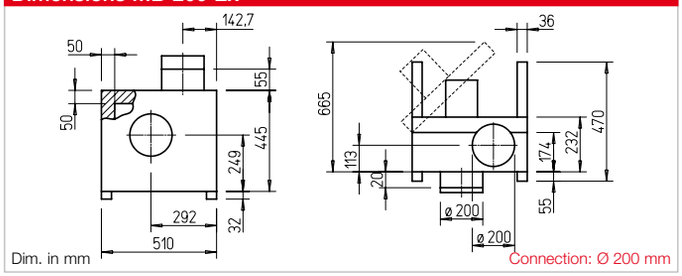

Casing
Double-walled, made of galvanised steel sheet. Sound insulated by lining with 50 mm thick mineral wool insulation boards. Duct connectors on inlet side and outlet side, with rubber lip seal, adapted to standard diameter. Motor-impeller unit fully retractable for inspection and cleaning, suspended on stable hinges. Includes mounting rails made of galvanised steel with screwed-on vibration dampers for easy installation.

Impeller
Forward curved high performance centrifugal impeller made of galvanised steel, dynamically balanced together with the motor.
High efficiency, low noise, aerodynamically optimised volute casing.

Drive
Through maintenance-free IEC flange motor in protection category IP55.
Ball bearing mounted, radio interference-free.

Electrical connection
Standard terminal box (IP55) on outside of motor.

Accessories

Wall bracket
Made of galvanised steel sheet.
MB-WK 200 Ref. no. 05526

Weather protection cover
Made of galvanised steel sheet, mounted above motor.
MB-WSD Ref. no. 01856

Flexible connecting sleeve
For installation between fan and duct.
FM 200 Ex Ref. no. 01686

Reference	Page
Techn. description, selection table	322 ff.

Type	Ref. no.	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption*	Current consumption* at rated voltage	Current consumption* in contr. mode	Wiring diagram	Max. air flow temperature Rat. vol..	Max. air flow temperature Control	Weight net aprx.	Transformer speed controller 5-step with motor prot. circuit breaker Type	Ref. no.	Transformer speed controller 5-step w/o motor prot. circuit breaker Type	Ref. no.	Mot. prot. circ. break. for connecting built-in thermal contacts Type	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) at 1m	kW	A	A	No.	+ °C	+ °C	kg						
Explosion-proof, II 2G Ex h IIB T3 Gb, motor Ex e, three-phase current 400 V, 50 Hz, protection category IP55																	
MBD 200/4 Ex	06008	1840	1440	54	0.55	1.32	–	470	40	–	35.0	Not permitted		Not permitted		–	

* For Ex types: Motor ratings, see info p. 20.

MB 225

(Fig. similar)

Also available in version: Ex

Dimensions MB 225

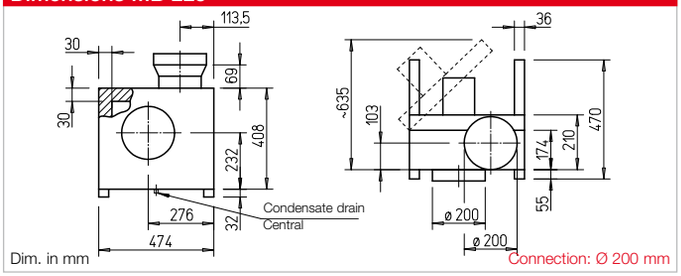

Performance curves MBW 225/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	36	56	55	48	47	42	33
L_{WA}	Inlet side	dB(A)	72	51	67	67	65	59	54	47
L_{WA}	Outlet side	dB(A)	74	50	70	69	62	61	56	47

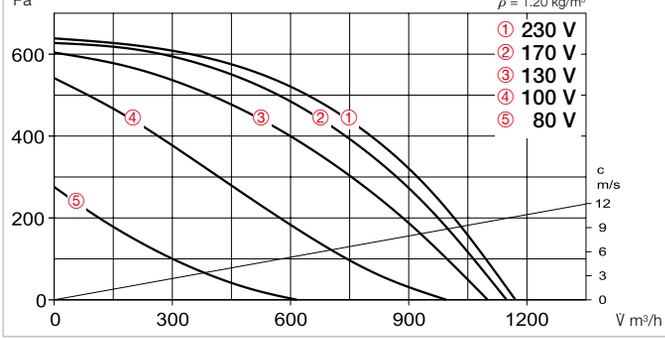

Performance curves MBD 225/2/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	36	56	54	47	47	42	34
L_{WA}	Inlet side	dB(A)	73	50	68	67	64	59	55	48
L_{WA}	Outlet side	dB(A)	74	50	70	68	61	61	56	48

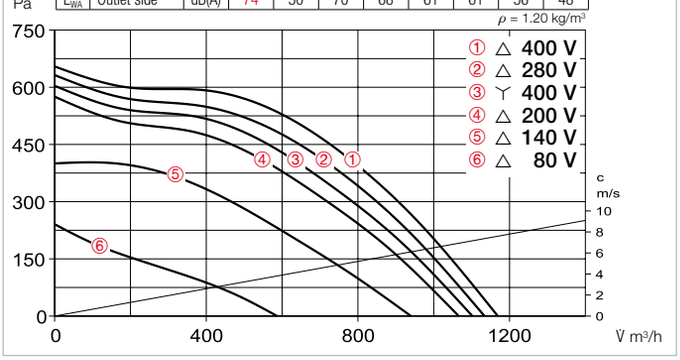

Performance curves MBD 225/4 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	64	62	58	55	51	49	45	41
L_{WA}	Inlet side	dB(A)	82	80	76	73	69	67	63	59
L_{WA}	Outlet side	dB(A)	84	82	78	75	71	69	65	61

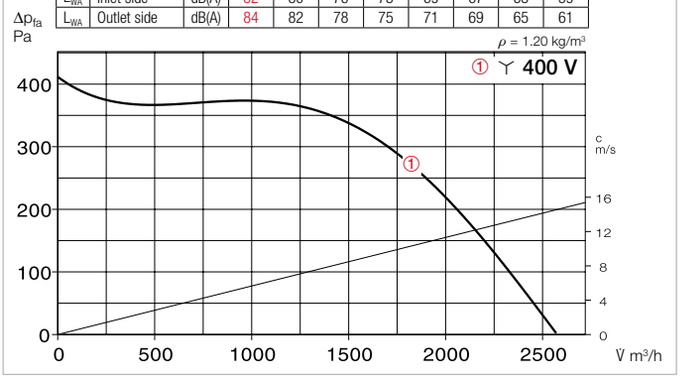

Casing
See page 322.

Impeller
Backward curved high performance centrifugal impeller made of aluminium, forward curved and made of galvanised steel for explosion-proof types. Dynamically balanced together with the motor. High efficiency, low noise, aerodynamically optimised casing.

Drive
Through maintenance-free, speed-controllable IEC flange motor in protection category IP55. Ball bearing mounted, radio interference-free.

Electrical connection
Standard terminal box (IP55) mounted to external cable, on outside of motor for explosion-proof types.

Motor protection
With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

Power control
See page 322.

Accessories

Wall bracket made of galv. steel sheet.
MB-WK EC225 Ref. no. 05526

Wall bracket for Ex types.
MB-WK 225 Ref. no. 05527

Weather protection cover (galv. steel sheet), mounted above motor.
MB-WSD Ref. no. 01856

Flexible connecting sleeve for installation between fan and duct.
FM 200 (+70 °C) No. 01670
FM 200 T120 (+120 °C) No. 01654
FM 250 Ex No. 01688

Speed switch and on/off switch for two-speed ⋎/△ switchable three-phase current fans.
DS 2 [3] Ref. no. 01351

Type	Ref. no.	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption*	Current consumption* at rated voltage	Current consumption* in contr. mode	Wiring diagram	Max. air flow temperature Rat. vol..	Max. air flow temperature Control	Weight net aprx.	Transformer speed controller 5-step with motor prot. circuit breaker Type	Ref. no.	w/o motor prot. circuit breaker Type	Ref. no.	Mot. prot. circ. break. for connecting built-in thermal contacts Type	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) at 1m	kW	A	A	No.	+ °C	+ °C	kg						
Alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP55																	
MBW 225/2	06456	1170	2900	52	0.21	1.10	1.80	1119	100	60	25.0	**MWS 3**	01948	**TSW 3.0**	01496	**MW** [1]	01579
Two-speed, three-phase current motor, 400 V, 50 Hz, ⋎/△ connection, protection category IP55																	
MBD 225/2/2	06457	1100/1170	2675/2885	49.52	0.16/0.20	0.29/0.57	0.57	520	100	60	25.0	**RDS 1**	01314	**TSD 0.8** [3]	01500	**M 4** [2]	01571
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																	
MBD 225/4 Ex [4]	06011	2500	1445	56	0.75	3.20	–	470	40	–	40	Not permitted		Not permitted		–	

* For Ex types: Motor ratings, see info p. 20. [1] Incl. operating switch. [2] Incl. operating and speed switch. [3] Req. motor protection circuit breaker: Type MD, No. 05849.
[4] Dimensional drawing at www.HeliosSelect.de.

MB 250

Also available in version: Ex

(Fig. similar)

Dimensions MB 250

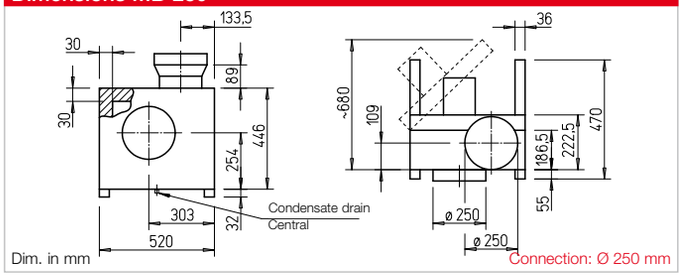

Performance curves MBW 250/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	63	36	60	55	50	50	44	36
L_{WA}	Inlet side	dB(A)	76	52	74	69	67	64	59	55
L_{WA}	Outlet side	dB(A)	78	51	75	70	65	65	59	51

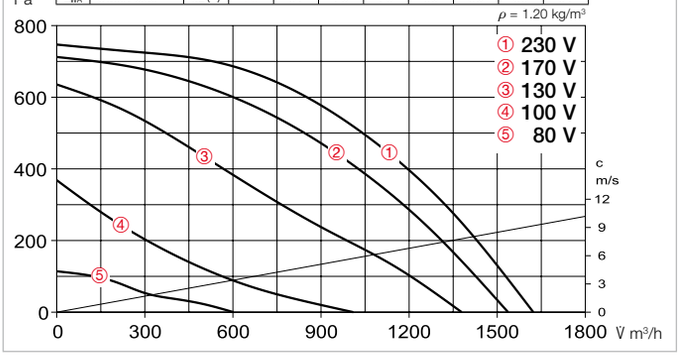

Performance curves MBD 250/2/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	64	37	60	52	51	50	44	38
L_{WA}	Inlet side	dB(A)	76	51	70	69	66	64	60	56
L_{WA}	Outlet side	dB(A)	78	52	75	72	66	65	59	53

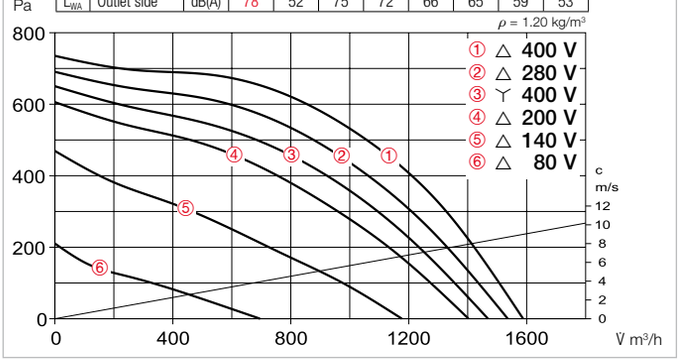

Performance curves MBD 250/4 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	66	62	59	55	53	49	45
L_{WA}	Inlet side	dB(A)	86	84	80	77	73	71	67	63
L_{WA}	Outlet side	dB(A)	88	86	82	79	75	73	69	65

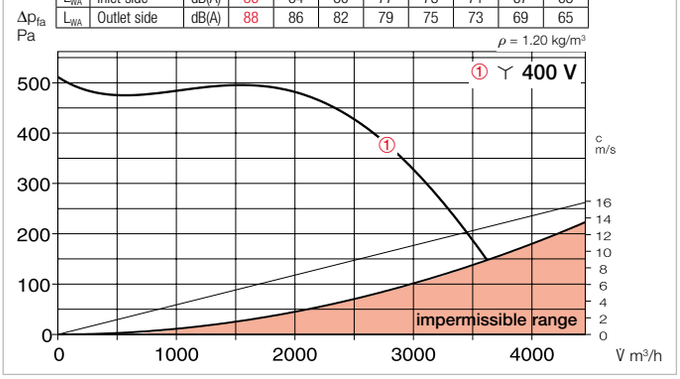

- **Casing**
  See page 322.

- **Impeller**
  Backward curved high performance centrifugal impeller made of aluminium, forward curved and made of galvanised steel for explosion-proof types. Dynamically balanced together with the motor. High efficiency, low noise, aerodynamically optimised casing.

- **Drive**
  Through maintenance-free, speed-controllable IEC flange motor in protection category IP55. Ball bearing mounted, radio interference-free.

- **Electrical connection**
  Standard terminal box (IP55) mounted to external cable, on outside of motor for explosion-proof types.

- **Motor protection**
  With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

- **Power control**
  See page 322.

- **Accessories**

Wall bracket made of galv. steel sheet.
MB-WK EC250 Ref. no. 05526

Wall bracket for Ex types.
MB-WK 250 Ref. no. 05527

Weather protection cover (galv. steel sheet), mounted above motor.
MB-WSD Ref. no. 01856

Flexible connecting sleeve for installation between fan and duct.
FM 250 (+70 °C) No. 01672
FM 250 T120 (+120 °C) No. 01655
FM 315 Ex No. 01690

Speed switch and on/off switch for two-speed ⋎/△ switchable three-phase current fans.
DS 2 [3] Ref. no. 01351

Type	Ref. no.	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption*	Current consumption* at rated voltage	Current consumption* in contr. mode	Wiring diagram	Max. air flow temperature Rat. vol..	Max. air flow temperature Control	Weight net aprx.	Transformer speed controller 5-step with motor prot. circuit breaker		Transformer speed controller 5-step w/o motor prot. circuit breaker		Mot. prot. circ. break. for connecting built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) at 1m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP55																	
MBW 250/2	06458	1620	2840	55	0.30	1.40	2.10	1119	100	60	28.0	**MWS 3**	01948	**TSW 3.0**	01496	**MW** [1]	01579
Two-speed, three-phase current motor, 400 V, 50 Hz, ⋎/△ connection, protection category IP55																	
MBD 250/2/2	06459	1470/1600	2500/2820	53/56	0.23/0.29	0.40/0.70	0.70	520	100	60	28.0	**RDS 1**	01314	**TSD 0.8** [3]	01500	**M 4** [2]	01571
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																	
MBD 250/4 Ex [4]	06014	4140	1440	62	1.50	3.40	–	470	40	–	52.0	Not permitted		Not permitted		–	

* For Ex types: Motor ratings, see info p. 20. [1] Incl. operating switch. [2] Incl. operating and speed switch. [3] Req. motor protection circuit breaker: Type MD, No. 05849.
[4] Dimensional drawing at www.HeliosSelect.de..

MB 280

(Fig. similar)

Dimensions MB 280

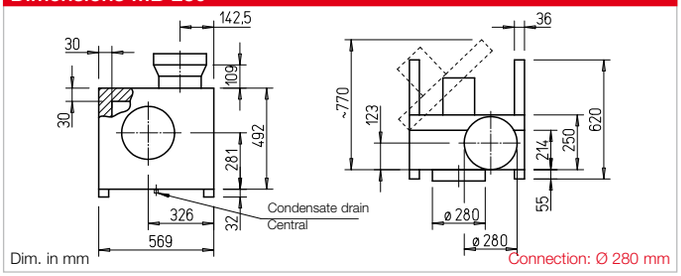

Performance curves MBD 280/2/2

	Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	42	46	59	54	52	45	35
L_{WA}	Inlet side	dB(A)	83	59	78	78	73	67	62	58
L_{WA}	Outlet side	dB(A)	88	62	86	79	74	72	65	55

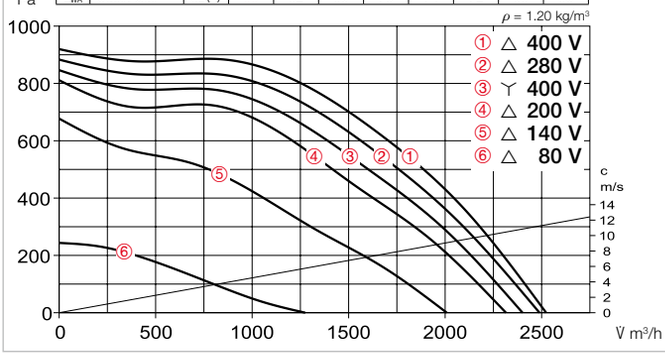

Performance curves MBD 280/6 Ex

	Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	60	56	53	49	47	43	39
L_{WA}	Inlet side	dB(A)	80	78	74	71	67	65	61	57
L_{WA}	Outlet side	dB(A)	82	80	76	73	69	67	63	59

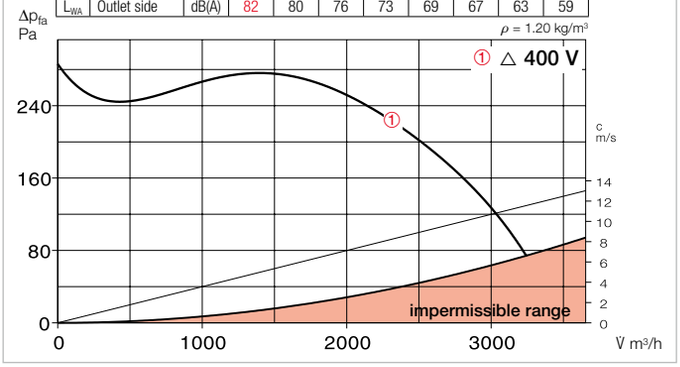

Performance curves MBD 280/4 Ex

	Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	71	69	65	62	58	56	52	48
L_{WA}	Inlet side	dB(A)	89	87	83	80	76	74	70	66
L_{WA}	Outlet side	dB(A)	91	89	85	82	78	76	72	68

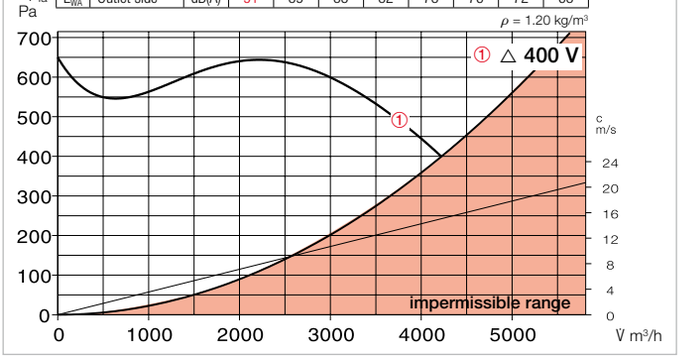

- **Casing**
  See page 322.

- **Impeller**
  Backward curved high performance centrifugal impeller made of aluminium, forward curved and made of galvanised steel for explosion-proof types. Dynamically balanced together with the motor. High efficiency, low noise, aerodynamically optimised casing.

- **Drive**
  Through maintenance-free, speed-controllable IEC flange motor in protection category IP55. Ball bearing mounted, radio interference-free.

- **Electrical connection**
  Standard terminal box (IP55) mounted to external cable, on outside of motor for explosion-proof types.

- **Motor protection**
  With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

- **Power control**
  See page 322.

- **Accessories**

Wall bracket made of galv. steel sheet.
MB-WK EC280 Ref. no. 05527

Wall bracket for Ex types.
MB-WK 280 Ref. no. 05527

Weather protection cover (galv. steel sheet), mounted above motor.
MB-WSD Ref. no. 01856

Flexible connecting sleeve for installation between fan and duct.
FM 280 (+70 °C) No. 01673
FM 280 T120 (+120 °C) No. 01656
FM 315 Ex No. 01690

Speed switch and on/off switch for two-speed ⋎/△ switchable three-phase current fans.
DS 2 [2] Ref. no. 01351

Type	Ref. no.	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption*	Current consumption* at rated voltage	Current consumption* in contr. mode	Wiring diagram	Max. air flow temperature Rat. vol..	Max. air flow temperature Control	Weight net aprx.	Transformer speed controller 5-step with motor prot. circuit breaker		Transformer speed controller 5-step w/o motor prot. circuit breaker		Mot. prot. circ. break. for connecting built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) at 1m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Two-speed, three-phase current motor, 400 V, 50 Hz, ⋎/△ connection, protection category IP55																	
MBD 280/2/2	06460	2400/2520	2680/2890	56/60	0.48/0.57	0.80/1.50	1.60	520	100	60	35.0	**RDS 2**	01315	**TSD 3.0** [2]	01502	**M 4** [1]	01571
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55**																	
MBD 280/6 Ex [3]	06016	2960	960	56	0.95	2.70	–	498	40	–	60.0	Not permitted		Not permitted		–	
MBD 280/4 Ex [3]	06017	4960	1435	65	2.20	4.90	–	498	40	–	68.0	Not permitted		Not permitted		–	

* For Ex types: Motor ratings, see info p.20. [1] Incl. operating and speed switch. [2] Req. motor prot. circuit breaker: Type MD, No. 05849. [3] Dim. drawing at www.HeliosSelect.de.

MB 315

Dimensions MB 315

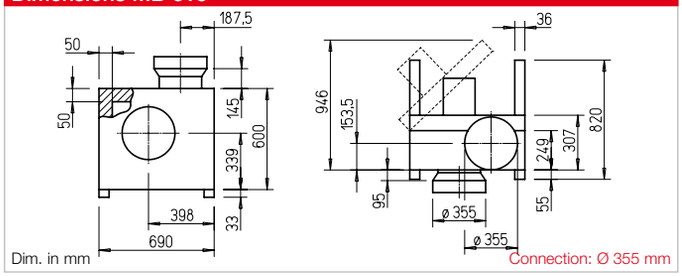

Performance curves MBW 315/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	34	43	44	40	41	42	31
L_{WA}	Inlet side	dB(A)	69	54	66	61	56	58	63	49
L_{WA}	Outlet side	dB(A)	69	54	63	64	60	61	62	50

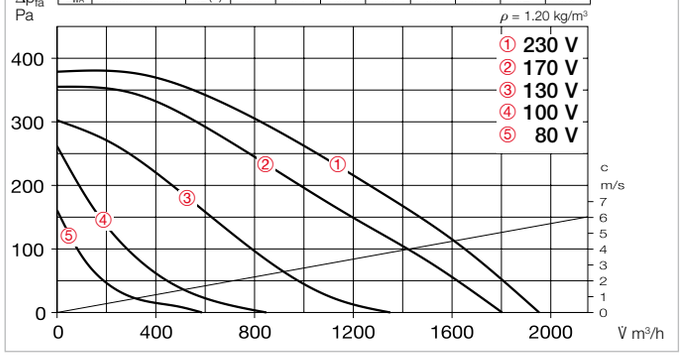

Performance curves MBD 315/4/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	33	47	44	40	39	38	26
L_{WA}	Inlet side	dB(A)	68	55	67	60	56	57	59	47
L_{WA}	Outlet side	dB(A)	69	53	67	64	60	59	58	46

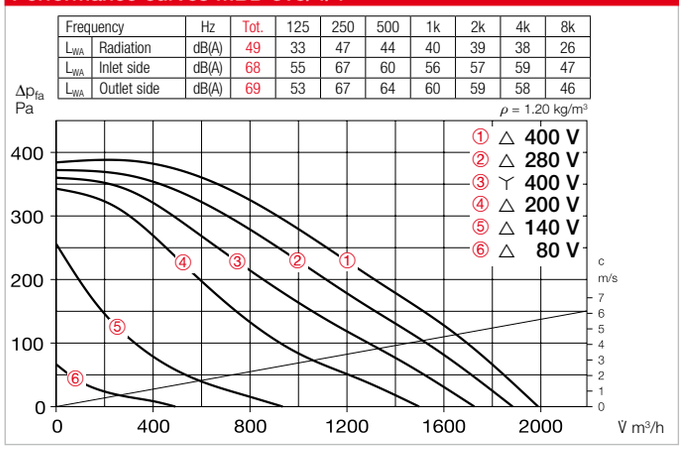

Performance curves MBD 315/2/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	70	44	60	68	62	61	59	72
L_{WA}	Inlet side	dB(A)	88	62	78	86	80	79	77	70
L_{WA}	Outlet side	dB(A)	90	64	80	88	82	81	79	70

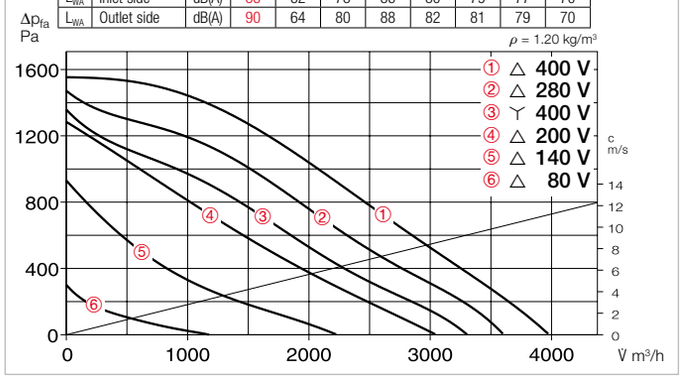

Casing
See page 322.

Impeller
Backward curved high performance centrifugal impeller made of aluminium, mounted directly on motor shaft.
High efficiency, low noise, aerodynamically optimised volute casing.
Dynamically balanced in accordance with DIN ISO 21940-11 – quality grade 6.3.

Drive
Through maintenance-free, speed-controllable IEC flange motor in protection category IP55. Ball bearing mounted.

Electrical connection
Standard terminal box (IP55) mounted to external cable, on outside of motor for type MBD 315/2/2.

Motor protection
With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

Power control
All types are speed-controllable using voltage reduction by means of transformer (accessories).
The 3~ types can also be operated at two speeds using a ⅄/△ switch or motor protection circuit breaker M 4. Performance levels are shown in the performance diagram.

Accessories

Wall bracket made of galv. steel sheet.
MB-WK 315 Ref. no. 05528

Weather protection cover (galv. steel sheet), mounted above motor.
MB-WSD Ref. no. 01856

Flexible connecting sleeve for installation between fan and duct.
FM 355 (+70 °C) No. 01675
FM 355 T120 (+120 °C) No. 01658

Speed switch and on/off switch for two-speed ⅄/△ switchable three-phase current fans.
DS 2 [3] Ref. no. 01351

Type	Ref. no.	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in contr. mode	Wiring diagram	Max. air flow temperature Rat. vol..	Max. air flow temperature Control	Weight net aprx.	Transformer speed controller 5-step with motor prot. circuit breaker		Transformer speed controller 5-step w/o motor prot. circuit breaker		Mot. prot. circ. break. for connecting built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) at 1m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP55																	
MBW 315/4	05929	1950	1400	41	0.16	0.80	0.97	1119	100	60	72.0	**MWS 1.5**	01947	**TSW 1.5**	01495	**MW** [1]	01579
Two-speed, three-phase current motor, 400 V, 50 Hz, ⅄/△ connection, protection category IP55																	
MBD 315/4/4	05945	1730/1990	1180/1430	37/41	0.14/0.16	0.27/0.37	0.46	520	100	60	72.0	**RDS 1**	01314	**TSD 0.8** [3]	01500	**M 4** [2]	01571
MBD 315/2/2	05946	3300/3980	2270/2780	60/64	0.86/1.16	1.40/2.20	2.40	520	100	60	75.0	**RDS 4**	01316	**TSD 3.0** [3]	01502	**M 4** [2]	01571

[1] Incl. operating switch. [2] Incl. operating and speed switch. [3] Req. motor protection circuit breaker: Type MD, No. 05849.

MB 355

Dimensions MB 355

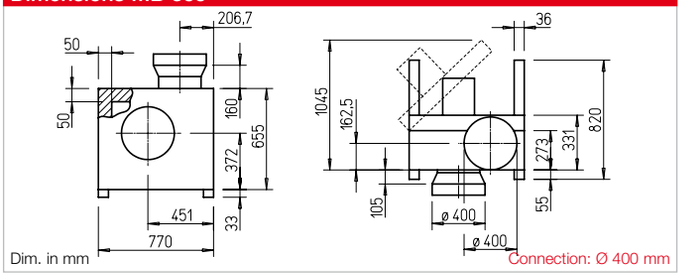

Performance curves MBW 355/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	51	34	49	46	42	40	34	28
L_{WA}	Inlet side	dB(A)	68	53	66	62	58	58	53	46
L_{WA}	Outlet side	dB(A)	71	54	69	66	62	60	54	48

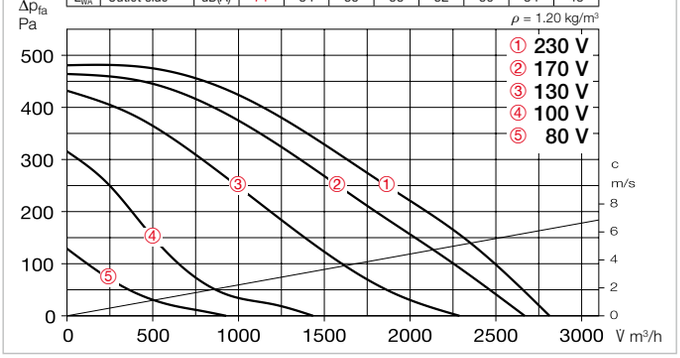

Performance curves MBD 355/4/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	50	33	46	46	43	40	32	22
L_{WA}	Inlet side	dB(A)	68	54	64	62	58	58	53	45
L_{WA}	Outlet side	dB(A)	70	53	66	66	63	60	52	42

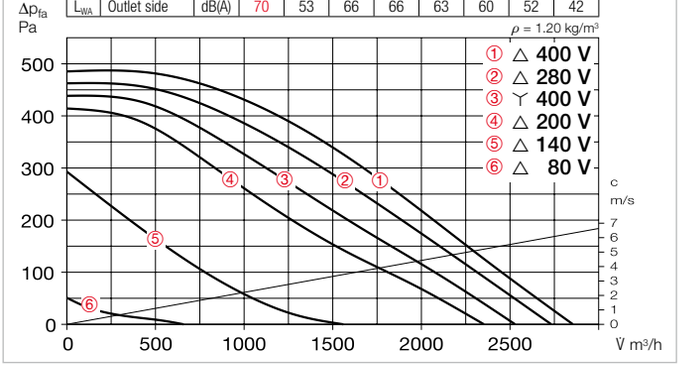

Performance curves MBD 355/2/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	74	46	62	72	66	65	63	56
L_{WA}	Inlet side	dB(A)	92	66	80	90	84	83	81	74
L_{WA}	Outlet side	dB(A)	94	68	82	92	86	85	83	76

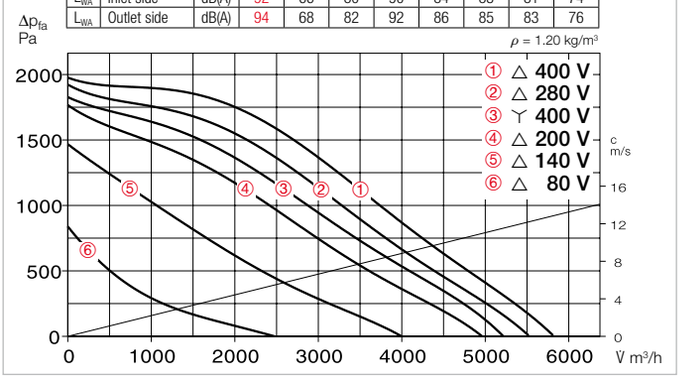

Casing
See page 322.

Impeller
Backward curved high performance centrifugal impeller made of aluminium, mounted directly on motor shaft.
High efficiency, low noise, aerodynamically optimised volute casing.
Dynamically balanced in accordance with DIN ISO 21940-11 – quality grade 6.3.

Drive
Through maintenance-free, speed-controllable IEC flange motor in protection category IP55. Ball bearing mounted, radio interference-free.

Electrical connection
Standard terminal box (IP55) mounted to external cable, on outside of motor for type MBD 355/2/2.

Motor protection
With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

Power control
All types are speed-controllable using voltage reduction by means of transformer (accessories).
The 3~ types can also be operated at two speeds using a ⅄/△ switch or motor protection circuit breaker M 4. Performance levels are shown in the performance diagram.

Accessories

Wall bracket made of galv. steel sheet.
MB-WK 355 Ref. no. 05528

Weather protection cover (galv. steel sheet), mounted above motor.
MB-WSD Ref. no. 01856

Flexible connecting sleeve for installation between fan and duct.
FM 400 (+70 °C) No. 01676
FM 400 T120 (+120 °C) No. 01659

Speed switch and on/off switch for two-speed ⅄/△ switchable three-phase current fans.
DS 2 [3] Ref. no. 01351

Type	Ref. no.	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in contr. mode	Wiring diagram	Max. air flow temperature Rat. vol..	Max. air flow temperature Control	Weight net aprx.	Transformer speed controller 5-step with motor prot. circuit breaker		Transformer speed controller 5-step w/o motor prot. circuit breaker		Mot. prot. circ. break. for connecting built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) at 1m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP55																	
MBW 355/4	05951	2810	1410	43	0.30	1.40	1.90	1119	100	60	81.0	**MWS 3**	01948	**TSW 3.0**	01496	**MW** [1]	01579
Two-speed, three-phase current motor, 400 V, 50 Hz, ⅄/△ connection, protection category IP55																	
MBD 355/4/4	05947	2530/2850	1240/1430	40/42	0.26/0.30	0.45/0.63	0.84	520	100	60	81.0	**RDS 2**	01315	**TSD 1.5** [3]	01501	**M 4** [2]	01571
MBD 355/2/2	05948	5210/5800	2510/2840	65/68	1.65/2.20	2.9/5.0	5.50	520	100	60	100.0	**RDS 7**	01578	**TSD 7.0** [3]	01504	**M 4** [2]	01571

[1] Incl. operating switch. [2] Incl. operating and speed switch. [3] Req. motor protection circuit breaker: Type MD, No. 05849.

MB 400

Dimensions MB 400

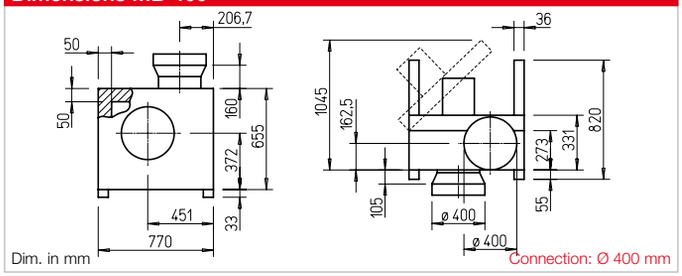

Performance curves MBW 400/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	39	56	50	46	43	44	32
L_{WA}	Inlet side	dB(A)	78	61	77	67	69	66	68	56
L_{WA}	Outlet side	dB(A)	76	59	76	70	66	63	64	52

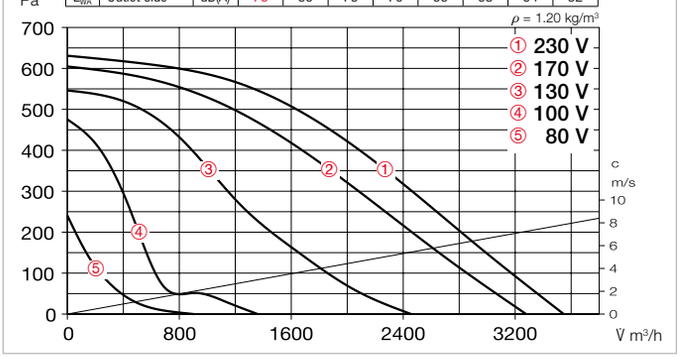

Performance curves MBD 400/4/4

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	58	41	57	51	47	46	47	34
L_{WA}	Inlet side	dB(A)	77	60	77	67	64	65	68	55
L_{WA}	Outlet side	dB(A)	78	61	77	71	67	66	67	54

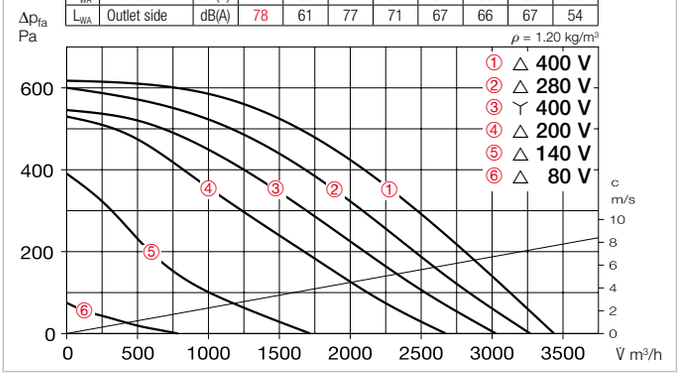

Performance curves MBD 400/2/2

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	80	55	69	79	70	70	67	81
L_{WA}	Inlet side	dB(A)	98	73	87	97	88	88	85	79
L_{WA}	Outlet side	dB(A)	100	75	89	99	90	90	87	79

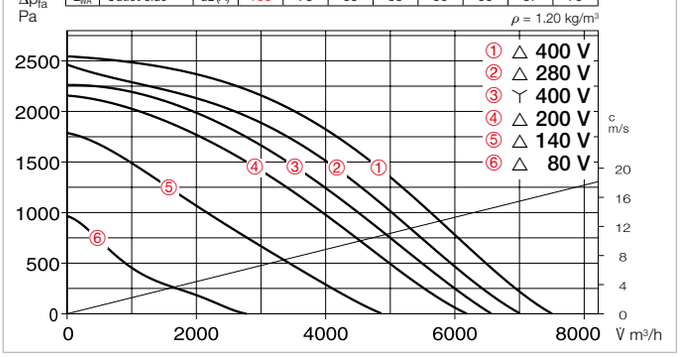

- **Casing**
  See page 322.

- **Impeller**
  Backward curved high performance centrifugal impeller made of aluminium, mounted directly on motor shaft.
  High efficiency, low noise, aerodynamically optimised volute casing.
  Dynamically balanced in accordance with DIN ISO 21940-11 – quality grade 6.3.

- **Drive**
  Through maintenance-free, speed-controllable IEC flange motor in protection category IP55. Ball bearing mounted, radio interference-free.

- **Electrical connection**
  Standard terminal box (IP55) mounted to external cable, on outside of motor for type MBD 400/2/2.

- **Motor protection**
  With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

- **Power control**
  All types are speed-controllable using voltage reduction by means of transformer (accessories).
  The 3~ types can also be operated at two speeds using a ⋎/△ switch or motor protection circuit breaker M 4. Performance levels are shown in the performance diagram.

- **Accessories**

Wall bracket made of galv. steel sheet.
MB-WK 400 Ref. no. 05528

Weather protection cover (galv. steel sheet), mounted above motor.
MB-WSD Ref. no. 01856

Flexible connecting sleeve for installation between fan and duct.
FM 400 (+70 °C) No. 01676
FM 400 T120(+120 °C) No. 01659

Speed switch and on/off switch for two-speed ⋎/△ switchable three-phase current fans.
DS 2 [3] Ref. no. 01351

Type	Ref. no.	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption at rated voltage	Current consumption in contr. mode	Wiring diagram	Max. air flow temperature Rat. vol..	Max. air flow temperature Control	Weight net aprx.	Transformer speed controller 5-step with motor prot. circuit breaker		Transformer speed controller 5-step w/o motor prot. circuit breaker		Mot. prot. circ. break. for connecting built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) at 1m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP55																	
MBW 400/4	05953	3550	1410	48	0.49	2.50	3.70	1119	100	60	85.0	**MWS 5**	01949	**TSW 7.5**	01596	**MW** [1]	01579
Two-speed, three-phase current motor, 400 V, 50 Hz, ⋎/△ connection, protection category IP55																	
MBD 400/4/4	05955	3030/3440	1180/1410	46/50	0.41/0.50	0.71/1.00	1.30	520	100	60	82.0	**RDS 2**	01315	**TSD 1.5** [3]	01501	**M 4** [2]	01571
MBD 400/2/2	05949	6570/7500	2510/2840	71/74	3.10/3.70	4.80/6.10	9.00	520	100	60	110.0	**RDS 11**	01332	**TSD 11** [3]	01513	**M 4** [2]	01571

[1] Incl. operating switch. [2] Incl. operating and speed switch. [3] Req. motor protection circuit breaker: Type MD, No. 05849.

Feel-good climate **thanks to pre-heated and filtered supply air.**

System solution: **Supply air ductwork.**

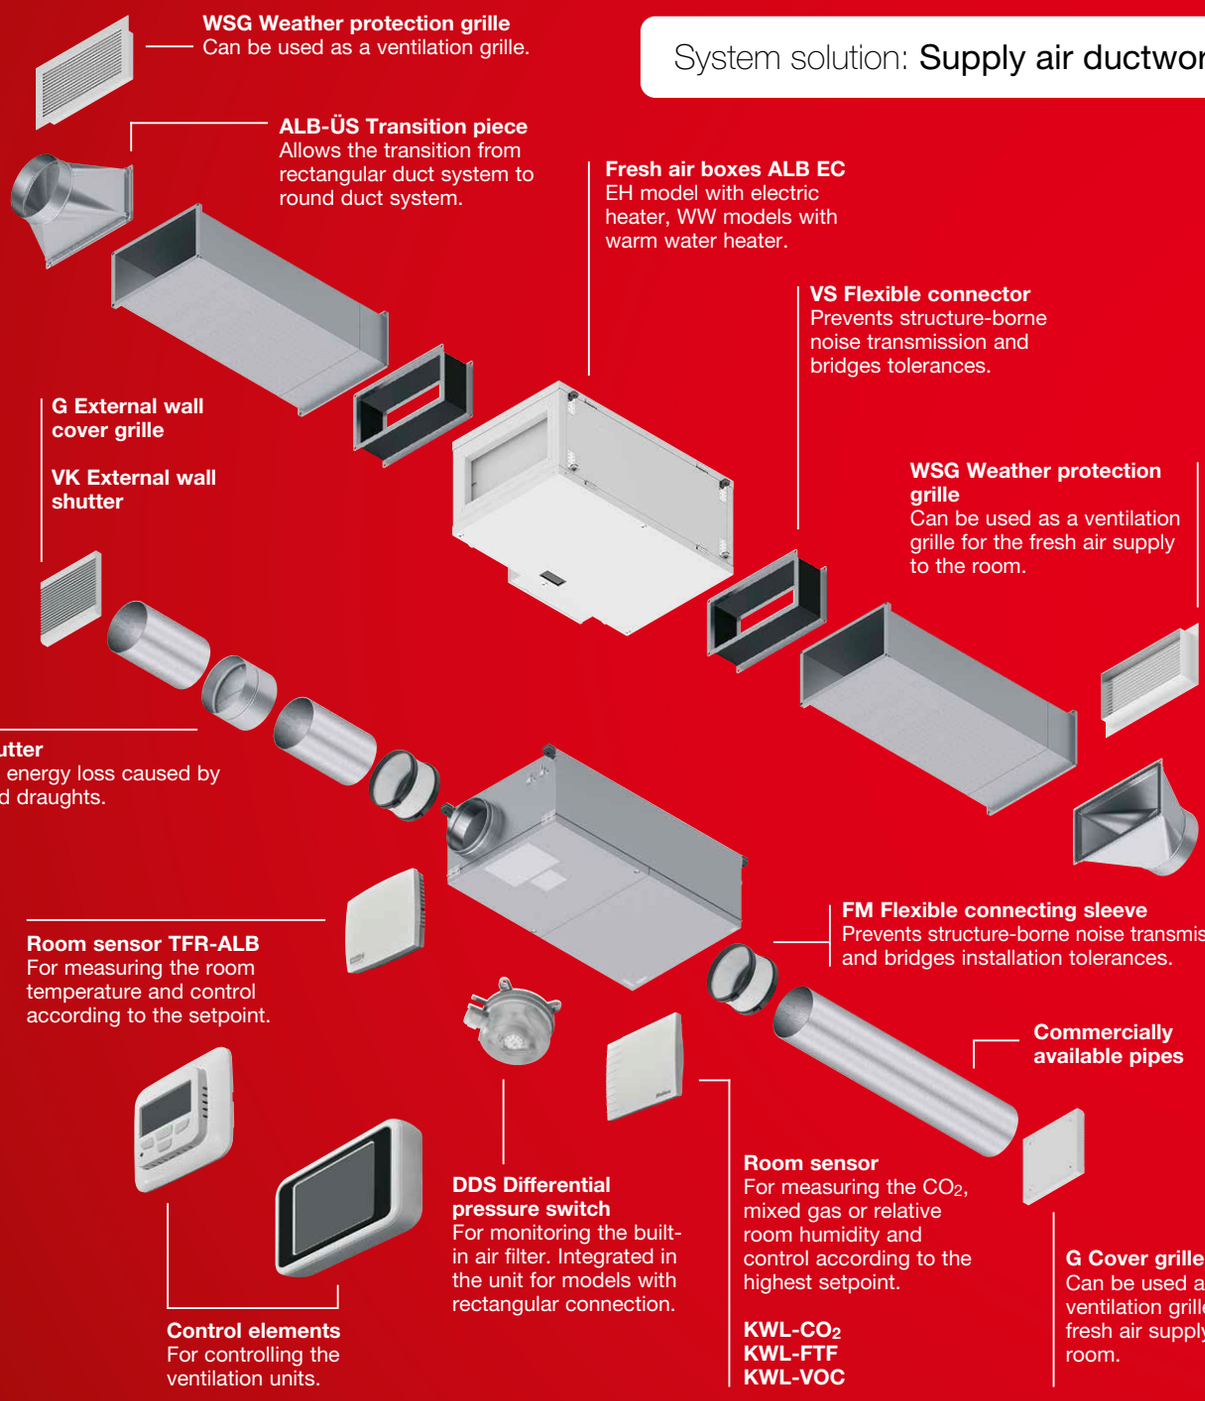

System solution: Extract air ductwork

The fresh air box control elements allow the control of extract air fans in the Helios range.

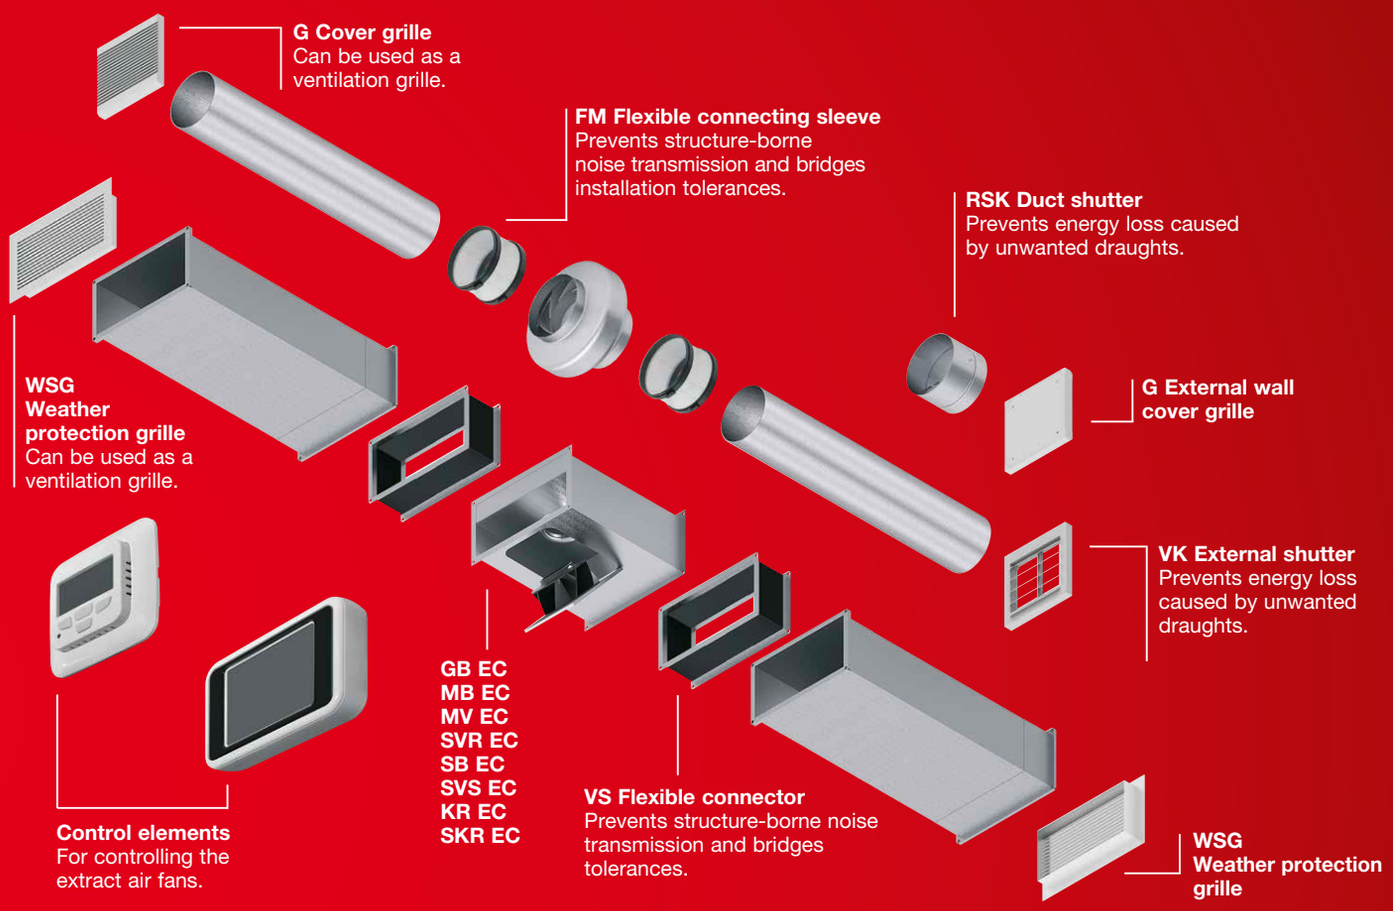

Incredibly practical:

Supply air, heating and filter in one single unit. For direct insertion in round duct and rectangular duct runs. The Helios fresh air boxes ALB provide for a pleasant indoor climate by supplying external intake air which is filtered and heated to the pre-set temperature. ALB are ideally suitable for all rooms where filtered and preheated fresh air is required.

Whether in bistros, boutiques or other commercial areas. Specially equipped silencer casings and low-noise centrifugal fans ensure that the fresh air boxes are virtually silent.
Large cartridge filters result in the longest possible cleaning intervals.
Control options for maximum comfort and efficient energy saving are included in the scope of delivery or available as accessories.

■ EH models with electric heater

ALB EC EH
With electric heater and air filter. Heat output control is continuously variable. Delivered ready-for-connection with control unit included.

Ø 125 – 250 mm
▭ 30 x 20 cm

EC 344ff

■ WW models with warm water heater

ALB EC WW
With warm water heater and air filter. Delivered ready-for-connection with control unit included.

▭ 40 x 20 cm, 50 x 30 cm, 60 x 35 cm, 80 x 50 cm

EC 352ff

Fresh air box ALB EC EH with electric heating element and air filter Ø 125 mm

ALB EC 125 EH

Efficiency class

B ALB EC 125 EH

EC

Dimensions ALB EC 125 EH

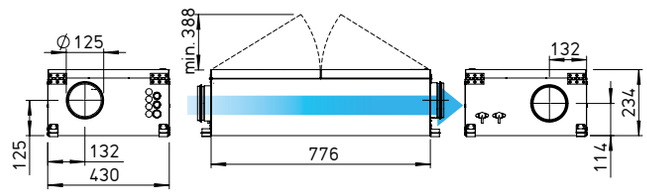

Dim. in mm

Application /Function
Pleasant indoor climate through the addition of external fresh air which is filtered and automatically heated to the specified temperature.

Operational unit for connection to round duct systems. Suitable for a wide range of applications.

Description / Scope of delivery
The air filter, fan, heater with controller and electrical terminal box are integrated in a compact flat casing which is thermally and acoustically insulated. Equipped as standard with a continuously variable, electronic heating controller and an external control unit for controlling the unit, as well as a connection cable (10 metres). Air quality, humidity and temperature sensors (see Accessories) can be connected to the electronics in the terminal box to control the specified setpoints.

Casing
Robust construction made of galvanised steel sheet, 50 mm thick mineral wool lining on all sides, which is also covered with dirt-repellent glass fabric. The cover is easy to open with screw caps and hinge for cleaning purposes. Round duct connectors on inlet side and outlet side with sealing lips, adapted to standard duct Ø. No thermal bridges, smooth surface for easy cleaning.

Filter
The large filter for long cleaning intervals is freely accessible by opening the casing cover. Standard version ISO $ePM_{2.5}$ 60 % (M5). Alternatively, filters with higher classifications ISO ePM_1 50 % (F7) (see accessories) can be used. The volume output reduction must be taken into account. Periodic filter inspection / cleaning is required. Equipment with automatic monitoring DDS (see Accessories) is recommended.

Fan
The volume flow rate switching is continuously variable with the control unit. Low-noise and high performance centrifugal fan made of galvanised steel sheet. Motor/impeller unit freely accessible for servicing. Drive through energy-saving, speed-controllable EC motor with a high level of efficiency. Maintenance-free, with lifetime lubricated ball bearings.

Heating element
Enclosed sheathed heating elements made of stainless steel with low surface temperature heat the intake air to the specified setpoint temperature.
The electronic pulser continuously variably controls the heat output in constant comparison between the setpoint and the temperature measured by the room or duct sensor.

Turn-off delay
The unit has a fixed turn-off delay time of approx. 2 minutes if the heating element has been activated.

Electrical connection
Spacious terminal box inside the casing. Cable entry from the front of the unit through three cable glands and another four holes are provided.

Motor protection
Deactivation when overheating is imminent. Automatic reactivation after cool down.

Noise
The total level and range for the case-radiated sound power and outlet side sound power in dB(A) are specified above the performance diagram. In addition, the type table shows the radiated noise and outlet side air noise as sound pressure at 1 m (free field conditions). If necessary, a cross talk silencer (see Accessories) must be integrated in the duct system on site. The radiated noise as sound pressure level at 1 m (free field conditions) is additionally stated in the type table as well as in the table below the performance curve.

Control
The control element is included in the delivery and offers the following functions:
- ▢ Operation with different volume flows.
- ▢ Weekly and seasonal timer.
- ▢ Temperature control (using room sensor, accessories).
- ▢ Control of electronic heating controller. Specification of min./ max. temperature.
- ▢ Control of an EC extract air fan.
- ▢ Display of ambient temperature, outdoor temperature, supply air temperature, fan control and filter contamination (using differential pressure switch, accessories).

Other inputs and outputs:
- ▢ Emergency switch contact.
- ▢ Boost switch contact.
- ▢ Input for air quality or humidity sensor.
- ▢ Input for room temperature sensor.

Control element with connection cable (10 m) included in delivery. For flush-mounted installation. Dimensions mm (W x H) 82 x 82

Type	Ref. no.	Flow rate* free blowing	Max. speed	Freq.	Sound pressure level		Prot. category	Voltage	Power consumption	Current consump. max. tot.	Wiring diagram	Max. intake temp.	Weight net aprx.
					Case-radiation	Air noise outlet side							
		V̇ m³/h (max.)	min-1	Hz	dB(A) at 1m	dB(A) at 1m		Volt	kW	A	No.	+°C	kg
ALB EC 125 EH	06808	445	3640	50/60	45	64	IP44	230, 1~	2.10	9.52	SS-1308	40	20

* Volume reduction by approx. 15% when using the filter ISO ePM_1 50 % (F7).

Performance curves ALB EC 125 EH

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	53	44	50	48	39	35	33	31
L_{WA}	Inlet side	dB(A)	62	57	58	51	43	45	44	33
L_{WA}	Outlet side	dB(A)	72	63	65	64	63	67	60	52

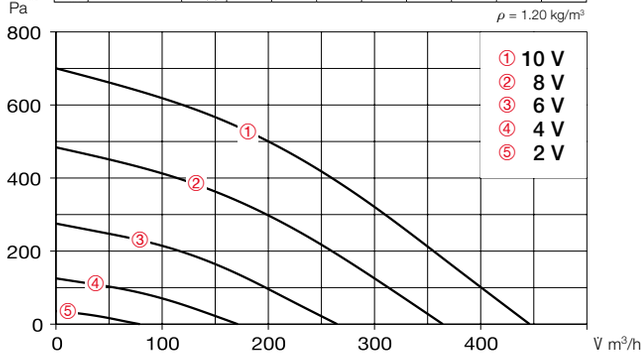

	Voltage V	n min⁻¹	V̇ m³/h	P W	I A	Lp dB(A)	SFP kW/m³/s
Free blowing	10	3640	445	96	0.77	45	0.77
	8	3030	360	56	0.48	41	0.56
	6	2270	260	26	0.24	35	0.35
	4	1510	170	9	0.11	28	0.20
	2	730	80	4	0.06	24	0.17



Reference

The integration of air filters ELF-ALB 125 F7 (ISO ePM_1 50 %) and differential pressure switches DDS (accessories) in outdoor installation fulfils the requirements of VDI 6022.

Reference	Page
Planning information	14 ff.

Other accessories	Page
Silencers	496 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters,	
Supply air disc valves	586 f.

Accessories

Replacement and pollen filter
Large cassette filter for long cleaning intervals.
Unit = 3 pcs.
– Filter class ISO $ePM_{2,5}$ 60% (M5)
ELF-ALB 125 M5 No. 07231
– Filter class ISO ePM_1 50 % (F7)
ELF-ALB 125 F7 No. 07337

Differential pressure switch
DDS Ref. no. 00445
Adjustable normally closed / normally open contact for monitoring drops in pressure.

Room sensor – Temperature
TFR-ALB Ref. no. 40000
Room temperature sensor for surface installation.

Temperature range	0 – 30 °C
Protection category	IP20
Dim. mm	W 87 x H 87 x D 30
Weight approx.	0.05 kg

Flexible cross talk silencer
FSD 125 Ref. no. 00677
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Pipe clamp connectors
BM 125 Ref. no. 05076
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs).

Surface-mounted casing incl. frame
ALB-APG Ref. no. 00134
Casing for surface-mounting of control element.

Protection category	IP20
Dim. mm	W 85 x H 85 x D 48

External wall cover grille
G 160 Ref. no. 00893
Made of plastic, white. For covering and insertion in round ventilation openings.

Duct shutter
RSKK 125 Ref. no. 05107
Automatic, made of plastic.

Plastic supply air disc valve
KTVZ 125 Ref. no. 02737
Made of plastic, for low and high flow velocities or resistances.

Metal supply air disc valve
MTVZ 125 Ref. no. 09605
Made of metal, for low and high flow velocities.

Fresh air box ALB EC EH with electric heating element and air filter Ø 200 mm

ALB EC 200 EH

Efficiency class

B ALB EC 200 EH

EC

Dimensions ALB EC 200 EH

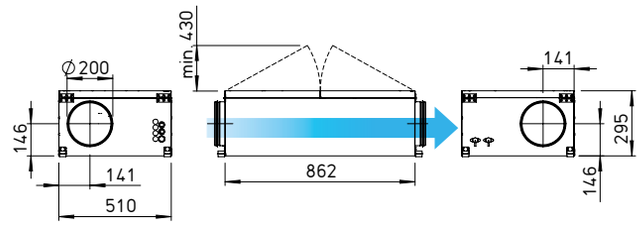

Dim. in mm

Application /Function

Pleasant indoor climate through the addition of external fresh air which is filtered and automatically heated to the specified temperature.

Operational unit for connection to round duct systems. Suitable for a wide range of applications.

Description / Scope of delivery

The air filter, fan, heater with controller and electrical terminal box are integrated in a compact flat casing which is thermally and acoustically insulated. Equipped as standard with a continuously variable, electronic heating controller and an external control unit for controlling the unit, as well as a connection cable (10 metres). Air quality, humidity and temperature sensors (see Accessories) can be connected to the electronics in the terminal box to control the specified setpoints.

Casing

Robust construction made of galvanised steel sheet, 50 mm thick mineral wool lining on all sides, which is also covered with dirt-repellent glass fabric. The cover is easy to open with screw caps and hinge for cleaning purposes. Round duct connectors on inlet side and outlet side with sealing lips, adapted to standard duct Ø. No thermal bridges, smooth surface for easy cleaning.

Filter

The large filter for long cleaning intervals is freely accessible by opening the casing cover. Standard version ISO $ePM_{2.5}$ 60 % (M5). Alternatively, filters with higher classifications ISO ePM_1 50 % (F7) (see accessories) can be used. The volume output reduction must be taken into account. Periodic filter inspection / cleaning is required. Equipment with automatic monitoring DDS (see Accessories) is recommended.

Fan

The volume flow rate switching is continuously variable with the control unit. Low-noise and high performance centrifugal fan made of galvanised steel sheet. Motor/impeller unit freely accessible for servicing. Drive through energy-saving, speed-controllable EC motor with a high level of efficiency. Maintenance-free, with lifetime lubricated ball bearings.

Heating element

Enclosed sheathed heating elements made of stainless steel with low surface temperature heat the intake air to the specified setpoint temperature.
The electronic pulser continuously variably controls the heat output in constant comparison between the setpoint and the temperature measured by the room or duct sensor.

Turn-off delay

The unit has a fixed turn-off delay time of approx. 2 minutes if the heating element has been activated.

Electrical connection

Spacious terminal box inside the casing. Cable entry from the front of the unit through three cable glands and another four holes are provided.

Motor protection

Deactivation when overheating is imminent. Automatic reactivation after cool down.

Noise

The total level and range for the case-radiated sound power and outlet side sound power in dB(A) are specified above the performance diagram. In addition, the type table shows the radiated noise and outlet side air noise as sound pressure at 1 m (free field conditions). If necessary, a cross talk silencer (see Accessories) must be integrated in the duct system on site. The radiated noise as sound pressure level at 1 m (free field conditions) is additionally stated in the type table as well as in the table below the performance curve.

Control

The control element is included in the delivery and offers the following functions:

- ▢ Operation with different volume flows.
- ▢ Weekly and seasonal timer.
- ▢ Temperature control (using room sensor, accessories).
- ▢ Control of electronic heating controller. Specification of min./ max. temperature.
- ▢ Control of an EC extract air fan.
- ▢ Display of ambient temperature, outdoor temperature, supply air temperature, fan control and filter contamination (using differential pressure switch, accessories).

Other inputs and outputs:

- ▢ Emergency switch contact.
- ▢ Boost switch contact.
- ▢ Input for air quality or humidity sensor.
- ▢ Input for room temperature sensor.

Control element with connection cable (10 m) included in delivery. For flush-mounted installation. Dimensions mm (W x H) 82 x 82

Type	Ref. no.	Flow rate* free blowing	Max. speed	Freq.	Sound pressure level		Prot. category	Voltage	Power consumption	Current consump. max. tot.	Wiring diagram	Max. intake temp.	Weight net aprx.
					Case-radiation	Air noise outlet side							
		V̇ m³/h (max.)	min-1	Hz	dB(A) at 1m	dB(A) at 1m		Volt	kW	A	No.	+°C	kg
ALB EC 200 EH	06809	720	2910	50/60	44	66	IP44	400, 3N~	5.12	13.52	SS-1309	40	26

* Volume reduction by approx. 15% when using the filter ISO ePM_1 50 % (F7).

Performance curves ALB EC 200 EH

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	43	50	46	37	32	31	29
L_{WA}	Inlet side	dB(A)	65	56	61	53	46	44	41	32
L_{WA}	Outlet side	dB(A)	74	61	66	70	64	64	60	50

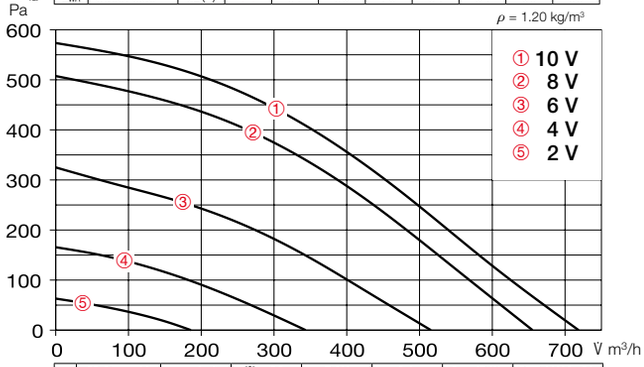

	Voltage V	n min⁻¹	V̇ m³/h	P W	I A	Lp dB(A)	SFP kW/m³/s
Free blowing	10	2930	720	119	0.97	44	0.60
	8	2730	650	95	0.77	44	0.52
	6	2160	510	49	0.41	39	0.34
	4	1530	340	19	0.18	32	0.20
	2	940	185	7	0.08	27	0.13



Reference

The integration of air filters ELF-ALB 125 F7 (ISO ePM_1 50 %) and differential pressure switches DDS (accessories) in outdoor installation fulfils the requirements of VDI 6022.

Reference	Page
Planning information	14 ff.

Other accessories	Page
Silencers	496 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters,	
Supply air disc valves	586 f.

Accessories

Replacement and pollen filter
Large cassette filter for long cleaning intervals.
Unit = 3 pcs.
– Filter class ISO $ePM_{2,5}$ 60 % (M5)
ELF-ALB 200 M5 No. 07238
– Filter class ISO ePM_1 50 % (F7)
ELF-ALB 200 F7 No. 07266

Differential pressure switch
DDS Ref. no. 00445
Adjustable normally closed / normally open contact for monitoring drops in pressure.

Room sensor – Temperature
TFR-ALB Ref. no. 40000
Room temperature sensor for surface installation.

Temperature range	0 – 30 °C
Protection category	IP20
Dim. mm	W 87 x H 87 x D 30
Weight approx.	0.05 kg

Flexible cross talk silencer
FSD 200 Ref. no. 00679
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Pipe clamp connectors
BM 200 Ref. no. 05078
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs).

Surface-mounted casing incl. frame
ALB-APG Ref. no. 00134
Casing for surface-mounting of control element.

Protection category	IP20
Dim. mm	W 85 x H 85 x D 48

Duct shutter
RSK 200 Ref. no. 05074
Automatic, casing made from galvanized steel.

External wall cover grille
G 200 Ref. no. 00255
Made of plastic, white. For covering and insertion in round ventilation openings.

Supply air disc valve
KTVZ 125 Ref. no. 02737
Made of plastic, for low and high flow velocities or resistances.

Supply air disc valve
MTVZ 200 Ref. no. 09607
Made of metal, for low and high flow velocities.

Fresh air box ALB EC EH with electric heating element and air filter Ø 250 mm

ALB EC 250 EH

Efficiency class

B ALB EC 250 EH

EC

Dimensions ALB EC 250 EH

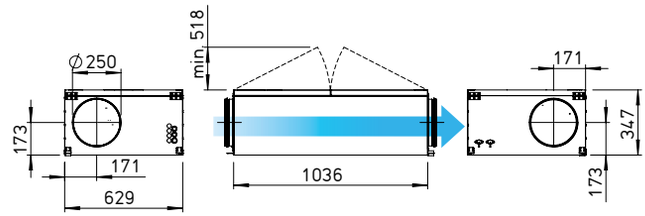

Dim. in mm

Application /Function
Pleasant indoor climate through the addition of external fresh air which is filtered and automatically heated to the specified temperature.

Operational unit for connection to round duct systems. Suitable for a wide range of applications.

Description / Scope of delivery
The air filter, fan, heater with controller and electrical terminal box are integrated in a compact flat casing which is thermally and acoustically insulated. Equipped as standard with a continuously variable, electronic heating controller and an external control unit for controlling the unit, as well as a connection cable (10 metres). Air quality, humidity and temperature sensors (see Accessories) can be connected to the electronics in the terminal box to control the specified setpoints.

Casing
Robust construction made of galvanised steel sheet, 50 mm thick mineral wool lining on all sides, which is also covered with dirt-repellent glass fabric. The cover is easy to open with screw caps and hinge for cleaning purposes. Round duct connectors on inlet side and outlet side with sealing lips, adapted to standard duct Ø. No thermal bridges, smooth surface for easy cleaning.

Filter
The large filter for long cleaning intervals is freely accessible by opening the casing cover. Standard version ISO $ePM_{2.5}$ 60 % (M5). Alternatively, filters with higher classifications ISO ePM_1 50 % (F7) (see accessories) can be used. The volume output reduction must be taken into account. Periodic filter inspection / cleaning is required. Equipment with automatic monitoring DDS (see Accessories) is recommended.

Fan
The volume flow rate switching is continuously variable with the control unit. Low-noise and high performance centrifugal fan made of galvanised steel sheet. Motor/impeller unit freely accessible for servicing. Drive through energy-saving, speed-controllable EC motor with a high level of efficiency. Maintenance-free, with lifetime lubricated ball bearings.

Heating element
Enclosed sheathed heating elements made of stainless steel with low surface temperature heat the intake air to the specified setpoint temperature.
The electronic pulser continuously variably controls the heat output in constant comparison between the setpoint and the temperature measured by the room or duct sensor.

Turn-off delay
The unit has a fixed turn-off delay time of approx. 2 minutes if the heating element has been activated.

Electrical connection
Spacious terminal box inside the casing. Cable entry from the front of the unit through three cable glands and another four holes are provided.

Motor protection
Deactivation when overheating is imminent. Automatic reactivation after cool down.

Noise
The total level and range for the case-radiated sound power and outlet side sound power in dB(A) are specified above the performance diagram. In addition, the type table shows the radiated noise and outlet side air noise as sound pressure at 1 m (free field conditions). If necessary, a cross talk silencer (see Accessories) must be integrated in the duct system on site. The radiated noise as sound pressure level at 1 m (free field conditions) is additionally stated in the type table as well as in the table below the performance curve.

Control
The control element is included in the delivery and offers the following functions:
- ▢ Operation with different volume flows.
- ▢ Weekly and seasonal timer.
- ▢ Temperature control (using room sensor, accessories).
- ▢ Control of electronic heating controller. Specification of min./ max. temperature.
- ▢ Control of an EC extract air fan.
- ▢ Display of ambient temperature, outdoor temperature, supply air temperature, fan control and filter contamination (using differential pressure switch, accessories).

Other inputs and outputs:
- ▢ Emergency switch contact.
- ▢ Boost switch contact.
- ▢ Input for air quality or humidity sensor.
- ▢ Input for room temperature sensor.

Control element with connection cable (10 m) included in delivery. For flush-mounted installation. Dimensions mm (W x H) 82 x 82

Type	Ref. no.	Flow rate* free blowing	Max. speed	Freq.	Sound pressure level		Prot. category	Voltage	Power consumption	Current consump. max. tot.	Wiring diagram	Max. intake temp.	Weight net aprx.
					Case-radiation	Air noise outlet side							
		V̇ m³/h (max.)	min-1	Hz	dB(A) at 1m	dB(A) at 1m		Volt	kW	A	No.	+°C	kg
ALB EC 250 EH	06818	1010	2810	50/60	41	63	IP44	400, 3N~	5.15	13.73	SS-1309	40	36

* Volume reduction by approx. 15% when using the filter ISO ePM_1 50 % (F7).

Performance curves ALB EC 250 EH

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	34	46	41	35	33	31	29
L_{WA}	Inlet side	dB(A)	59	46	53	42	43	45	41	33
L_{WA}	Outlet side	dB(A)	71	53	68	61	62	62	58	49

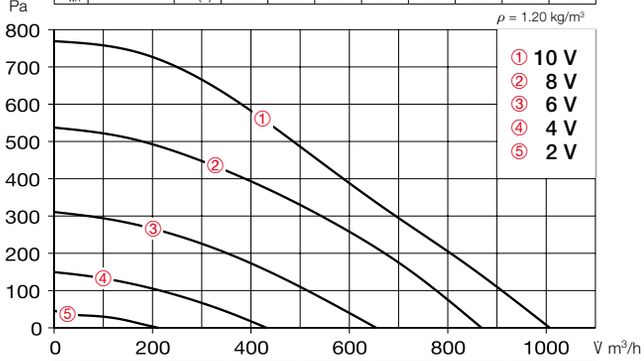

	Voltage V	n min⁻¹	V̇ m³/h	P W	I A	Lp dB(A)	SFP kW/m³/s
Free blowing	10	2900	1010	147	1.18	41	0.52
	8	2530	870	99	0.82	39	0.41
	6	1900	650	45	0.40	36	0.25
	4	1300	430	17	0.17	27	0.14
	2	650	210	5	0.07	25	0.09



Reference

The integration of air filters ELF-ALB 125 F7 (ISO ePM_1 50 %) and differential pressure switches DDS (accessories) in outdoor installation fulfils the requirements of VDI 6022.

Reference	Page
Planning information	14 ff.

Other accessories	Page
Silencers	496 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters,	
Supply air disc valves	586 f.

Accessories

Replacement and pollen filter
Large cassette filter for long cleaning intervals.
Unit = 3 pcs.
– Filter class ISO $ePM_{2,5}$ 60 % (M5)
ELF-ALB 250 M5 No. 07294
– Filter class ISO ePM_1 50 % (F7)
ELF-ALB 250 F7 No. 07305

Differential pressure switch
DDS Ref. no. 00445
Adjustable normally closed / normally open contact for monitoring drops in pressure.

Room sensor – Temperature
TFR-ALB Ref. no. 40000
Room temperature sensor for surface installation.

Temperature range	0 – 30 °C
Protection category	IP20
Dim. mm	W 87 x H 87 x D 30
Weight approx.	0.05 kg

Flexible cross talk silencer
FSD 250 Ref. no. 00680
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs).

Pipe clamp connectors
BM 250 Ref. no. 05079
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs).

Surface-mounted casing incl. frame
ALB-APG Ref. no. 00134
Casing for surface-mounting of control element.

Protection category	IP20
Dim. mm	W 85 x H 85 x D 48

Duct shutter
RSK 250 Ref. no. 05673
Automatic, casing made from galvanized steel.

External wall cover grille
G 250 Ref. no. 00256
Made of plastic, white. For covering and insertion in round ventilation openings.

Automatic duct shutter
RVS 250 Ref. no. 02592
With spring return, can be installed horizontally in any direction, vertically with throughflow from bottom to top. Shutter opening in flow direction; automatic function through fan operation.

Fresh air box ALB EC EH
backward curved, for rectangular ducts 30 x 20 cm

ALB EC 30/20 EH

Dimensions ALB EC 30/20 EH

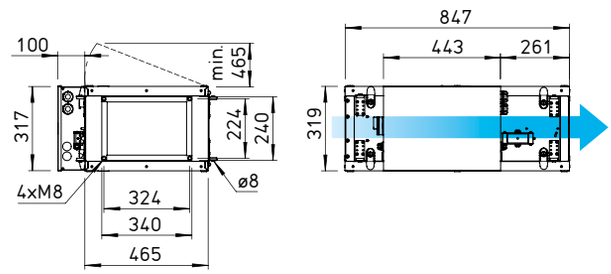

Dim. in mm

Application /Function
Pleasant indoor climate through the addition of external fresh air which is filtered and automatically heated to the specified temperature.

Operational unit for connection to rectangular duct systems. Suitable for a wide range of commercial applications.

Description/ Scope of delivery
The air filter, fan and electric heating element are integrated in a compact flat casing which is thermally and acoustically insulated. The unit is delivered ready for connection and includes an external control unit for controlling the unit, as well as a connection cable (10 metres). Air quality, humidity and temperature sensors (see Accessories) can be connected to the electronics in the terminal box to control the specified setpoints.

Casing
Robust construction made of coated steel sheet, double-walled with 30 mm thick mineral wool lining. The cover is easy to open with screw caps and hinge for cleaning purposes.
Rectangular duct connectors on inlet side and outlet side, adapted to standard rectangular duct dimensions.
No thermal bridges, smooth surface for easy cleaning.

Filter
The large filter for long cleaning intervals is freely accessible by opening the casing cover. Standard version ISO Coarse 90% (G4).
Alternatively, filters with higher classifications ISO ePM_{10} 70% (M5) or ISO ePM_1 50% (F7) (see accessories) can be used. The volume output reduction must be taken into account.
Periodic filter inspection /cleaning is required.
A filter monitoring system is integrated.
The requirements of VDI 6022 are fulfilled through the integration of a ISO ePM_1 50% (F7) filter.

Fan
The volume flow rate switching is continuously variable with the control unit. Low-noise and high performance centrifugal fan made of galvanised steel sheet. Motor/impeller unit freely accessible for servicing. Drive through energy-saving, speed-controllable EC motor with a high level of efficiency. Maintenance-free, with lifetime lubricated ball bearings.

Heating element
The electric heating element made of stainless steel with low surface temperature heats the intake air to the specified setpoint temperature.
Control via the integrated control board.
The setpoint and the temperature measured by the room sensor (accessories) are constantly compared.
The electric heating element is equipped with an automatic safety temperature limiter (+50 °C) and a manually resettable safety temperature limiter (+115 °C).

Electrical connection
Spacious terminal box in IP20 on outside of casing

Motor protection
Deactivation when overheating is imminent. Automatic reactivation after cool down.

Noise
The type table shows the radiated noise and outlet side air noise as sound pressure at 1 m (free field conditions). If necessary, a cross talk silencer (see Accessories) must be integrated in the duct system on site. The radiated noise as sound pressure level at 1 m (free field conditions) is additionally stated in the type table as well as in the table below the performance curve.

Control
The control element is included in the delivery and offers the following functions:
- ☐ Operation with different volume flows.
- ☐ Weekly and seasonal timer.
- ☐ Temperature control (using room sensor, accessories).
- ☐ Control of an EC extract air fan.
- ☐ Display of ambient temperature, fan control and filter contamination.

Other inputs and outputs:
- ☐ Emergency switch contact.
- ☐ Boost switch contact.
- ☐ External switch.
- ☐ Input for air quality or humidity sensor.
- ☐ Input for room temperature sensor.
- ☐ Output for shutter control.

Control element with connection cable (10 m) included in delivery.
Dimensions mm (W x H x D) 115 x 80 x 25

Type	Ref. no.	Flow rate* free blowing	Max. speed	Sound pressure level		Voltage 50/60 Hz	Power consump.		Current consump. max. tot.	Wiring diagram	Maximum intake temp.	Weight net aprx.
				Case-radiation	Air noise outlet side		Motor	Heating				
		V̇ m³/h (max.)	min-1	dB(A) at 1m	dB(A) at 1m	Volt	kW	kW	A	No.	+°C	kg
ALB EC 30/20 EH	06538	720	3900	49	69	230, 1~	0.12	6.60	10.4	1371	40	36

* Volume reduction by approx. 5% when using the filter ISO ePM_{10} 50% (M5), by approx. 15% when using the filter ISO ePM_1 50% (F7).

Performance curves ALB EC 30/20 EH

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	42	45	55	48	47	45	35
L_{WA}	Inlet side	dB(A)	75	60	65	73	65	60	59	58
L_{WA}	Outlet side	dB(A)	77	62	64	72	66	70	71	67

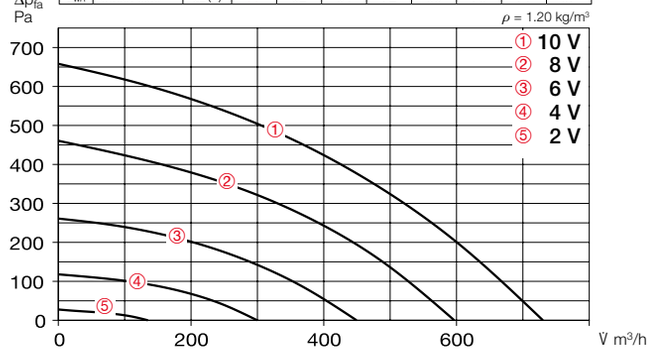

Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)
10	3860	720	105	0.81	49
8	3200	590	60	0.45	45
6	2420	440	28	0.22	39
4	1640	300	11	0.10	31



Reference

The integration of air filters ELF-ALB 30/20 F7 (ISO ePM_1 50 % (F7)) in intake air systems fulfils the requirements of VDI 6022.

Reference	Page
Planning information	14 ff.

Other accessories	Page
Silencers	496 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters,	
Supply air disc valves	586 f.

Accessories

Replacement and pollen filter
– ISO Coarse 90 % (G4)
ELF-ALB 30/20 G4 No. 07284
– Filter class ISO ePM_{10} 70 % (M5)
ELF-ALB 30/20 M5 No. 07285
– Filter class ISO ePM_1 50 % (F7)
ELF-ALB 30/20 F7 No. 07319
Large cassette filter for long cleaning intervals. Unit = 3 pcs.

Room sensor – Air quality
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2 concentration or relative room humidity. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL Ref. no. 07277
For measuring the room temperature and controlling the ventilation unit according to the setpoint.
Dim. mm (W x H x D) 80 x 80 x 25

Connection cable
– 20 metres long
ALB EC-SK 20 Ref. no. 06816

– 40 metres long
ALB EC-SK 40 Ref. no. 06817
Attach between ALB and control element as well as between ALB and TFR-ALB/KWL.

Transition piece – Symmetrical
KWL-ÜS 700 D Ref. no. 04206
From unit flange to round duct systems.

Flexible connecting sleeve
FM 250 Ref. no. 01672
For acoustic decoupling, incl. 2 pcs. hose clamps.

Angle flange ring
FR 250 Ref. no. 01203
Made of galvanised steel sheet, for duct connection.



Duct shutter, motorised
RVM 250 Ref. no. 02576
Prevents cold draughts when the unit is at a standstill. Automatic function through fan operation, with mounted spring return motor. Installation in any position, closing force adjustable corresponding to fan power and installation position.

Fresh air box ALB EC WW
backward curved, for rectangular ducts 40 x 20 cm

ALB EC 40/20 WW

Dimensions ALB EC 40/20 WW

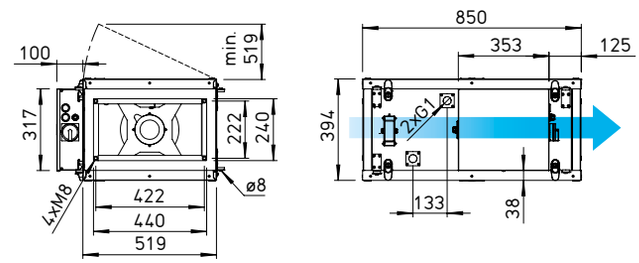

Dim. in mm

Application /Function
Pleasant indoor climate through the addition of external fresh air which is filtered and automatically heated to the specified temperature.

Operational unit for connection to rectangular duct systems. Suitable for a wide range of commercial applications.

Description/ Scope of delivery
The air filter, fan and warm water heater are integrated in a compact flat casing which is thermally and acoustically insulated. The unit is delivered ready for connection and includes an external control unit for controlling the unit, as well as a connection cable (10 metres). Air quality, humidity and temperature sensors (see Accessories) can be connected to the electronics in the terminal box to control the specified setpoints. In order to prevent frost damage to the unit, a shutter (see Accessories) is essential.

Casing
Robust construction made of coated steel sheet, double-walled with 30 mm thick mineral wool lining. The cover is easy to open with screw caps and hinge for cleaning purposes.
Rectangular duct connectors on inlet side and outlet side, adapted to standard rectangular duct dimensions.
No thermal bridges, smooth surface for easy cleaning.

Filter
The large filter for long cleaning intervals is freely accessible by opening the casing cover. Standard version ISO Coarse 90% (G4).
Alternatively, filters with higher classifications ISO ePM_{10} 70% (M5) or ISO ePM_1 50% (F7) (see accessories) can be used. The volume output reduction must be taken into account.
Periodic filter inspection /cleaning is required.
A filter monitoring system is integrated.
The filters comply with VDI 6022.

Fan
The volume flow rate switching is continuously variable with the control unit. Low-noise and high performance centrifugal fan made of galvanised steel sheet. Motor/impeller unit freely accessible for servicing. Drive through energy-saving, speed-controllable EC motor with a high level of efficiency. Maintenance-free, with lifetime lubricated ball bearings.

Heating element
Air heater with AL blades and staggered copper pipes heat the intake air to the specified setpoint temperature. Control through connection of a hydraulic unit (accessories) via the integrated control board.
The setpoint and the temperature measured by the room sensor (accessories) are constantly compared.
A frost protection circuit is integrated as standard.
Max. operating pressure 1.6 MPa.
Water connection pipes with external thread.

Electrical connection
Spacious terminal box in IP20 on outside of casing.

Motor protection
Deactivation when overheating is imminent. Automatic reactivation after cool down.

Noise
The type table shows the radiated noise and outlet side air noise as sound pressure at 1 m (free field conditions). If necessary, a cross talk silencer (see Accessories) must be integrated in the duct system on site. The radiated noise as sound pressure level at 1 m (free field conditions) is additionally stated in the type table as well as in the table below the performance curve.

Control
The control element is included in the delivery and offers the following functions:
- ☐ Operation with different volume flows.
- ☐ Weekly and seasonal timer.
- ☐ Temperature control (using room sensor, accessories).
- ☐ Frost protection.
- ☐ Control of hydraulic unit (accessories) to control the WW heating element. Specification of min./max. temperature.
- ☐ Control of an EC extract air fan.
- ☐ Display of ambient temperature, fan control and filter contamination.

Other inputs and outputs:
- ☐ Emergency switch contact.
- ☐ Boost switch contact.
- ☐ External switch.
- ☐ Input for air quality or humidity sensor.
- ☐ Input for room temperature sensor.
- ☐ Output for shutter control.

Control element with connection cable (10 m) included in delivery.
Dimensions mm (W x H x D) 115 x 80 x 25

Type	Ref. no.	Flow rate* free blowing	Max. speed	Sound pressure level		Voltage 50/60 Hz	Power consump.		Current consump. max. tot.	Wiring diagram	Maximum intake temp.	Weight net aprx.
				Case-radiation	Air noise outlet side		Motor	Heating				
		$\dot{V}$ m³/h (max.)	min-1	dB(A) at 1m	dB(A) at 1m	Volt	kW	kW	A	No.	+°C	kg
ALB EC 40/20 WW	06533	1100	2900	52	73	230, 1~	0.15	–	1.09	1371	40	37

* Volume reduction by approx. 5% when using the filter ISO ePM_{10} 50% (M5), by approx. 15% when using the filter ISO ePM_1 50% (F7).

Performance curves ALB EC 40/20 WW

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	60	64	60	49	44	42	35
L_{WA}	Inlet side	dB(A)	75	73	78	72	67	65	64	59
L_{WA}	Outlet side	dB(A)	81	74	86	81	70	55	57	61

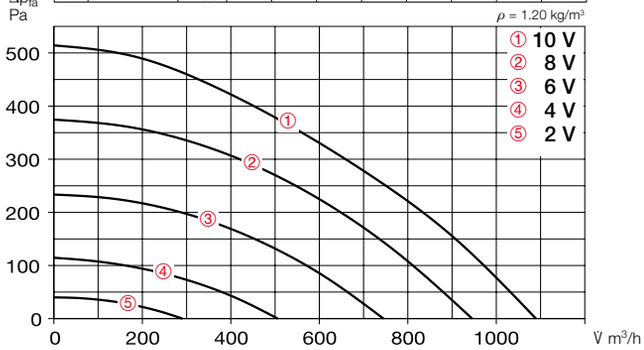

Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)
10	2890	1090	128	0.92	52
8	2365	945	89	0.68	48
6	1840	745	49	0.38	42
4	1193	505	22	0.20	33

Accessories

Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
For controlling the heat output of the warm water heating element in combination with room/duct sensors. Includes flow/return temperature display, pump, actuator, mixer valve, gravity brake, thermal cladding and flexible connection hoses.

Replacement and pollen filter
– ISO Coarse 90 % (G4)
ELF-ALB 40/20 G4 No. 07619
– Filter class ISO ePM_{10} 70 % (M5)
ELF-ALB 40/20 M5 No. 06766
– Filter class ISO ePM_1 50 % (F7)
ELF-ALB 40/20 F7 No. 06767
Large cassette filter for long cleaning intervals. Unit = 3 pcs.

Room sensor – Air quality
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2 concentration or relative room humidity. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL Ref. no. 07277
For measuring the room temperature and controlling the ventilation unit according to the setpoint.
Dim. mm (W x H x D) 80 x 80 x 25

Connection cable
– 20 metres long
ALB EC-SK 20 Ref. no. 06816
– 40 metres long
ALB EC-SK 40 Ref. no. 06817
Attach between ALB and control element as well as between ALB and TFR-ALB/KWL.

Transition piece – Symmetrical
ALB-ÜS 40/20 Ref. no. 07617
From unit flange to round duct systems.



Dim. in mm

Duct shutter, motorised
RVM 250 Ref. no. 02576
Prevents cold draughts when the unit is at a standstill. Automatic function through fan operation, with mounted spring return motor. Installation in any position, closing force adjustable corresponding to fan power and installation position.

Flexible connecting sleeve
FM 250 Ref. no. 01672
For acoustic decoupling, incl. 2 pcs. hose clamps.

Angle flange ring
FR 250 Ref. no. 01203
Made of galvanised steel sheet, for duct connection.

Flexible connector
VS 40/20 Ref. no. 05694
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 40/20 Ref. no. 06919
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Multi-leaf damper for rectangular duct installation
JVK 40/20 Ref. no. 06910
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 40/20 Ref. no. 00832
For cost-effective integration of rectangular duct fans in round duct systems with Ø 200 mm.

Rectangular duct silencer
KSD 40/20 Ref. no. 08728
For outlet and inlet side insertion in the rectangular duct system.

Other accessories	Page
Silencers	496 ff.
Hydraulic unit details	494 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters	563 ff.
Supply air disc valves	586 f.

Reference
The integration of air filters ELF-ALB 40/20 F7 (ISO ePM_1 50 % (F7)) in intake air systems fulfils the requirements of VDI 6022.

Reference	Page
Planning information	14 ff.

Fresh air box ALB EC WW
backward curved, for rectangular ducts 50 x 30 cm

ALB EC 50/30 WW

Dimensions ALB EC 50/30 WW

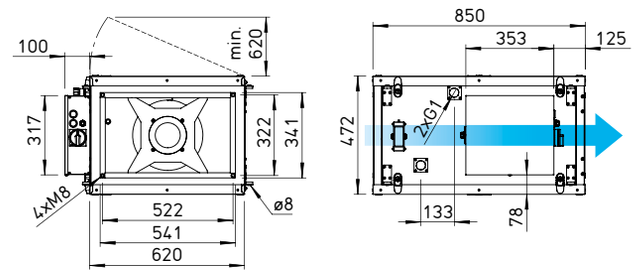

Dim. in mm

Application /Function
Pleasant indoor climate through the addition of external fresh air which is filtered and automatically heated to the specified temperature.

Operational unit for connection to rectangular duct systems. Suitable for a wide range of commercial applications.

Description/ Scope of delivery
The air filter, fan and warm water heater are integrated in a compact flat casing which is thermally and acoustically insulated. The unit is delivered ready for connection and includes an external control unit for controlling the unit, as well as a connection cable (10 metres). Air quality, humidity and temperature sensors (see Accessories) can be connected to the electronics in the terminal box to control the specified setpoints. In order to prevent frost damage to the unit, a shutter (see Accessories) is essential.

Casing
Robust construction made of coated steel sheet, double-walled with 30 mm thick mineral wool lining. The cover is easy to open with screw caps and hinge for cleaning purposes.
Rectangular duct connectors on inlet side and outlet side, adapted to standard rectangular duct dimensions.
No thermal bridges, smooth surface for easy cleaning.

Filter
The large filter for long cleaning intervals is freely accessible by opening the casing cover. Standard version ISO Coarse 90% (G4).
Alternatively, filters with higher classifications ISO ePM_{10} 70% (M5) or ISO ePM_1 50% (F7) (see accessories) can be used. The volume output reduction must be taken into account.
Periodic filter inspection /cleaning is required.
A filter monitoring system is integrated.
The filters comply with VDI 6022.

Fan
The volume flow rate switching is continuously variable with the control unit. Low-noise and high performance centrifugal fan made of galvanised steel sheet. Motor/impeller unit freely accessible for servicing. Drive through energy-saving, speed-controllable EC motor with a high level of efficiency. Maintenance-free, with lifetime lubricated ball bearings.

Heating element
Air heater with AL blades and staggered copper pipes heat the intake air to the specified setpoint temperature. Control through connection of a hydraulic unit (accessories) via the integrated control board.
The setpoint and the temperature measured by the room sensor (accessories) are constantly compared.
A frost protection circuit is integrated as standard.
Max. operating pressure 1.6 MPa.
Water connection pipes with external thread.

Electrical connection
Spacious terminal box in IP20 on outside of casing.

Motor protection
Deactivation when overheating is imminent. Automatic reactivation after cool down.

Noise
The type table shows the radiated noise and outlet side air noise as sound pressure at 1 m (free field conditions). If necessary, a cross talk silencer (see Accessories) must be integrated in the duct system on site. The radiated noise as sound pressure level at 1 m (free field conditions) is additionally stated in the type table as well as in the table below the performance curve.

Control
The control element is included in the delivery and offers the following functions:
- ☐ Operation with different volume flows.
- ☐ Weekly and seasonal timer.
- ☐ Temperature control (using room sensor, accessories).
- ☐ Frost protection.
- ☐ Control of hydraulic unit (accessories) to control the WW heating element. Specification of min./max. temperature.
- ☐ Control of an EC extract air fan.
- ☐ Display of ambient temperature, fan control and filter contamination.

Other inputs and outputs:
- ☐ Emergency switch contact.
- ☐ Boost switch contact.
- ☐ External switch.
- ☐ Input for air quality or humidity sensor.
- ☐ Input for room temperature sensor.
- ☐ Output for shutter control.

Control element with connection cable (10 m) included in delivery.
Dimensions mm (W x H x D) 115 x 80 x 25

Type	Ref. no.	Flow rate* free blowing	Max. speed	Sound pressure level		Voltage 50/60 Hz	Power consump.		Current consump. max. tot.	Wiring diagram	Maximum intake temp.	Weight net aprx.
				Case-radiation	Air noise outlet side		Motor	Heating				
		V̇ m³/h (max.)	min-1	dB(A) at 1m	dB(A) at 1m	Volt	kW	kW	A	No.	+°C	kg
ALB EC 40/20 WW	06534	2100	2600	57	74	230, 1~	0.47	–	2.90	1371	40	55

* Volume reduction by approx. 5% when using the filter ISO ePM_{10} 50% (M5), by approx. 15% when using the filter ISO ePM_1 50% (F7).

Performance curves ALB EC 50/30 WW

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	70	63	65	58	55	50	38
L_{WA}	Inlet side	dB(A)	76	83	76	76	67	62	61	59
L_{WA}	Outlet side	dB(A)	82	85	78	77	76	76	73	72

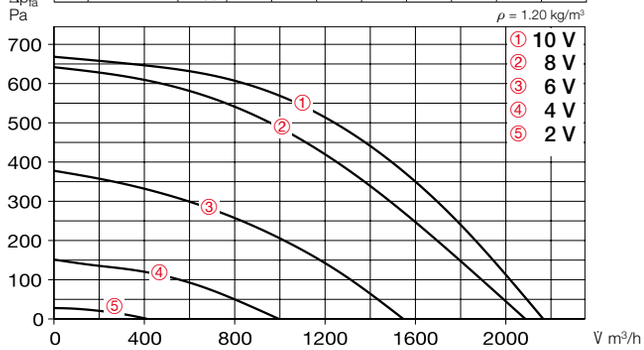

Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)
10	2594	2162	367	2,29	57
8	2475	2086	320	2.01	56
6	1858	1546	141	0.93	50
4	1193	994	47	0.35	40

Accessories

Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
For controlling the heat output of the warm water heating element in combination with room/duct sensors. Includes flow/return temperature display, pump, actuator, mixer valve, gravity brake, thermal cladding and flexible connection hoses.

Replacement and pollen filter
– ISO Coarse 90 % (G4)
ELF-ALB 220/4/50/30 G4 No. 03646
– Filter class ISO ePM_{10} 70 % (M5)
ELF-ALB 220/4/50/30 M5 No. 03647
– Filter class ISO ePM_1 50 % (F7)
ELF-ALB 220/4/50/30 F7 No. 03648
Large cassette filter for long cleaning intervals.
Unit = 3 pcs.

Room sensor – Air quality
AIR1/KWL-FTF 0-10V No. 20252
For measuring the relative room humidity. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL Ref. no. 07277
For measuring the room temperature and controlling the ventilation unit according to the setpoint.
Dim. mm (W x H x D) 80 x 80 x 25

Connection cable
– 20 metres long
ALB EC-SK 20 Ref. no. 06816
– 40 metres long
ALB EC-SK 40 Ref. no. 06817
Attach between ALB and control element as well as between ALB and TFR-ALB/KWL.

Transition piece – Symmetrical
ALB-ÜS 220/4/50/30 No. 07515
From unit flange to round duct systems.



Dim. in mm

Duct shutter, motorised
RVM 315 Ref. no. 02578
Prevents cold draughts when the unit is at a standstill. Automatic function through fan operation, with mounted spring return motor. Installation in any position, closing force adjustable corresponding to fan power and installation position.

Flexible connecting sleeve
FM 315 Ref. no. 01674
For acoustic decoupling, incl. 2 pcs. hose clamps.

Angle flange ring
FR 315 Ref. no. 01204
Made of galvanised steel sheet, for duct connection.

Flexible connector
VS 50/30 Ref. no. 05696
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 50/30 Ref. no. 06921
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Multi-leaf damper for rectangular duct installation
JVK 50/30 Ref. no. 06912
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 50/30 Ref. no. 00837
For cost-effective integration of rectangular duct fans in round duct systems with Ø 315 mm.

Rectangular duct silencer
KSD 50/25-30 Ref. no. 08729
For outlet and inlet side insertion in the rectangular duct system.

Other accessories	Page
Silencers	496 ff.
Hydraulic unit details	494 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters	563 ff.
Supply air disc valves	586 f.

Reference
The integration of air filters ELF-ALB 50/30 F7 (ISO ePM_1 50 % (F7)) in intake air systems fulfils the requirements of VDI 6022.

Reference	Page
Planning information	14 ff.

Fresh air box ALB EC WW
backward curved, for rectangular ducts 60 x 35 cm

ALB EC 60/35 WW

Dimensions ALB EC 60/35 WW

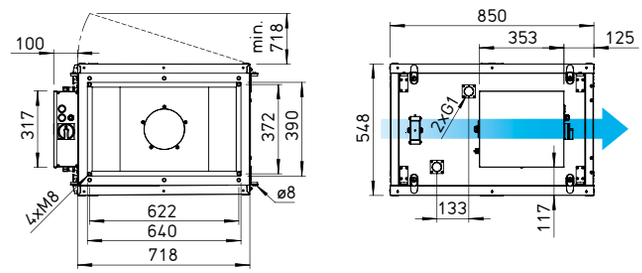

Dim. in mm

Application /Function
Pleasant indoor climate through the addition of external fresh air which is filtered and automatically heated to the specified temperature.

Operational unit for connection to rectangular duct systems. Suitable for a wide range of commercial applications.

Description/ Scope of delivery
The air filter, fan and warm water heater are integrated in a compact flat casing which is thermally and acoustically insulated. The unit is delivered ready for connection and includes an external control unit for controlling the unit, as well as a connection cable (10 metres). Air quality, humidity and temperature sensors (see Accessories) can be connected to the electronics in the terminal box to control the specified setpoints. In order to prevent frost damage to the unit, a shutter (see Accessories) is essential.

Casing
Robust construction made of coated steel sheet, double-walled with 30 mm thick mineral wool lining. The cover is easy to open with screw caps and hinge for cleaning purposes.
Rectangular duct connectors on inlet side and outlet side, adapted to standard rectangular duct dimensions.
No thermal bridges, smooth surface for easy cleaning.

Filter
The large filter for long cleaning intervals is freely accessible by opening the casing cover. Standard version ISO Coarse 90% (G4).
Alternatively, filters with higher classifications ISO ePM_{10} 70% (M5) or ISO ePM_1 50% (F7) (see accessories) can be used. The volume output reduction must be taken into account.
Periodic filter inspection /cleaning is required.
A filter monitoring system is integrated.
The filters comply with VDI 6022.

Fan
The volume flow rate switching is continuously variable with the control unit. Low-noise and high performance centrifugal fan made of galvanised steel sheet. Motor/impeller unit freely accessible for servicing. Drive through energy-saving, speed-controllable EC motor with a high level of efficiency. Maintenance-free, with lifetime lubricated ball bearings.

Heating element
Air heater with AL blades and staggered copper pipes heat the intake air to the specified setpoint temperature. Control through connection of a hydraulic unit (accessories) via the integrated control board.
The setpoint and the temperature measured by the room sensor (accessories) are constantly compared.
A frost protection circuit is integrated as standard.
Max. operating pressure 1.6 MPa.
Water connection pipes with external thread.

Electrical connection
Spacious terminal box in IP20 on outside of casing.

Motor protection
Deactivation when overheating is imminent. Automatic reactivation after cool down.

Noise
The type table shows the radiated noise and outlet side air noise as sound pressure at 1 m (free field conditions). If necessary, a cross talk silencer (see Accessories) must be integrated in the duct system on site. The radiated noise as sound pressure level at 1 m (free field conditions) is additionally stated in the type table as well as in the table below the performance curve.

Control
The control element is included in the delivery and offers the following functions:
- ☐ Operation with different volume flows.
- ☐ Weekly and seasonal timer.
- ☐ Temperature control (using room sensor, accessories).
- ☐ Frost protection.
- ☐ Control of hydraulic unit (accessories) to control the WW heating element. Specification of min./max. temperature.
- ☐ Control of an EC extract air fan.
- ☐ Display of ambient temperature, fan control and filter contamination.

Other inputs and outputs:
- ☐ Emergency switch contact.
- ☐ Boost switch contact.
- ☐ External switch.
- ☐ Input for air quality or humidity sensor.
- ☐ Input for room temperature sensor.
- ☐ Output for shutter control.

Control element with connection cable (10 m) included in delivery.
Dimensions mm (W x H x D) 115 x 80 x 25

Type	Ref. no.	Flow rate* free blowing	Max. speed	Sound pressure level		Voltage 50/60 Hz	Power consump.		Current consump. max. tot.	Wiring diagram	Maximum intake temp.	Weight net aprx.
				Case-radiation	Air noise outlet side		Motor	Heating				
		V̇ m³/h (max.)	min-1	dB(A) at 1m	dB(A) at 1m	Volt	kW	kW	A	No.	+°C	kg
ALB EC 60/35 WW	06536	4070	2650	63	80	400, 3N~	1.03	–	1.90	1371	40	70

* Volume reduction by approx. 5% when using the filter ISO ePM_{10} 50% (M5), by approx. 15% when using the filter ISO ePM_1 50% (F7).

Performance curves ALB EC 60/35 WW

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	71	71	77	69	61	59	55	47
L_{WA}	Inlet side	dB(A)	86	82	93	83	73	70	67	70
L_{WA}	Outlet side	dB(A)	88	84	87	84	83	80	75	75

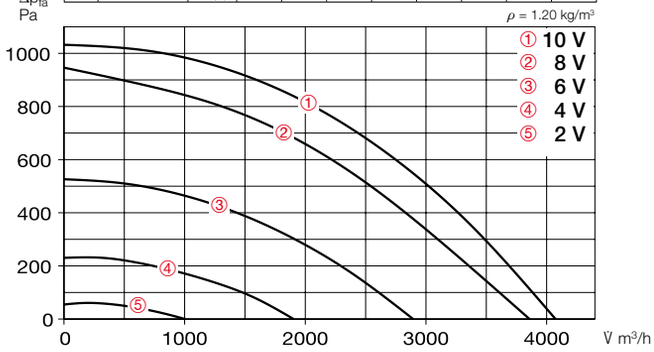

Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)
10	2606	4077	860	1.54	63
8	2433	3861	712	1.32	62
6	1841	2906	336	0.68	56
4	1221	1901	120	0.3	47

Accessories

Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
For controlling the heat output of the warm water heating element in combination with room/duct sensors. Includes flow/return temperature display, pump, actuator, mixer valve, gravity brake, thermal cladding and flexible connection hoses.

Replacement and pollen filter
– ISO Coarse 90 % (G4)
ELF-ALB 280/4/60/35 G4 No. 03649
– Filter class ISO ePM_{10} 70 % (M5)
ELF-ALB 280/4/60/35 M5 No. 03650
– Filter class ISO ePM_1 50 % (F7)
ELF-ALB 280/4/60/35 F7 No. 03654
Large cassette filter for long cleaning intervals. Unit = 3 pcs.

Room sensor – Air quality
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2 concentration or relative room humidity. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL Ref. no. 07277
For measuring the room temperature and controlling the ventilation unit according to the setpoint.
Dim. mm (W x H x D) 80 x 80 x 25

Connection cable
– 20 metres long
ALB EC-SK 20 Ref. no. 06816
– 40 metres long
ALB EC-SK 40 Ref. no. 06817
Attach between ALB and control element as well as between ALB and TFR-ALB/KWL.

Transition piece – Symmetrical
ALB-ÜS 280/4/60/35 No. 07516
From unit flange to round duct systems.



Dim. in mm

Duct shutter, motorised
RVM 355 Ref. no. 02579
Prevents cold draughts when the unit is at a standstill. Automatic function through fan operation, with mounted spring return motor. Installation in any position, closing force adjustable corresponding to fan power and installation position.

Flexible connecting sleeve
FM 355 Ref. no. 01675
For acoustic decoupling, incl. 2 pcs. hose clamps.

Angle flange ring
FR 355 Ref. no. 01205
Made of galvanised steel sheet, for duct connection.

Flexible connector
VS 60/30 Ref. no. 05697
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 60/30 Ref. no. 06922
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Multi-leaf damper for rectangular duct installation
JVK 60/30 Ref. no. 06913
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 60/30 Ref. no. 00834
For cost-effective integration of rectangular duct fans in round duct systems with Ø 315 mm.

Rectangular duct silencer
KSD 60/30-35 Ref. no. 08730
For outlet and inlet side insertion in the rectangular duct system.

Other accessories	Page
Silencers	496 ff.
Hydraulic unit details	494 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters	563 ff.
Supply air disc valves	586 f.

Reference
The integration of air filters ELF-ALB 60/35 F7 (ISO ePM_1 50 % (F7)) in intake air systems fulfils the requirements of VDI 6022.

Reference	Page
Planning information	14 ff.

Fresh air box ALB EC WW
backward curved, for rectangular ducts 80 x 50 cm

ALB EC 80/50 WW

Dimensions ALB EC 80/50 WW

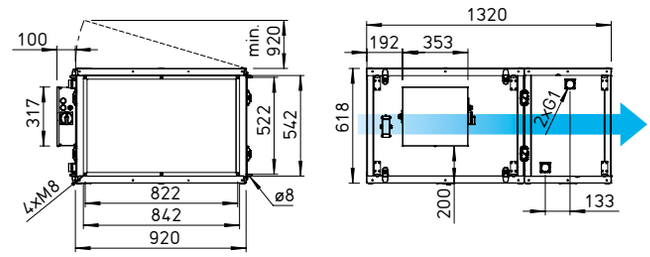

Dim. in mm

Application /Function
Pleasant indoor climate through the addition of external fresh air which is filtered and automatically heated to the specified temperature.

Operational unit for connection to rectangular duct systems. Suitable for a wide range of commercial applications.

Description/ Scope of delivery
The air filter, fan and warm water heater are integrated in a compact flat casing which is thermally and acoustically insulated. The unit is delivered ready for connection and includes an external control unit for controlling the unit, as well as a connection cable (10 metres). Air quality, humidity and temperature sensors (see Accessories) can be connected to the electronics in the terminal box to control the specified setpoints. In order to prevent frost damage to the unit, a shutter (see Accessories) is essential.

Casing
Robust construction made of coated steel sheet, double-walled with 30 mm thick mineral wool lining. The cover is easy to open with screw caps and hinge for cleaning purposes.
Rectangular duct connectors on inlet side and outlet side, adapted to standard rectangular duct dimensions.
No thermal bridges, smooth surface for easy cleaning.

Filter
The large filter for long cleaning intervals is freely accessible by opening the casing cover. Standard version ISO Coarse 90% (G4).
Alternatively, filters with higher classifications ISO ePM_{10} 70% (M5) or ISO ePM_1 50% (F7) (see accessories) can be used. The volume output reduction must be taken into account.
Periodic filter inspection /cleaning is required.
A filter monitoring system is integrated.
The filters comply with VDI 6022.

Fan
The volume flow rate switching is continuously variable with the control unit. Low-noise and high performance centrifugal fan made of galvanised steel sheet. Motor/impeller unit freely accessible for servicing. Drive through energy-saving, speed-controllable EC motor with a high level of efficiency. Maintenance-free, with lifetime lubricated ball bearings.

Heating element
Air heater with AL blades and staggered copper pipes heat the intake air to the specified setpoint temperature. Control through connection of a hydraulic unit (accessories) via the integrated control board.
The setpoint and the temperature measured by the room sensor (accessories) are constantly compared.
A frost protection circuit is integrated as standard.
Max. operating pressure 1.6 MPa.
Water connection pipes with external thread.

Electrical connection
Spacious terminal box in IP20 on outside of casing.

Motor protection
Deactivation when overheating is imminent. Automatic reactivation after cool down.

Noise
The type table shows the radiated noise and outlet side air noise as sound pressure at 1 m (free field conditions). If necessary, a cross talk silencer (see Accessories) must be integrated in the duct system on site. The radiated noise as sound pressure level at 1 m (free field conditions) is additionally stated in the type table as well as in the table below the performance curve.

Control
The control element is included in the delivery and offers the following functions:
- ☐ Operation with different volume flows.
- ☐ Weekly and seasonal timer.
- ☐ Temperature control (using room sensor, accessories).
- ☐ Frost protection.
- ☐ Control of hydraulic unit (accessories) to control the WW heating element. Specification of min./max. temperature.
- ☐ Control of an EC extract air fan.
- ☐ Display of ambient temperature, fan control and filter contamination.

Other inputs and outputs:
- ☐ Emergency switch contact.
- ☐ Boost switch contact.
- ☐ External switch.
- ☐ Input for air quality or humidity sensor.
- ☐ Input for room temperature sensor.
- ☐ Output for shutter control.

Control element with connection cable (10 m) included in delivery.
Dimensions mm (W x H x D) 115 x 80 x 25

Type	Ref. no.	Flow rate* free blowing	Max. speed	Sound pressure level		Voltage 50/60 Hz	Power consump.		Current consump. max. tot.	Wiring diagram	Maximum intake temp.	Weight net aprx.
				Case-radiation	Air noise outlet side		Motor	Heating				
		V̇ m³/h (max.)	min-1	dB(A) at 1m	dB(A) at 1m	Volt	kW	kW	A	No.	+°C	kg
ALB EC 80/50 WW	06537	6200	2600	69	81	400, 3N~	1.91	–	2.90	1371	40	104

* Volume reduction by approx. 5% when using the filter ISO ePM_{10} 50% (M5), by approx. 15% when using the filter ISO ePM_1 50% (F7).

Performance curves ALB EC 80/50 WW

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	77	72	83	74	66	64	61	48
L_{WA}	Inlet side	dB(A)	86	81	92	83	76	73	71	70
L_{WA}	Outlet side	dB(A)	89	84	85	83	84	82	79	76

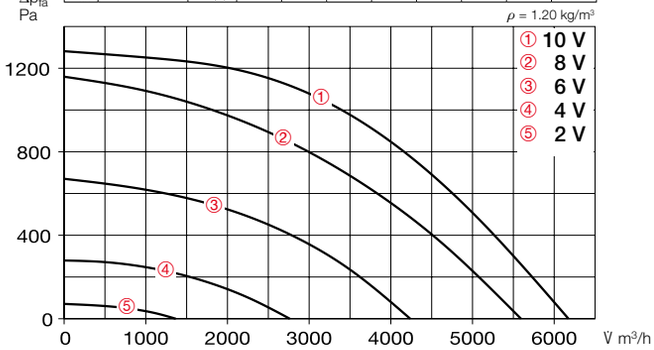

Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)
10	2641	6188	1438	2,22	69
8	2394	5602	1084	1.65	67
6	1827	4236	510	0.86	61
4	1193	2769	172	0.39	52

Accessories

Hydraulic unit
WHSH HE 24 V (0-10 V) No. 08318
For controlling the heat output of the warm water heating element in combination with room/duct sensors. Includes flow/return temperature display, pump, actuator, mixer valve, gravity brake, thermal cladding and flexible connection hoses.

Replacement and pollen filter
– ISO Coarse 90 % (G4)
ELF-ALB 80/50 G4 No. 06768
– Filter class ISO ePM_{10} 70 % (M5)
ELF-ALB 80/50 M5 No. 06769
– Filter class ISO ePM_1 50 % (F7)
ELF-ALB 80/50 F7 No. 06815
Large cassette filter for long cleaning intervals. Unit = 3 pcs.

Room sensor – Air quality
AIR1/KWL-CO2 0-10V No. 20251
AIR1/KWL-FTF 0-10V No. 20252
For measuring the CO_2 concentration or relative room humidity. Maximum total of one sensor can be connected.
Dim. mm (W x H x D) 85 x 85 x 27

Room sensor – Temperature
TFR-ALB/KWL Ref. no. 07277
For measuring the room temperature and controlling the ventilation unit according to the setpoint.
Dim. mm (W x H x D) 80 x 80 x 25

Connection cable
– 20 metres long
ALB EC-SK 20 Ref. no. 06816
– 40 metres long
ALB EC-SK 40 Ref. no. 06817
Attach between ALB and control element as well as between ALB and TFR-ALB/KWL.

Transition piece – Symmetrical
ALB-ÜS 80/50 Ref. no. 07618
From unit flange to round duct systems.



Dim. in mm

Duct shutter, motorised
RVM 560 Ref. no. 02583
Prevents cold draughts when the unit is at a standstill. Automatic function through fan operation, with mounted spring return motor. Installation in any position, closing force adjustable corresponding to fan power and installation position.

Flexible connecting sleeve
FM 560 Ref. no. 01679
For acoustic decoupling, incl. 2 pcs. hose clamps.

Angle flange ring
FR 560 Ref. no. 01209
Made of galvanised steel sheet, for duct connection.

Flexible connector
VS 80/50 Ref. no. 05700
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 80/50 Ref. no. 06925
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Multi-leaf damper for rectangular duct installation
JVK 80/50 Ref. no. 06916
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 80/50 Ref. no. 00842
For cost-effective integration of rectangular duct fans in round duct systems with Ø 500 mm.

Rectangular duct silencer
KSD 80/50 Ref. no. 08732
For outlet and inlet side insertion in the rectangular duct system.

Other accessories	Page
Silencers	496 ff.
Hydraulic unit details	494 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters	563 ff.
Supply air disc valves	586 f.

Reference
The integration of air filters ELF-ALB 80/50 F7 (ISO ePM_1 50 % (F7)) in intake air systems fulfils the requirements of VDI 6022.

Reference	Page
Planning information	14 ff.

Helios circular duct fans.
System solutions for your next project.

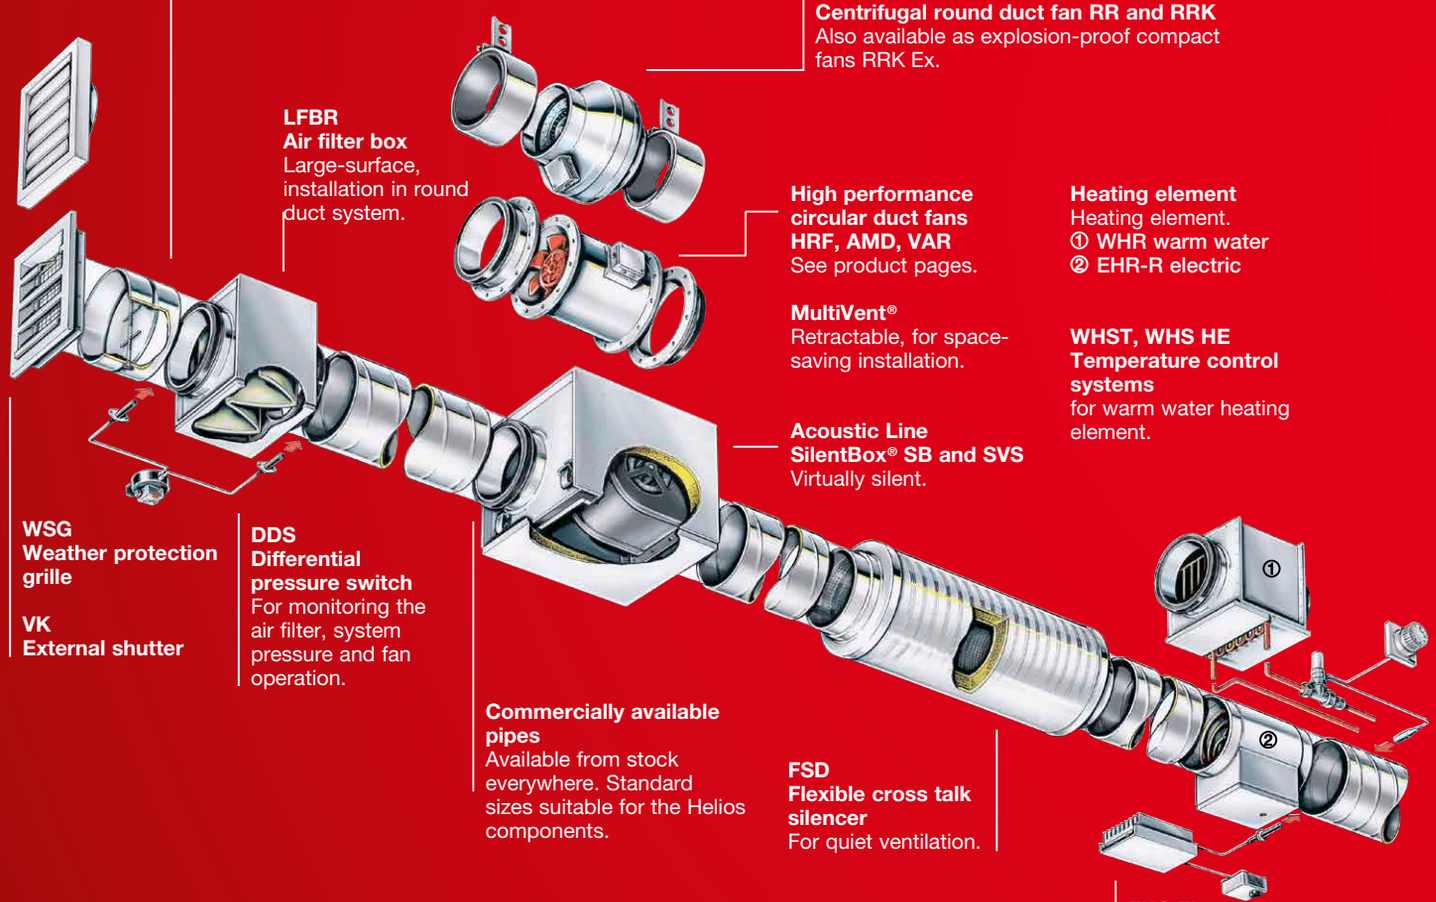

RSK
Duct shutter
Prevents energy loss caused by unwanted draughts.

BM
Pipe clamp connector
For structure-borne noise-free connection of fan and piping and for suspension.

Flat centrifugal round duct fan SV
Also available in Acoustic Line version (Type SVS) for lowest noise levels.

Centrifugal round duct fan RR and RRK
Also available as explosion-proof compact fans RRK Ex.

LFBR
Air filter box
Large-surface, installation in round duct system.

High performance circular duct fans HRF, AMD, VAR
See product pages.

Heating element
Heating element.
① WHR warm water
② EHR-R electric

MultiVent®
Retractable, for space-saving installation.

WHST, WHS HE
Temperature control systems
for warm water heating element.

Acoustic Line
SilentBox® SB and SVS
Virtually silent.

WSG
Weather protection grille

VK
External shutter

DDS
Differential pressure switch
For monitoring the air filter, system pressure and fan operation.

Commercially available pipes
Available from stock everywhere. Standard sizes suitable for the Helios components.

FSD
Flexible cross talk silencer
For quiet ventilation.

EHS Electronic temperature control system
for electric heating element.

EC Ex acousticline

Explosion-proof compact fans RRK Ex, 230 V~

382f

Centrifugal circular duct fans

Product-specific information, selection table.

362f

Fresh air boxes

Efficient EC version. With electric or warm water heating and air filter.

ALB EC EH
Ø 125 – 250 mm
▭ 30 x 20 cm

ALB EC WW
▭ 40 x 20 cm, 50 x 30 cm, 60 x 35 cm, 80 x 50 cm

EC 342ff

MultiVent® MV circular duct fans

Compact circular duct fans for space-saving installation in the pipeline.

7 types available from Ø 100 – 315 with highly efficient EC motors for low operating costs.

EC 364ff

InlineVent® RR, RRK and SVR circular duct fans

RR, RRK: Optionally made of galvanised steel sheet or in corrosion-resistant plastic casing.

SlimVent: Slimline, with retractable motor-impeller unit.

18 types available from Ø 100 – 315 with highly efficient EC motors for low operating costs.

EC 384ff

Acoustic Line SilentBox® SB and SlimVent SVS, sound-insulated

Virtually silent with high volume output and pressure performance. SlimVent models for limited installation spaces.

20 types available from Ø 125 – 400 with highly efficient EC motors for low operating costs.

EC 410ff

Properties

InlineVent and MultiVent circular duct fans have the advantages of axial design, such as linear flow pattern and easy, cost-effective installation, as well as the performance characteristics of high performance centrifugal fans.
Highlights:
- ▢ Low space requirement.
- ▢ Unrestricted controllability.
- ▢ Low installation costs.
- ▢ Cost-effective installation.
- ▢ Low sound power level.
- ▢ High pressure reserve.

Designs – Overview

MultiVent® MV

High pressure performance and volume output with space-saving dimensions.
With 190 – 1860 m^3/h and above 800 Pa, universally suitable for the ventilation of small to medium-sized rooms of any kind.
19 types from standard diameter 100 – 250 mm in single and two level as well as parallel design.

- **MV EC**
  7 types available from Ø 100 – 315 mm with highly efficient EC motors for low operating costs.

RR

Market-leading solution with favourable price/performance ratio. Centrifugal circular duct fans with small to medium output in standard diameters from 100 – 315 mm. Robust casing made of galvanised steel sheet.

- **RR EC**
  9 types available from Ø 100 – 315 mm with highly efficient EC motors for low operating costs.

RRK

Alternative in corrosion-resistant and impact-resistant plastic casing in standard diameters from 100 – 315 mm.

SVV, SVR

Compact flat circular duct fans from Ø 80 – 200 mm. With energy-efficient centrifugal impellers for the delivery of small to large volume flows.

- **SVR EC**
  9 types available from Ø 100 – 315 mm with highly efficient EC motors for low operating costs.

RRK Ex

Explosion-proof compact fans for 230 V, 1~ alternating current. Especially suitable for the ventilation of chemical and pharmaceutical laboratories, workshops, etc. For installation in the pipeline, approved for operation in zones 1 and 2 according to DIN EN 60079 / VDE 0165.

Acoustic Line SB

Helios SilentBox – the virtually silent solution for powerful centrifugal fans with duct connection to standard diameters 125 – 400 mm.

- **SB EC**
  12 types available from Ø 125 – 400 mm with highly efficient EC motors for low operating costs.

Acoustic Line SVS

Fully lined with sound-insulating mineral wool.
In an extremely compact design. Ideal for suspended ceilings, with duct connection to standard diameters 125 – 200 mm.

- **SVS EC**
  8 types available from Ø 125 – 315 mm with highly efficient EC motors for low operating costs.

■ Reference

The integration of air filters in class ISO ePM_1 50 % (F7) and differential pressure switches DDS (Ref. no. 00445) in intake air systems meets the requirements of VDI 6022.

■ Reference	Page
Planning information, acoustics, expl. protection	14 ff.
General techn. information, power control	19 ff.

This information supplements the "General technical information" and the information on the product pages.

- **Installation position, installation, condensate outlets**
  All series (except for SVR, SVS) can be installed in any position. With regard to series SV, the swivelling range must be kept clear and access for inspection and cleaning must be unhindered. In case of condensation (e.g. in case of intermittent operation, air flow with high moisture and varying temperatures), the unit must be installed so that condensate can drain downwards without restriction. Corresponding holes must be made in the fan casing, if necessary. With regard to RR types, there are condensate outlets in the impeller disc and the motor casing. If necessary, the pipeline must be insulated so that condensation is prevented.

- **Structure-borne noise transmission**
  to buildings and duct systems must be prevented. The fan must not be rigidly connected to the pipeline. Suitable connecting sleeves are offered as accessories.

- **Explosion-proof types**
  With regard to the operating conditions and standards, reference is made to the information in "Planning information Explosion protection". The explosion proof types RRK Ex correspond to unit group II, category 2G for operation in zones 1 and 2 in accordance with Directive 2014/34/EU (ATEX).

- **Drive, impeller**
  External rotor motors which are located in the air flow are used for all types. They correspond to DIN EN 60034/VDE 0530 and DIN EN 60335-1/VDE 0700 and they are in ISO class F with additional humidity protection.
  The EC types are equipped with especially energy-saving, speed-controllable EC external rotor motors. They are maintenance-free and they are suitable for continuous operation (S1). The ball bearings have a sufficient lubricant supply for their service life.
  The centrifugal impellers are pressed on the motor body, i.e. fixed to it, and dynamically balanced as a unit according to DIN ISO 21940-11 – quality grade 6.3.

- **Power control**
  All InlineVent- , MultiVent and Acoustic Line AC standard types can be controlled from 0 – 100% through voltage reduction. As a result, the output can be set to the desired volume. One or more AC fans (until the max. rated current is reached) can be operated with the offered speed controls.
  The dimensioning must be based on a 10% reserve.
  Type SVV 80 can also be controlled using a three level switch and types SVR, SVS and RR can be controlled using a two level switch.
  Control via two level switch or a five-step transformer is possible for all MultiVent AC types. Continuously variable control is also possible via electronic speed controller.
  All EC types have continuously variable speed control via internal or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. The performance levels are shown on the performance curve as examples.

- **Air flow direction**
  The air flow direction cannot be changed for centrifugal fans; but it can be set by the corresponding positioning. The correct motor rotation direction and air flow direction is marked by arrows and must be checked during commissioning.

- **Incorrect direction of rotation**
  Operation in the incorrect direction of rotation overloads the AC motor and causes the thermal contacts to respond. Typical concomitant features include virtually non-existent flow rate, vibration and abnormal noise.

- **Air flow temperature**
  The units can be used in the range from –40 °C to at least +40 °C (type-dependent).

By combining the parameters of static pressure increase Δp_{fa}, case-radiated noise and inlet side air noise as sound pressure at 1 m (free field conditions), the following table facilitates the selection of circular duct fans.

EC	Sound pre. Radiation	Sound pre. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure												
	L_{PA} dB(A)	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
Type	at 1m dist.	at 1m dist.	**0**	**50**	**100**	**150**	**200**	**250**	**300**	**350**	**400**	**500**	**600**	**700**	**800**
MV EC 100	44	57	280	150	100	60	30	10							
MV EC 125	44	57	360	290	210	140	90	40							
MV EC 150	48	61	600	540	460	390	320	250	190	130	80				
MV EC 160	49	61	620	560	520	470	390	290	210	150	100				
MV EC 200	51	62	1100	1030	950	840	670	410	170						
MV EC 250	53	66	1470	1380	1270	1160	1010	850	470	160	30				
MV EC 315	57	72	2620	2490	2370	2240	2100	1880	1660	280	110				
RR EC 100	46	70	370	350	330	300	280	250	230	200	170	100			
RR EC 125	45	71	570	530	490	450	410	370	330	290	240	140			
RR EC 160	44	67	650	620	590	550	510	470	430	370	330	200			
RR EC 200 A	44	67	980	930	880	820	750	670	590	470	340				
RR EC 200 B	47	69	1130	1070	1010	950	890	830	770	700	620	450	180		
RR EC 250 A	44	66	1050	1000	940	870	800	720	610	500	390				
RR EC 250 B	45	68	1200	1130	1060	1000	930	860	800	730	650	490	190		
RR EC 315 A	47	66	1910	1830	1730	1580	1370	1210	1050	930	820	620	450	160	
RR EC 315 B	48	71	2140	2030	1920	1800	1690	1580	1480	1380	1260	1060	820	560	230
SB EC 125 A	41	54	520	500	480	460	440	420	390	370	350	280	140		
SB EC 125 B	45	54	530	500	480	460	430	410	380	360	330	280	210	220	130
SB EC 160 A	41	57	590	570	550	530	510	480	450	420	380	280	60		
SB EC 160 B	46	57	590	560	530	500	470	440	410	380	350	280	200	240	150
SB EC 200 A	39	55	900	850	800	740	670	600	540	450	360				
SB EC 200 B	43	57	1020	960	910	860	790	740	660	590	520	360	110		
SB EC 250	43	56	1190	1130	1060	990	910	830	730	660	560	380	130		
SB EC 315 A	49	62	2490	2380	2270	2160	2040	1910	1770	1600	1380	130		80	
SB EC 315 B	53	65	3280	3210	3140	3060	2980	2900	2820	2720	2630	2440	2190		
SB EC 355	53	64	2710	2530	2390	2250	2110	1960	1780	1610	1380				
SB EC 400 A	51	60	2980	2850	2700	2540	2390	2200	2000	1780	1520				
SB EC 400 B	58	68	4570	4370	4190	4020	3850	3680	3490	3290	3080	2590	1810		
SVR EC 100	52	67	400	380	360	340	320	300	280	260	230	170	90		
SVR EC 125	50	70	520	490	470	450	420	400	370	340	310	240	150		
SVR EC 160 A	52	68	580	550	530	510	480	450	420	380	350	260	150	220	20
SVR EC 160 B	54	68	740	700	660	620	580	530	490	440	400	290	180		
SVR EC 200 A	50	68	850	800	760	700	650	590	520	450	360	40			
SVR EC 200 B	53	68	980	930	880	820	770	720	670	620	570	450	320		
SVR EC 250	48	65	1180	1120	1050	980	920	830	770	700	630	480	310		
SVR EC 315 A	52	67	1700	1590	1460	1350	1230	1120	1010	900	810	610	400	220	20
SVR EC 315 B	54	71	1950	1830	1730	1630	1540	1440	1350	1270	1180	1010	840	650	450
SVS EC 125	53	62	540	510	490	460	430	410	380	350	310	240	150		
SVS EC 160 A	51	62	570	550	520	500	470	430	410	370	330	250	140		
SVS EC 160 B	52	61	780	740	690	640	580	540	490	440	390	300	180		
SVS EC 200 A	49	60	900	850	800	740	680	620	560	490	410				
SVS EC 200 B	52	61	1010	950	900	840	780	730	680	610	560	420	270	0	
SVS EC 250	46	58	1210	1150	1070	1010	930	860	790	720	650	510	340		
SVS EC 315 A	50	60	1700	1580	1450	1340	1230	1110	1000	890	780	580	390	200	0
SVS EC 315 B	52	64	1950	1830	1720	1620	1520	1420	1330	1250	1160	970	800	620	410

	Sound pre. Radiation	Sound pre. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure												
	L_{PA} dB(A)	L_{PA} dB(A)	(ΔP_{fa}) in Pa												
Type	at 1m dist.	at 1m dist.	**0**	**50**	**100**	**150**	**200**	**250**	**300**	**350**	**400**	**500**	**600**	**700**	**800**
MV 100 A	34/38	45/50	190												
MV 100 B	32/38	46/52	230	120	40										
MV 125	35/42	49/56	350	300	100										
MV 150	40/48	56/64	520	480	420	350	80								
MV 160	41/49	57/65	550	470	410	350	120								
MV 200	36/44	50/58	930	860	770	630	160								
MV 250	40/52	53/66	910	830	700	600	500	390	270	180	110				
RR 100 A	36	59	250	200	160	120	90	60	30						
RR 100 C	42	63	330	290	240	190	150	100	70	20					
RR 125 C	42	63	480	420	350	250	170	120	70	30					
RR 160 B	42	62	530	470	380	300	240	160	100						
RR 160 C	49	66	870	800	730	600	500	400	320	180					
RR 200 A	47	65	960	900	830	760	670	590	480	350	230				
RR 200 B	44	66	980	940	890	830	760	690	610	520	410	120			
RR 250 A	47	67	950	880	800	730	650	550	450	320	100				
RR 250 C	45	67	970	930	870	810	760	690	630	560	470	160			
RR 315	46	68	1260	1190	1140	1080	1010	940	870	790	700	390			
RRK 100	44	55	290	230	170	110	70	20							
RRK 125	36	52	390	350	300	250	190	120	40						
RRK 160	36	53	520	470	410	340	260	170	70						
RRK 200	40	57	930	870	790	660	570	440	340	250	150				
RRK 250	40	56	1000	910	820	700	580	450	350	240	130				
RRK 315	48	65	1080	1040	980	920	850	780	710	630	530	320	30		
SB 125 A	28	46	230	220	200	180	150	120							
SB 125 C	37	55	440	420	400	370	340	310	270	10					
SB 160 B	36	54		360	340	330	310	290	240						
SB 160 D	43	60	580	540	510	470	440	400	360	20					
SB 200 C	44	55	810	730	650	570	470	350	240	120					
SB 200 D	48	58	1030	940	880	830	770	710	650	560	450	150			
SB 250 C	43	56				940	890	820	740	590	330				
SB 250 E	45	55	1080	990	910	840	770	700	630	550	460	200			
SB 315	51	59	2420	2250	2080	1830	1530	1020	130						
SBD 315 A	50	61	2200	2020	1830	1640	1420	1120	710	240					
SBD 315 B	47	57	2250	2150	2030	1830	1620	1430	1200						
SB 355	52	63	2960	2730	2490	2230	1950	1560	310						
SBD 355	51	65	3330	3210	3070	2920	2770	2600	2420	2200	1930				
SB 400	51	62	3930	3670	3410	3100	2750	2380	1860	1030					
SBD 400	50	65	3450	3320	3190	3060	2900	2730	2530	2280	1950				
SVR 100 C	40/45	54/59	310	290	270	240	210	160	110	50					
SVR 125 B	38/46	53/61	400	360	320	290	240	190	120	50					
SVR 160 K	37/45	51/60	450	400	360	320	270	220	160	80					
SVR 200 K	57	70	980	930	870	820	760	710	650	580	510	320	80		
SVS 125 B	35/44	45/55	400	360	330	280	240	180	130	60					
SVS 160 K	35/44	45/55	440	400	360	310	260	210	150	70					
SVS 160 L	39/50	48/58	670	620	570	510	440	370	290	210	90				
SVS 200 K	55	63	940	900	850	800	750	690	620	540	460	300	90		
SVV 80	24/26/37	25/32/43	110	100	90	80	70	60	20						

MultiVent® circular duct fans.

As slimline as the duct system itself.

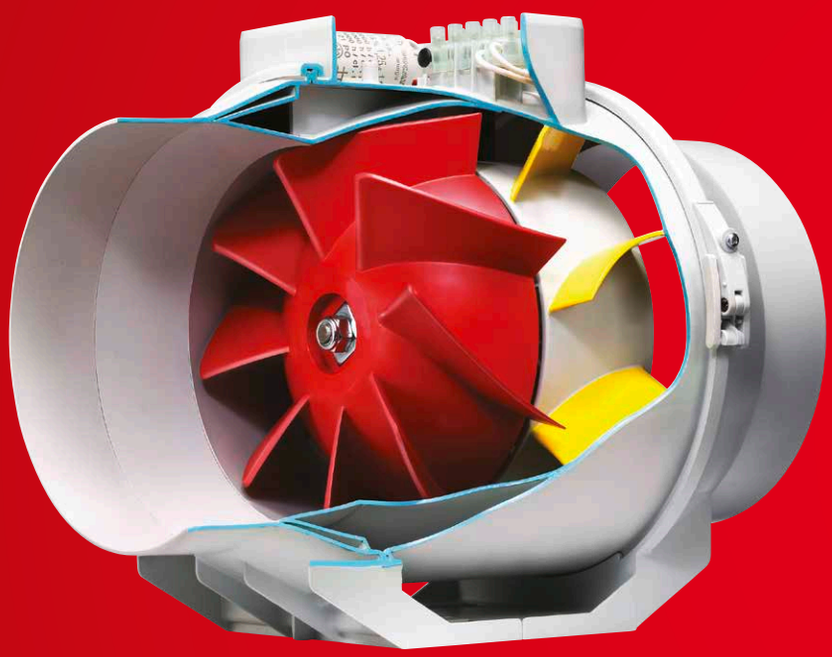

- **Energy-efficient EC version**

  – Ø 100 – 315 mm
  $\dot{V}$ = 280 – 2620 m³/h

  EC 366ff

- **Standard AC types available in two level or parallel design**

  – Ø 100 – 250 mm
  $\dot{V}$ = 190 – 1820 m³/h

  370ff

EC

Space-saving

With a volume output of 190 to 2620 m³/h and a pressure rate above 800 Pa (with two level configuration), Helios MultiVent units are suitable for the ventilation of small to medium-sized rooms of any kind. Their special advantage lies in their especially small dimensions. The casing diameter is only slightly larger than the ventilation duct. Horizontal, vertical or diagonal installation possible in any position.

Rotates as required

The installation of Helios MultiVent directly in the pipeline is space-saving and easy. Ideal in narrow spaces, e.g. below suspended ceilings.
The casing with integrated bracket can be installed in any position. The fan unit with terminal box can also be rotated to any position. It can be easily removed by loosening the clamp.

Freely accessible

This unit concept guarantees the easiest installation in the pipeline as well as problem-free inspection. The concept meets the requirements of VDI 6022. The energy-saving capacitor motors are fully enclosed and equipped with ball bearings for 30000 operating hours. This means that it can also be used for contaminated and dusty air.

MV EC 100

MV EC 125

Dimensions MV EC 100



Dimensions MV EC 125



Performance curves MV EC 100

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	27	47	46	44	41	36	28
L_{WA}	Inlet side	dB(A)	65	34	59	61	57	52	45	36
L_{WA}	Outlet side	dB(A)	66	37	62	61	59	53	48	40

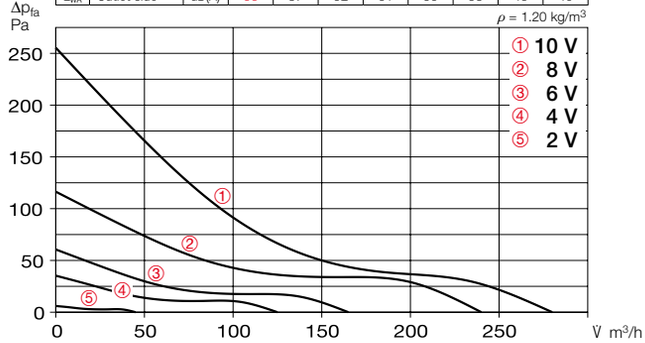

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2280	280	23	0.26	44	0.30
8	1950	240	16	0.18	41	0.24
6	1390	160	8	0.12	34	0.18
4	1080	120	6	0.08	29	0.18

Performance curves MV EC 125

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	29	37	44	46	47	47	28
L_{WA}	Inlet side	dB(A)	65	40	50	57	60	57	59	33
L_{WA}	Outlet side	dB(A)	66	41	50	57	59	60	60	40

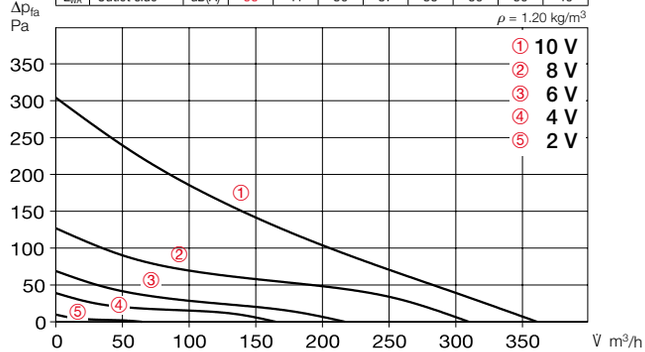

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2250	360	30	0.30	44	0.30
8	2000	310	20	0.18	40	0.23
6	1400	220	10	0.15	36	0.17
4	1115	170	8	0.10	32	0.16

Energy-saving EC round duct fan with high pressure performance, high volume output and space-saving dimensions.

Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Description

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic. Dynamically balanced for low-noise operation.

Drive
Energy-saving, speed-controllable EC external rotor motor with high efficiency. Maintenance-free and ball bearing mounted.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
The total level and range are specified above the performance diagram for:
- ▢ Case-radiated sound power.
- ▢ Inlet side sound power
- ▢ Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessory details	**Page**
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP45																
MV EC 100	09513	100	280	3250	44	0.029	0.31	1194	60	1.8	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
MV EC 125	06032	125	360	3600	44	0.039	0.39	1194	60	1.8	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

MV EC 150

MV EC 160

Dimensions MV EC 150



Dim. in mm

Dimensions MV EC 160



Dim. in mm

Performance curves MV EC 150

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	31	47	50	50	50	46	33
L_{WA}	Inlet side	dB(A)	69	42	60	63	63	67	56	46
L_{WA}	Outlet side	dB(A)	70	45	61	64	64	64	59	46

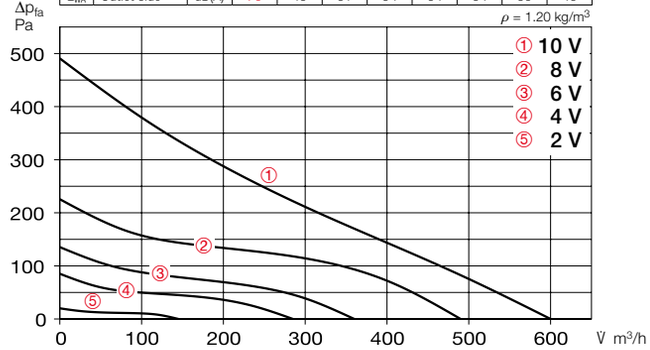

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2520	600	55	0.54	48	0.33
8	2120	490	34	0.34	44	0.24
6	1590	360	17	0.17	38	0.17
4	1270	280	10	0.12	33	0.12

Energy-saving EC round duct fan with high pressure performance, high volume output and space-saving dimensions.

Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Description

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic. Dynamically balanced for low-noise operation.

Drive
Energy-saving, speed-controllable EC external rotor motor with high efficiency. Maintenance-free and ball bearing mounted.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
The total level and range are specified above the performance diagram for:
- ▢ Case-radiated sound power.
- ▢ Inlet side sound power
- ▢ Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Performance curves MV EC 160

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	37	49	51	51	53	47	34
L_{WA}	Inlet side	dB(A)	69	48	61	66	61	61	58	43
L_{WA}	Outlet side	dB(A)	71	50	61	65	65	67	61	48

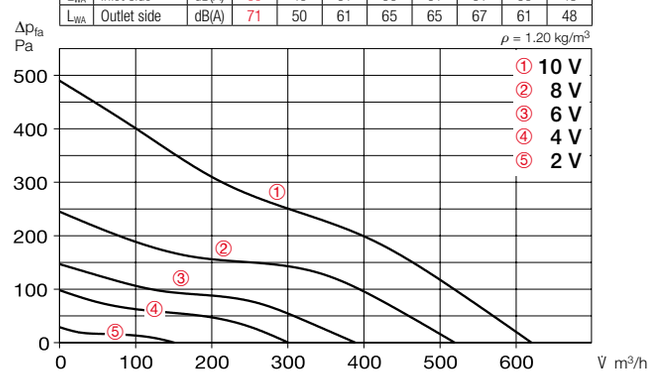

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2600	620	60	0.57	49	0.35
8	2200	520	40	0.35	45	0.28
6	1680	390	20	0.20	40	0.19
4	1350	300	15	0.15	33	0.18

Accessory details	**Page**
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP45																
MV EC 150	09307	150	600	3580	48	0.068	0.62	1194	60	2.1	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
MV EC 160	06033	160	620	3530	49	0.068	0.62	1194	60	2.1	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

MV EC 200

Dimensions MV EC 200



Dim. in mm

Performance curves MV EC 200

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	59	35	49	54	53	54	45	32
L_{WA}	Inlet side	dB(A)	70	45	59	66	62	63	55	40
L_{WA}	Outlet side	dB(A)	73	48	62	68	66	68	61	46

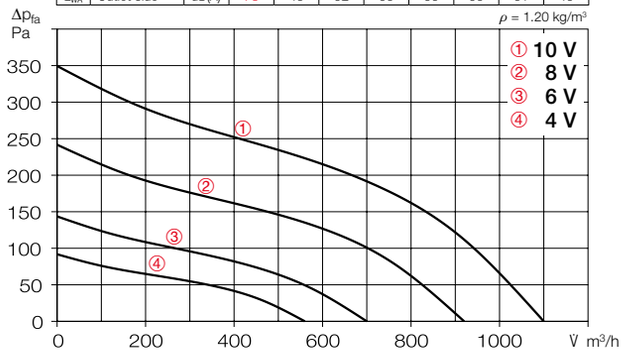

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2680	1100	89	0.8	51	0.29
8	2220	920	52	0.53	47	0.20
6	1700	700	26	0.28	41	0.13
4	1380	560	16	0.19	37	0.10

Energy-saving EC round duct fan with high pressure performance, high volume output and space-saving dimensions.

Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Special features

- Highly efficieny EC motor for low operating costs.
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Long-life ball bearings, designed for 30 000 operating hours.
- Problem-free maintenance and cleaning without dismantling the duct system due to the removable fan unit.
- Fan unit with terminal box can be rotated into any position.
- Integrated mounting bracket for easy installation to walls and ceilings.

Description

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic. Dynamically balanced for low-noise operation.

Drive
Energy-saving, speed-controllable EC external rotor motor with high efficiency. Maintenance-free and ball bearing mounted.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
The total level and range are specified above the performance diagram for:
- Case-radiated sound power.
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessory details	Page
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP45																
MV EC 200	06034	200	1100	3000	51	0.090	0.80	1194	50	2.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

MV EC 250

MV EC 315

Dimensions MV EC 250



Dim. in mm

Dimensions MV EC 315



Dim. in mm

Performance curves MV EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	61	38	49	55	55	56	44	33
L_{WA}	Inlet side	dB(A)	74	50	63	68	69	70	58	47
L_{WA}	Outlet side	dB(A)	76	52	65	70	69	73	60	45

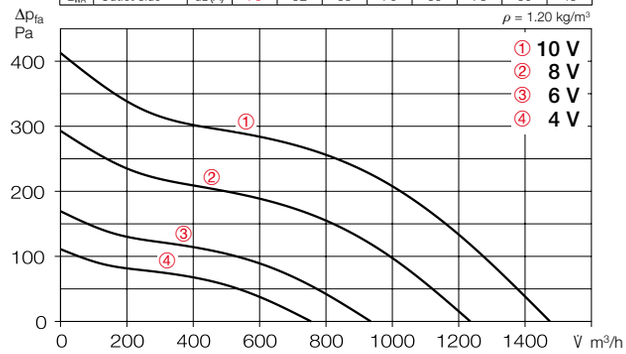

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2690	1470	124	1.00	53	0.30
8	2250	1230	73	0.61	49	0.21
6	1720	930	34	0.28	43	0.13
4	1390	750	20	0.17	39	0.10

Energy-saving EC round duct fan with high pressure performance, high volume output and space-saving dimensions.

Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Description

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic. Dynamically balanced for low-noise operation.

Drive
Energy-saving, speed-controllable EC external rotor motor with high efficiency. Maintenance-free and ball bearing mounted.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
The total level and range are specified above the performance diagram for:
- ▢ Case-radiated sound power.
- ▢ Inlet side sound power
- ▢ Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Performance curves MV EC 315

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	39	50	60	61	55	55	36
L_{WA}	Inlet side	dB(A)	78	52	63	73	75	69	69	50
L_{WA}	Outlet side	dB(A)	81	56	66	77	77	73	67	50

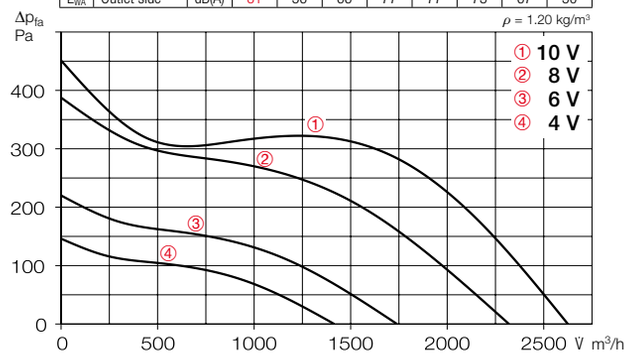

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2370	2620	234	1.75	57	0.32
8	2130	2320	166	1.32	55	0.26
6	1600	1740	76	0.63	48	0.16
4	1300	1410	45	0.37	44	0.11

Accessory details	**Page**
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP45																
MV EC 250	06035	250	1470	2740	53	0.126	1.00	1194	50	5.3	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
MV EC 315	06036	315	2620	2350	57	0.268	1.86	1195	50	9.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

MV 100 – Single level

Dimensions MV 100



Dim. in mm MV 100 B, *MV 100 A

High pressure performance and high volume output with space-saving dimensions.
Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Special features
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Comes with two performance levels; 100% speed-controllable as standard.
- Can be used in any position.
- Long-life ball bearings, designed for 30000 operating hours.
- Problem-free maintenance and cleaning without dismantling the duct system due to the removable fan unit.
- Fan unit with terminal box can be rotated into any position.
- Integrated mounting bracket for easy installation to walls and ceilings.

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Power control
With two performance levels as standard using an external operating switch MVB (accessories). Also with continuously variable control through electronic controller or five-step transformer.

Motor
Enclosed, ball bearing mounted motor with humidity protection, insulation class F, for continuous operation, maintenance-free.

Motor protection
Through thermal overload protection in the winding.

Noise
The total level and range are specified above the performance diagram for
- case-radiated sound power.
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MZ 100 B – Two level

Dimensions MV-MZ 100 B



Dim. in mm

Double pressure **Installation kit MV-MZ**

Description
Installation kit for arranging two MV fans in series. The pressure performance is approximately doubled through series operation. Scope of delivery: base plate (1 pc.), sleeve (1 pc.).

Electrical connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MP 100 B – Parallel

Dimensions MV-MP 100 B



Dim. in mm

Double volume **Installation kit MV-MP**

Description
Installation kit for arranging two MV fans in parallel. The volume output doubles during parallel operation (joint control). Scope of delivery: mounting rails (2 pcs.), rectangular duct connection plates (2 pcs.).

Power control/Connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.
Each fan can also be individually controlled and connected to the second fan if necessary. In order to prevent backflow in this case, two duct shutters (type RSK, accessories) must be provided on the outlet side.

Type	Ref. no.	Connection Ø	Flow rate min./max.	Speed min./max.	Sound pres. lev at 1m Case radiation	Sound pres. lev at 1m Air noise min./max.	Power consum. min/max.	Current consum. min/max.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Transformer speed controller 5-step Type	Transformer speed controller 5-step Ref. no.	Electronic* speed controller, cont. variable flush/ surf-mount. Type	Electronic* speed controller, cont. variable flush/ surf-mount. Ref. no.
		mm	V̇ m³/h	min⁻¹	dB (A)	dB (A)	W	A	No.	+ °C	kg				
Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
MV 100 A	06050	100	150/190	2070/2620	34/38	45/50	12/15	0.05/0.07	844.1	60	1.2	**TSW 0.3**	03608	**ESU1/ESA1**	00236/00238
MV 100 B	06051	100	170/240	1590/2170	32/38	46/52	20/23	0.09/0.11	844.1	60	1.7	**TSW 0.3**	03608	**ESU1/ESA1**	00236/00238
Double pressure **Two level fan unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MZ 100 B	06078	100	170/240	1590/2170	37/43	49/55	40/46	0.18/0.22	845.1	60	4.5	**TSW 0.3**	03608	**ESU1/ESA1**	00236/00238
Double volume **Parallel twin unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MP 100 B	06085	–	340/480	1590/2170	35/41	49/55	40/46	0.18/0.22	845.1	60	5.7	**TSW 0.3**	03608	**ESU1/ESA1**	00236/00238

* Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

Performance curves MV 100 A – Single level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	46	24	31	38	44	32	30	23
L_{WA}	Inlet side	dB(A)	58	27	46	51	54	52	44	33
L_{WA}	Outlet side	dB(A)	58	30	48	52	56	49	45	33

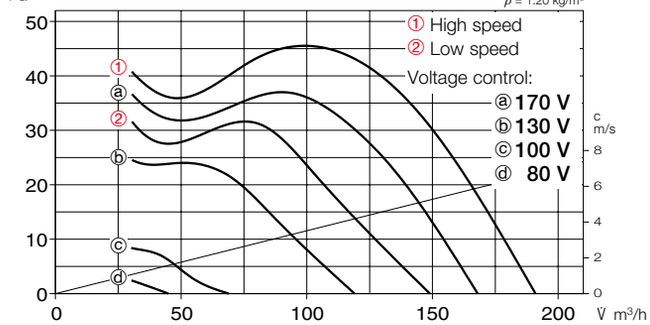

Performance curves MV 100 B – Single level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	46	30	37	41	42	35	28	23
L_{WA}	Inlet side	dB(A)	60	34	52	54	52	55	42	33
L_{WA}	Outlet side	dB(A)	60	36	54	55	54	52	44	33

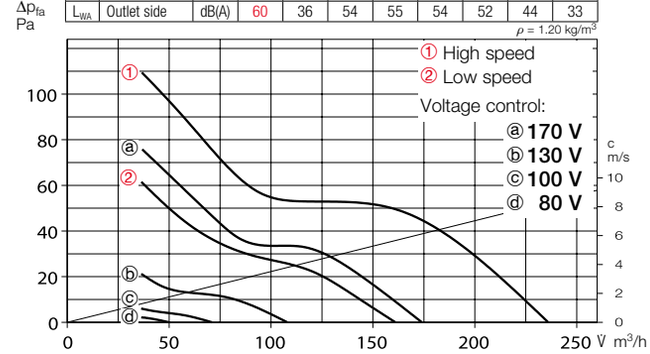

Performance curves MV-MZ 100 B – Two level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	51	37	42	46	47	43	33	25
L_{WA}	Inlet side	dB(A)	63	40	56	58	55	57	47	36
L_{WA}	Outlet side	dB(A)	63	43	57	59	57	54	49	36

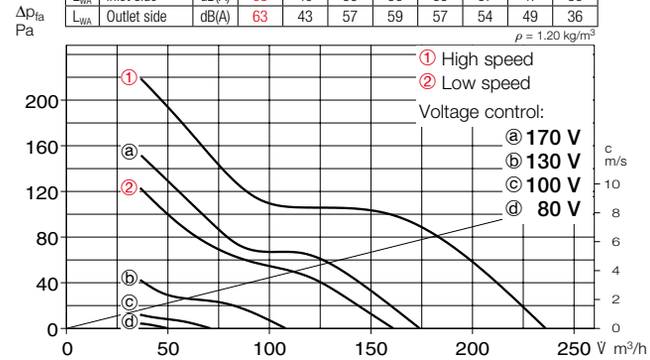

Performance curves MV-MP 100 B – Parallel

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	33	40	44	45	38	31	26
L_{WA}	Inlet side	dB(A)	63	37	55	57	55	58	45	36
L_{WA}	Outlet side	dB(A)	63	39	57	58	57	55	47	36

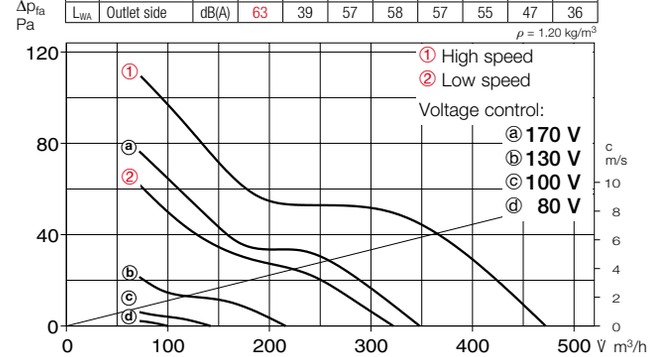

Accessories for MV and MV-MZ

Flexible connecting sleeve
FM 100 Ref. no. 01681
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 100 Ref. no. 00757
Automatic overpressure shutter for external wall connection of air outlet opening. Made of white plastic.

External wall cover grille
G 100 Ref. no. 00796
For covering and insertion in round ventilation openings. Made of break-resistant, white plastic.

Protection grille
MVS 100 Ref. no. 06071
For inlet and outlet side installation on fan.

Flexible cross talk silencer
FSD 100 Ref. no. 00676
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 100 Coarse 70%* 08576
Large-surface, installation in round duct system.

Electric heating element
EHR-R 0.4/100 0.4 kW No. 08708
In duct casing made of galvanised steel sheet.

Warm water heating element
WHR 100 Ref. no. 09479
For installation in duct system.

Accessories for all types

Duct shutter
RSKK 100 Ref. no. 05106
Automatic, made of plastic.
For installation in pipeline.

Operating switch 0-1-2
MVB Ref. no. 06091
With functions On/Off, Low and high speed.

Transformer speed controller
TSW See type table
Five-step, for surface installation.

Electronic speed controller
ESU/ESA See type table
For flush/surface installation.

Electronic turn-off delay switch
ZNE Ref. no. 00342
With continuously variable turn-off delay periods.

* See product page for detailed description

MV 125 – Single level

Dimensions MV 125



Dim. in mm

High pressure performance and high volume output with space-saving dimensions.
Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Special features

- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Comes with two performance levels; 100% speed-controllable as standard.
- Can be used in any position.
- Long-life ball bearings, designed for 30000 operating hours.
- Problem-free maintenance and cleaning without dismantling the duct system due to the removable fan unit.
- Fan unit with terminal box can be rotated into any position.
- Integrated mounting bracket for easy installation to walls and ceilings.

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Power control
With two performance levels as standard using an external operating switch MVB (accessories). Also with continuously variable control through electronic controller or five-step transformer.

Motor
Enclosed, ball bearing mounted motor with humidity protection, insulation class F, for continuous operation, maintenance-free.

Motor protection
Through thermal overload protection in the winding.

Noise
The total level and range are specified above the performance diagram for
- case-radiated sound power.
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MZ 125 – Two level

Dimensions MV-MZ 125



Dim. in mm

Double pressure **Installation kit MV-MZ**

Description
Installation kit for arranging two MV fans in series. The pressure performance is approximately doubled through series operation. Scope of delivery: base plate (1 pc.), sleeve (1 pc.).

Electrical connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MP 125 – Parallel

Dimensions MV-MP 125



Dim. in mm

Double volume **Installation kit MV-MP**

Description
Installation kit for arranging two MV fans in parallel. The volume output doubles during parallel operation (joint control). Scope of delivery: mounting rails (2 pcs.), rectangular duct connection plates (2 pcs.).

Power control/Connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.
Each fan can also be individually controlled and connected to the second fan if necessary. In order to prevent backflow in this case, two duct shutters (type RSK, accessories) must be provided on the outlet side.

Type	Ref. no.	Connection Ø	Flow rate min./max.	Speed min./max.	Sound pres. lev at 1m: Case radiation	Sound pres. lev at 1m: Air noise min./max.	Power consum. min/max.	Current consum. min/max.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Transformer speed controller 5-step		Electronic* speed controller, cont. variable flush/ surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB (A)	dB (A)	W	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Single level round duct fan, 230 V, 50 Hz, Capacitor motor, IP44															
MV 125	06052	125	250/360	1670/2300	35/42	49/56	25/33	0.11/0.15	844.1	60	1.7	**TSW 0.3**	03608	**ESU1/ESA1**	00236/00238
Double pressure **Two level fan unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MZ 125	06079	125	250/360	1670/2300	40/47	52/59	50/66	0.22/0.30	845.1	60	4.6	**TSW 0.3**	03608	**ESU1/ESA1**	00236/00238
Double volume **Parallel twin unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MP 125	06086	–	500/720	1670/2300	38/45	52/59	50/66	0.22/0.30	845.1	60	5.8	**TSW 0.3**	03608	**ESU1/ESA1**	00236/00238

* Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

Performance curves MV 125 – Single level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	50	30	36	42	48	41	34	27
L_{WA}	Inlet side	dB(A)	64	33	51	55	58	61	48	40
L_{WA}	Outlet side	dB(A)	64	35	53	56	60	58	50	39

ρ = 1.20 kg/m³

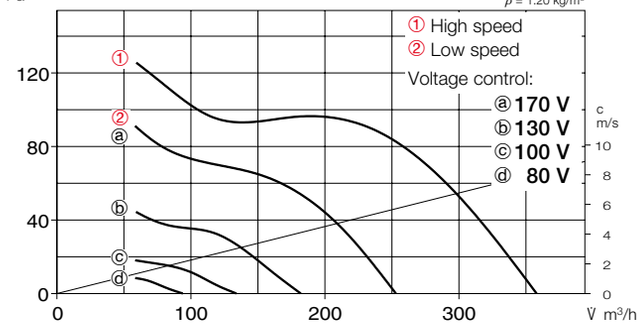

Performance curves MV-MZ 125 – Two level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	55	36	42	47	53	49	39	22
L_{WA}	Inlet side	dB(A)	67	39	55	59	62	63	53	42
L_{WA}	Outlet side	dB(A)	67	42	57	60	63	60	55	42

ρ = 1.20 kg/m³

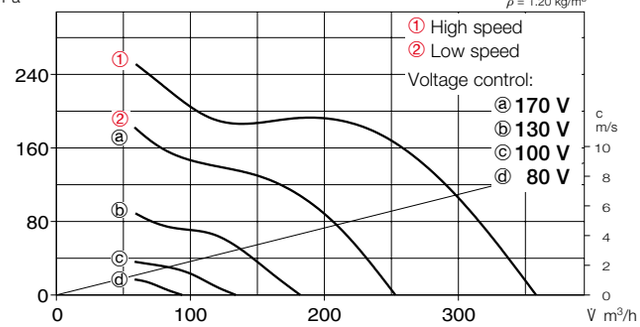

Performance curves MV-MP 125 – Parallel

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	53	33	39	45	51	44	37	30
L_{WA}	Inlet side	dB(A)	67	36	54	58	61	64	51	43
L_{WA}	Outlet side	dB(A)	67	38	56	59	63	61	53	42

ρ = 1.20 kg/m³

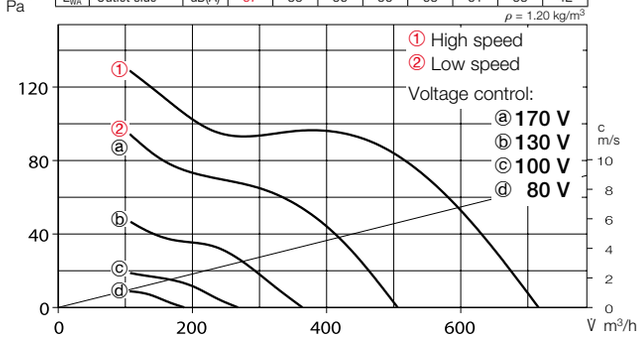

Accessory details	Page
Filter, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Speed controllers, controllers and switches	601 ff.

Accessories for MV and MV-MZ

Flexible connecting sleeve
FM 125 Ref. no. 01682
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 125 Ref. no. 00857
Automatic overpressure shutter for external wall connection of air outlet opening. Made of white plastic.

External wall cover grille
G 160 Ref. no. 00893
For covering and insertion in round ventilation openings. Made of break-resistant, white plastic.

Protection grille
MVS 125 Ref. no. 06072
For inlet and outlet side installation on fan.

Flexible cross talk silencer
FSD 125 Ref. no. 00677
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 125 Coarse 70%* 08577
Large-surface, installation in round duct system.

Electric heating element
EHR-R 0.8/125 0.8 kW No. 08709
In duct casing made of galvanised steel sheet.

Warm water heating element
WHR 125 Ref. no. 09480
For installation in duct system.

Accessories for all types

Duct shutter
RSKK 125 Ref. no. 05107
Automatic, made of plastic.
For installation in pipeline.

Operating switch 0-1-2
MVB Ref. no. 06091
With functions On/Off, Low and high speed.

Transformer speed controller
TSW See type table
Five-step, for surface installation.

Electronic speed controller
ESU/ESA See type table
For flush/surface installation.

Electronic turn-off delay switch
ZNE Ref. no. 00342
With continuously variable turn-off delay periods.

* See product page for detailed description

MV 150 – Single level

Dimensions MV 150



Dim. in mm

High pressure performance and high volume output with space-saving dimensions.
Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Special features
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Comes with two performance levels; 100% speed-controllable as standard.
- Can be used in any position.
- Long-life ball bearings, designed for 30000 operating hours.
- Problem-free maintenance and cleaning without dismantling the duct system due to the removable fan unit.
- Fan unit with terminal box can be rotated into any position.
- Integrated mounting bracket for easy installation to walls and ceilings.

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Power control
With two performance levels as standard using an external operating switch MVB (accessories). Also with continuously variable control through electronic controller or five-step transformer.

Motor
Enclosed, ball bearing mounted motor with humidity protection, insulation class F, for continuous operation, maintenance-free.

Motor protection
Through thermal overload protection in the winding.

Noise
The total level and range are specified above the performance diagram for
- case-radiated sound power.
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MZ 150 – Two level

Dimensions MV-MZ 150



Dim. in mm

Double pressure **Installation kit MV-MZ**

Description
Installation kit for arranging two MV fans in series. The pressure performance is approximately doubled through series operation. Scope of delivery: base plate (1 pc.), sleeve (1 pc.).

Electrical connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MP 150 – Parallel

Dimensions MV-MP 150



Dim. in mm

Double volume **Installation kit MV-MP**

Description
Installation kit for arranging two MV fans in parallel. The volume output doubles during parallel operation (joint control). Scope of delivery: mounting rails (2 pcs.), rectangular duct connection plates (2 pcs.).

Power control/Connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.
Each fan can also be individually controlled and connected to the second fan if necessary. In order to prevent backflow in this case, two duct shutters (type RSK, accessories) must be provided on the outlet side.

Type	Ref. no.	Connection Ø	Flow rate min./max.	Speed min./max.	Sound pres. lev at 1m: Case radiation	Sound pres. lev at 1m: Air noise min./max.	Power consum. min/max.	Current consum. min/max.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Transformer speed controller 5-step		Electronic* speed controller, cont. variable flush/ surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB (A)	dB (A)	W	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Single level round duct fan, 230 V, 50 Hz, Capacitor motor, IP44															
MV 150	06053	150	380/520	1520/2290	40/48	56/64	40/58	0.18/0.26	844.1	60	2.3	**TSW 0.3**	03608	**ESU1/ESA1**	00236/00238
Double pressure **Two level fan unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MZ 150	06080	150	380/520	1520/2290	46/54	59/67	80/116	0.36/0.52	845.1	60	5.8	**TSW 1.5**	01495	**ESU1/ESA1**	00236/00238
Double volume **Parallel twin unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MP 150	06087	–	760/1040	1520/2290	43/51	59/67	80/116	0.36/0.52	845.1	60	8.0	**TSW 1.5**	01495	**ESU1/ESA1**	00236/00238

* Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

Performance curves MV 150 – Single level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	39	43	50	52	51	41	25
L_{WA}	Inlet side	dB(A)	72	42	58	63	62	71	55	45
L_{WA}	Outlet side	dB(A)	71	44	60	65	64	68	57	45

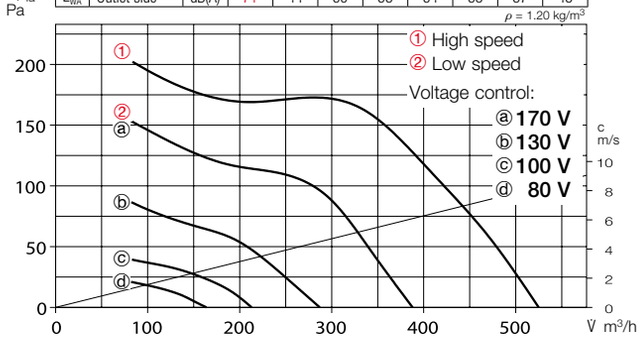

Performance curves MV-MZ 150 – Two level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	45	48	55	57	59	46	28
L_{WA}	Inlet side	dB(A)	75	48	62	67	66	73	60	48
L_{WA}	Outlet side	dB(A)	74	51	63	69	67	69	62	47

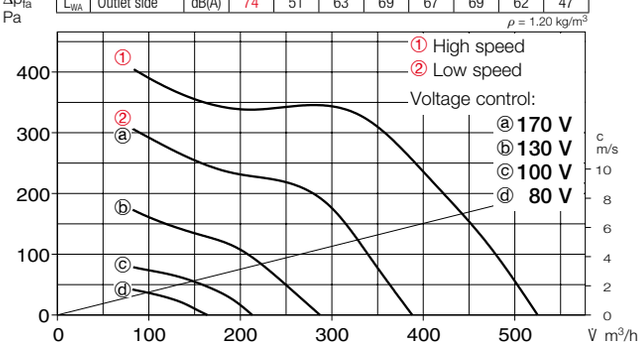

Performance curves MV-MP 150 – Parallel

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	59	42	46	53	55	54	44	28
L_{WA}	Inlet side	dB(A)	75	45	61	66	65	74	58	48
L_{WA}	Outlet side	dB(A)	74	47	63	68	67	71	60	48

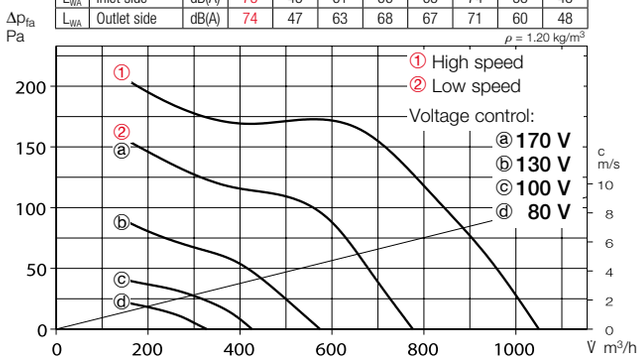

Accessory details	Page
Filter, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Speed controllers, controllers and switches	601 ff.

Accessories for MV and MV-MZ

Flexible connecting sleeve
FM 150 Ref. no. 01683
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 160 Ref. no. 00892
Automatic overpressure shutter for external wall connection of air outlet opening. Made of white plastic.

External wall cover grille
G 160 Ref. no. 00893
For covering and insertion in round ventilation openings. Made of break-resistant, white plastic.

Protection grille
MVS 150 Ref. no. 06073
For inlet and outlet side installation on fan.

Flexible cross talk silencer
FSD 160 [1] Ref. no. 00678
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 160 Coarse 70% [1] [2] 08578
Large-surface, installation in round duct system.

Electric heating element
EHR-R 1.2/160 [1] 1.2 kW No. 09434
In duct casing made of galvanised steel sheet.

Warm water heating element
WHR 160 [1] Ref. no. 09481
For installation in duct system.

Accessories for all types

Duct shutter
RSK 150 Ref. no. 05073
Automatic, made of metal.
For installation in pipeline.

Operating switch 0-1-2
MVB Ref. no. 06091
With functions On/Off, Low and high speed.

Transformer speed controller
TSW See type table
Five-step, for surface installation.

Electronic speed controller
ESU/ESA See type table
For flush/surface installation.

Electronic turn-off delay switch
ZNE Ref. no. 00342
With continuously variable turn-off delay periods.

[1] This accessory with ND 160 mm can be used for ducts with Ø 150 mm through on-site fillng with foam rubber.
[2] See product page for detailed description

Round duct fans

MV 160 – Single level

Dimensions MV 160



Dim. in mm

High pressure performance and high volume output with space-saving dimensions.
Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Special features
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Comes with two performance levels; 100% speed-controllable as standard.
- Can be used in any position.
- Long-life ball bearings, designed for 30000 operating hours.
- Problem-free maintenance and cleaning without dismantling the duct system due to the removable fan unit.
- Fan unit with terminal box can be rotated into any position.
- Integrated mounting bracket for easy installation to walls and ceilings.

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Power control
With two performance levels as standard using an external operating switch MVB (accessories). Also with continuously variable control through electronic controller or five-step transformer.

Motor
Enclosed, ball bearing mounted motor with humidity protection, insulation class F, for continuous operation, maintenance-free.

Motor protection
Through thermal overload protection in the winding.

Noise
The total level and range are specified above the performance diagram for
- case-radiated sound power.
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MZ 160 – Two level

Dimensions MV-MZ 160



Dim. in mm

Double pressure **Installation kit MV-MZ**

Description
Installation kit for arranging two MV fans in series. The pressure performance is approximately doubled through series operation. Scope of delivery: base plate (1 pc.), sleeve (1 pc.).

Electrical connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MP 160 – Parallel

Dimensions MV-MP 160



Dim. in mm

Double volume **Installation kit MV-MP**

Description
Installation kit for arranging two MV fans in parallel. The volume output doubles during parallel operation (joint control). Scope of delivery: mounting rails (2 pcs.), rectangular duct connection plates (2 pcs.).

Power control/Connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.
Each fan can also be individually controlled and connected to the second fan if necessary. In order to prevent backflow in this case, two duct shutters (type RSK, accessories) must be provided on the outlet side.

Type	Ref. no.	Connection Ø	Flow rate min./max.	Speed min./max.	Sound pres. lev at 1m: Case radiation	Sound pres. lev at 1m: Air noise min./max.	Power consum. min/max.	Current consum. min/max.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Transformer speed controller 5-step		Electronic* speed controller, cont. variable flush/ surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB (A)	dB (A)	W	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Single level round duct fan, 230 V, 50 Hz, Capacitor motor, IP44															
MV 160	06054	160	390/550	1520/2290	41/49	57/65	40/58	0.18/0.26	844.1	60	2.3	**TSW 0.3**	03608	**ESU1/ESA1**	00236/00238
Double pressure **Two level fan unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MZ 160	06081	160	390/550	1520/2290	47/55	59/67	80/116	0.36/0.52	845.1	60	5.8	**TSW 1.5**	01495	**ESU1/ESA1**	00236/00238
Double volume **Parallel twin unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MP 160	06088	–	780/110	1520/2290	44/52	60/68	80/116	0.36/0.52	845.1	60	7.7	**TSW 1.5**	01495	**ESU1/ESA1**	00236/00238

* Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

Performance curves MV 160 – Single level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	37	43	49	53	51	44	28
L_{WA}	Inlet side	dB(A)	73	41	58	62	63	71	58	48
L_{WA}	Outlet side	dB(A)	71	43	60	64	64	68	59	47

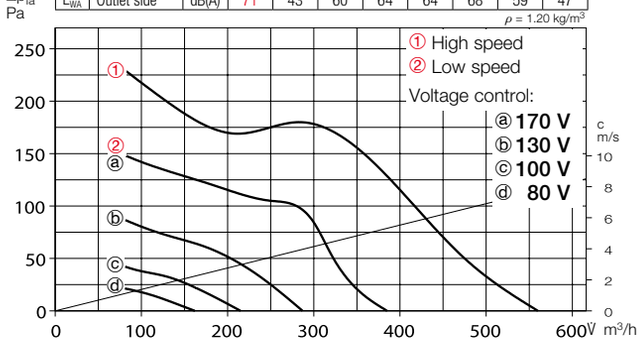

Performance curves MV-MZ 160 – Two level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	63	44	49	54	58	59	48	30
L_{WA}	Inlet side	dB(A)	75	47	62	66	66	73	62	50
L_{WA}	Outlet side	dB(A)	74	49	64	67	68	70	64	50

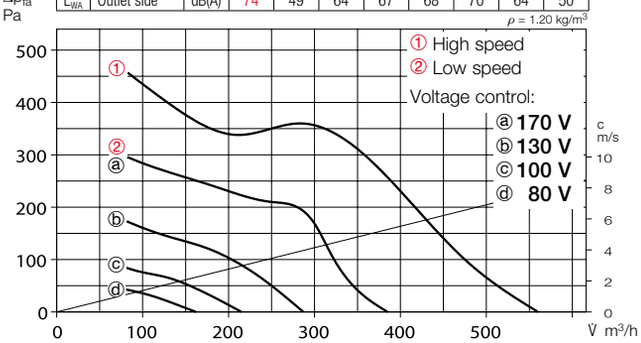

Performance curves MV-MP 160 – Parallel

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	40	46	52	56	54	47	31
L_{WA}	Inlet side	dB(A)	76	44	61	65	66	74	61	51
L_{WA}	Outlet side	dB(A)	74	46	63	67	67	71	62	50

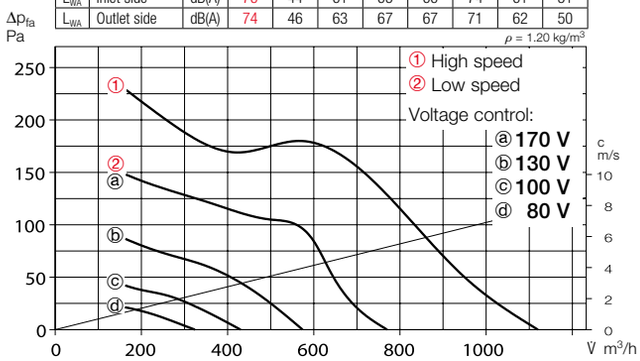

Accessory details	Page
Filter, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Speed controllers, controllers and switches	601 ff.

Accessories for MV and MV-MZ

Flexible connecting sleeve
FM 160 Ref. no. 01684
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 160 Ref. no. 00892
Automatic overpressure shutter for external wall connection of air outlet opening. Made of white plastic.

External wall cover grille
G 160 Ref. no. 00893
For covering and insertion in round ventilation openings. Made of break-resistant, white plastic.

Protection grille
MVS 160 Ref. no. 06074
For inlet and outlet side installation on fan.

Flexible cross talk silencer
FSD 160 Ref. no. 00678
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 160 Coarse 70%* 08578
Large-surface, installation in round duct system.

Electric heating element
EHR-R 1.2/160 1.2 kW No. 09434
In duct casing made of galvanised steel sheet.

Warm water heating element
WHR 160 Ref. no. 09481
For installation in duct system.

Accessories for all types

Duct shutter
RSK 160 Ref. no. 05669
Automatic, made of metal.
For installation in pipeline.

Operating switch 0-1-2
MVB Ref. no. 06091
With functions On/Off, Low and high speed.

Transformer speed controller
TSW See type table
Five-step, for surface installation.

Electronic speed controller
ESU/ESA See type table
For flush/surface installation.

Electronic turn-off delay switch
ZNE Ref. no. 00342
With continuously variable turn-off delay periods.

* See product page for detailed description

MV 200 – Single level

Dimensions MV 200



Dim. in mm

High pressure performance and high volume output with space-saving dimensions.
Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Special features
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Comes with two performance levels; 100% speed-controllable as standard.
- Can be used in any position.
- Long-life ball bearings, designed for 30000 operating hours.
- Problem-free maintenance and cleaning without dismantling the duct system due to the removable fan unit.
- Fan unit with terminal box can be rotated into any position.
- Integrated mounting bracket for easy installation to walls and ceilings.

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Power control
With two performance levels as standard using an external operating switch MVB (accessories). Also with continuously variable control through electronic controller or five-step transformer.

Motor
Enclosed, ball bearing mounted motor with humidity protection, insulation class F, for continuous operation, maintenance-free.

Motor protection
Through thermal overload protection in the winding.

Noise
The total level and range are specified above the performance diagram for
- case-radiated sound power.
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MZ 200 – Two level

Dimensions MV-MZ 200



Dim. in mm

Double pressure **Installation kit MV-MZ**

Description
Installation kit for arranging two MV fans in series. The pressure performance is approximately doubled through series operation. Scope of delivery: base plate (1 pc.), sleeve (1 pc.).

Electrical connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MP 200 – Parallel

Dimensions MV-MP 200



Dim. in mm

Double volume **Installation kit MV-MP**

Description
Installation kit for arranging two MV fans in parallel. The volume output doubles during parallel operation (joint control). Scope of delivery: mounting rails (2 pcs.), rectangular duct connection plates (2 pcs.).

Power control/Connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.
Each fan can also be individually controlled and connected to the second fan if necessary. In order to prevent backflow in this case, two duct shutters (type RSK, accessories) must be provided on the outlet side.

Type	Ref. no.	Connection Ø	Flow rate min./max.	Speed min./max.	Sound pres. lev at 1m: Case radiation	Sound pres. lev at 1m: Air noise min./max.	Power consum. min/max.	Current consum. min/max.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Transformer speed controller 5-step		Electronic* speed controller, cont. variable flush/ surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB (A)	dB (A)	W	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Single level round duct fan, 230 V, 50 Hz, Capacitor motor, IP44															
MV 200	06055	200	680/930	1780/2740	36/44	50/58	45/75	0.22/0.37	844.1	60	3.7	**TSW 1.5**	01495	**ESU1/ESA1**	00236/00238
Double pressure **Two level fan unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MZ 200	06082	200	755/900	1780/2740	44/51	55/62	90/150	0.44/0.74	845.1	60	8.5	**TSW 1.5**	01495	**ESU1/ESA1**	00236/00238
Double volume **Parallel twin unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MP 200	06089	–	1360/1860	1780/2740	39/47	53/61	90/150	0.44/0.74	845.1	60	11.2	**TSW 1.5**	01495	**ESU1/ESA1**	00236/00238

* Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

Performance curves MV 200 – Single level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	25	42	45	45	49	38	26
L_{WA}	Inlet side	dB(A)	66	39	56	59	59	63	52	40
L_{WA}	Outlet side	dB(A)	69	42	62	61	61	64	53	41

ρ = 1.20 kg/m³

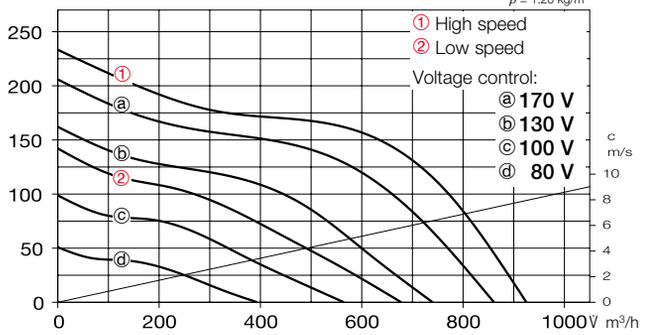

Performance curves MV-MZ 200 – Two level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	59	35	54	52	51	53	42	31
L_{WA}	Inlet side	dB(A)	70	46	65	63	62	64	53	42
L_{WA}	Outlet side	dB(A)	74	51	68	67	65	67	59	45

ρ = 1.20 kg/m³

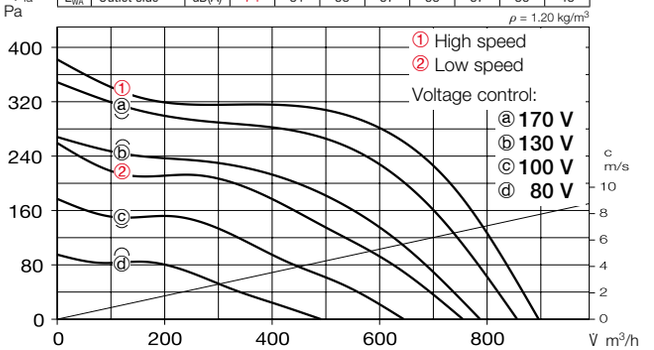

Performance curves MV-MP 200 – Parallel

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	55	28	45	48	48	52	41	29
L_{WA}	Inlet side	dB(A)	69	42	59	62	62	66	55	43
L_{WA}	Outlet side	dB(A)	72	45	65	64	64	67	56	44

ρ = 1.20 kg/m³

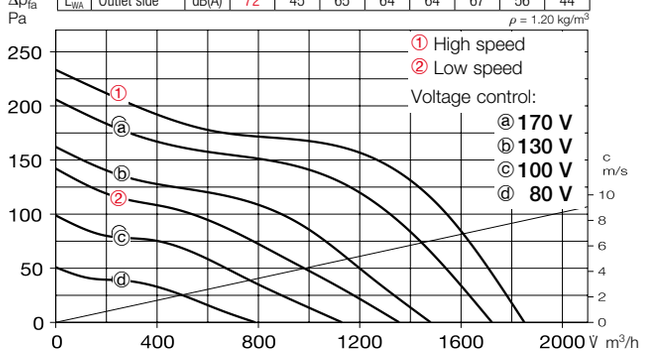

Accessory details	Page
Filter, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Speed controllers, controllers and switches	601 ff.

Accessories for MV and MV-MZ

Flexible connecting sleeve
FM 200 Ref. no. 01670
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 200 Ref. no. 00758
Automatic overpressure shutter for external wall connection of air outlet opening. Made of plastic; colour: light grey.

External wall cover grille
RAG 200 Ref. no. 00750
For placement in front of air inlet and outlet openings in facades. Made of plastic; colour: light grey.

Protection grille
MVS 200 Ref. no. 06075
For inlet and outlet side installation on fan.

Flexible cross talk silencer
FSD 200 Ref. no. 00679
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 200 Coarse 70%* 08579
Large-surface, installation in round duct system.

Electric heating element
EHR-R 1.2/200 1.2 kW No. 09436
In duct casing made of galvanised steel sheet.

Warm water heating element
WHR 200 Ref. no. 09482
For installation in duct system.

Accessories for all types

Duct shutter
RSK 200 Ref. no. 05074
Automatic, made of metal.
For installation in pipeline.

Operating switch 0-1-2
MVB Ref. no. 06091
With functions On/Off, Low and high speed.

Transformer speed controller
TSW See type table
Five-step, for surface installation.

Electronic speed controller
ESU/ESA See type table

Electronic turn-off delay switch – für MV
ZNE Ref. no. 00342

* See product page for detailed description

MV 250 – Single level

Dimensions MV 250



Dim. in mm

High pressure performance and high volume output with space-saving dimensions.
Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

Special features

- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Comes with two performance levels; 100% speed-controllable as standard.
- Can be used in any position.
- Long-life ball bearings, designed for 30000 operating hours.
- Problem-free maintenance and cleaning without dismantling the duct system due to the removable fan unit.
- Fan unit with terminal box can be rotated into any position.
- Integrated mounting bracket for easy installation to walls and ceilings.

Casing
The fan unit can be removed from the duct casing with integrated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

Power control
With two performance levels as standard using an external operating switch MVB (accessories). Also with continuously variable control through electronic controller or five-step transformer.

Motor
Enclosed, ball bearing mounted motor with humidity protection, insulation class F, for continuous operation, maintenance-free.

Motor protection
Through thermal contact connected to the winding in series, which responds if the temperature is too high. Recommissioning only after disconnection from the mains and motor cooling.

Noise
The total level and range are specified above the performance diagram for
- case-radiated sound power.
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Impeller
Optimised for high pressure performance and volume output, made of high-quality plastic.

Electrical connection
Spacious terminal box (IP44) on outside of casing; can be rotated into any position.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MZ 250 – Two level

Dimensions MV-MZ 250



Dim. in mm

Double pressure **Installation kit MV-MZ**

Description
Installation kit for arranging two MV fans in series. The pressure performance is approximately doubled through series operation. Scope of delivery: base plate (1 pc.), sleeve (1 pc.).

Electrical connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

MV-MP 250 – Parallel

Dimensions MV-MP 250



Dim. in mm

Double volume **Installation kit MV-MP**

Description
Installation kit for arranging two MV fans in parallel. The volume output doubles during parallel operation (joint control). Scope of delivery: mounting rails (2 pcs.), rectangular duct connection plates (2 pcs.).

Power control/Connection
A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.
The high performance level must be connected when using speed controllers.
Each fan can also be individually controlled and connected to the second fan if necessary. In order to prevent backflow in this case, two duct shutters (type RSK, accessories) must be provided on the outlet side.

Type	Ref. no.	Connection Ø	Flow rate min./max.	Speed min./max.	Sound pres. lev at 1m: Case radiation	Sound pres. lev at 1m: Air noise min./max.	Power consum. min/max.	Current consum. min/max.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Transformer speed controller 5-step		Electronic* speed controller, cont. variable flush/ surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB (A)	dB (A)	W	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Single level round duct fan, 230 V, 50 Hz, Capacitor motor, IP44															
MV 250	06056	250	680/910	1850/2550	40/52	53/66	85/110	0.40/0.50	844.1	60	7.0	**TSW 1.5**	01495	**ESU1/ESA1**	00236/00238
Double pressure **Two level fan unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MZ 250	06083	250	710/900	1850/2550	46/56	57/67	170/220	0.80/1.00	845.1	60	17.6	**TSW 1.5**	01495	**ESU3/ESA3**	00237/00239
Double volume **Parallel twin unit, 230 V, 50 Hz, Capacitor motor, IP44**															
MV-MP 250	06090	–	1280/1820	1850/2550	43/55	56/69	170/220	0.80/1.00	845.1	60	18.7	**TSW 1.5**	01495	**ESU3/ESA3**	00237/00239

* Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

Performance curves MV 250 – Single level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	52	54	53	54	50	40	29
L_{WA}	Inlet side	dB(A)	74	66	68	67	68	64	54	43
L_{WA}	Outlet side	dB(A)	76	63	71	70	70	69	60	48

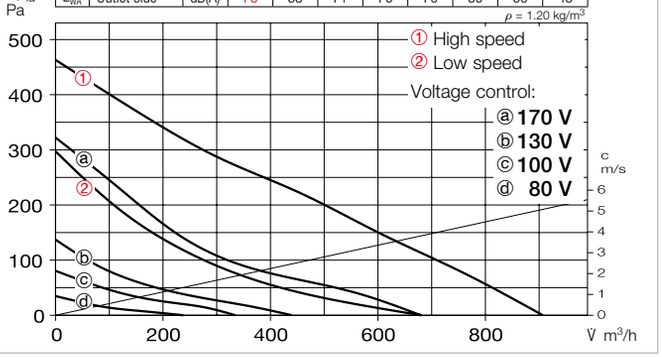

Performance curves MV-MZ 250 – Two level

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	64	51	59	57	58	54	46	36
L_{WA}	Inlet side	dB(A)	75	62	70	68	69	65	57	47
L_{WA}	Outlet side	dB(A)	77	64	69	70	70	69	61	52

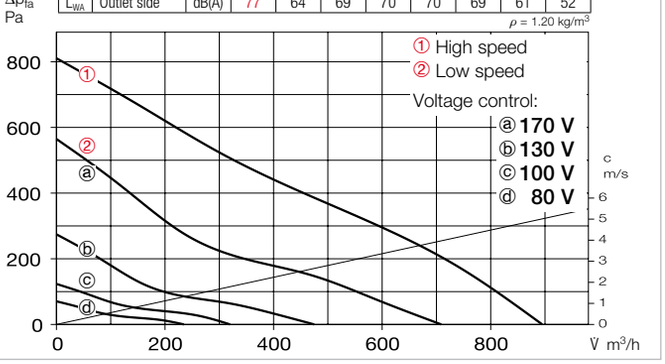

Performance curves MV-MP 250 – Parallel

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	63	55	57	56	57	53	43	32
L_{WA}	Inlet side	dB(A)	77	69	71	70	71	67	57	46
L_{WA}	Outlet side	dB(A)	79	66	74	73	73	72	63	51

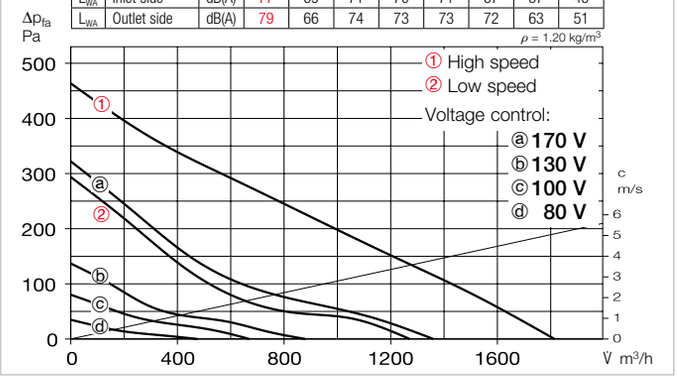

Accessory details	Page
Filter, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Speed controllers, controllers and switches	601 ff.

Accessories for MV and MV-MZ

Flexible connecting sleeve
FM 250 Ref. no. 01672
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 250 Ref. no. 00759
Automatic overpressure shutter for external wall connection of air outlet opening. Made of plastic; colour: light grey.

External wall cover grille
RAG 250 Ref. no. 00751
For placement in front of air inlet and outlet openings in facades. Made of plastic; colour: light grey.

Protection grille
MVS 250 Ref. no. 06076
For inlet and outlet side installation on fan.



Flexible cross talk silencer
FSD 250 Ref. no. 00680
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 250 Coarse 70%* 08580
Large-surface, installation in round duct system.

Electric heating element
EHR-R 6/250 6.0 kW No. 08712
In duct casing made of galvanised steel sheet.



Warm water heating element
WHR 250 Ref. no. 09483
For installation in duct system.

Accessories for all types

Duct shutter
RSK 250 Ref. no. 05673
Automatic, made of metal.
For installation in pipeline.

Operating switch 0-1-2
MVB Ref. no. 06091
With functions On/Off, Low and high speed.

Transformer speed controller
TSW See type table
Five-step, for surface installation.

Electronic speed controller
ESU/ESA See type table
For flush/surface installation.

* See product page for detailed description

Explosion-proof circular duct fans **according to Directive 2014/34/EU (ATEX).**

Explosion protection

The requirements for facilities and equipment, which may present an ignition hazard, have been standardised across Europe and listed in the Directive 2014/34/EU (ATEX).

This contains the basic health and safety requirements for explosion-proof products and describes the conformity assessment procedure for units which are used in potentially explosive atmospheres.

RRK Ex from Helios

The compact fans RRK Ex are suitable for the transportation of potentially explosive gas, vapour and air mixtures and they meet the requirements of Directive 2014/34/EU (ATEX). They have ignition protection type “e” (= increased safety) and thus they correspond to unit group II, category 2G for operation in zones 1 and 2. Hazardous, potentially explosive atmospheres occur occasionally or rarely and briefly in these zones.

Ideal for commercial and industrial applications

When RRK Ex units are professionally installed, they meet all basic health and safety requirements.

RRK Ex units are suitable for the transportation of small volume flows for the ventilation of commercial and industrial rooms.

Ø 180 – 250 mm
$\dot{V}$ = 290 – 870 m³/h

RRK 180 Ex / RRK 200 Ex / RRK 250 Ex

Dimensions RRK 180 Ex / RRK 200 Ex / RRK 250 Ex

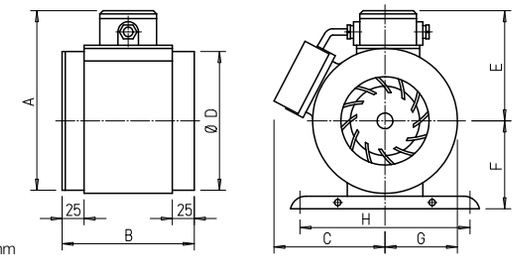

Dim. in mm

Type	RRK 180 Ex	RRK 200 Ex	RRK 250 Ex
A	231	278	304
B	164	267	205
C	160	195	210
D	Ø 178	Ø 198 [1]	Ø 248
E	142	179	180
F	120	140	160
G	92	115	128
H	275	299	311

[1] via reducers connected on the inlet and outlet side.

For the delivery of small volume flows for the ventilation of rooms and workspaces in commercial and industrial buildings where the occasional occurrence of potentially explosive atmospheres can be expected. Suitable for installation in the pipeline.
Approved for operation in zones 1 and 2 according to DIN EN 60079-10. Especially suitable for the ventilation of chemical and pharmaceutical laboratories, storerooms, workshops, dyeing facilities, battery rooms, etc.

Special features

- EC type-examination certificate provided according to Directive 2014/34/EU (ATEX).
- Explosion protection, increased safety according to DIN EN 60079-0, 60079-7, 1127-1, 14986.
- Operating voltage Alternating current ~230 V, 50 Hz.
- Preferably for direct installation in the pipeline. Cross-section reduction possible. See diagram RRK 180 Ex for perform. loss.
- Low space requirement and installation costs due to linear throughflow.
- Installation poss. in any position.

Description

Casing and impeller
Made of high-quality, break-resistant and antistatic plastic. Surface resistance lower than $10^9\Omega$.

Motor
Closed design (IP54) for continuous operation. Ball bearing mounted, with moisture protection, maintenance-free.

Electrical connection
Terminal box made of plastic, IP54, explosion-tested, on outside of duct casing.

Installation
In any position. For supply and extract ventilation through corresponding installation.

Installation information
The regulations DIN EN 60079-10 shall apply. According to this, overload protection must be provided for each fan by a motor protection circuit breaker, which must be triggered within the heating time specified in the test certificate in case of a short circuit.
Fans must be protected by a protection grille or shutter against foreign bodies larger than 12 mm getting sucked in or falling in.
Approved operating mode according to DIN EN 60034-1/ VDE 0530 = S1 (continuous operation). Speed control is not permitted.





Accessories for RRK 180 Ex

Reducer

RZ 180/125	Ref. no. 05876
RZ 180/100	Ref. no. 05877

Accessories for all types

Mounting bracket

MK 4	Ref. no. 05824

Flexible connecting sleeve
For installation between fan and duct system.

FM 180 Ex	Ref. no. 01685
FM 200 Ex	Ref. no. 01686
FM 250 Ex	Ref. no. 01688

Protection grille

SGR 180 Ex	Ref. no. 05051
SGR 200 Ex	Ref. no. 05049
SGR 250 Ex	Ref. no. 05052

Duct shutter

RSK 180	Ref. no. 05662
RSK 200	Ref. no. 05074
RSK 250	Ref. no. 05673



Other accessories	Page
Filters and silencers	483 ff.
Flexible ventilation ducts, ventilation grilles, fittings and roof outlets	563 ff.
Disc valves	584 ff.

Reference	Page
Explosion protection	
– Zoning	18
– Directive 2014/34/EU	20

Type	Ref. no.	Impeller Ø	Flow rate free blowing	Rated speed	Sound power L_{WA}	Sound press. at 1 m	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Weight net approx.
		mm	V̇ m³/h	min⁻¹	dB (A)	dB (A)	W	A	No.	+°C	kg
Explosion-proof, II 2G Ex eb h IIB + H_2 T3 Gb, Alternating current 230 V, 50 Hz, Protection category IP54											
RRK 180 Ex[1]	05889	170	290	2780	66	58	50	0.25	453	50	3.0
RRK 200 Ex	05890	215	560	2860	64	56	200	0.92	453	50	5.5
RRK 250 Ex	05891	240	870	2860	77	69	300	1.40	453	50	7.0

[1] Temperature class T4.

Helios InlineVent®.
Robust and slimline.

InlineVent® circular duct fans from Helios combine the performance characteristics of centrifugal fans with the advantages of axial design.
The linear flow pattern allows direct insertion in duct systems as well as easy, cost-effective installation.

Helios SlimVent
SlimVent centrifugal fans are ideal for limited installation spaces in residential, commercial and industrial buildings.
Thanks to their compact dimensions, they can be easily installed below suspended ceilings, wall coverings, above and inside built-in cupboards or behind cavities.

Helios RR and RRK
For the delivery of medium and low air volumes against high resistances.
For various applications in residential, commercial and industrial buildings.
Available in galvanised steel sheet or corrosion-resistant plastic.

■ **InlineVent®-circular duct fans RR and SlimVent SVR**

– Energy efficient EC version

Ø 100 – 315 mm
V̇ = 340 – 2050 m³/h

EC 386ff

■ **InlineVent® round duct fans RR, RRK and SlimVent SVR**

– Standard AC types

Ø 100 – 315 mm
V̇ = 250 – 1260 m³/h

398ff

EC

SVV 80

Performance curves SVV 80

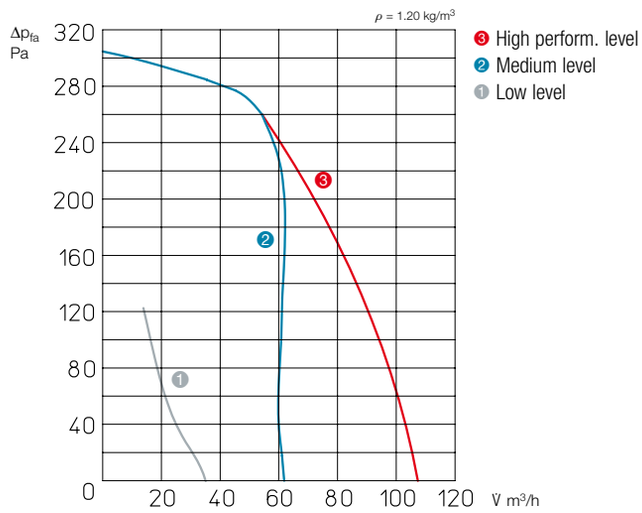

* Char. curve with factory connector position.

Dimensions SVV 80



Dim. in mm

SVV 80 Connector position



Connector position			Total output
No. 1	No. 2	No. 3	
V̇ m³/h	V̇ m³/h	V̇ m³/h	V̇ m³/h
35	45	45	**125**
65	closed	60	**125**
zu	45	75	**120**
50	60	closed	**110**
110*	closed*	closed*	**110***
closed	closed	110	**110**
closed	100	zu	**100**

Volume output depending on number of inlet side connectors and position.

Flat casing in compact design made of high-quality, impact-resistant plastic. Suitable for the ventilation of wet rooms, toilets, etc. in industrial, commercial and residential buildings. Standard delivery with inlet and outlet side connectors for standard duct Ø.
One or two additional inlet connectors (accessories) can be inserted in the casing by removing the blind cover for the ventilation of multiple rooms.

Casing
Plastic cover easily removable for removal of the volute casing.

Impeller
Energy-saving centrifugal impeller with forward curved blades made of high-quality plastic.

Motor
Enclosed, ball bearing mounted energy-saving motor, maintenance-free.

Motor protection
Through thermal overload protection in the winding.

Power control
Manual three level operation using DSEL 3. Medium or low performance level can be connected for continuous operation and switched using DSEL 2.

Electrical connection
Terminal box (IP55) on outside of casing.

Installation
Possible in any position. The removable volute casing allows inspection and cleaning without dismantling the duct system. An inspection opening must be taken into account.

Protection category
IP45 with connected duct system.

Delivery and accessories

Delivery includes mounting bracket as well as inlet and outlet side connectors. One or two additional inlet connectors (accessories, DN 75/80 mm) can be inserted in the casing by removing the blind cover.

ELS-ZAS Ref. no. 08184

Three level speed and operating switch with 0 position.
Convenient flush-mounted speed switch. Room light not switchable in parallel.
Installation in flush-mounted switch box.
Dim. mm (WxHxD) 80 x 80 x 23

DSEL 3 Ref. no. 01611

Type	Ref. no.	Connection Ø	Flow rate free blowing*	Rated speed*	Sound pressure level Case-radiation*	Sound press. level Air noise inlet side*	Power consumption*	Current consumption*	Wiring diagram[1]	Max. air flow temperature	Weight net aprx.
		mm	V̇ m³/h	min⁻¹	dB(A) in 3 m / 1 m	dB(A) in 3 m / 1 m	kW	A	No.	+ °C	kg
Single phase Alternating current, 230 V, 50 Hz, IP45											
SVV 80	02660	80	110 / 65 / 35	2710 / 1200 / 650	29/37 18/26 16/24	35/43 24/32 17/25	27 / 20 / 11	0.13 / 0.12 / 0.09	913	40	2.0

* Values refer to the three performance levels (see performance diagram).

1) With three level speed switch DSEL 3: Wiring diagram no. 914.

RR EC 100

SVR EC 100

SlimVent – Slimline EC space saver w/ retractable motor-impeller unit.

Dimensions RR EC 100



Dim. in mm

Dimensions SVR EC 100



Dim. in mm

Energy-saving EC circular duct fans for the delivery medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features
- Highly efficient EC motor for low operating costs.
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features RR EC and SVR EC

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP44 with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Description RR EC

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Dynamically balanced together with motor for low-noise operation, high level of efficiency.

Protection category
Protection category IP54 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description SVR EC

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced together with motor for low-noise operation.

Protection category
IP44 with connected duct system.

Noise
The total level and range are specified above the performance diagram for:
- Case-radiated sound power
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type RR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
RR EC 100	05804	100	370	3640	46	0.10	0.80	979	60	2.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Type SVR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVR EC 100	06124	100	390	3600	52	0.090	0.76	979	60	5.3	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

Performance curves RR EC 100

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	54	37	44	44	50	45	46	36
L_{WA}	Inlet side	dB(A)	78	70	72	71	72	67	67	58
L_{WA}	Outlet side	dB(A)	79	69	73	71	72	71	67	59

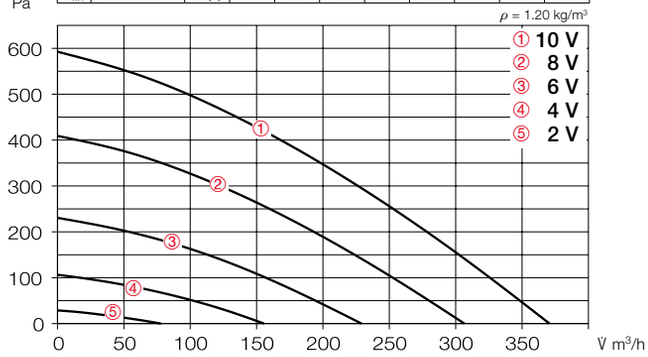

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3630	370	100	0.81	46	0.97
8	3020	310	60	0.50	41	0.69
6	2260	230	25	0.23	36	0.39
4	1520	160	10	0.10	30	0.22

Performance curves SVR EC 100

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	43	54	56	51	49	43	34
L_{WA}	Inlet side	dB(A)	75	65	66	72	65	65	60	54
L_{WA}	Outlet side	dB(A)	79	66	68	76	71	69	64	59

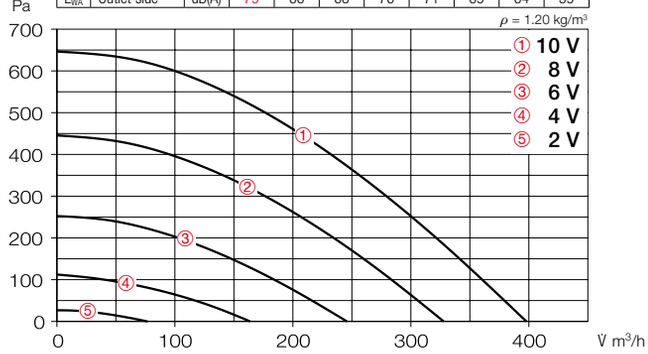

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3610	400	90	0.75	52	0.81
8	2020	330	50	0.45	48	0.54
6	2270	250	25	0.21	42	0.36
4	1510	160	10	0.10	33	0.22

Other accessories	**Page**
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Accessories



Pipe clamp connectors
BM 100 Ref. no. 05075
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.

Mounting bracket for RR EC
MK 4 Ref. no. 05824

External wall shutter
VK 100 Ref. no. 00757
Automatic made of plastic, white.



External wall cover grille
G 100 Ref. no. 00796
Made of plastic, white.

Protection grille
SGR 100 Ref. no. 05063
For inlet and outlet side installation. Made of powder-coated steel wire.

Duct shutter
RSKK 100 Ref. no. 05106
Automatic, made of plastic

Flexible cross talk silencer
FSD 100 Ref. no. 00676
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 100 Coarse 70%* 08576
LFBR 100 ePM1 50%* 08530
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 0.4/100 0.4 kW No. 08708
In duct casing made of galvanised steel sheet.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 100 Ref. no. 09479
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 Ref. no. 08817

* See product page 486 for detailed description.

RR EC 125

SVR EC 125

SlimVent – Slimline EC space saver w/ retractable motor-impeller unit.

Dimensions RR EC 125



Dim. in mm

Dimensions SVR EC 125



Dim. in mm

Energy-saving EC circular duct fans for the delivery medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Highly efficient EC motor for low operating costs.
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features RR EC and SVR EC

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP44 a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Description RR EC

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Dynamically balanced together with motor for low-noise operation, high level of efficiency.

Protection category
Protection category IP54 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description SVR EC

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced together with motor for low-noise operation.

Protection category
IP44 with connected duct system.

Noise
The total level and range are specified above the performance diagram for:
- Case-radiated sound power
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type RR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
RR EC 125	05789	125	570	3600	45	0.10	0.83	979	60	2.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Type SVR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVR EC 125	02531	125	520	3640	50	0.10	0.81	979	60	6.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

1) Multiple EC fans can normally be connected. 2) alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

Performance curves RR EC 125

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	53	35	41	44	49	45	46	36
L_{WA}	Inlet side	dB(A)	79	67	72	74	72	70	69	59
L_{WA}	Outlet side	dB(A)	79	68	70	71	72	73	68	61

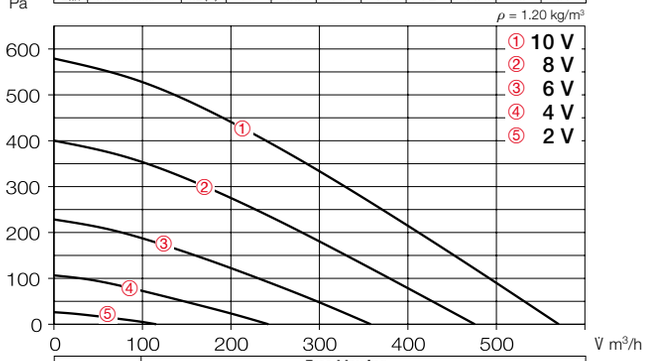

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3600	570	100	0.82	45	0.63
8	3010	480	60	0.50	40	0.45
6	2270	360	25	0.25	35	0.25
4	1530	240	10	0.10	28	0.15

Performance curves SVR EC 125

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	58	45	53	54	49	48	44	35
L_{WA}	Inlet side	dB(A)	78	68	70	76	65	65	63	55
L_{WA}	Outlet side	dB(A)	81	68	70	78	72	69	66	58

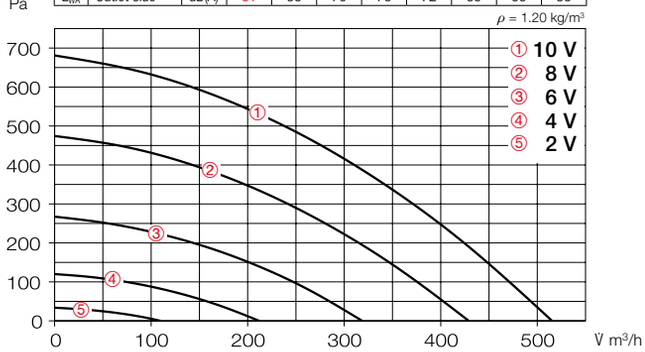

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3630	520	95	0.78	50	0.65
8	3030	430	55	0.47	46	0.46
6	2270	320	25	0.22	40	0.28
4	1510	210	10	0.10	34	0.17

Other accessories	**Page**
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Accessories



Pipe clamp connectors
BM 125 Ref. no. 05076
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.

Mounting bracket for RR EC
MK 4 Ref. no. 05824

External wall shutter
VK 125 Ref. no. 00857
Automatic made of plastic, white.



External wall cover grille
G 160 Ref. no. 00893
Made of plastic, white.

Protection grille
SGR 125 Ref. no. 05064
For inlet and outlet side installation. Made of powder-coated steel wire.

Duct shutter
RSKK 125 Ref. no. 05107
Automatic, made of plastic

Flexible cross talk silencer
FSD 125 Ref. no. 00677
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 125 Coarse 70%* 08577
LFBR 125 ePM1 50%* 08531
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 0.8/125 0.8 kW No.08709
EHR-R 1.2/125 1.2 kW No.09433
– with integrated temp. control
EHR-R 0.8/125 TR 0.8 kW No.05293
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 125 Ref. no. 09480
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 Ref. no. 08817

* See product page 486 for detailed description.

RR EC 160

SVR EC 160

SlimVent – Slimline EC space saver w/ retractable motor-impeller unit.

Dimensions RR EC 160



Dim. in mm

Dimensions SVR EC 160



Dim. in mm

Energy-saving EC circular duct fans for the delivery medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Highly efficient EC motor for low operating costs.
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features RR EC and SVR EC

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP44 a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Description RR EC

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Dynamically balanced together with motor for low-noise operation, high level of efficiency.

Protection category
Protection category IP54 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description SVR EC

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced together with motor for low-noise operation.

Protection category
IP44 with connected duct system.

Noise
The total level and range are specified above the performance diagram for:
- Case-radiated sound power
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type RR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
RR EC 160	05785	160	650	3640	44	0.10	0.82	979	60	2.8	**EUR EC** 1) 2)	01347	**PU 10** 1)	01734	**PA 10** 1)	01735
Type SVR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVR EC 160 A	02535	160	580	3630	52	0.10	0.81	979	60	6.5	**EUR EC** 1) 2)	01347	**PU 10** 1)	01734	**PA 10** 1)	01735
SVR EC 160 B	02543	160	740	3110	54	0.12	0.98	979	60	6.9	**EUR EC** 1) 2)	01347	**PU 10** 1)	01734	**PA 10** 1)	01735

1) Multiple EC fans can normally be connected. 2) alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

Performance curves RR EC 160

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	34	39	45	46	46	43	35
L_{WA}	Inlet side	dB(A)	75	64	67	71	68	65	65	60
L_{WA}	Outlet side	dB(A)	77	65	68	71	68	70	67	62

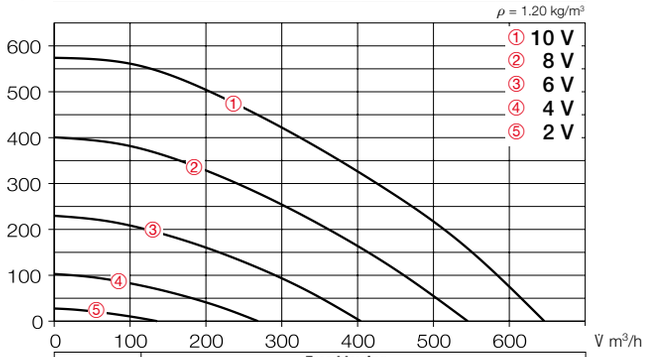

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3630	650	80	0.65	44	0.44
8	3030	550	45	0.40	40	0.29
6	2270	400	20	0.20	34	0.18
4	1510	270	10	0.10	28	0.13

Performance curves SVR EC 160 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	43	53	58	51	49	43	35
L_{WA}	Inlet side	dB(A)	76	66	69	71	67	64	63	54
L_{WA}	Outlet side	dB(A)	80	66	70	78	68	70	66	59

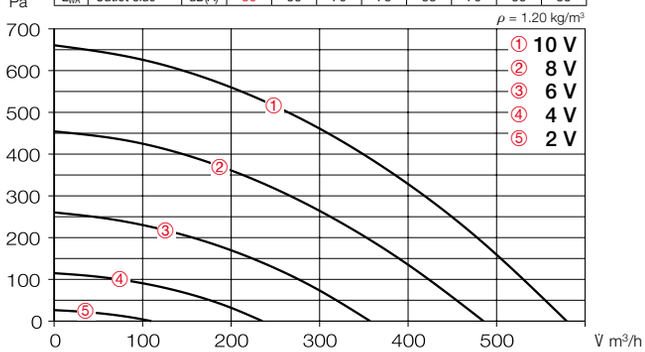

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3630	580	90	0.72	52	0.56
8	3020	490	50	0.44	48	0.36
6	2270	360	25	0.22	43	0.25
4	1520	240	10	0.10	35	0.15

Performance curves SVR EC 160 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	44	58	58	52	49	43	32
L_{WA}	Inlet side	dB(A)	76	65	70	72	67	62	61	52
L_{WA}	Outlet side	dB(A)	79	66	71	75	70	69	67	56

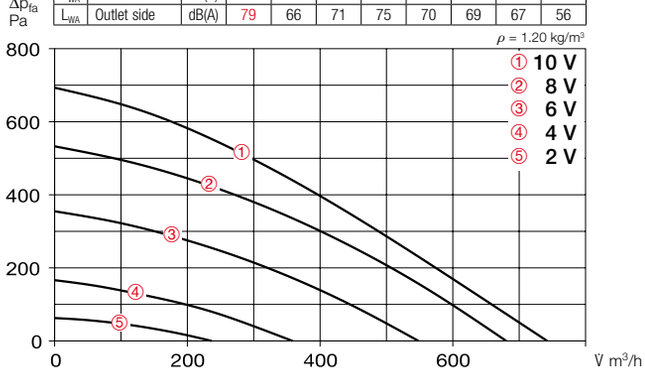

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3100	740	125	0.99	54	0.61
8	2850	680	90	0.78	52	0.48
6	2300	550	50	0.41	48	0.33
4	1600	360	20	0.15	42	0.20

Accessories



Pipe clamp connectors
BM 160 Ref. no. 05077
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.

Mounting bracket for RR EC
MK 4 Ref. no. 05824

External wall shutter
VK 160 Ref. no. 00892
Automatic made of plastic, white.

External wall cover grille
G 160 Ref. no. 00893
Made of plastic, white.

Protection grille
SGR 160 Ref. no. 05069
For inlet and outlet side installation. Made of galvanised steel.

Duct shutter
RSK 160 Ref. no. 05669
Automatic, made of metal.

Flexible cross talk silencer
FSD 160 Ref. no. 00678
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 160 Coarse 70%* 08578
LFBR 160 ePM1 50%* 08532
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 1.2/160 1.2 kW No.09434
EHR-R 2.4/160 2.4 kW No.09435
EHR-R 5/160 5.0 kW No.08710
– with integrated temp. control
EHR-R 2.4/160 TR 2.4 kW No.05294
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 160 Ref. no. 09481
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 Ref. no. 08817

* See product page 486 for detailed description.

RR EC 200

SVR EC 200

SlimVent – Slimline EC space saver w/ retractable motor-impeller unit.

Dimensions RR EC 200



Dim. in mm

Dimensions SVR EC 200



Dim. in mm

Energy-saving EC circular duct fans for the delivery medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features
- Highly efficient EC motor for low operating costs.
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features RR EC and SVR EC

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP44 a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Description RR EC

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Dynamically balanced together with motor for low-noise operation, high level of efficiency.

Protection category
Protection category IP54 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description SVR EC

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced together with motor for low-noise operation.

Protection category
IP44 with connected duct system.

Noise
The total level and range are specified above the performance diagram for:
- Case-radiated sound power
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type RR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
RR EC 200 A	06121	200	985	2890	44	0.12	1.00	979	60	3.4	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
RR EC 200 B	05786	200	1130	3200	47	0.17	1.37	979	60	4.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Type SVR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVR EC 200 A	03310	200	850	2900	50	0.12	1.02	979	60	7.4	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SVR EC 200 B [3)]	02539	200	980	2890	53	0.15	1.19	979	60	7.4	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.
[3)] Performance diagram at www.HeliosSelect.de

Performance curves RR EC 200 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	30	44	47	43	44	43	31
L_{WA}	Inlet side	dB(A)	75	63	68	70	66	67	63	55
L_{WA}	Outlet side	dB(A)	75	65	67	69	66	70	65	56

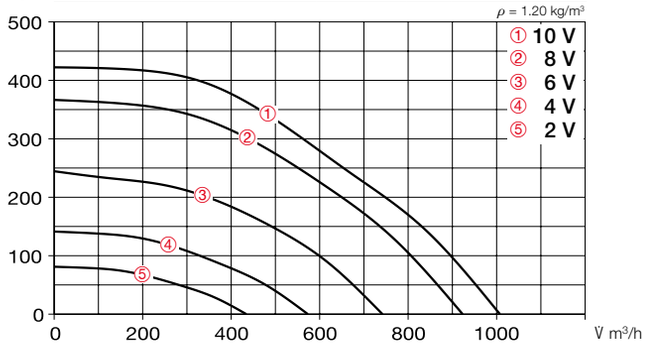

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2900	985	85	0.70	44	0.31
8	2550	860	55	0.50	41	0.23
6	1960	670	30	0.25	34	0.16
4	1360	460	15	0.12	28	0.12

Performance curves RR EC 200 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	55	28	38	51	49	47	45	33
L_{WA}	Inlet side	dB(A)	77	66	69	73	69	68	66	60
L_{WA}	Outlet side	dB(A)	78	67	72	70	69	71	68	60

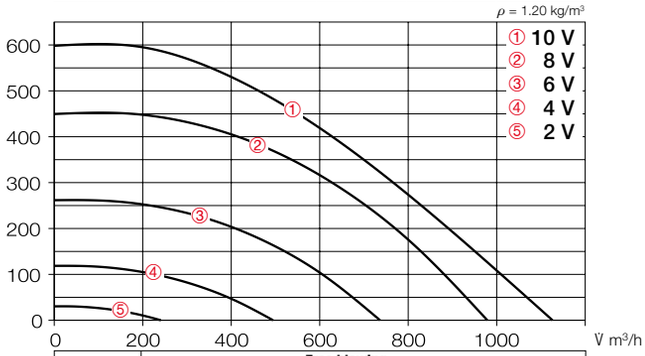

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3430	1130	130	1.1	47	0.41
8	2990	980	90	0.76	44	0.33
6	2260	740	40	0.37	37	0.19
4	1510	500	20	0.16	30	0.14

Performance curves SVR EC 200 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	58	41	51	56	48	46	40	31
L_{WA}	Inlet side	dB(A)	76	66	68	73	66	63	63	53
L_{WA}	Outlet side	dB(A)	80	66	70	77	70	71	67	56

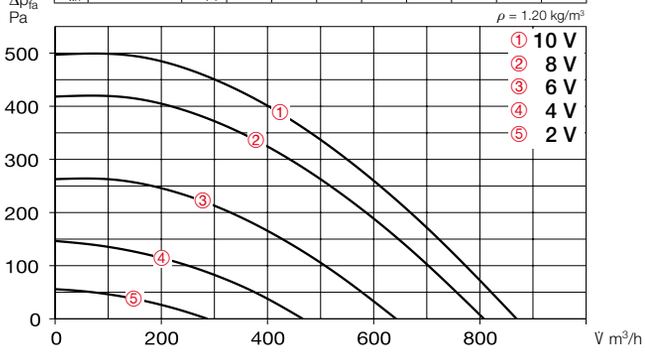

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2900	850	115	0.92	50	0.48
8	2550	700	75	0.65	49	0.38
6	1960	570	35	0.32	42	0.22
4	1360	390	15	0.14	32	0.14

Accessories



Pipe clamp connectors
BM 200 Ref. no. 05078
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.

Mounting bracket for RR EC
MK 4 Ref. no. 05824

External wall shutter
VK 200 Ref. no. 00758
Made of plastic, light grey.

External wall cover grille
RAG 200 Ref. no. 00750
Made of plastic, light grey.

Protection grille
SGR 200 Ref. no. 05066
For inlet and outlet side installation. Made of galvanised steel.

Duct shutter
RSK 200 Ref. no. 05074
Automatic, made of metal.

Flexible cross talk silencer
FSD 200 Ref. no. 00679
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 200 Coarse 70%* 08579
LFBR 200 ePM1 50%* 08533
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 1.2/200 1.2 kW No.09436
EHR-R 2/200 2.0 kW No.09437
EHR-R 5/200 5.0 kW No.08711
– with integrated temp. control
EHR-R 5/200 TR 5.0 kW No.05295
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 200 Ref. no. 09482
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 Ref. no. 08817

* See product page 486 for detailed description.

RR EC 250

SVR EC 250

SlimVent – Slimline EC space saver w/ retractable motor-impeller unit.

Dimensions RR EC 250



Dim. in mm

Dimensions SVR EC 250



Dim. in mm

Energy-saving EC circular duct fans for the delivery medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Highly efficient EC motor for low operating costs.
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features RR EC and SVR EC

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP44 a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Description RR EC

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Dynamically balanced together with motor for low-noise operation, high level of efficiency.

Protection category
Protection category IP54 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description SVR EC

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced together with motor for low-noise operation.

Protection category
IP44 with connected duct system.

Noise
The total level and range are specified above the performance diagram for:
- Case-radiated sound power
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type RR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
RR EC 250 A	06122	250	1050	3830	44	0.12	1.04	979	60	3.4	**EUR EC**[1)2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735
RR EC 250 B	05787	250	1200	3200	45	0.17	1.35	979	60	4.2	**EUR EC**[1)2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735
Type SVR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVR EC 250	02294	250	1180	2800	48	0.15	1.22	979	60	7.9	**EUR EC**[1)2)]	01347	**PU 10**[1)]	01734	**PA 10**[1)]	01735

1) Multiple EC fans can normally be connected. 2) alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

Performance curves RR EC 250 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	27	37	49	43	43	42	29
L_{WA}	Inlet side	dB(A)	74	57	63	67	70	68	65	58
L_{WA}	Outlet side	dB(A)	76	58	64	67	71	70	65	55

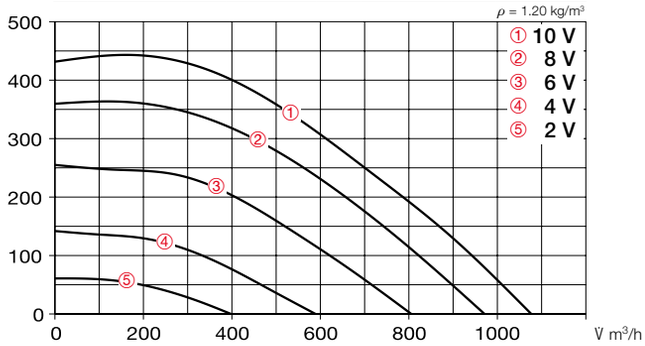

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2900	1050	80	0.70	44	0.27
8	2540	930	55	0.48	41	0.21
6	1960	720	30	0.25	33	0.15
4	1360	500	10	0.12	28	0.07

Performance curves RR EC 250 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	53	25	35	48	47	46	44	32
L_{WA}	Inlet side	dB(A)	76	60	66	69	72	69	68	60
L_{WA}	Outlet side	dB(A)	78	58	67	68	73	72	69	60

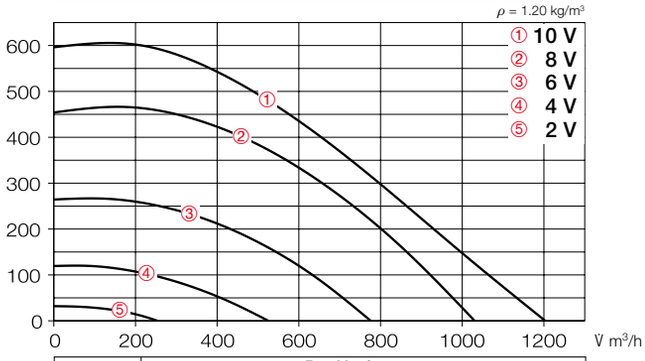

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3190	1200	130	1.1	45	0.39
8	3010	1030	90	0.74	42	0.31
6	2260	780	40	0.36	35	0.18
4	1510	530	15	0.15	30	0.10

Performance curves SVR EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	37	50	53	45	44	36	30
L_{WA}	Inlet side	dB(A)	73	58	70	65	62	65	61	52
L_{WA}	Outlet side	dB(A)	76	60	69	70	66	71	63	54

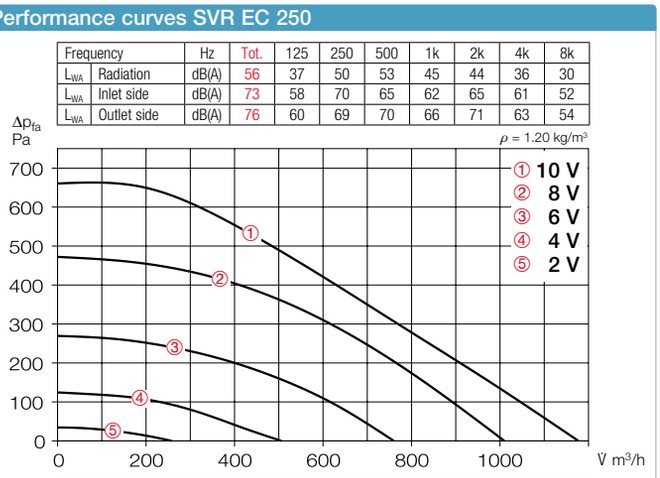

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2950	1180	150	1.2	48	0.46
8	2520	1010	95	0.82	45	0.34
6	1900	760	40	0.40	40	0.19
4	1270	510	15	0.15	32	0.11

Accessories



Pipe clamp connectors
BM 250 Ref. no. 05079
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.

Mounting bracket
MK 4 Ref. no. 05824
Made of galvanised steel sheet.

External wall shutter
VK 250 Ref. no. 00759
Automatic made of plastic, light grey.

External wall cover grille
RAG 250 Ref. no. 00751
Made of plastic, light grey.

Protection grille
SGR 250 Ref. no. 05067
For inlet and outlet side installation. Made of galvanised steel.

Duct shutter
RSK 250 Ref. no. 05673
Automatic, made of metal.

Flexible cross talk silencer
FSD 250 Ref. no. 00680
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 250 Coarse 70%* 08580
LFBR 250 ePM1 50%* 08534
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 6/250 6.0 kW No.08712
– with integrated temp. control
EHR-R 6/250 TR 6.0 kW No.05296
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 250 Ref. no. 09483
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

RR EC 315

SVR EC 315

SlimVent – Slimline EC space saver w/ retractable motor-impeller unit.

Dimensions RR EC 315



Dim. in mm

Dimensions SVR EC 315



Dim. in mm

Energy-saving EC circular duct fans for the delivery medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Highly efficient EC motor for low operating costs.
- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features RR EC and SVR EC

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP44 a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Description RR EC

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic, made of galvanised steel sheet for RR EC 315 B impeller. Dynamically balanced together with motor for low-noise operation, high level of efficiency.

Protection category
Protection category IP54 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description SVR EC

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) on external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced together with motor for low-noise operation.

Protection category
IP44 with connected duct system.

Noise
The total level and range are specified above the performance diagram for:
- Case-radiated sound power
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type RR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
RR EC 315 A	05788	315	1910	2370	47	0.22	1.69	979	60	4.8	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
RR EC 315 B	06123	315	2140	2880	48	0.32	2.46	979	60	7.6	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Type SVR EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVR EC 315 A	02669	315	1700	2570	52	0.21	1.65	979	60	13.6	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SVR EC 315 B [3)]	00668	315	1940	2890	54	0.32	2.45	979	60	14.8	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.
[3)] Performance diagram at www.HeliosSelect.de

Performance curves RR EC 315 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	55	33	43	50	50	50	42	35
L_{WA}	Inlet side	dB(A)	74	62	66	66	66	68	64	64
L_{WA}	Outlet side	dB(A)	75	59	63	70	68	70	64	61

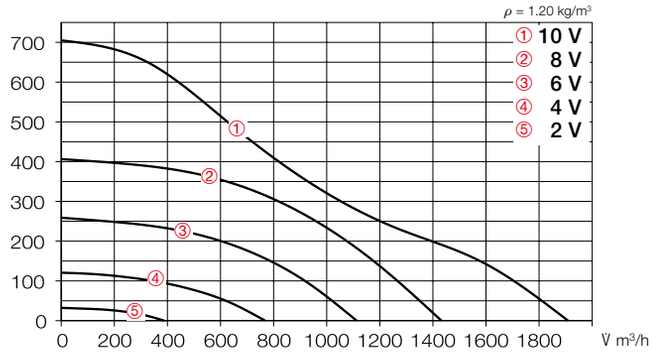

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2780	1910	190	1.5	47	0.36
8	2110	1430	90	0.72	45	0.23
6	1670	1110	50	0.40	40	0.16
4	1140	770	20	0.20	32	0.09

Performance curves RR EC 315 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	41	44	49	48	52	45	36
L_{WA}	Inlet side	dB(A)	79	60	67	69	68	74	71	71
L_{WA}	Outlet side	dB(A)	81	61	68	75	73	76	70	69

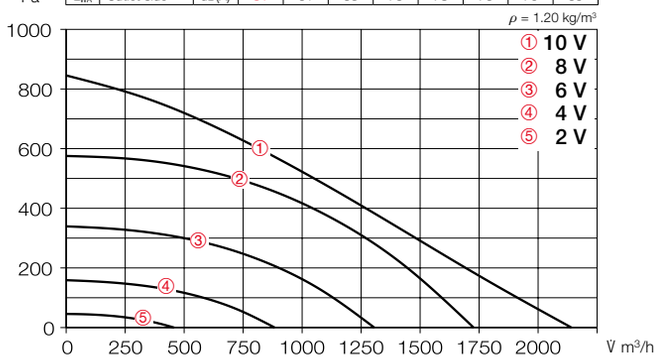

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3130	2140	240	1.8	48	0.40
8	2560	1730	140	1.1	46	0.29
6	1950	1310	65	0.53	40	0.17
4	1310	880	25	0.23	34	0.10

Performance curves SVR EC 315 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	43	51	56	52	50	47	38
L_{WA}	Inlet side	dB(A)	75	62	67	70	68	67	66	62
L_{WA}	Outlet side	dB(A)	79	64	68	75	69	72	68	63

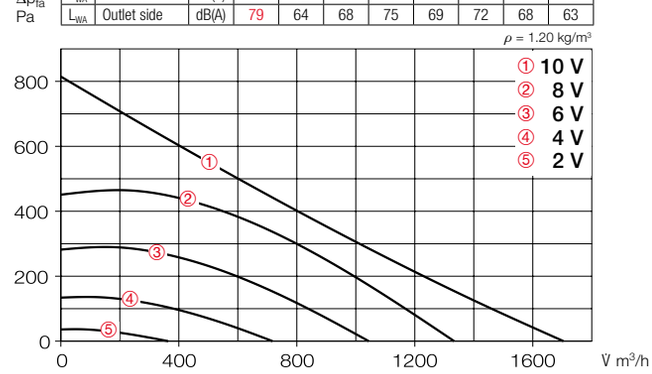

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
110	2680	1700	205	1.6	52	0.43
8	2120	1330	105	0.90	50	0.28
6	1670	1040	55	0.46	43	0.19
4	1150	720	25	0.20	36	0.12

Accessories

Pipe clamp connectors
BM 315 Ref. no. 05080
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.



Mounting bracket
MK 4 Ref. no. 05824
Made of galvanised steel sheet.

External wall shutter
VK 315 Ref. no. 00760
Automatic made of plastic, light grey.

External wall cover grille
RAG 315 Ref. no. 00752
Made of plastic, light grey.



Protection grille
SGR 315 Ref. no. 05068
For inlet and outlet side installation. Made of galvanised steel.

Duct shutter
RSK 315 Ref. no. 05674
Automatic, made of metal.

Flexible cross talk silencer
FSD 315 Ref. no. 00681
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 315 Coarse 70%* 08581
LFBR 315 ePM1 50%* 08535
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 6/315 6.0 kW No.08713
– with integrated temp. control
EHR-R 6/315 TR 6.0 kW No.05301
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 315 Ref. no. 09484
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

RR 100

Efficiency class
C RR + accessories*

RRK 100

Alternative in corrosion-resistant and impact-resistant plastic casing.

SVR 100

Efficiency class
C SVR + accessories*

Dimensions RR 100



Dim. in mm

Dimensions RRK 100



Dim. in mm

Dimensions SVR 100



Dim. in mm

For the delivery of medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features

Motor
Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation (exception: SVR must not be installed with the retractable motor-impeller unit upward). Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
See page 400.

Description RR

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
For type RR 100 A from 0–100% possible using electronic controller or step transformer (see table). For Type RR 100 C also two level operation using type DS 2/2 (accessories).

DS 2/2 Ref. no. 01267

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
Protection category IP44 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description RRK

Casing
All components made of corrosion-resistant and impact-resistant plastic. Six built-in guide blades additionally increase the level of efficiency. Colour: Silver-grey.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table).

Electrical connection
Terminal box (IP44) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
IP44

Description SVR

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table) or two level operation with type DS 2/2 (accessories).

DS 2/2 Ref. no. 01267

Electrical connection
Terminal box (IP54) mounted to external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced for low-noise operation.

Protection category
IP44 with connected duct system.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step Type	Transformer speed controller 5-step Ref. no.	Electronic[3] Speed controller, cont. var. flush-mount. / surf-mount. Type	Electronic[3] Speed controller, cont. var. flush-mount. / surf-mount. Ref. no.
		V̇ m³/h	min⁻¹	dB(A) in 1 m	W	A	A	No.	+ °C	+ °C	kg				
Type RR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RR 100 A	05653	250	1730	36	41	0.18	0.18	508	60	60	2.9	**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236 / 00238
RR 100 C[1]	05654	330[1]/220	2530[1]/1655	42	62[1]/40	0.27[1]/0.18	0.27	934.1	60	60	2.9	**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236 / 00238
Type RRK, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RRK 100	05973	290	2125	44	29	0.13	0.13	508	70	60	2.0	**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236 / 00238
Type SVR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP33															
SVR 100 C[2]	02658	310/245[2]	2600/1940[2]	45/40[2]	58/40[2]	0.25/0.18[2]	0.23	934.1	60	60	4.8	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238

[1] Type with high speed; with additional energy-saving level as standard (see performance diagram). [2] Values refer to the two performance levels (see performance diagram).
[3] Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.
* See ErP product data sheet at www.HeliosSelect.de.

Performance curves RR 100 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	43	21	33	35	39	37	37	31
L_{WA}	Inlet side	dB(A)	66	56	64	60	58	52	45	38

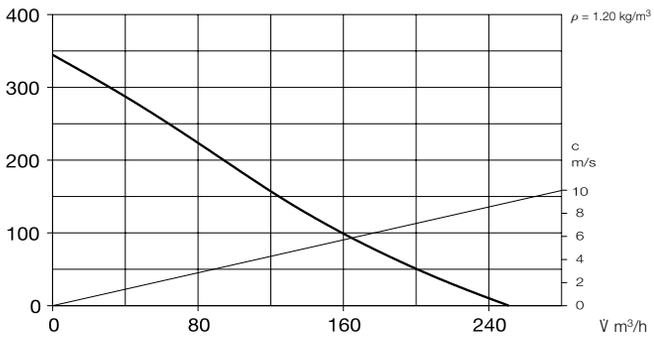

Performance curves RR 100 C

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	23	40	40	44	42	44	38
L_{WA}	Inlet side	dB(A)	70	61	66	65	65	59	52	46

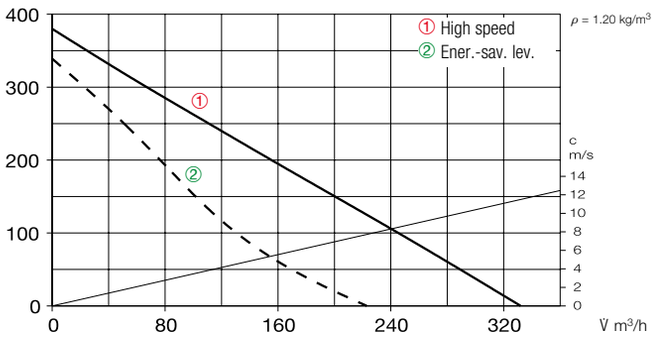

Performance curves RRK 100

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	51	32	42	44	47	44	38	27
L_{WA}	Inlet side	dB(A)	62	43	54	57	56	54	51	41

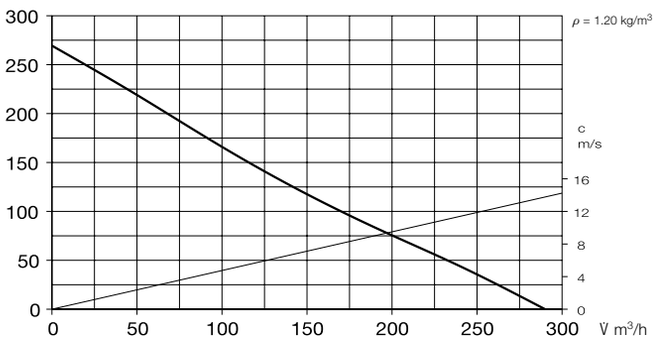

Performance curves SVR 100 C

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	53	37	50	49	44	41	35	31
L_{WA}	Inlet side	dB(A)	67	60	61	64	57	55	49	44
L_{WA}	Outlet side	dB(A)	70	60	63	66	64	60	54	48

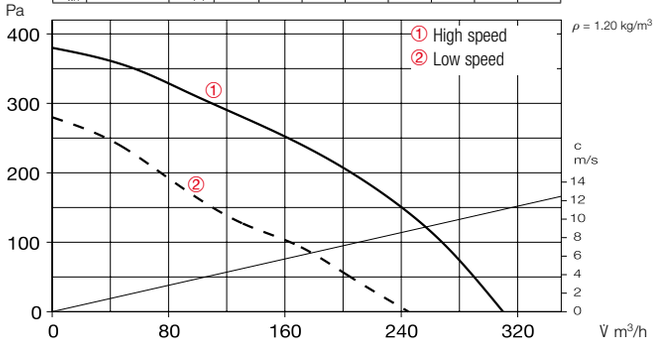

Accessories

Pipe clamp connectors
BM 100 Ref. no. 05075
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.



Mounting bracket for RR
MK 4 Ref. no. 05824
Mounting bracket for RRK
MK 1 Ref. no. 05821
Made of galvanised steel sheet.

External wall shutter
VK 100 Ref. no. 00757
Automatic made of plastic, white.

External wall cover grille
G 100 Ref. no. 00796
Made of plastic, white.



Protection grille
SGR 100 Ref. no. 05063
For inlet and outlet side installation. Made of powder-coated steel wire.

Duct shutter
RSKK 100 Ref. no. 05106
Automatic, made of plastic.

Flexible cross talk silencer
FSD 100 Ref. no. 00676
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 100 Coarse 70%* 08576
LFBR 100 ePM1 50%* 08530
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 0.4/100 0.4 kW No. 08708
In duct casing made of galvanised steel sheet.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 100 Ref. no. 09479
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 Ref. no. 08817

* See product page 486 for detailed description.

RR 125

Efficiency class

C RR + accessories*

RRK 125

Alternative in corrosion-resistant and impact-resistant plastic casing.

SVR 125

Efficiency class

C SVR + accessories*

Dimensions RR 125



Dim. in mm

Dimensions RRK 125



Dim. in mm

Dimensions SVR 125



Dim. in mm

For the delivery of medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features

Motor
Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation (exception: SVR must not be installed with the retractable motor-impeller unit upward). Installation in duct system, preferably away from the room to be ventilated for less noise.

Description RR

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table) or two level operation with type DS 2/2 (accessories).

DS 2/2	Ref. no. 01267

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
Protection category IP44 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description RRK

Casing
All components made of corrosion-resistant and impact-resistant plastic. Six built-in guide blades additionally increase the level of efficiency. Colour: Silver-grey.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table).

Electrical connection
Terminal box (IP44) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
IP44

Description SVR

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table) or two level operation with type DS 2/2 (accessories).

DS 2/2	Ref. no. 01267

Electrical connection
Terminal box (IP54) mounted to external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced for low-noise operation.

Protection category
IP44 with connected duct system.

Noise
The total level and range are specified above the performance diagram for
- Case-radiated sound power
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step		Electronic[3] Speed controller, cont. var. flush-mount. / surf-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 1 m	W	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Type RR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RR 125 C[1]	05655	480[1]/310	2480[1]/1655	42	62[1]/40	0.27[1]/0.18	0.27	934.1	70	70	2.9	**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236 / 00238
Type RRK, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RRK 125	05974	390	2635	36	42	0.19	0.19	508	70	60	2.5	**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236 / 00238
Type SVR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP33															
SVR 125 B[2]	02671	400/290[2]	2570/1810[2]	46/38[2]	59/41[2]	0.26/0.18[2]	0.24	934.1	60	60	5.1	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238

[1] Type with high speed; with additional energy-saving level as standard (see performance diagram). [2] Values refer to the two performance levels (see performance diagram).
[3] Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.
* See ErP product data sheet at www.HeliosSelect.de.

Performance curves RR 125 C

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	25	39	39	44	43	45	36
L_{WA}	Inlet side	dB(A)	70	55	64	67	64	60	55	48

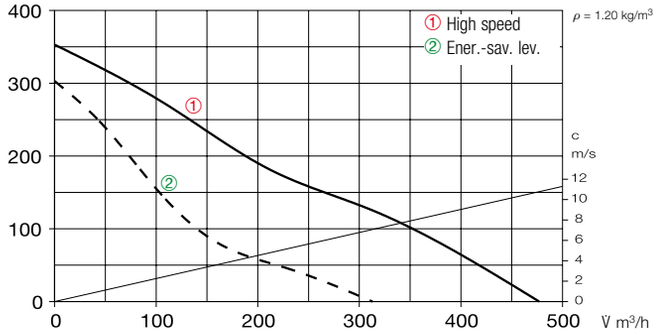

Performance curves RRK 125

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	43	29	30	33	39	38	32	23
L_{WA}	Inlet side	dB(A)	59	36	46	52	53	54	51	43

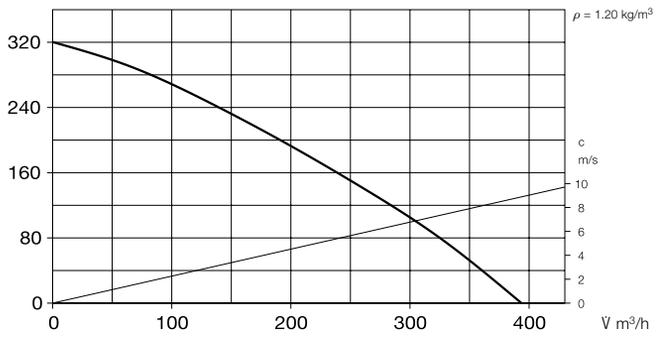

Performance curves SVR 125 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	54	37	50	51	46	41	35	31
L_{WA}	Inlet side	dB(A)	69	60	63	66	57	54	51	46
L_{WA}	Outlet side	dB(A)	71	60	64	67	64	59	56	49

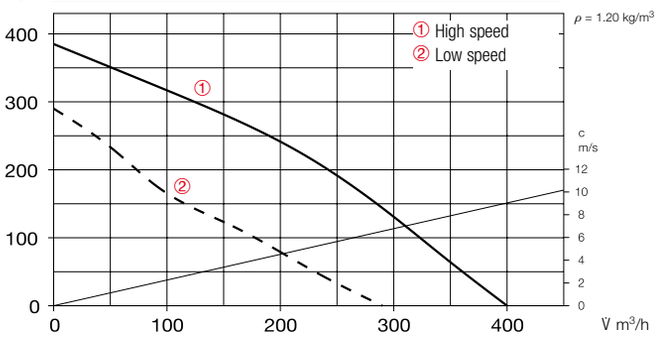

References	Page
Techn. description	362
Selection table	363
Planning information	14 ff.
Modular system	360

Other accessories	Page
Filter, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Speed controllers, controllers and switches	601 ff.

Accessories

Pipe clamp connectors
BM 125 Ref. no. 05076
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.



Mounting bracket for RR
MK 4 Ref. no. 05824
Mounting bracket for RRK
MK 1 Ref. no. 05821
Made of galvanised steel sheet.

External wall shutter
VK 125 Ref. no. 00857
Automatic made of plastic, white.

External wall cover grille
G 160 Ref. no. 00893
Made of plastic, white.

Protection grille
SGR 125 Ref. no. 05064
For inlet and outlet side installation. Made of powder-coated steel wire.

Duct shutter
RSKK 125 Ref. no. 05107
Automatic, made of plastic

Flexible cross talk silencer
FSD 125 Ref. no. 00677
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 125 Coarse 70%* 08577
LFBR 125 ePM1 50%* 08531
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 0.8/125 0.8 kW No.08709
EHR-R 1.2/125 1.2 kW No.09433
– with integrated temp. control
EHR-R 0.8/125 TR 0.8 kW No.05293
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 125 Ref. no. 09480
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 Ref. no. 08817

* See product page 486 for detailed description.

RR 160

Efficiency class

C RR 160 B + accessories*

B RR 160 C + accessories*

RRK 160

Alternative in corrosion-resistant and impact-resistant plastic casing.

SVR 160

SlimVent – Slimline space saver with retractable motor-impeller unit.

Dimensions RR 160



Dim. in mm

RR 160 B
*RR 160 C

Dimensions RRK 160



Dim. in mm

Dimensions SVR 160



Dim. in mm

For the delivery of medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features

Motor
Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation (exception: SVR must not be installed with the retractable motor-impeller unit upward). Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
See page 400.

Description RR

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table) or two level operation with type DS 2/2 (accessories).

DS 2/2	Ref. no. 01267

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
Protection category IP44 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description RRK

Casing
All components made of corrosion-resistant and impact-resistant plastic. Six built-in guide blades additionally increase the level of efficiency. Colour: Silver-grey.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table).

Electrical connection
Terminal box (IP44) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
IP44

Description SVR

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table) or two level operation with type DS 2/2 (accessories).

DS 2/2	Ref. no. 01267

Electrical connection
Terminal box (IP54) mounted to external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced for low-noise operation.

Protection category
IP44 with connected duct system.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step		Electronic[3] Speed controller, cont. var. flush-mount. / surf-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 1 m	W	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Type RR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RR 160 B[1]	05656	530[1]/370	2540[1]/1695	42	62[1]/40	0.27[1]/0.18	0.27	934.1	60	60	3.2	**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236 / 00238
RR 160 C[1]	05657	870[1]/610	2480[1]/1580	49	101[1]/64	0.44[1]/0.28	0.44	934.1	65	65	4.3	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
Type RRK, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RRK 160	05976	500	2380	32	53	0.24	0.24	508	70	60	2.7	**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236 / 00238
Type SVR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP33															
SVR 160 K[2]	02672	450/310[2]	2550/1740[2]	45/37[2]	61/42[2]	0.26/0.19[2]	0.25	934.1	60	60	6.7	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238

[1] Type with high speed; with additional energy-saving level as standard (see performance diagram). [2] Values refer to the two performance levels (see performance diagram).
[3] Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.
* See ErP product data sheet at www.HeliosSelect.de.

Performance curves RR 160 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	24	39	40	45	44	44	32
L_{WA}	Inlet side	dB(A)	69	54	64	65	63	58	53	48

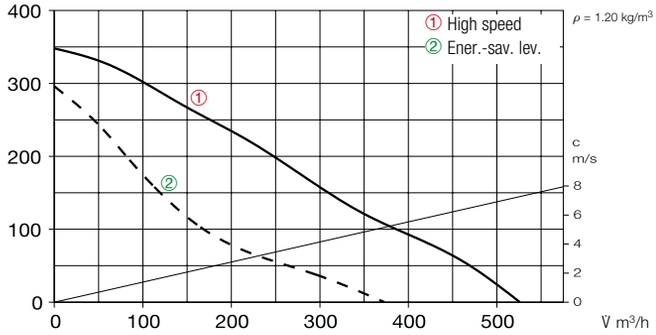

Performance curves RR 160 C

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	34	42	49	54	47	48	35
L_{WA}	Inlet side	dB(A)	73	60	64	68	69	64	64	54

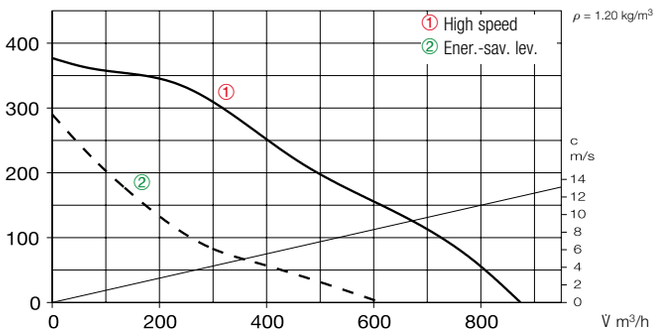

Performance curves RRK 160

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	40	31	33	32	34	33	27	20
L_{WA}	Inlet side	dB(A)	59	35	49	51	53	53	52	45

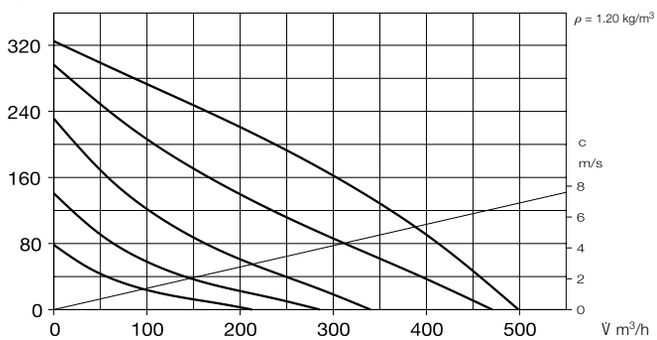

Performance curves SVR 160 K

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	53	39	48	50	41	39	34	31
L_{WA}	Inlet side	dB(A)	68	59	65	62	57	51	52	45
L_{WA}	Outlet side	dB(A)	70	59	65	66	60	56	55	47

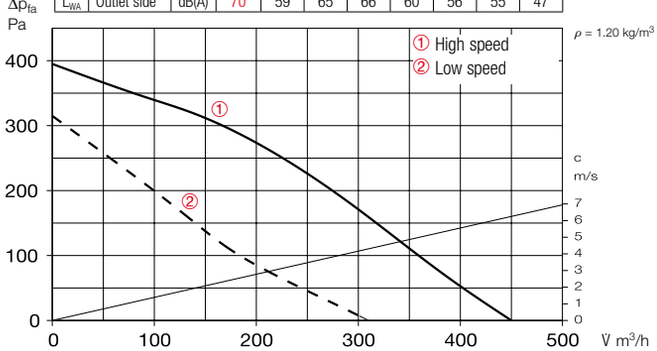

Accessories

Pipe clamp connectors
BM 160 Ref. no. 05077
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.



Mounting bracket for RR
MK 4 Ref. no. 05824
Mounting bracket for RRK
MK 2 Ref. no. 05822
Made of galvanised steel sheet.

External wall shutter
VK 160 Ref. no. 00892
Automatic made of plastic, white.

External wall cover grille
G 160 Ref. no. 00893
Made of plastic, white.



Protection grille
SGR 160 Ref. no. 05069
For inlet and outlet side installation. Made of galvanised steel.

Duct shutter
RSK 160 Ref. no. 05669
Automatic, made of metal.

Flexible cross talk silencer
FSD 160 Ref. no. 00678
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 160 Coarse 70%* 08578
LFBR 160 ePM1 50%* 08532
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 1.2/160 1.2 kW No.09434
EHR-R 2.4/160 2.4 kW No.09435
EHR-R 5/160 5.0 kW No.08710
– with integrated temp. control
EHR-R 2.4/160 TR 2.4 kW No.05294
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 160 Ref. no. 09481
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 Ref. no. 08817

* See product page 486 for detailed description.

RR 200

RRK 200

Alternative in corrosion-resistant and impact-resistant plastic casing.

SVR 200

SlimVent – Slimline space saver with retractable motor-impeller unit.

Dimensions RR 200



Dim. in mm

Dimensions RRK 200



Dim. in mm

Dimensions SVR 200



Dim. in mm

For the delivery of medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features

Motor
Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation (exception: SVR must not be installed with the retractable motor-impeller unit upward). Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
See page 400.

Description RR

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table).
Two level operation with type RR 200 A using Type DS 2/2 (Accessories).

DS 2/2	Ref. no. 01267

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
Protection category IP44 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description RRK

Casing
All components made of corrosion-resistant and impact-resistant plastic. Six built-in guide blades additionally increase the level of efficiency. Colour: Silver-grey.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table).

Electrical connection
Terminal box (IP44) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
IP44

Description SVR

Casing
Flat casing in compact design made of galvanised steel sheet. Connectors and lip seal on inlet and outlet side for standard duct Ø.
The retractable motor-impeller unit allows inspection and cleaning without dismantling components. The swivelling range must be considered for the inspection opening.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table).

Electrical connection
Terminal box (IP54) mounted to external cable.

Impeller
Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced for low-noise operation.

Protection category
IP44 with connected duct system.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step		Electronic[2] Speed controller, cont. var. flush-mount. / surf-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 1 m	W	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Type RR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44 (Type RR 200 B, IP33)															
RR 200 A[1]	05658	960[1]/760	2630[1]/1980	43	129[1]/85	0.57[1]/0.38	0.57	934.1	60	60	4.2	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
RR 200 B	05659	980	2750	44	145	0.63	0.78	508	70	60	5.0	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
Type RRK, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RRK 200	05977	870	2370	38	95	0.41	0.41	508	70	60	3.4	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
Type SVR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP33															
SVR 200 K	02673	980	2730	57	154	0.67	0.81	508	70	50	8.4	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238

[1] Type with high speed; with additional energy-saving level as standard (see performance diagram).
[2] Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

Performance curves RR 200 A

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Radiation	dB(A)	50	31	40	46	46	40	38	31
L_{WA} Inlet side	dB(A)	74	61	68	69	64	66	64	56

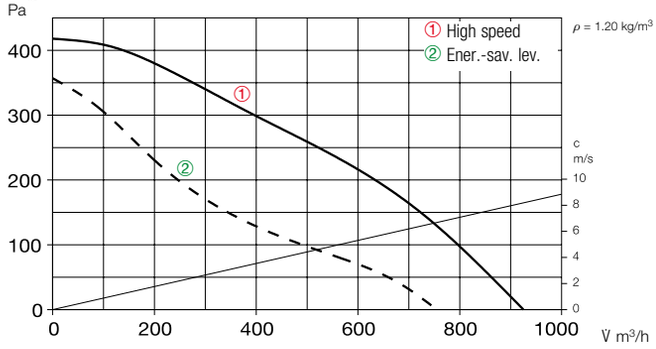

Performance curves RR 200 B

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Radiation	dB(A)	52	34	41	46	48	44	44	35
L_{WA} Inlet side	dB(A)	74	62	67	69	66	63	62	57

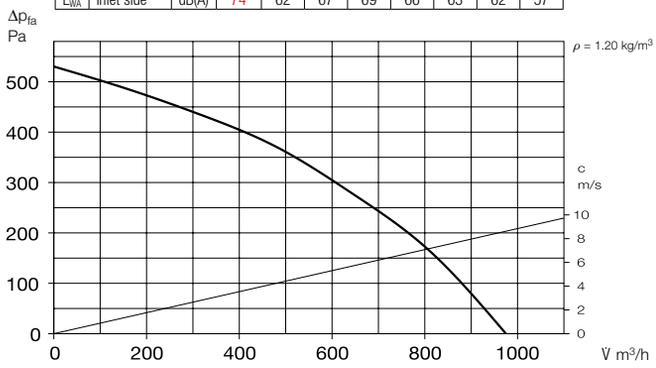

Performance curves RRK 200

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Radiation	dB(A)	46	32	35	40	41	40	33	26
L_{WA} Inlet side	dB(A)	63	40	55	56	56	58	53	46

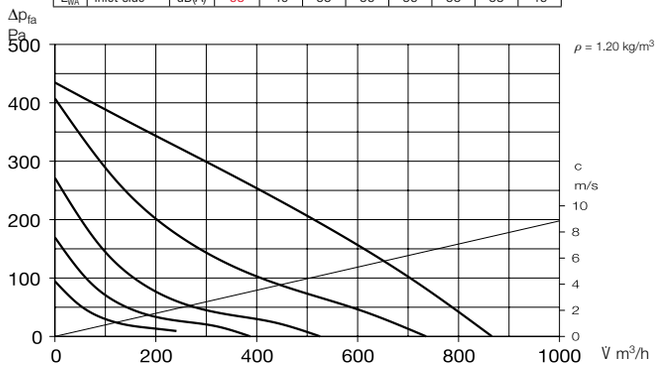

Performance curves SVR 200 K

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Radiation	dB(A)	65	47	62	61	53	48	42	36
L_{WA} Inlet side	dB(A)	78	65	74	73	65	63	60	57
L_{WA} Outlet side	dB(A)	82	69	77	79	71	70	66	63

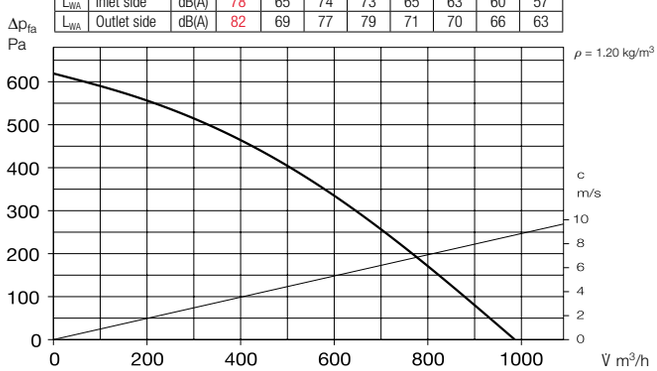

Accessories



Pipe clamp connectors
BM 200 Ref. no. 05078
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.

Mounting bracket for RR
MK 4 Ref. no. 05824
Mounting bracket for RRK
MK 2 Ref. no. 05822
Made of galvanised steel sheet.

External wall shutter
VK 200 Ref. no. 00758
Made of plastic, light grey.

External wall cover grille
RAG 200 Ref. no. 00750
Made of plastic, light grey.

Protection grille
SGR 200 Ref. no. 05066
For inlet and outlet side installation. Made of galvanised steel.

Duct shutter
RSK 200 Ref. no. 05074
Automatic, made of metal.

Flexible cross talk silencer
FSD 200 Ref. no. 00679
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 200 Coarse 70%* 08579
LFBR 200 ePM1 50%* 08533
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 1.2/200 1.2 kW No.09436
EHR-R 2/200 2.0 kW No.09437
EHR-R 5/200 5.0 kW No.08711
– with integrated temp. control
EHR-R 5/200 TR 5.0 kW No.05295
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002



Warm water heating element
WHR 200 Ref. no. 09482
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 Ref. no. 08817

* See product page 486 for detailed description.

RR 250

Market-leading unit series with favourable price/performance ratio.
With energy-saving level as standard.

RRK 250

Alternative in corrosion-resistant and impact-resistant plastic casing.

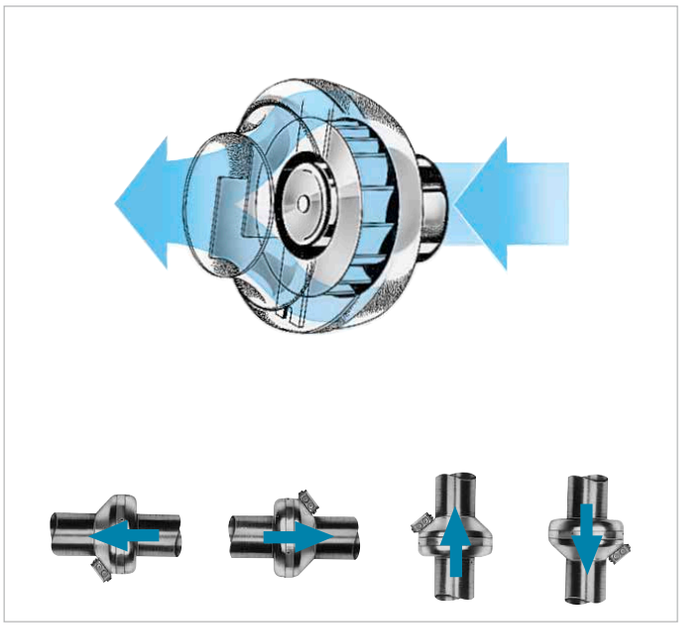

Dimensions RR 250



Dim. in mm

Dimensions RRK 250



Dim. in mm

For the delivery of medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features

Motor
Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.

Description RR

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
From 0 – 100% using electronic controller or step transformer (see table).
Two level operation for type RR 250 A possible using type DS 2/2 (accessories).

DS 2/2	Ref. no. 01267

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
Protection category IP44 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description RRK

Casing
All components made of corrosion-resistant and impact-resistant plastic. Six built-in guide blades additionally increase the level of efficiency. Colour: Silver-grey.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table).

Electrical connection
Terminal box (IP44) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
IP44

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
The total level and range are specified above the performance diagram for
- Case-radiated sound power
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step Type	Transformer speed controller 5-step Ref. no.	Electronic[2] Speed controller, cont. var. flush-mount. / surf-mount. Type	Electronic[2] Ref. no.
		V̇ m³/h	min⁻¹	dB(A) in 1 m	W	A	A	No.	+ °C	+ °C	kg				
Type RR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44 (Type RR 250 C, IP33)															
RR 250 A[1]	05652	950[1]/740	2650[1]/2030	42	126[1]/83	0.56[1]/0.37	0.56	934.1	60	60	4.6	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
RR 250 C	05660	970	2750	45	145	0.63	0.78	508	70	60	5.0	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
Type RRK, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RRK 250	05978	910	2360	38	98	0.43	0.43	508	70	60	3.4	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238

[1] Type with high speed; with additional energy-saving level as standard (see performance diagram).
[2] Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

Performance curves RR 250 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	29	40	45	42	41	38	31
L_{WA}	Inlet side	dB(A)	75	63	68	67	69	68	66	57

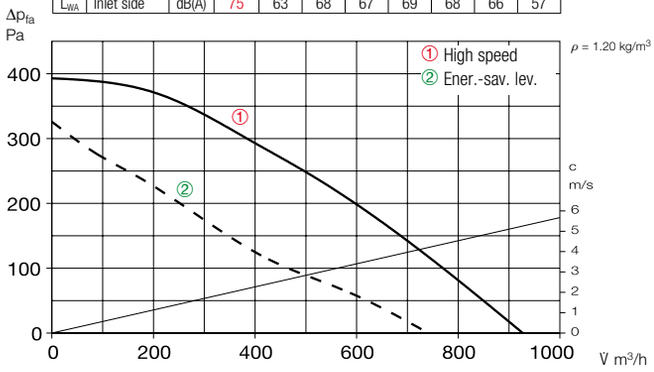

Performance curves RR 250 C

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	53	31	42	46	49	46	43	38
L_{WA}	Inlet side	dB(A)	75	60	67	67	70	66	64	66

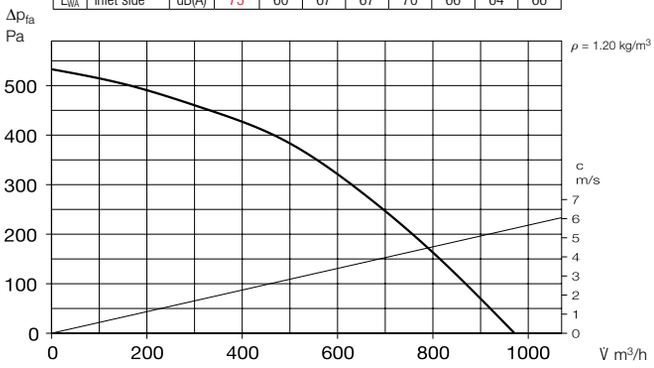

Performance curves RRK 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	46	32	35	40	41	40	33	26
L_{WA}	Inlet side	dB(A)	63	40	55	56	56	58	53	46

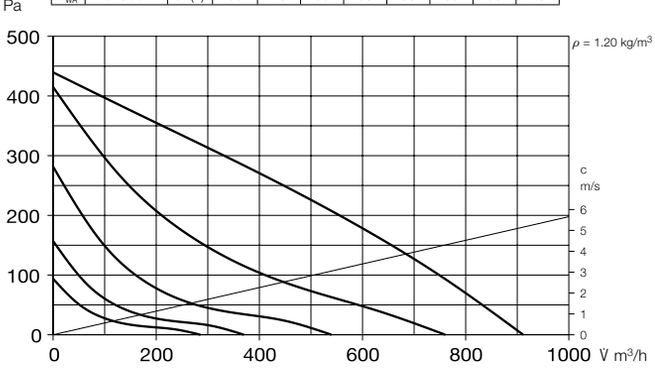

References	Page
Techn. description	362
Selection table	363
Planning information	14 ff.
Modular system	360

Other accessories	Page
Filter, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Speed controllers, controllers and switches	601 ff.

Accessories

Pipe clamp connectors
BM 250 Ref. no. 05079
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.



Mounting bracket for RR
MK 4 Ref. no. 05824
Mounting bracket for RRK
MK 2 Ref. no. 05822
Made of galvanised steel sheet.

External wall shutter
VK 250 Ref. no. 00759
Automatic made of plastic, light grey.

External wall cover grille
RAG 250 Ref. no. 00751
Made of plastic, light grey.



Protection grille
SGR 250 Ref. no. 05067
For inlet and outlet side installation. Made of galvanised steel.

Duct shutter
RSK 250 Ref. no. 05673
Automatic, made of metal.

Flexible cross talk silencer
FSD 250 Ref. no. 0680
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 250 Coarse 70%* 08580
LFBR 250 ePM1 50%* 08534
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 6/250 6.0 kW No.08712
– with integrated temp. control
EHR-R 6/250 TR 6.0 kW No.05296
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 250 Ref. no. 09483
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

RR 315

Market-leading unit series with favourable price/performance ratio.

RRK 315

Alternative in corrosion-resistant and impact-resistant plastic casing.

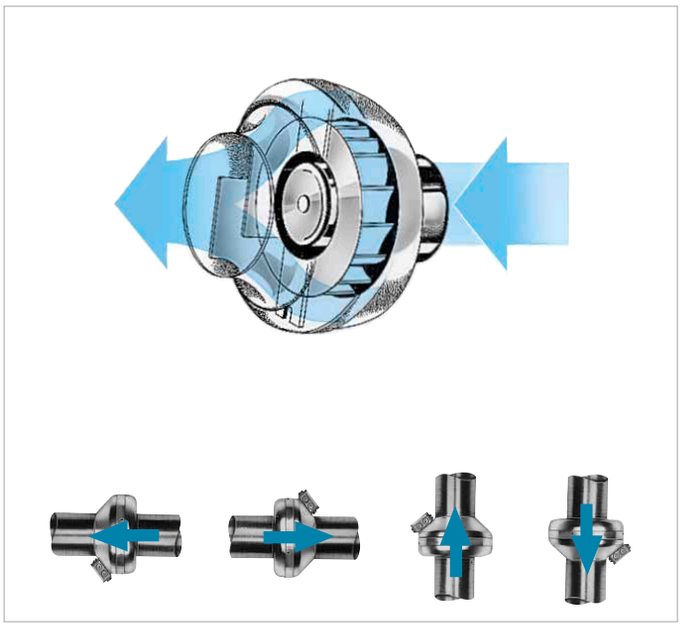

Dimensions RR 315



Dim. in mm

Dimensions RRK 315



Dim. in mm

For the delivery of medium and small air volumes against high resistances.
Specifically designed for direct insertion in duct systems. High pressure performance for overcoming friction losses, deflection losses and aggregate resistances.
For various applications in commercial, industrial and residential areas.

Special features

- Low space requirement and installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Performance adjustment through 100% speed control.
- Can be used in any position.
- Wide range of accessories.
- Aerodynamically optimised casing design.

Common features

Motor
Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.

Description RR

Casing
Made of galvanised steel sheet, robust for harsh operating conditions. Inlet and outlet side connection dimensions correspond to standard duct Ø.

Power control
From 0 – 100% possible using electronic controller or step transformer (see table).

Electrical connection
Terminal box (IP54) on outside of casing.

Impeller
Centrifugal, with backward curved blades made of plastic. Directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
Protection category IP44 through inlet and outlet-side installation in a duct system which prevents the ingress of rainwater.

Description RRK

Casing
All components made of corrosion-resistant and impact-resistant plastic. Six built-in guide blades additionally increase the level of efficiency. Colour: Silver-grey.

Electrical connection
Terminal box (IP44) on outside of casing.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table).

Impeller
Centrifugal, with backward curved blades made of steel sheet. Directly pressed on motor and dynamically balanced as a unit. Low-noise, high level of efficiency.

Protection category
IP44

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

Noise
The total level and range are specified above the performance diagram for
- Case-radiated sound power
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step Type	Ref. no.	Electronic * Speed controller, cont. var. flush-mount. / surf-mount. Type	Ref. no.
		V̇ m³/h	min⁻¹	dB(A) in 1 m	W	A	A	No.	+ °C	+ °C	kg				
Type RR, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RR 315	05920	1260	2660	46	200	0.87	0.97	508	70	60	6.1	**TSW 1.5**	01495	**ESU 3 / ESA 3**	00237 / 00239
Type RRK, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
RRK 315	05979	1080	2690	48	170	0.75	0.97	508	70	60	5.7	**TSW 1.5**	01495	**ESU 3 / ESA 3**	00237 / 00239

* Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

Performance curves RR 315

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	54	40	45	46	48	49	46	37
L_{WA}	Inlet side	dB(A)	76	58	65	66	67	70	70	64

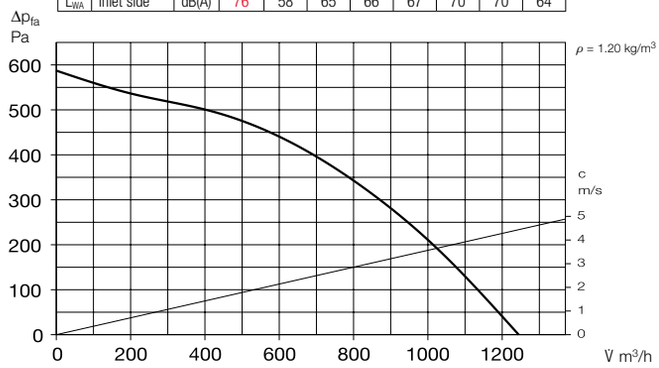

Performance curves RRK 315

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	55	40	45	50	50	47	43	34
L_{WA}	Inlet side	dB(A)	72	45	63	64	68	64	63	57

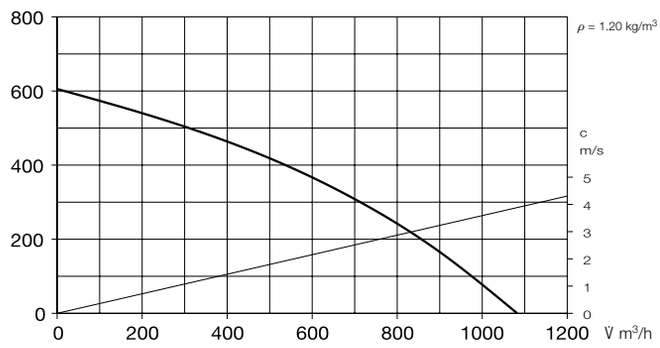

References	Page
Techn. description	362
Selection table	363
Planning information	14 ff.
Modular system	360

Other accessories	Page
Filter, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Speed controllers, controllers and switches	601 ff.

Accessories



Pipe clamp connectors
BM 315 Ref. no. 05080
For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs). Mount ventilation duct and fan connector at a distance and fold sleeve over during installation.

Mounting bracket for RR
MK 4 Ref. no. 05824
Mounting bracket for RRK
MK 3 Ref. no. 05823
Made of galvanised steel sheet.



External wall shutter
VK 315 Ref. no. 00760
Automatic made of plastic, light grey.

External wall cover grille
RAG 315 Ref. no. 00752
Made of plastic, light grey.

Protection grille
SGR 315 Ref. no. 05068
For inlet and outlet side installation. Made of galvanised steel.

Duct shutter
RSK 315 Ref. no. 05674
Automatic, made of metal.

Flexible cross talk silencer
FSD 315 Ref. no. 00681
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 315 Coarse 70%* 08581
LFBR 315 ePM1 50%* 08535
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 6/315 6.0 kW No.08713
– with integrated temp. control
EHR-R 6/315 TR 6.0 kW No.05301
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 315 Ref. no. 09484
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

Acoustic Line from Helios.
Ventilation could not be quieter.

Two powerful series: Helios SilentBox® and SlimVent.

Acoustic Line centrifugal circular duct fans are characterised by the lowest noise levels and thus they are also suitable for noise sensitive environments. This is achieved by using particularly low-noise high performance impellers and the casing which was designed as a silencer.

The 50 mm thick mineral wool lining ensures that the casing radiation and ventilation noise are kept to a minimum.
The retractable motor-impeller unit also offers maximum convenience for inspection and cleaning.

Helios SilentBox SB
Ø 125 to 400 mm
$\dot{V}$ = 230 – 4560 m³/h

High volume output and pressure performance with ideal sound values make Helios SilentBox centrifugal circular duct fans the best solution for extract air and intake air systems with particular noise level requirements.

The sound-insulated casing ensures virtually silent operation and it is designed for installation in any position.

Helios SlimVent SVS
Ø 125 to 315 mm
$\dot{V}$ = 400 – 1940 m³/h

Helios SlimVent centrifugal circular duct fans are only slightly higher than the duct diameter and they allow easy and space-saving installation in any position.

System resistances and longer duct sections are not restrictions due to the high pressure rates. The use of energy-saving centrifugal impellers also ensures highly energy-efficient operation.

Acoustic Line

Energy-efficient
EC version

EC 412ff

Acoustic Line

Standard AC types

426ff

SB EC 125

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

EC

SVS EC 125

Lowest installation height. Ideal for limited installation spaces. With sound-insulating mineral wool lining for particularly low-noise operation.

EC

Dimensions SB EC 125



Dim. in mm

SB EC 125 A, *SB EC 125 B

Dimensions SVS EC 125



Dim. in mm

Common features SilentBox SB EC and SlimVent SVS EC

- **Installation**
  No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Mounting bracket included in delivery.

- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP44 with high efficiency. Maintenance-free and ball bearing mounted. Motor and impeller dynamically balanced for low-noise operation.

- **Power control**
  Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

- **Noise**
  See page 419

Description SilentBox EC

- **Casing**
  Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.

- **Impeller**
  With backward curved blades. Inlet via nozzle. SB EC 125 A forward curved impeller in aerodynamically optimised volute casing, galvanised steel sheet.

- **Electrical connection**
  Terminal box (IP54) mounted to external cable.

- **Protection category**
  IP44 (SB EC 125 A IP54) with connected duct system.

Description SlimVent SVS EC

- **Casing**
  Extremely flat casing with sound-insulating, over 50 mm thick mineral wool lining and glass fibre surface. The acoustic box placed in front of the fan wheel significantly reduces the inlet-side noises. The radiated noises are reduced to a lesser extent (see noise data above the performance diagrams).

- The retractable motor-impeller unit allows inspection and cleaning without dismantling the system components. The removal area of the motor-impeller unit must be considered.

- **Impeller**
  Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic.

- **Electrical connection**
  Terminal box (IP54) mounted to external cable.

- **Protection category**
  IP44 with connected duct system.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type SB EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54 (A), IP44 (B)																
SB EC 125 A	06132	125	520	2890	41	0.12	1.03	979	60	10.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SB EC 125 B	09624	125	530	3600	45	0.10	0.81	979	60	12.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Type SVS EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVS EC 125	00016	125	540	3530	53	0.10	0.82	979	60	6.2	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

Performance curves SB EC 125 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	46	41	39	37	36	36	31
L_{WA}	Inlet side	dB(A)	62	60	54	46	43	45	44	43
L_{WA}	Outlet side	dB(A)	79	69	69	72	71	72	68	68

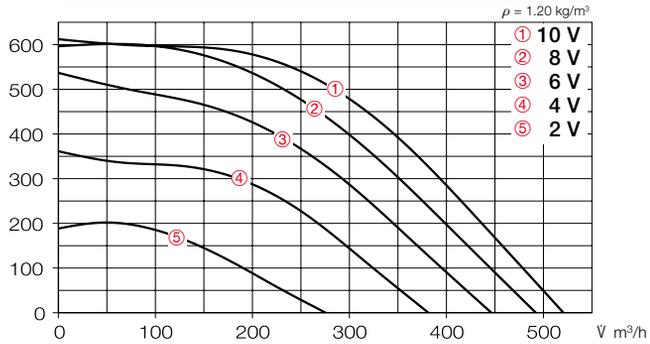

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2360	520	120	1.0	41	0.83
8	2280	490	100	0.83	40	0.73
6	2120	450	80	0.65	38	0.64
4	1830	380	50	0.43	35	0.47

Performance curves SB EC 125 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	53	41	45	51	40	38	35	31
L_{WA}	Inlet side	dB(A)	62	57	53	58	46	47	44	38
L_{WA}	Outlet side	dB(A)	82	65	68	80	75	73	67	62

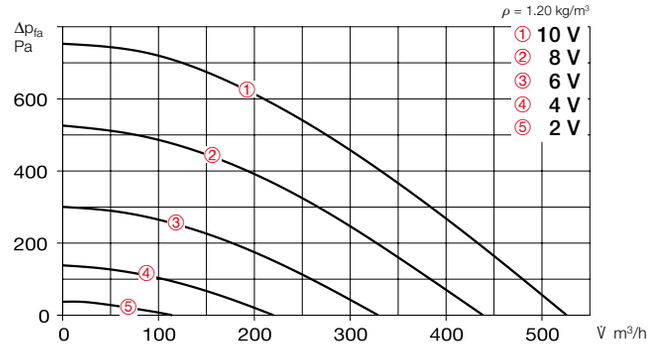

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3630	530	95	0.77	45	0.64
8	3020	440	55	0.47	42	0.45
6	2270	330	25	0.23	38	0.27
4	1510	220	10	0.10	32	0.16

Performance curves SVS EC 125

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	61	40	52	60	51	47	41	33
L_{WA}	Inlet side	dB(A)	70	65	66	61	56	57	53	45
L_{WA}	Outlet side	dB(A)	81	67	70	77	73	73	67	59

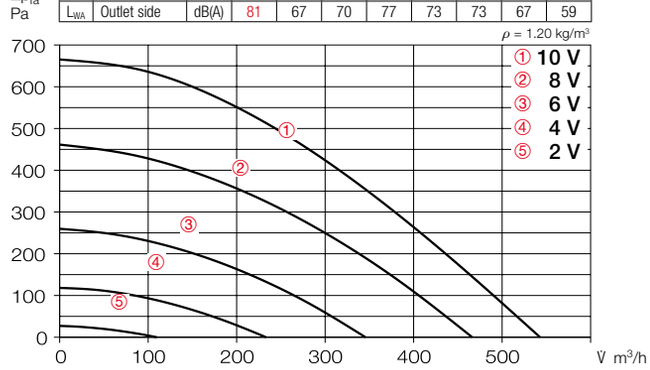

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3530	540	100	0.80	53	0.66
8	3020	470	60	0.55	49	0.45
6	2270	350	30	0.25	43	0.31
4	1530	230	15	0.15	34	0.23

Accessories

Flexible connecting sleeve
FM 125 Ref. no. 01682
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 125 Ref. no. 00857
Automatic made of plastic, white.

External wall cover grille
G 160 Ref. no. 00893
Made of plastic, white.

Protection grille
SGR 125 Ref. no. 05064
For inlet and outlet side installation. Made of powder-coated steel wire.



Duct shutter
RSKK 125 Ref. no. 05107
Automatic, made of plastic.

Flexible cross talk silencer
FSD 125 Ref. no. 00677
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 125 Coarse 70%* 08577
LFBR 125 ePM1 50%* 08531
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 0.8/125 0.8 kW No. 08709
EHR-R 1.2/125 1.2 kW No. 09433
– with integrated temp. control
EHR-R 0.8/125 TR 0.8 kW No.05293
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 125 Ref. no. 09480
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 No. 08817

* See product page 486 for detailed description.

SB EC 160

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

EC

SVS EC 160

Lowest installation height. Ideal for limited installation spaces. With sound-insulating mineral wool lining for particularly low-noise operation.

EC

Dimensions SB EC 160



Dim. in mm

SB EC 160 A, *SB EC 160 B

Dimensions SVS EC 160



Dim. in mm

Common features SilentBox SB EC and SlimVent SVS EC

- **Installation**
  See page 412.
- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP44 with high efficiency. Maintenance-free and ball bearing mounted. Motor and impeller dynamically balanced for low-noise operation.
- **Power control**
  Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.
- **Noise**
  See page 419.

Description SilentBox EC

- **Casing**
  Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.
- **Impeller**
  With backward curved blades. Inlet via nozzle. SB EC 125 A forward curved impeller in aerodynamically optimised volute casing, galvanised steel sheet.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Protection category**
  IP44 (SB EC 160 A IP54) with connected duct system.

Description SlimVent SVS EC

- **Casing**
  Extremely flat casing with sound-insulating, over 50 mm thick mineral wool lining and glass fibre surface. The acoustic box placed in front of the fan wheel significantly reduces the inlet-side noises. The radiated noises are reduced to a lesser extent (see noise data above the performance diagrams).
- The retractable motor-impeller unit allows inspection and cleaning without dismantling the system components. The removal area of the motor-impeller unit must be considered.
- **Impeller**
  Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Protection category**
  IP44 with connected duct system.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type SB EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54 (A), IP44 (B)																
SB EC 160 A	06136	160	580	2630	41	0.12	1.02	979	60	10.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SB EC 160 B	09625	160	590	3610	46	0.10	0.81	979	60	12.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Type SVS EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVS EC 160 A [3)]	00017	160	570	3610	51	0.10	0.80	979	60	8.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SVS EC 160 B	00018	160	780	2920	52	0.12	0.97	979	60	7.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.
[3)] Performance diagram at www.HeliosSelect.de.

Performance curves SB EC 160 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	45	40	42	37	38	36	31
L_{WA}	Inlet side	dB(A)	65	63	58	50	44	49	47	45
L_{WA}	Outlet side	dB(A)	78	68	68	71	68	71	69	68

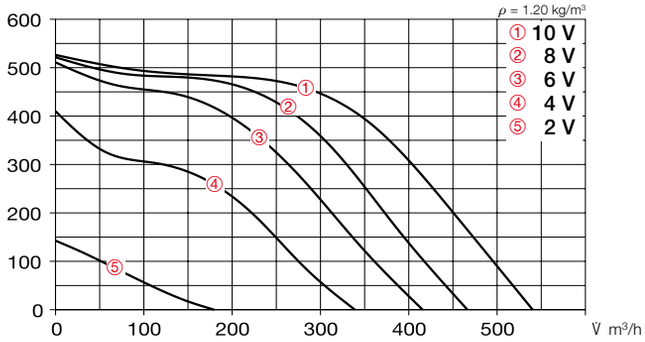

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2190	590	120	1.0	41	0.73
8	2070	550	100	0.85	40	0.65
6	1910	500	75	0.65	39	0.54
4	1650	430	50	0.43	35	0.42

Performance curves SB EC 160 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	54	41	46	52	40	36	33	30
L_{WA}	Inlet side	dB(A)	65	60	57	61	49	51	45	40
L_{WA}	Outlet side	dB(A)	82	65	69	80	74	72	67	61

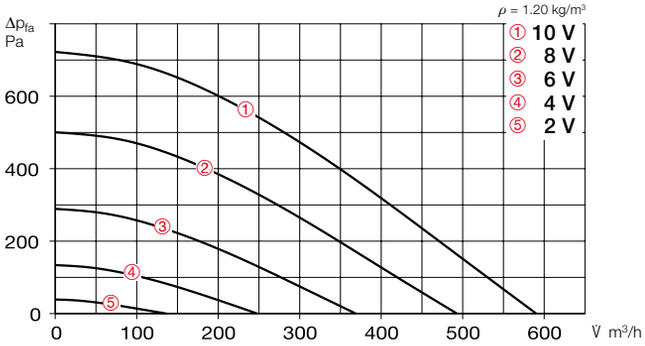

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3630	590	90	0.73	46	0.55
8	3020	490	50	0.44	41	0.36
6	2270	370	25	0.20	38	0.24
4	1510	250	10	0.10	31	0.14

Performance curves SVS EC 160 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	45	54	57	48	48	41	32
L_{WA}	Inlet side	dB(A)	69	63	66	61	56	52	51	43
L_{WA}	Outlet side	dB(A)	79	64	70	77	68	67	65	54

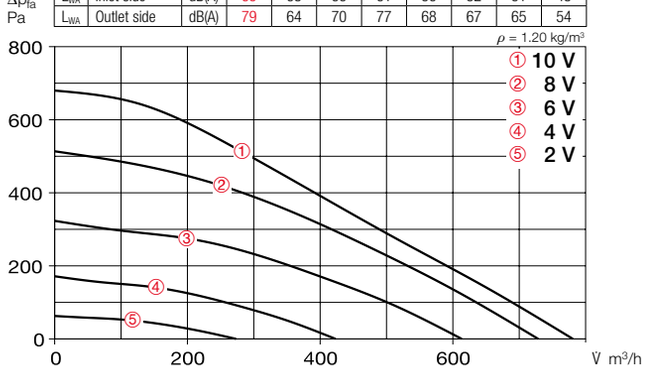

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2900	780	125	0.99	52	0.58
8	2700	730	100	0.87	50	0.49
6	2270	610	60	0.51	46	0.35
4	1550	420	20	0.20	40	0.17

Accessories

Flexible connecting sleeve
FM 160 Ref. no. 01684
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.



External wall shutter
VK 160 Ref. no. 00892
Automatic made of plastic, white.

External wall cover grille
G 160 Ref. no. 00893
Made of plastic, white.

Protection grille
SGR 160 Ref. no. 05069
For inlet and outlet side installation.
Made of galvanised steel.



Duct shutter
RSK 160 Ref. no. 05669
Automatic, made of metal.

Flexible cross talk silencer
FSD 160 Ref. no. 00678
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 160 Coarse 70%* 08578
LFBR 160 ePM1 50%* 08532
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 1.2/160 1.2 kW No. 09434
EHR-R 2.4/160 2.4 kW No. 09435
EHR-R 5/160 5.0 kW No. 08710
– with integrated temp. control
EHR-R 2.4/160 TR 2.4 kW No. 05294
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 160 Ref. no. 09481
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 No. 08817

* See product page 486 for detailed description.

SB EC 200

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

EC

SVS EC 200

Lowest installation height. Ideal for limited installation spaces. With sound-insulating mineral wool lining for particularly low-noise operation.

EC

Dimensions SB EC 200



Dim. in mm

Dimensions SVS EC 200



Dim. in mm

Common features SilentBox SB EC and SlimVent SVS EC

- **Installation**
  No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Mounting bracket included in delivery.
- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP44 with high efficiency. Maintenance-free and ball bearing mounted. Motor and impeller dynamically balanced for low-noise operation.
- **Power control**
  Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.
- **Noise**
  See page 419.

Description SilentBox EC

- **Casing**
  Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.
- **Impeller**
  With backward curved blades. Inlet via nozzle.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Protection category**
  IP44 with connected duct system.

Description SlimVent SVS EC

- **Casing**
  Extremely flat casing with sound-insulating, over 50 mm thick mineral wool lining and glass fibre surface. The acoustic box placed in front of the fan wheel significantly reduces the inlet-side noises. The radiated noises are reduced to a lesser extent (see noise data above the performance diagrams).
- The retractable motor-impeller unit allows inspection and cleaning without dismantling the system components. The removal area of the motor-impeller unit must be considered.
- **Impeller**
  Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Protection category**
  IP44 with connected duct system.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type SB EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54 (A), IP44 (B)																
SB EC 200 A	06138	200	900	2830	39	0.12	1.00	979	60	17	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SB EC 200 B	09626	200	970	2890	42	0.15	1.20	979	60	17	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Type SVS EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVS EC 200 A [3)]	03390	200	910	2780	49	0.12	1.02	979	60	8.1	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SVS EC 200 B	00019	200	1010	2880	52	0.15	1.22	979	60	8.3	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.
[3)] Performance diagram at www.HeliosSelect.de.

Performance curves SB EC 200 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	47	40	43	42	36	32	29	29
L_{WA}	Inlet side	dB(A)	63	60	58	54	46	45	44	42
L_{WA}	Outlet side	dB(A)	72	64	62	67	60	65	61	52

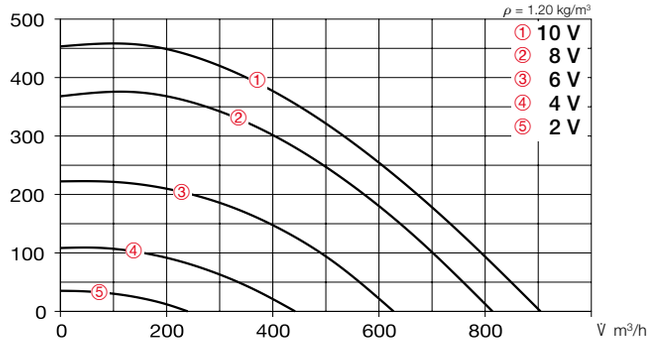

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2900	900	110	0.9	39	0.44
8	2620	810	80	0.7	38	0.35
6	2010	630	40	0.3	34	0.23
4	1390	440	20	0.2	30	0.16

Performance curves SB EC 200 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	50	42	48	42	38	33	30	30
L_{WA}	Inlet side	dB(A)	66	62	62	55	46	45	42	38
L_{WA}	Outlet side	dB(A)	73	65	70	66	61	63	58	50

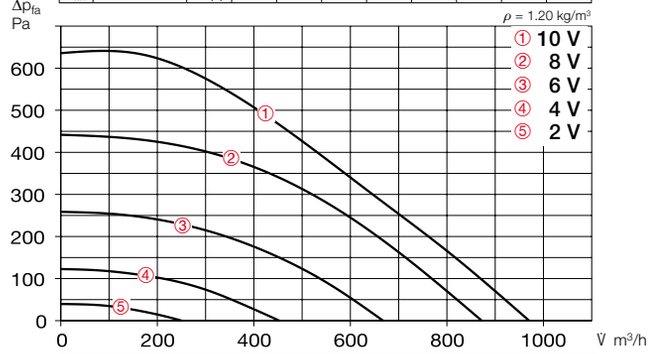

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2920	970	150	1.2	42	0.55
8	2550	870	100	0.8	40	0.41
6	1920	670	40	0.4	38	0.21
4	1280	450	20	0.2	29	0.16

Performance curves SVS EC 200 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	40	52	58	48	48	39	31
L_{WA}	Inlet side	dB(A)	69	63	65	61	55	54	53	45
L_{WA}	Outlet side	dB(A)	80	67	72	77	71	73	66	58

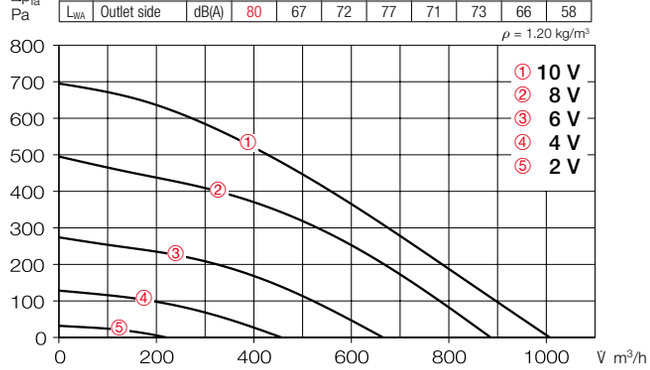

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2890	1010	150	1.18	52	0.53
8	2540	890	100	0.83	49	0.40
6	1900	665	45	0.39	42	0.24
4	1300	460	20	0.17	34	0.16

Accessories

Flexible connecting sleeve
FM 200 Ref. no. 01670
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 200 Ref. no. 00758
Made of plastic, light grey.

External wall cover grille
RAG 200 Ref. no. 00750
For placement in front of air inlet and outlet openings in facades.
Made of plastic, light grey.

Protection grille
SGR 200 Ref. no. 05066
For inlet and outlet side installation.
Made of galvanised steel.



Duct shutter
RSK 200 Ref. no. 05074
Automatic, made of metal.

Flexible cross talk silencer
FSD 200 Ref. no. 00679
Made of aluminium pipe with double-sided plug-in connectors.
Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 200 Coarse 70%* 08579
LFBR 200 ePM1 50%* 08533
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 1.2/200 1.2 kW No. 09436
EHR-R 2/200 2.0 kW No. 09437
EHR-R 5/200 5.0 kW No. 08711
– with integrated temp. control
EHR-R 5/200 TR 5.0 kW No. 05295
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 200 Ref. no. 09482
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 No. 08817

* See product page 486 for detailed description.

SB EC 250

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

EC

SVS EC 250

Lowest installation height. Ideal for limited installation spaces. With sound-insulating mineral wool lining for particularly low-noise operation.

EC

Dimensions SB EC 250



Dim. in mm

Dimensions SVS EC 250



Dim. in mm

Common features SilentBox SB EC and SlimVent SVS EC

- **Installation**
  No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Mounting bracket included in delivery.
- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP44 with high efficiency. Maintenance-free and ball bearing mounted. Motor and impeller dynamically balanced for low-noise operation.
- **Power control**
  Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

Description SilentBox EC

- **Casing**
  Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.
- **Impeller**
  With backward curved blades. Inlet via nozzle.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Protection category**
  IP44 with connected duct system.

Description SlimVent SVS EC

- **Casing**
  Extremely flat casing with sound-insulating, over 50 mm thick mineral wool lining and glass fibre surface. The acoustic box placed in front of the fan wheel significantly reduces the inlet-side noises. The radiated noises are reduced to a lesser extent (see noise data above the performance diagrams).
- The retractable motor-impeller unit allows inspection and cleaning without dismantling the system components. The removal area of the motor-impeller unit must be considered.
- **Impeller**
  Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Protection category**
  IP44 with connected duct system.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	$\dot{V}$ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type SB EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SB EC 250	09627	250	1190	2790	42	0.15	1.18	979	60	23	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Type SVS EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVS EC 250	06125	250	1210	2920	46	0.15	1.21	979	60	9.6	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

Performance curves SB EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	50	38	48	42	37	34	32	27
L_{WA}	Inlet side	dB(A)	62	54	56	46	50	49	47	38
L_{WA}	Outlet side	dB(A)	71	58	67	60	62	65	59	47

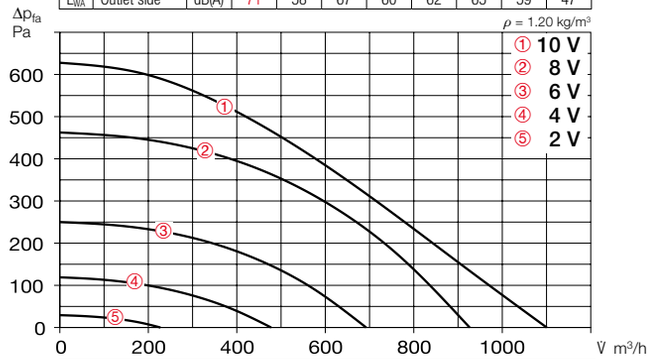

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3030	1100	140	1.1	42	0.46
8	2560	930	90	0.8	40	0.35
6	1920	690	40	0.3	38	0.21
4	1290	480	20	0.2	28	0.15

Performance curves SVS EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	54	37	50	49	43	42	35	29
L_{WA}	Inlet side	dB(A)	66	55	63	52	53	57	52	43
L_{WA}	Outlet side	dB(A)	75	59	69	69	66	69	62	52

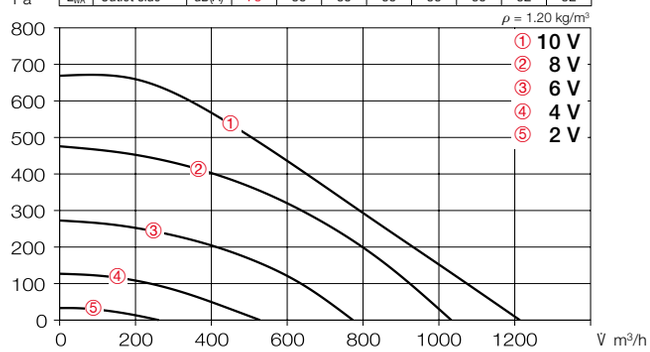

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3010	1210	150	1.2	46	0.45
8	2520	1030	95	0.80	43	0.33
6	1900	770	45	0.38	40	0.21
4	1300	530	15	0.16	31	0.10

Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power.
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Accessory details	Page
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Accessories

Flexible connecting sleeve
FM 250 Ref. no. 01672
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.



External wall shutter
VK 250 Ref. no. 00759
Automatic made of plastic, light grey.

External wall cover grille
RAG 250 Ref. no. 00751
For placement in front of air inlet and outlet openings in facades. Made of plastic, light grey.

Protection grille
SGR 250 Ref. no. 05067
For inlet and outlet side installation. Made of galvanised steel.



Duct shutter
RSK 250 Ref. no. 05673
Automatic, made of metal.

Flexible cross talk silencer
FSD 250 Ref. no. 00680
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 250 Coarse 70%* 08580
LFBR 250 ePM1 50%* 08534
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 6/250 6.0 kW No. 08712
– with integrated temp. control
EHR-R 6/250 TR 6.0 kW No. 05296
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 250 Ref. no. 09483
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

SB EC 315

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

EC

SVS EC 315

Lowest installation height. Ideal for limited installation spaces. With sound-insulating mineral wool lining for particularly low-noise operation.

EC

Dimensions SB EC 315



Dim. in mm

Dimensions SVS EC 315



Dim. in mm

Common features SilentBox SB EC and SlimVent SVS EC

- **Installation**
  No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Mounting bracket included in delivery.
- **Drive**
  Energy-saving, speed-controllable EC external rotor motor in protection category IP44 with high efficiency. Maintenance-free and ball bearing mounted. Motor and impeller dynamically balanced for low-noise operation.
- **Power control**
  Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.
- **Noise**
  See page 419.

Description SilentBox EC

- **Casing**
  Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.
- **Impeller**
  With backward curved blades. Inlet via nozzle.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable (aprx. 60 cm long).
- **Protection category**
  IP54 with connected duct system.

Description SlimVent SVS EC

- **Casing**
  Extremely flat casing with sound-insulating, over 50 mm thick mineral wool lining and glass fibre surface. The acoustic box placed in front of the fan wheel significantly reduces the inlet-side noises. The radiated noises are reduced to a lesser extent (see noise data above the performance diagrams).
- The retractable motor-impeller unit allows inspection and cleaning without dismantling the system components. The removal area of the motor-impeller unit must be considered.
- **Impeller**
  Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Protection category**
  IP44 with connected duct system.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type SB EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54																
SB EC 315 A	06157	315	2490	1660	49	0.36	1.56	979	60	35	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SB EC 315 B	09628	315	3280	2210	53	0.85	3.73	979	60	38	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Type SVS EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP44																
SVS EC 315 A	06126	315	1690	2330	50	0.21	1.66	979	60	16.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SVS EC 315 B [3)]	00667	315	1940	2880	52	0.32	2.46	979	60	16.1	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.
[3)] Performance diagram at www.HeliosSelect.de.

Performance curves SB EC 315 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	46	56	43	39	34	32	28
L_{WA}	Inlet side	dB(A)	70	62	68	49	45	49	45	39
L_{WA}	Outlet side	dB(A)	78	67	75	66	70	66	60	52

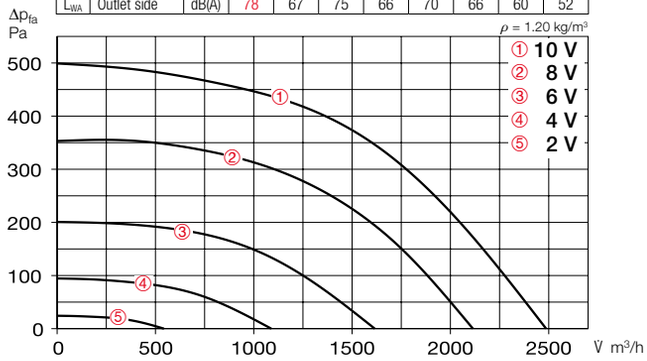

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1660	2490	310	1.4	49	0.45
8	1420	2120	200	0.9	46	0.34
6	1070	1620	100	0.5	39	0.22
4	730	1090	40	0.2	31	0.13

Performance curves SB EC 315 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	61	52	59	52	49	42	38	34
L_{WA}	Inlet side	dB(A)	73	67	70	58	53	58	53	47
L_{WA}	Outlet side	dB(A)	83	71	79	72	77	74	68	61

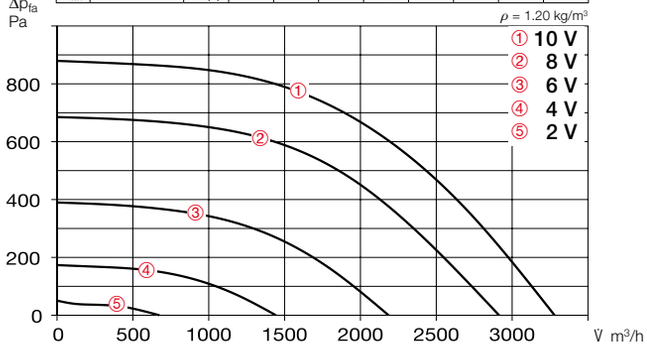

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2210	3280	740	3.3	53	0.81
8	1960	2910	520	2.3	51	0.64
6	1470	2190	230	1.0	47	0.38
4	980	1440	80	0.5	37	0.20

Performance curves SVS EC 315 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	58	39	50	55	49	46	41	37
L_{WA}	Inlet side	dB(A)	68	60	63	55	58	60	58	52
L_{WA}	Outlet side	dB(A)	79	63	68	75	69	72	67	63

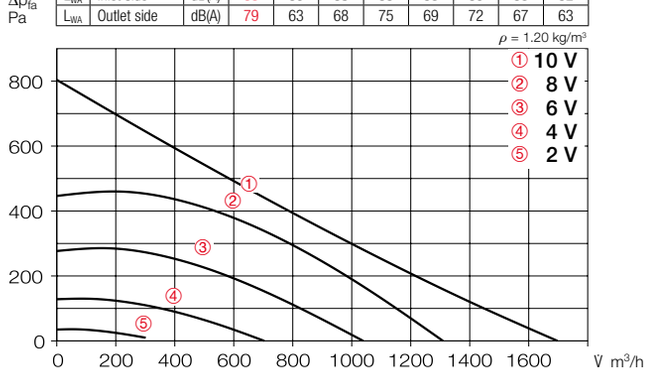

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2690	1700	210	1.7	50	0.44
8	2130	1310	110	0.88	48	0.30
6	1670	1040	55	0.47	42	0.19
4	1130	700	20	0.20	36	0.10

Accessories

Flexible connecting sleeve
FM 315 Ref. no. 01674
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 315 Ref. no. 00760
Automatic made of plastic, light grey.

External wall cover grille
RAG 315 Ref. no. 00752
For placement in front of air inlet and outlet openings in facades. Made of plastic, light grey.

Protection grille
SGR 315 Ref. no. 05068
For inlet and outlet side installation. Made of galvanised steel.



Duct shutter
RSK 315 Ref. no. 05674
Automatic, made of metal.

Flexible cross talk silencer
FSD 315 Ref. no. 00681
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 315 Coarse 70%* 08581
LFBR 315 ePM1 50%* 08535
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 6/315 6.0 kWNo. 08713
– with integrated temp. control
EHR-R 6/315 TR 6.0 kWNo. 05301
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 315 Ref. no. 09484
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

SB EC 355

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

EC

Dimensions SB EC 355

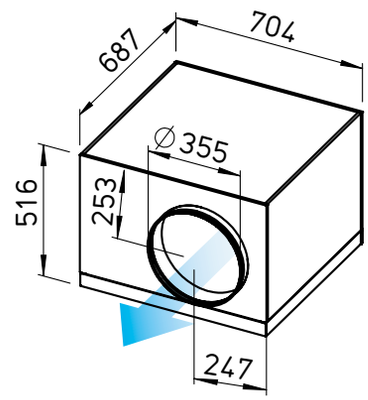

Dim. in mm

Casing
Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.

Impeller
With backward curved blades. Inlet via nozzle.

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP44 with high efficiency. Maintenance-free and ball bearing mounted. Motor and impeller dynamically balanced for low-noise operation.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) mounted to external cable (aprx. 60 cm long).

Protection category
IP44 with connected duct system.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Mounting bracket included in delivery.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type SB EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54																
SB EC 355	06139	355	2710	1630	53	0.36	1.56	979	60	38	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

Performance curves SB EC 355

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	61	48	61	44	42	35	28	26
L_{WA}	Inlet side	dB(A)	72	65	70	50	48	49	45	41
L_{WA}	Outlet side	dB(A)	79	68	77	67	70	67	60	53

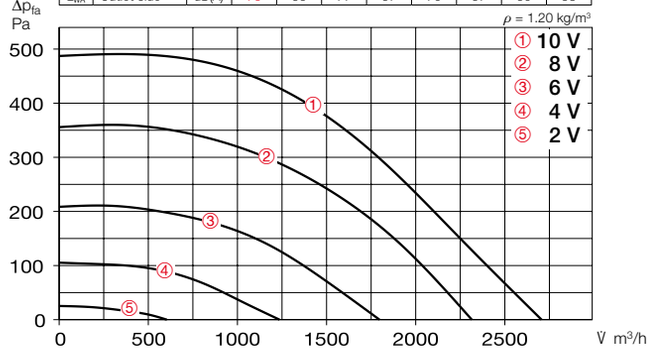

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1650	2710	350	1.5	53	0.46
8	1410	2320	220	1.0	51	0.34
6	1060	1800	110	0.5	40	0.22
4	720	1240	40	0.2	30	0.12

Accessory details

Accessory details	Page
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Accessories

Flexible connecting sleeve
FM 355 Ref. no. 01675
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.



External wall shutter
VK 355 Ref. no. 00761
Automatic made of plastic, light grey.

External wall cover grille
RAG 355 Ref. no. 00753
For placement in front of air inlet and outlet openings in facades. Made of plastic, light grey.

Duct shutter
RSK 355 Ref. no. 05650
Automatic, made of metal.

Flexible cross talk silencer
FSD 355 Ref. no. 00682
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 355 Coarse 70%* 08583
LFBR 355 ePM1 50%* 08536
Air filter with large surface area and absorption capacity for installation in pipeline. Connections with double lip seal, matched to standard.

Electric heating element
EHR-R 355 9.0 kW No. 08656
– with integrated temp. control
EHR-R 9/355 TR 9.0 kW No. 05297
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 355 Ref. no. 08790
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

SB EC 400

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

Dimensions SB EC 400

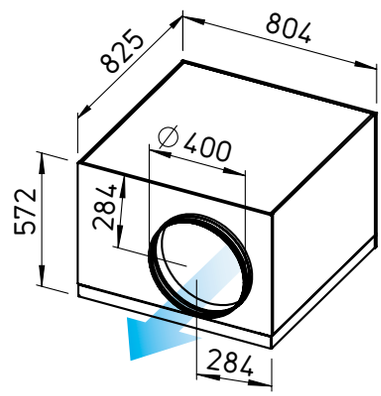

Dim. in mm

Casing
Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.

Impeller
With backward curved blades. Inlet via nozzle.

Drive
Energy-saving, speed-controllable EC external rotor motor in protection category IP44 with high efficiency. Maintenance-free and ball bearing mounted. Motor and impeller dynamically balanced for low-noise operation.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) mounted to external cable (aprx. 60 cm long).

Protection category
IP44 with connected duct system.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Mounting bracket included in delivery.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Connection Ø	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surf-mount.	
		mm	V̇ m³/h	min⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type SB EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54																
SB EC 400 A	06140	400	2980	1640	51	0.36	1.59	979	60	52	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SB EC 400 B	09629	400	4570	1510	58	0.80	3.49	979	60	55	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

Performance curves SB EC 400 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	59	43	58	41	37	34	28	29
L_{WA}	Inlet side	dB(A)	68	59	67	50	50	51	46	45
L_{WA}	Outlet side	dB(A)	77	63	73	65	71	66	58	58

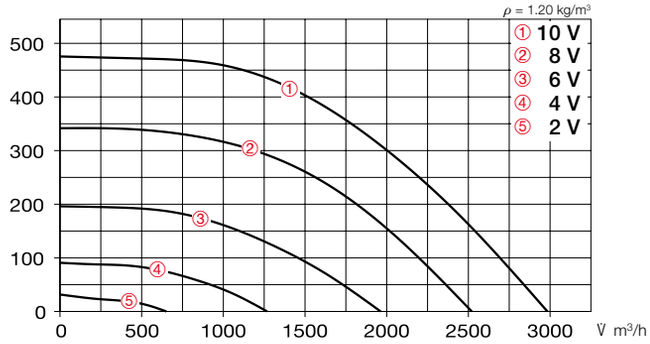

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1660	2980	310	1.3	51	0.37
8	1410	2520	190	0.8	49	0.27
6	1060	1960	90	0.4	38	0.16
4	720	1270	40	0.2	30	0.11

Performance curves SB EC 400 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	66	57	65	48	44	38	34	31
L_{WA}	Inlet side	dB(A)	76	70	73	64	58	53	49	44
L_{WA}	Outlet side	dB(A)	83	74	80	71	75	68	62	56

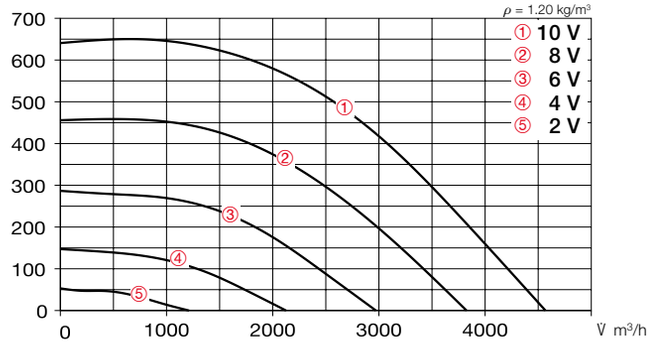

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1510	4570	710	3.1	58	0.56
8	1270	3830	430	1.9	54	0.40
6	980	2970	210	0.9	46	0.25
4	700	2130	90	0.4	37	0.15

Accessory details — Page

Filters, heating elements and silencers 483 ff.
Temperature control systems for heating elements 489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets 563 ff.
Disc valves 584 ff.
Universal control system, electronic controllers, speed potentiometer 615 ff.

Accessories

Flexible connecting sleeve
FM 400 Ref. no. 01676
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 400 Ref. no. 00762
Automatic made of plastic, light grey.

External wall cover grille
RAG 400 Ref. no. 00754
For placement in front of air inlet and outlet openings in facades. Made of plastic, light grey.

Duct shutter
RSK 400 Ref. no. 05651
Automatic, made of metal.

Flexible cross talk silencer
FSD 400 Ref. no. 00683
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 400 Coarse 70%* 08582
LFBR 400 ePM1 50%* 08537
Air filter with large surface area and absorption capacity for installation in pipeline. Connections with double lip seal, matched to standard.

Electric heating element
EHR-R 9/400 9.0 kWNo. 08657
– with integrated temp. control
EHR-R 9/400 TR 9.0 kWNo. 05299
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 400 Ref. no. 09524
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

SB 125

Efficiency class

D SB + accessories*

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

SVS 125

Efficiency class

C SVS + accessories*

Lowest installation height. Ideal for limited installation spaces. With sound-insulating mineral wool lining for particularly low-noise operation.

Dimensions SB 125



Dim. in mm

Dimensions SVS 125



Dim. in mm

Common features SB and SVS

- **Installation**
  No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation (exception: SVS must not be installed with the retractable motor-impeller unit upward).
- **Motor**
  Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Description SilentBox

- **Casing**
  Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan and casing spiral. Retractable motor and impeller. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.
- **Impeller**
  Low-noise forward curved impeller in aerodynamically optimised volute casing, made of galvanised steel sheet. Inlet via nozzle.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable (aprx. 60 cm long).
- **Motor protection**
  Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.
- **Power control**
  From 0 – 100 % possible using electronic controller or step transformer (see table).
- **Protection category**
  IP44

Description SlimVent SVS

- **Casing**
  Extremely flat casing with sound-insulating, over 50 mm thick mineral wool lining and glass fibre surface. The acoustic box placed in front of the fan wheel significantly reduces the inlet-side noises. The radiated noises are reduced to a lesser extent (see noise data above the performance diagrams).
- The retractable motor-impeller unit allows inspection and cleaning without dismantling the system components. The removal area of the motor-impeller unit must be considered.
- **Impeller**
  Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced for low-noise operation.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Motor protection**
  Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.
- **Power control**
  From 0 – 100 % possible using electronic controller or step transformer (see table) or two level operation with type DS 2/2 (accessories).

DS 2/2	Ref. no. 01267

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step		Electronic[2] Speed control., cont. var. flush-mount. / surf-mount.	
		V̇ m³/h	min⁻¹	db(A) in 1m	W	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Type SB, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44															
SB 125 A	09506	230	1130	28	61	0.27	0.27	508	60	60	12.0	**TSW 0.3**	03608	**ESU 1 / ESA 1**	00236 / 00238
SB 125 C	09562	440	1850	37	122	0.53	0.53	508	60	60	12.0	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
Type SVS, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP33															
SVS 125 B	00130	400/270 [1]	2570/1710 [1]	45/36 [1]	61/45 [1]	0.27/0.20 [1]	0.26 [1]	934.1	60	60	5.9	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238

[1] Values refer to the two performance levels (see performance diagram). [2] Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming. *See ErP product data sheet at www.HeliosSelect.de.

Performance curves SB 125 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	35	28	28	27	27	25	26	27
L_{WA}	Inlet side	dB(A)	53	51	48	43	38	33	29	17
L_{WA}	Outlet side	dB(A)	61	53	54	55	56	50	43	30

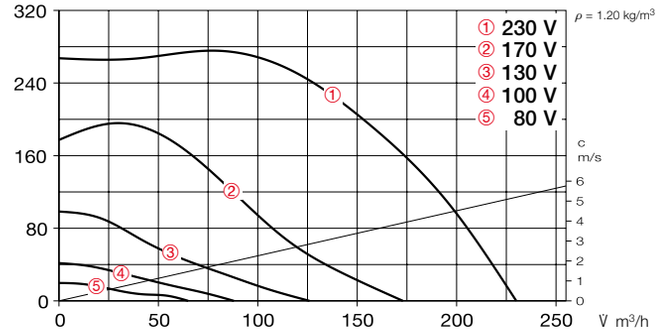

Performance curves SB 125 C

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	44	35	42	36	33	29	28	28
L_{WA}	Inlet side	dB(A)	62	59	57	54	46	44	40	30
L_{WA}	Outlet side	dB(A)	70	62	63	65	64	62	55	46

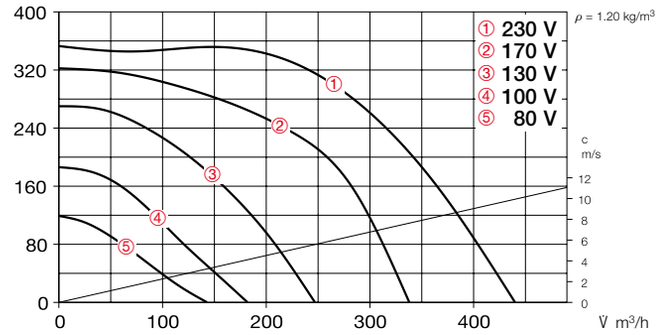

Performance curves SVS 125 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	54	38	48	51	43	39	33	30
L_{WA}	Inlet side	dB(A)	63	58	60	53	44	44	43	36
L_{WA}	Outlet side	dB(A)	72	61	65	68	64	61	57	49

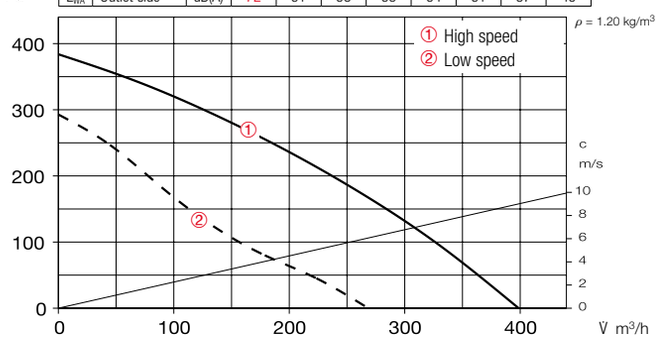

Protection category

IP44 with connected duct system.

Noise

The total level and range are specified above the performance diagram for

- Case-radiated sound power.
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise as sound pressure at **1 m** (free field conditions) are also specified in the type table.

Accessory details	Page
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Accessories

Flexible connecting sleeve
FM 125 Ref. no. 01682
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.



External wall shutter
VK 125 Ref. no. 00857
Automatic made of plastic, white.

External wall cover grille
G 160 Ref. no. 00893
Made of plastic, white.

Protection grille
SGR 125 Ref. no. 05064
For inlet and outlet side installation. Made of powder-coated steel wire.



Duct shutter
RSKK 125 Ref. no. 05107
Automatic, made of plastic.

Flexible cross talk silencer
FSD 125 Ref. no. 00677
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 125 Coarse 70%* 08577
LFBR 125 ePM1 50%* 08531
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 0.8/125 0.8 kW No. 08709
EHR-R 1.2/125 1.2 kW No. 09433
– with integrated temp. control
EHR-R 0.8/125 TR 0.8 kW No. 05293
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 125 Ref. no. 09480
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 No. 08817

* See product page 486 for detailed description.

Round duct fans

SB 160

Efficiency class

D SB + accessories*

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

SVS 160

Efficiency class

C SVS 160 L + accessories*

Lowest installation height. Ideal for limited installation spaces. With sound-insulating mineral wool lining for particularly low-noise operation.

Dimensions SB 160



Dim. in mm

Dimensions SVS 160



Dim. in mm

Common features SB and SVS

- **Installation see page** 426.
- **Motor see page** 426.
- **Noise see page** 427.

Description SilentBox

- **Casing**
  Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.
- **Impeller**
  Low-noise forward curved impeller in aerodynamically optimised volute casing, made of galvanised steel sheet. Inlet via nozzle.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable (aprx. 60 cm long).
- **Motor protection**
  Through built-in thermal contacts wired in series to the winding, which automatically activated and deactivate again after cooling.
- **Power control**
  From 0 – 100 % possible using electronic controller or step transformer (see table).
- **Protection category**
  IP44

Description SlimVent SVS

- **Casing**
  Extremely flat casing with sound-insulating, over 50 mm thick mineral wool lining and glass fibre surface. The acoustic box placed in front of the fan wheel significantly reduces the inlet-side noises. The radiated noises are reduced to a lesser extent (see noise data above the performance diagrams).
- The retractable motor-impeller unit allows inspection and cleaning without dismantling the system components. The removal area of the motor-impeller unit must be considered.
- **Impeller**
  Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced for low-noise operation.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Motor protection**
  Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.
- **Power control**
  From 0 – 100 % possible using electronic controller or step transformer (see table) or two level operation with type DS 2/2 (accessories).
  DS 2/2 Ref. no. 01267
- **Protection category**
  IP44 with connected duct system.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step		Electronic[2] Speed controll., cont. var. flush-mount. / surf-mount.	
		V̇ m³/h	min⁻¹	db(A) in 1m	W	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Type SB, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44 (B), IP33 (D)															
SB 160 B	09508	360	1650	36	105	0.46	0.46	508	60	60	13.0	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
SB 160 D	09563	580	2220	43	164	0.72	0.72	508	60	60	10.3	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
Type SVS, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP33															
SVS 160 K	00131	440/300 [1]	2560/1730 [1]	44/35 [1]	61/45 [1]	0.26/0.20 [1]	0.26 [1]	934.1	60	60	7.6	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
SVS 160 L	02653	670/390 [1]	2520/1530 [1]	50/39 [1]	108/69 [1]	0.47/0.30 [1]	0.45 [1]	934.1	60	60	7.8	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238

[1] Values refer to the two performance levels (see performance diagram). [2] Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming. * See ErP product data sheet at www.HeliosSelect.de.

Performance curves SB 160 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	43	40	39	34	32	28	27	27
L_{WA}	Inlet side	dB(A)	61	59	56	50	44	39	35	26
L_{WA}	Outlet side	dB(A)	68	61	61	62	61	58	53	44

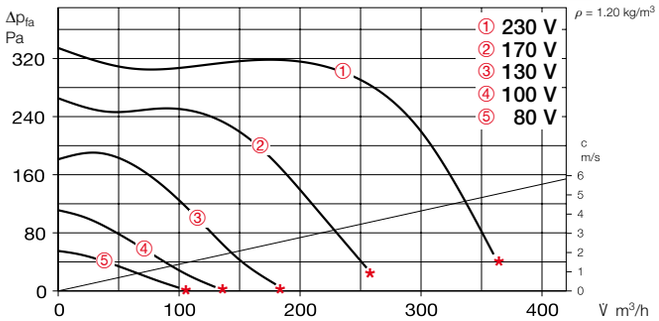

* Note the required minimum system resistance.

Performance curves SB 160 D

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	50	47	44	41	34	32	30	28
L_{WA}	Inlet side	dB(A)	67	65	60	53	44	48	46	45
L_{WA}	Outlet side	dB(A)	79	68	71	72	69	71	69	69

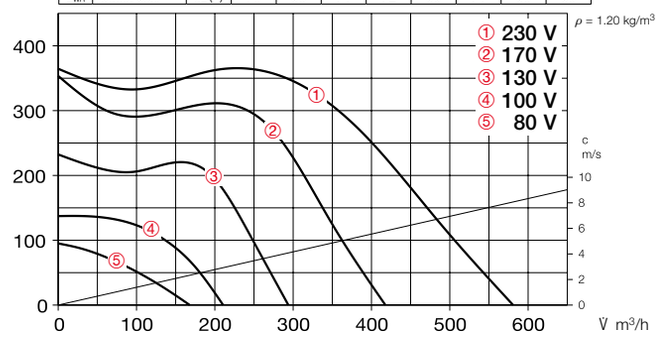

Performance curves SVS 160 K

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	38	47	50	40	37	32	31
L_{WA}	Inlet side	dB(A)	63	58	61	50	40	45	44	38
L_{WA}	Outlet side	dB(A)	70	60	66	65	59	56	56	48

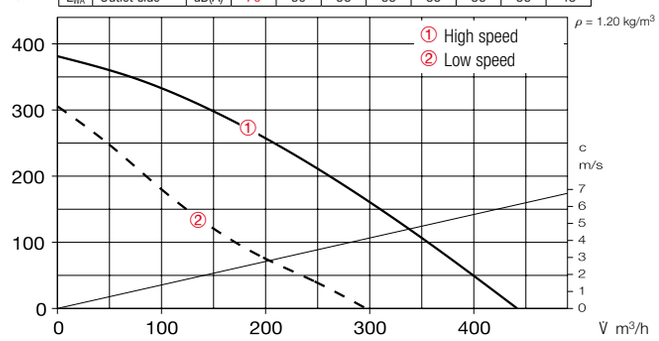

Performance curves SVS 160 L

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	58	40	53	55	46	44	38	31
L_{WA}	Inlet side	dB(A)	66	60	64	58	50	47	48	35
L_{WA}	Outlet side	dB(A)	75	62	67	73	66	63	63	51

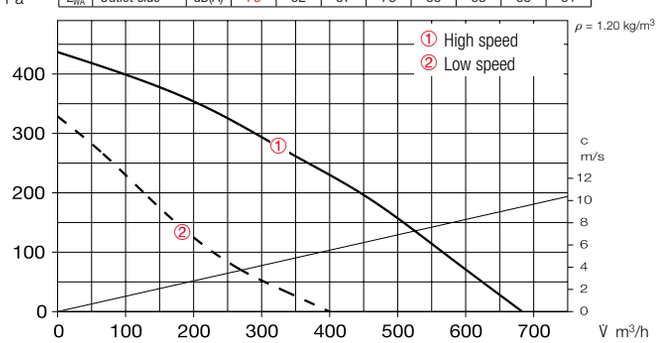

Accessories

Flexible connecting sleeve
FM 160 Ref. no. 01684
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.



External wall shutter
VK 160 Ref. no. 00892
Automatic made of plastic, white.

External wall cover grille
G 160 Ref. no. 00893
Made of plastic, white.

Protection grille
SGR 160 Ref. no. 05069
For inlet and outlet side installation. Made of galvanised steel.



Duct shutter
RSK 160 Ref. no. 05669
Automatic, made of metal.

Flexible cross talk silencer
FSD 160 Ref. no. 00678
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 160 Coarse 70%* 08578
LFBR 160 ePM1 50%* 08532
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 1.2/160 1.2 kWNo. 09434
EHR-R 2.4/160 2.4 kWNo. 09435
EHR-R 5/160 5.0 kWNo. 08710
– with integrated temp. control
EHR-R 2.4/160 TR 2.4 kWNo. 05294
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 160 Ref. no. 09481
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 No. 08817

* See product page 486 for detailed description.

SB 200

Efficiency class

B SB 200 C + accessories*

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

SVS 200

Lowest installation height. Ideal for limited installation spaces. With sound-insulating mineral wool lining for particularly low-noise operation.

Dimensions SB 200



Dim. in mm

Dimensions SVS 200



Dim. in mm

Common features SB and SVS

- **Installation**
  No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation (exception: SVS must not be installed with the retractable motor-impeller unit upward).
- **Motor**
  Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Description SilentBox

- **Casing**
  Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.
- **Impeller**
  With backward curved blades made of high-quality plastic. Inlet via nozzle.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable (aprx. 60 cm long).
- **Motor protection**
  Through built-in thermal contacts wired in series to the winding, which automatically activated and deactivate again after cooling.
- **Power control**
  From 0 – 100 % possible using electronic controller or step transformer (see table).
- **Protection category**
  IP44.

Description SlimVent SVS

- **Casing**
  Extremely flat casing with sound-insulating, over 50 mm thick mineral wool lining and glass fibre surface. The acoustic box placed in front of the fan wheel significantly reduces the inlet-side noises. The radiated noises are reduced to a lesser extent (see noise data above the performance diagrams).
- The retractable motor-impeller unit allows inspection and cleaning without dismantling the system components. The removal area of the motor-impeller unit must be considered.
- **Impeller**
  Energy-saving centrifugal impeller with backward curved blades made of high-quality plastic. Dynamically balanced for low-noise operation.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Motor protection**
  Through built-in thermal contacts wired in series to the winding, automatic deactivation and reactivation after cooling.
- **Power control**
  From 0 – 100 % using electronic controller or step transformer (see table).
- **Protection category**
  IP44 with connected duct system.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step		Electronic[1] Speed controll., cont. var. flush-mount. / surf-mount.	
		V̇ m³/h	min⁻¹	db(A) in 1m	W	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Type SB, SB, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP33															
SB 200 C	09510	810	2520	44	105	0.46	0.46	508	70	70	19.0	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
SB 200 D	09564	1030	2700	48	160	0.69	0.83	508	70	50	19.7	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238
Type SVS, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP33															
SVS 200 K	00132	940	2710	55	163	0.71	0.83	508	70	50	9.2	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238

[1] Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

* See ErP product data sheet at www.HeliosSelect.de.

Performance curves SB 200 C

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	51	37	51	40	36	36	29	28
L_{WA}	Inlet side	dB(A)	62	58	58	49	42	41	38	33
L_{WA}	Outlet side	dB(A)	69	59	65	61	57	60	56	49

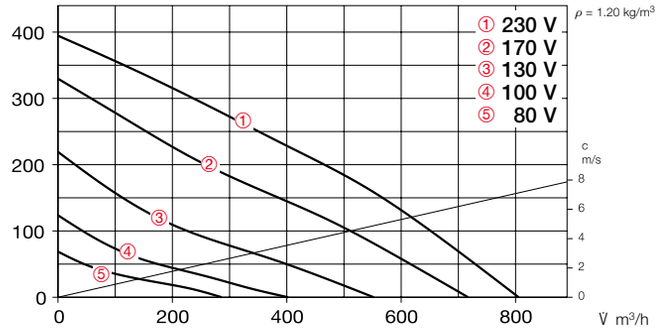

Performance curves SB 200 D

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	55	42	53	48	40	37	32	29
L_{WA}	Inlet side	dB(A)	65	60	62	57	48	41	40	39
L_{WA}	Outlet side	dB(A)	73	62	68	66	63	62	58	60

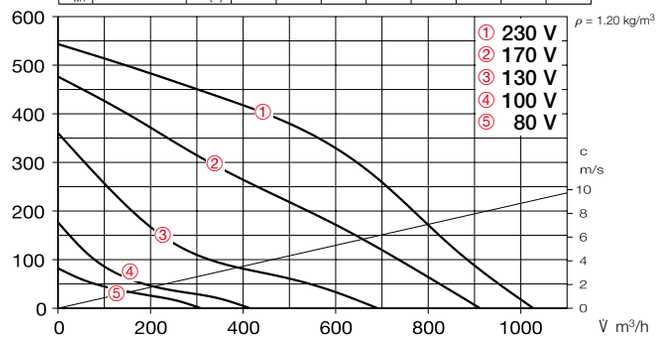

Performance curves SVS 200 K

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	63	45	55	61	50	45	38	35
L_{WA}	Inlet side	dB(A)	71	65	67	61	54	49	49	46
L_{WA}	Outlet side	dB(A)	81	67	74	78	72	70	66	61

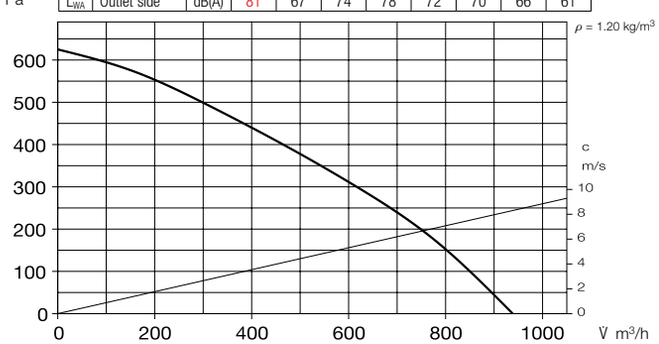

Noise

The total level and range are specified above the performance diagram for

- ☐ Case-radiated sound power.
- ☐ Inlet/outlet side sound power in dB(A).
- ☐ The case-radiated noise as sound pressure at **1 m** (free field conditions) are also specified in the type table.

Accessory details	Page
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

References	Page
Techn. description	362
Selection table	363
Planning information	14 ff.
Modular system	360

Accessories

Flexible connecting sleeve
FM 200 Ref. no. 01670
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.



External wall shutter
VK 200 Ref. no. 00758
Automatic made of plastic, light grey.

External wall cover grille
RAG 200 Ref. no. 00750
For placement in front of air inlet and outlet openings in facades. Made of plastic, light grey.

Protection grille
SGR 200 Ref. no. 05066
For inlet and outlet side installation. Made of galvanised steel.



Duct shutter
RSK 200 Ref. no. 05074
Automatic, made of metal.

Flexible cross talk silencer
FSD 200 Ref. no. 00679
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 200 Coarse 70%* 08579
LFBR 200 ePM1 50%* 08533
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 1.2/200 1.2 kW No. 09436
EHR-R 2/200 2.0 kW No. 09437
EHR-R 5/200 5.0 kW No. 08711
– with integrated temp. control
EHR-R 5/200 TR 5.0 kW No. 05295
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 200 Ref. no. 09482
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHST 300 T38 No. 08817

* See product page 486 for detailed description.

SB 250 C

Efficiency class

C SB + accessories*

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

SB 250 E

Lowest installation height. Ideal for limited installation spaces. With sound-insulating mineral wool lining for particularly low-noise operation.

Dimensions SB 250 C



Dim. in mm

Dimensions SB 250 E



Dim. in mm

Common features SB 250 C and E

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation.

Motor
Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Motor protection
Through built-in thermal contacts wired in series to the winding, which automatically activated and deactivate again after cooling.

Power control
From 0 – 100 % possible using electronic controller or step transformer (see table).

Electrical connection
Terminal box (IP54) mounted to external cable (aprx. 60 cm long).

Protection category
IP44.

Description SB 250 C

Casing
Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.

Impeller
Forward curved impeller in aerodynamically optimised volute casing, made of galvanised steel sheet. Inlet via nozzle.

Description SB 250 E

Casing
Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm).
Removable cover with locking clamp. Freely accessible fan.
Removable motor-impeller unit.
Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø.
All parts made of galvanised steel sheet.

Impeller
With backward curved blades made of high-quality plastic. Dynamically balanced for low-noise operation. Inlet via nozzle.

Reference	Page
Techn. description	362
Selection table	363
Planning information	14 ff.
Modular system	360

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Wgt net aprx.	Transformer speed controller 5-step		Electronic[1] Speed controll., cont. var. flush-mount. / surf-mount.	
		V̇ m³/h	min⁻¹	db(A) in 1m	W	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Type SB, Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, IP44 (C), IP33 (E)															
SB 250 C	09512	960	2120	43	255	1.13	1.13	508	50	50	18.0	**TSW 1.5**	01495	**ESU 3 / ESA 3**	00237 / 00239
SB 250 E	09565	1080	2690	45	165	0.71	0.86	508	70	50	33.4	**TSW 1.5**	01495	**ESU 1 / ESA 1**	00236 / 00238

[1] Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.

* See ErP product data sheet at www.HeliosSelect.de.

Performance curves SB 250 C

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	47	38	45	39	34	36	35	36
L_{WA}	Inlet side	dB(A)	63	59	58	55	50	47	46	44
L_{WA}	Outlet side	dB(A)	70	61	60	63	62	63	61	58

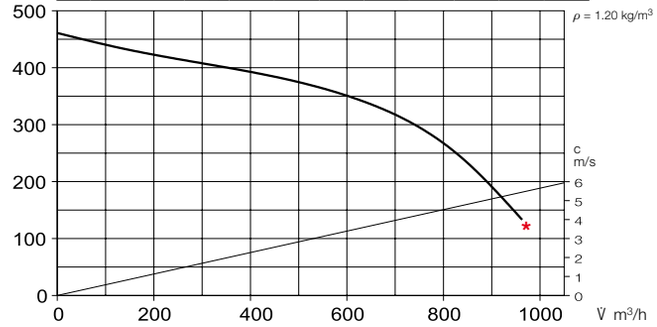

* Note the required minimum system resistance.

Performance curves SB 250 E

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	52	38	51	44	38	33	30	28
L_{WA}	Inlet side	dB(A)	62	55	57	47	50	46	44	46
L_{WA}	Outlet side	dB(A)	73	57	69	63	65	66	61	62

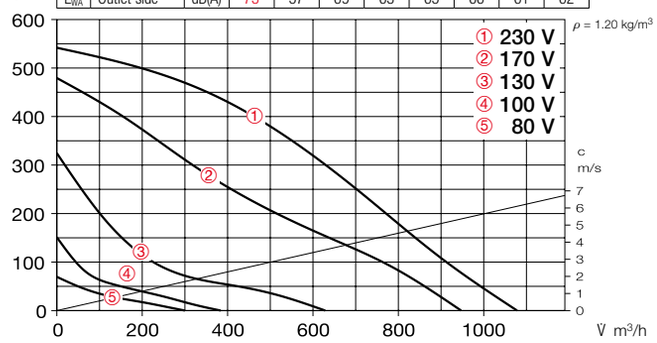

Noise

The total level and range are specified above the performance diagram for

- ▢ Case-radiated sound power.
- ▢ Inlet/outlet side sound power in dB(A).
- ▢ The case-radiated noise as sound pressure at **1 m** (free field conditions) are also specified in the type table.

Accessory details	Page
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Accessories

Flexible connecting sleeve
FM 250 Ref. no. 01672
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 250 Ref. no. 00759
Automatic made of plastic, light grey.

External wall cover grille
RAG 250 Ref. no. 00751
For placement in front of air inlet and outlet openings in facades. Made of plastic, light grey.

Protection grille
SGR 250 Ref. no. 05067
For inlet and outlet side installation. Made of galvanised steel.



Duct shutter
RSK 250 Ref. no. 05673
Automatic, made of metal.

Flexible cross talk silencer
FSD 250 Ref. no. 00680
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 250 Coarse 70%* 08580
LFBR 250 ePM1 50%* 08534
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 6/250 6.0 kW No. 08712
– with integrated temp. control
EHR-R 6/250 TR 6.0 kW No. 05296
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 250 Ref. no. 09483
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

SBD 315

Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.

Dimensions SBD 315

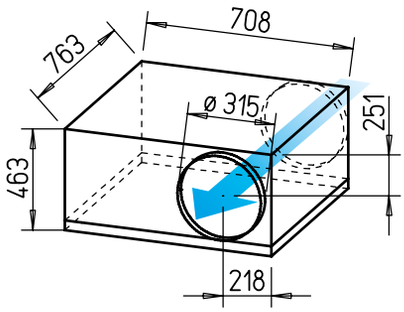

Dim. in mm

Casing
Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm).
Removable cover with locking clamp. Freely accessible fan.
Removable motor-impeller unit.
Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø.
All parts made of galvanised steel sheet.

Impeller
With backward curved blades made of high-quality plastic. Dynamically balanced for low-noise operation. Inlet via nozzle.

Motor
Enclosed, ball bearing mounted external rotor motor with humidity protection, insulation class F, for continuous operation and maintenance-free.

Motor protection
With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker (see type table).

Power control
Possible through voltage reduction using 5-step transformer or electronic (continuously variable).

Electrical connection
Terminal box (IP54) mounted to external cable (ca. 60 cm long).

Protection category
IP54.

Installation
No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation.

Noise
The total level and range are specified above the performance diagram for
- Case-radiated sound power
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case radiation	Power consum.	Power consump. at rated voltage	Power consump. with control	Wiring diagram	Max air flow temp. at rated voltage	Max air flow temp. with control	Weight net approx.	Speed controller 5-step without motor prot. circ. breaker		Speed controller 5-step with motor prot. circ. breaker	
		V̇ m³/h	min⁻¹	db(A) in 1m	W	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Type SBD, Three-phase current motor, 230/400 V, 50 Hz, IP54															
SBD 315 A	09718	2200	1350	47	215	0.73/0.42	0.44	860	60	60	46.0	**TSD 0.8**[1]	01500	**RDS 1**	01314

[1] Motor protection circuit breaker required, Type MD, No. 05849, see accessories.

Performance curves SBD 315 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	54	51	51	37	36	31	29	28
L_{WA}	Inlet side	dB(A)	64	62	57	41	35	35	32	29
L_{WA}	Outlet side	dB(A)	70	68	64	53	53	51	50	38

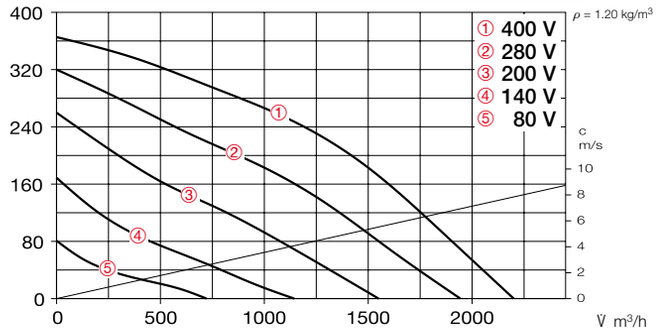

Accessory details	Page
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Accessories

Flexible connecting sleeve
FM 315 Ref. no. 01674
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.
2 pcs required for inlet and outlet side application.

External wall shutter
VK 315 Ref. no. 00760
Automatic made of plastic, light grey.

External wall cover grille
RAG 315 Ref. no. 00752
For placement in front of air inlet and outlet openings in facades. Made of plastic, light grey.

Protection grille
SGR 315 Ref. no. 05068
For inlet and outlet side installation. Made of galvanised steel.



Duct shutter
RSK 315 Ref. no. 05674
Automatic, made of metal.

Flexible cross talk silencer
FSD 315 Ref. no. 00681
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Air filter box
LFBR 315 Coarse 70%* 08581
LFBR 315 ePM1 50%* 08535
Air filter with large surface area, for installation in pipeline.

Electric heating element
EHR-R 6/315 6.0 kWNo. 08713
– with integrated temp. control
EHR-R 6/315 TR 6.0 kWNo. 05301
Room or duct sensor (TFK/TFR, Accessories) required.

Temperature control system for electric heating element EHR-R
EHS Ref. no. 05002

Warm water heating element
WHR 315 Ref. no. 09484
Compact heat exchanger for installation in duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 486 for detailed description.

Helios rectangular duct fans.
Perfect system solutions.

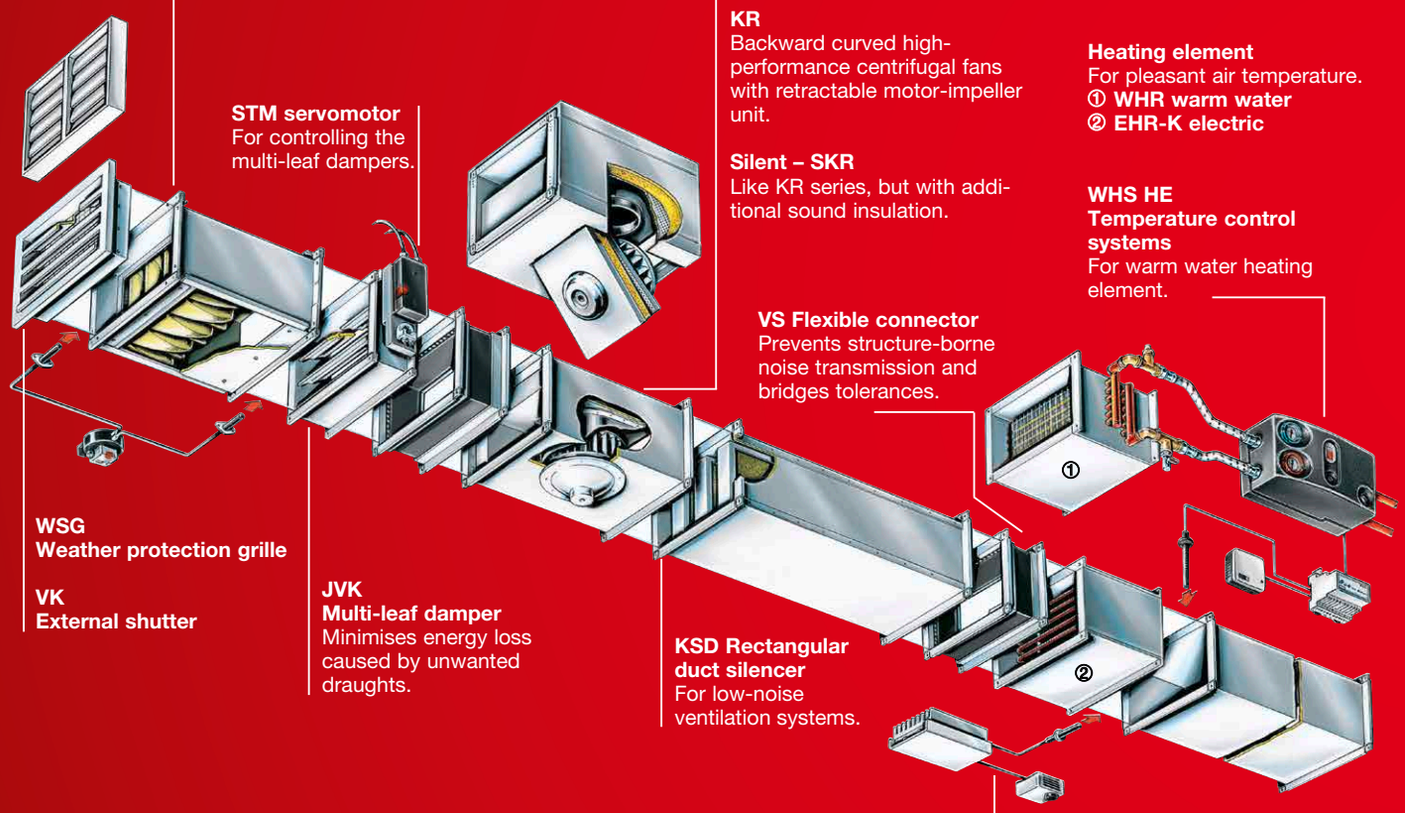

KLF Rectangular duct air filter
With large bag filter.

STM servomotor
For controlling the multi-leaf dampers.

Rectangular duct fans
KV
Forward curved centrifugal fans with retractable motor-impeller unit.

KR
Backward curved high-performance centrifugal fans with retractable motor-impeller unit.

Silent – SKR
Like KR series, but with additional sound insulation.

Heating element
For pleasant air temperature.
① WHR warm water
② EHR-K electric

WHS HE
Temperature control systems
For warm water heating element.

VS Flexible connector
Prevents structure-borne noise transmission and bridges tolerances.

WSG
Weather protection grille

VK
External shutter

JVK
Multi-leaf damper
Minimises energy loss caused by unwanted draughts.

KSD Rectangular duct silencer
For low-noise ventilation systems.

EHS Electronic temperature control system
For electric heating element.

Helios rectangular duct fans are the ideal solution for the reliable supply and extract ventilation of industrial and commercial applications. The compact design promises minimal space requirement and shows its advantages in combination with numerous accessory components, such as the warm water and electric heating elements, filters or silencers. This system diversity means the right solution can always be found for your construction project.

Fresh air boxes

Efficient EC version.

With electric heating
Ø 125 – 250 mm
▭ 30 x 20 cm

With warm water heating
▭ 40 x 20 cm, 50 x 30 cm, 60 x 35 cm, 80 x 50 cm

EC 342ff

Backward curved InlineVent rectangular duct fans KR

Energy-efficient
EC version.

Ø 180 – 560 mm
30 x 15 cm – 100 x 50 cm
$\dot{V}$ = 660 – 14 410 m³/h

EC 454ff

Backward curved InlineVent rectangular duct fans KR

Standard
AC version.

Ø 180 – 560 mm
30 x 15 cm – 80 x 50 cm
$\dot{V}$ = 540 – 11 970 m³/h

470ff

Centrifugal rectangular duct fans

Product-specific information, Selection table.

438f

Forward curved InlineVent rectangular duct fans KV

Standard
AC version.

Ø 200 – 400 mm
40 x 20 cm – 80 x 50 cm
$\dot{V}$ = 920 – 7620 m³/h

Also available in version: Ex

440ff

Sound-insulated rectangular duct fans, backward curved, Acoustic Line SKR

Energy-efficient
EC version.

Ø 315 – 560 mm
50 x 25 cm – 100 x 50 cm
$\dot{V}$ = 1180 – 13 700 m³/h

EC 458ff

Sound-insulated rectangular duct fans, backward curved, Acoustic Line SKR

Standard
AC version.

Ø 355 – 560 mm
60 x 35 cm – 80 x 50 cm
$\dot{V}$ = 2800 – 8050 m³/h

474ff

Accessories

For InlineVent rectangular duct fans.

482

This information supplements the "General technical information" and the information on the product pages.

- **Installation position, installation, condensate outlets**
  Installation possible in any position, but only with the inspection cover to the bottom or side for KR types. The swivelling range must be kept clear and access for inspection and cleaning must be unhindered.
  In case of condensation (e.g. in case of intermittent operation, air flow with high moisture and varying temperatures), the unit must be installed so that condensate can drain downwards without restriction.
  Corresponding holes must be made in the fan casing, if necessary. If necessary, the pipeline or duct system must be insulated so that condensation is prevented.

- **Structure-borne noise transmission**
  to buildings and duct systems must be prevented. The fan must not be rigidly connected to the duct system. Accessory VS provided for this purpose.

- **Explosion-proof types**
  With regard to the operating conditions and standards, reference is made to the information in "Planning information Explosion protection". The explosion- proof types correspond to unit group II, category 2G for operation in zones 1 and 2 in accordance with Directive 2014/34/EU (ATEX).
  The KVD Ex motors are equipped with PTC thermistors
  (for direct winding temperature monitoring) as standard. Their connection leads must be led to the terminal board and connected to the motor protection trigger unit MSA.
  With this equipment, the KVD explosion-proof fans are also approved for speed control. The transformer control units TSD or TSSD can be used for this purpose; a minimum voltage of 100 V must always be maintained.
  Electronic speed control or control using a frequency inverter is not permitted.

- **Drive-Impeller**
  External rotor motors located in the air flow in protection category IP44 and IP54 are used for all AC types.
  They correspond to
  DIN EN 60034/VDE 0530 and
  DIN EN 60335-1/VDE 0700-1
  and they are in ISO class F with additional humidity protection.
  The EC types are equipped with especially energy-saving, speed-controllable EC external rotor motors in protection category IP44 or IP54 for low operating costs.
  All motors are maintenance-free and they are suitable for continuous and normal operation.
  The ball bearings have a sufficient lubricant supply for their service life.
  The centrifugal impellers are pressed on the motor body, i.e. fixed to it, and dynamically balanced as a unit according to DIN ISO 21940-11 – quality grade 6.3.

- **Power control**
  All InlineVent AC rectangular duct fans can be controlled from 0 – 100% through voltage reduction. As a result, the output can be set to the desired volume. One or more fans (until the max. rated current is reached) can be operated with the offered speed controls. The dimensioning must be based on a 10% reserve.
  Control is possible for 3~types using a frequency inverter with integrated sine filter.
  All EC types have continuously variable speed control via speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller.
  The performance levels are shown on the performance curve as examples.

- **Air flow direction**
  The air flow direction cannot be changed for centrifugal fans; but it can be set by the corresponding positioning. The correct motor rotation direction and air flow direction is marked by arrows and must be checked during commissioning.

- **Incorrect direction of rotation**
  Operation in the incorrect direction of rotation overloads the AC motor and causes the thermal contacts to respond. Typical concomitant features include virtually non-existent flow rate, vibration and abnormal noise.

- **Air flow temperature**
  All units can be used in the range from –40 °C to at least +60 °C, Types KV Ex from –20 °C to +40 °C.
  The upper limit value is type-specific and can be found in the table on the product page.

The types and their features

- **KV**
  Centrifugal rectangular duct fans with forward curved impeller blades. Retractable motor-impeller unit. Low-noise impeller in volute casing for high delivery pressures.

  $\dot{V}$ = 920 – 7620 m³/h.
  Compact, flat design for versatile use in extract air and intake air systems in commercial and industrial buildings.

- **KR and KR EC**
  With backward curved impeller blades, optionally with energy-saving EC drive technology. High-performance centrifugal impellers with high level of efficiency. Retractable motor-impeller unit.

  $\dot{V}$ = 540 – 13 480 m³/h.
  For the delivery of larger volume flows in extract air and intake air systems. Non-critical for the delivery of contaminated air.

- **SKR and SKR EC**
  For noise-critical systems. Backward curved high-performance centrifugal impellers in sound-insulated casing, optionally with energy-saving EC drive technology.
  Performance characteristics like KR.

  $\dot{V}$ = 1270 – 13 480 m³/h.
  The use of rectangular duct silencers (KLF, Accessories) is recommended for the further reduction of inlet and outlet side air noise.
  Application in extract and intake air systems with specific noise level requirements.

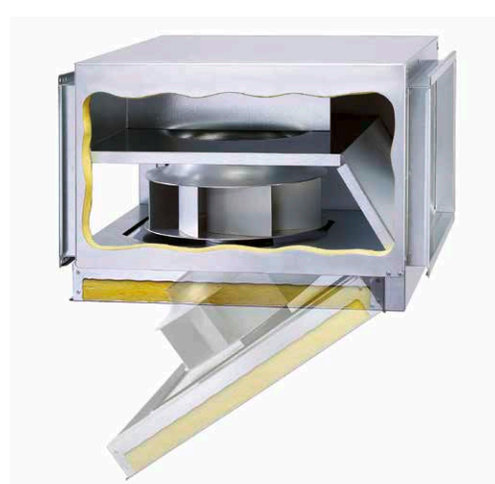

By combining the parameters of static pressure increase Δp_{fa}, case-radiated noise and inlet side air noise as sound pressure at 4 m (free field conditions), the following table facilitates the selection of rectangular duct fans.

Type	Sound pre. radiation L_{PA} dB(A) at 4 m dist.	Sound pre. inlet side L_{PA} dB(A) at 4 m dist.	Flow rate $\dot{V}$ m³/h depending on static pressure (ΔP_{fa}) in Pa 0	50	100	150	200	250	300	350	400	500	600	700	800
KV – with forward curved impellers															
KVW 200/4/40/20	37	49	920	890	850	800	750	40							
KVD 200/4/40/20	36	50	1130	1030	930	830	710								
KVD 225/4/50/25	43	52	1920	1820	1710	1590	1460	1290	1040						
KVD 355/6/70/40	42	53			4970	4680	4380	4060	3680	3190					
KVD 400/6/80/50	45	60	7620	7320	7020	6710	6390	6060	5690	5290	4800	1460			

EC Type	Sound pre. radiation L_{PA} dB(A) at 4 m dist.	Sound pre. inlet side L_{PA} dB(A) at 4 m dist.	Flow rate $\dot{V}$ m³/h depending on static pressure (ΔP_{fa}) in Pa 0	50	100	150	200	250	300	350	400	500	600	700	800
KR EC – with backward curved impellers / SKR EC – with sound-insulated casing															
KRW EC 180/30/15	41	57	720	680	650	620	580	530	490	450	390	280	130		
KRW EC 225/40/20	41	52	1200	1120	1040	980	920	860	790	730	670	520	360		
KRW EC 315/50/25 A	35	49	1210	1130	1060	990	920	860	790	730	660	510	340		
KRW EC 315/50/25 B	44	57	2250	2130	2010	1910	1800	1680	1580	1470	1350	1140	920	730	510
KRW EC 355/60/30	46	59	2960	2860	2750	2620	2460	2300	2100	1910	1670	1090			
KRW EC 400/60/35	49	62	4100	4020	3930	3840	3750	3640	3540	3430	3310	3050	2770	2470	2120
KRW EC 450/70/40	48	61	5570	5360	5150	4940	4760	4570	4350	4100	3860	3280	2460		
KRD EC 355/60/30	56	66	4380	4310	4250	4190	4120	4040	3960	3880	3800	3630	3410	3200	2940
KRD EC 400/60/35	53	65	4580	4500	4420	4340	4250	4170	4080	3990	3890	3700	3500	3290	3060
KRD EC 450/70/40	54	64	7520	7390	7260	7120	6970	6800	6610	6380	6140	5600	5100	4600	4130
KRD EC 500/80/50 A	47	60	7990	7730	7450	7150	6850	6520	6160	5820	5460	4620	3680	840	
KRD EC 500/80/50 B	51	63	9080	8910	8720	8520	8290	8020	7710	7380	7040	6300	5530	4780	3930
KRD EC 560/100/50 A	50	60	9370	9210	9040	8870	8690	8480	8210	7890	7580	6900	6070	5350	4440
KRD EC 560/100/50 B	56	68	13590	13420	13240	13060	12870	12680	12470	12250	12020	11540	11010	10440	9810
SKRW EC 315/50/25 A	29	40	1270	1170	1090	990	900	830	760	670	580	380	70		
SKRW EC 315/50/25 B	36	47	2170	2050	1960	1870	1760	1640	1530	1400	1250	980	760	570	400
SKRW EC 355/60/30	43	53	3860	3760	3660	3550	3450	3360	3270	3160	3050	2840	2580	2270	1830
SKRW EC 400/60/35	42	56	3960	3880	3790	3700	3610	3510	3400	3290	3180	2920	2610	2260	1740
SKRW EC 450/70/40	46	56	5390	5190	4990	4780	4540	4300	4070	3830	3580	2980	2130		
SKRD EC 355/60/30	46	55	4340	4260	4180	4090	4010	3920	3830	3740	3650	3450	3240	3020	2770
SKRD EC 400/60/35	46	57	4580	4500	4420	4340	4250	4170	4080	3990	3890	3700	3500	3290	3060
SKRD EC 450/70/40 A	49	59	7460	7320	7190	7040	6870	6670	6460	6230	5990	5500	5020	4570	4080
SKRD EC 500/80/50 A	45	53	7990	7730	7450	7150	6850	6520	6160	5820	5460	4620	3680	840	
SKRD EC 500/80/50 B	48	55	8760	8570	8380	8170	7940	7670	7380	7090	6790	6130	5350	4530	3390
SKRD EC 560/100/50 A	47	51	9370	9210	9040	8870	8690	8480	8210	7890	7580	6900	6070	5350	4440
SKRD EC 560/100/50 B	51	57	12890	12660	12430	12210	11990	11770	11530	11280	11010	10490	9940	9300	8600

Type	Sound pre. radiation L_{PA} dB(A) at 4 m dist.	Sound pre. inlet side L_{PA} dB(A) at 4 m dist.	Flow rate $\dot{V}$ m³/h depending on static pressure (ΔP_{fa}) in Pa 0	50	100	150	200	250	300	350	400	500	600	700	800
KR – with backward curved impellers / SKR – with sound-insulated casing															
KRW 180/2/30/15	37	51	540	480	420	360	280	210	110						
KRW 225/2/40/20	40	52	1020	920	820	700	590	490	380	260	100				
KRW 225/2/50/25	45	52	1160	1100	1040	990	910	850	780	690	610	340	60		
KRW 355/4/60/35	42	55	3600	3370	3130	2900	2590	2090	1330	570					
KRW 400/4/70/40	44	54	4970	4710	4400	4110	3730	3320	2750	2090	1160				
KRW 450/4/70/40	51	59	6650	6360	6010	5710	5430	5120	4730	4280	3850	2290			
KRW 500/4/80/50	52	62	9700	9380	9040	8670	8310	7920	7460	6890	6260	4590	2290		
KRD 355/4/60/35	37	50	2840	2640	2410	2110	1860	1510	1050	450					
KRD 450/4/70/40	47	57	5830	5570	5320	5060	4810	4550	4230	3930	3610	2840	1840		
KRD 500/4/80/50 A	52	58	8430	8120	7810	7490	7110	6670	6300	5870	5420	4530	3560	1330	
KRD 560/6/80/50	41	53	7460	6940	6300	5630	5110	4290	3490	2410	400				
KRD 560/4/80/50	55	66	11970	11630	11260	10870	10480	10080	9640	9140	8620	7230	5470	2920	840
SKRW 355/4/60/35	39	49	3580	3350	3070	2830	2450	1880	110						
SKRW 400/4/70/40	42	49	4940	4540	4230	3830	3470	3040	2460	1670	780				
SKRD 355/4/60/35	34	43	2800	2510	2270	2030	1670	1300	650	140					
SKRD 450/4/70/40	46	52	5430	5230	5000	4770	4520	4240	4000	3640	3290	2380	860		
SKRD 500/6/70/40	36	48	4620	4230	3800	3480	2980	2490	1490						
SKRD 500/4/80/50	48	54	8050	7830	7520	7060	6650	6210	5820	5450	5040	4150	2560	690	
SKRD 560/6/80/50	36	46	7600	6990	6220	5630	5040	4280	3220	1810	400				

KV 200

Efficiency class

D KVW 200/4/40/20 + accessories*

Dimensions KV 200

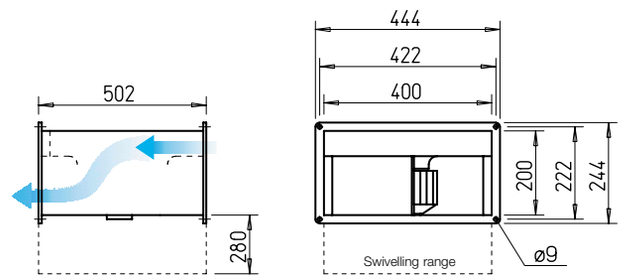

Dim. in mm

Centrifugal rectangular duct fans with forward curved impeller blades. Retractable motor-impeller unit.

- Low-noise impeller in optimised volute casing for high delivery pressures.
- Compact, flat design for versatile use in extract air and intake air systems in commercial and industrial buildings.

Description

- **Casing**
  Double-sided standardised rectangular duct flange profiles, made of galvanised steel sheet, space-saving design.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- **Impeller**
  Forward curved impeller made of galvanised steel, good level of efficiency, low noise, aerodynamically optimised volute casing; inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted. Closed design, IP44. Winding with moisture proof coating. Ball bearing mounted. Dynamic balancing and flexible motor mount for low-vibration and low-noise operation.
- **Electrical connection**
  Terminal box (IP55 for 3~ or 44 for 1~ types) mounted to external cable.
- **Motor protection**
  Type KVW through thermal contacts connected in series with the winding, automatically resets. Type KVD through built-in thermal contacts which must be connected to a motor protection circuit breaker.
- **Power control**
  Possible through voltage reduction by means of 5-step transformer or electronic (continuously variable) controller. The performances at corresponding voltages are shown in the performance diagram.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ▢ Case-radiated sound power
  - ▢ Inlet side sound power
  - ▢ Outlet side sound power
  The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - ▢ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate max.	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temperature at		Wgt net aprx.	Speed controller 5-step				Motor protection circuit breaker for connection of built-in thermal contacts	
								Rat. vol.	Control		without motor prot. circ. brea.		with motor prot. circ. brea.			
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP44																
KVW 200/4/40/20	05675	925	810	37	0.21	0.95	0508	40	40	11	**TSW 1.5**	01495	—	—	—	—
Three-phase current motor, 230/400 V, 50 Hz, protection category IP44																
KVD 200/4/40/20	05676	1130	1260	36	0.25	0.82/0.47	0860	70	70	8.6	**TSD 0.8**	01347	**RDS 1**	01314	**MD**	05849

* See ErP product data sheet at www.HeliosSelect.de.

Performance curves KVW 200/4/40/20

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	46	52	50	52	45	40	32
L_{WA}	Inlet side	dB(A)	69	64	64	61	55	56	54	47
L_{WA}	Outlet side	dB(A)	72	63	65	65	64	63	62	55

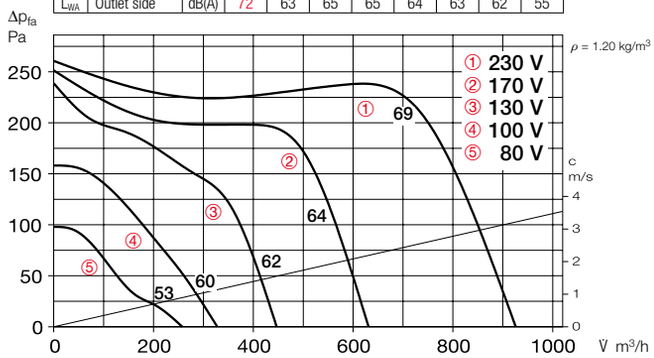

Performance curves KVD 200/4/40/20

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	45	52	51	48	45	43	37
L_{WA}	Inlet side	dB(A)	70	65	65	62	58	58	59	54
L_{WA}	Outlet side	dB(A)	77	68	70	68	68	70	68	64

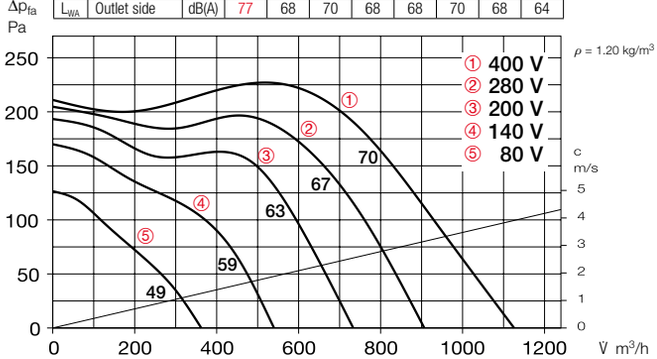

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f.
Speed controllers and motor protection circuit breakers	601 ff.

Accessories

External wall shutter
VK 40/20 Ref. no. 00874
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 40/20 Ref. no. 00109
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 40/20 Ref. no. 06910
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 40/20 Ref. no. 00832
For cost-effective integration of rectangular duct fans in round duct systems with Ø 200 mm.

Flexible connector
VS 40/20 Ref. no. 05694
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 40/20 Ref. no. 06919
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 40/20 Ref. no. 08728
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 40/20 Coarse 70%* 08720
KLF 40/20 ePM1 50%* 08644
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Electric heating element
EHR-K 6/40/20 No. 08702
EHR-K 15/40/20 No. 08703
Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

Temperature control system for electric heating element
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 2/40/20 No. 08782
WHR 4/40/20 No. 08783
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 477 for detailed description.

KV 225

Also available in version:

Dimensions KV 225

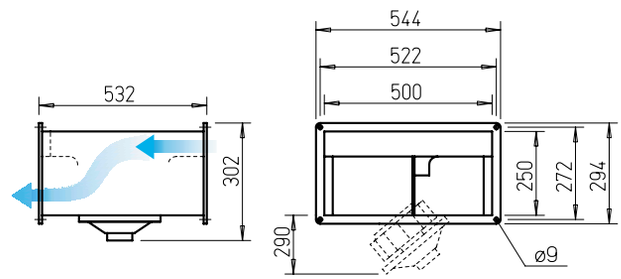

Dim. in mm

Centrifugal rectangular duct fans with forward curved impeller blades. Retractable motor-impeller unit.

- Low-noise impeller in optimised volute casing for high delivery pressures.
- Compact, flat design for versatile use in extract air and intake air systems in commercial and industrial buildings.

Description

Casing
Double-sided standardised rectangular duct flange profiles, made of galvanised steel sheet, space-saving design.

- Particularly easy to service (cleaning) due to retractable motor-impeller unit.

Impeller
Forward curved impeller made of galvanised steel, good level of efficiency, low noise, aerodynamically optimised volute casing; inlet via nozzle.

Drive
Through maintenance-free external rotor motor on which the impeller is mounted.
Closed design, IP44.
Winding with moisture proof coating. Ball bearing mounted. Dynamic balancing and flexible motor mount for low-vibration and low-noise operation.

Electrical connection
Terminal box (IP55 for 3~ or 44 for 1~ types) mounted to external cable.

Motor protection
Through built-in thermal contacts which must be connected to a motor protection circuit breaker.

Power control
Possible through voltage reduction by means of 5-step transformer or electronic (continuously variable) controller.
The performances at corresponding voltages are shown in the performance diagram.

Noise
The total level and range are specified above the performance diagram for:
- ▢ Case-radiated sound power
- ▢ Inlet side sound power
- ▢ Outlet side sound power

The inlet side sound power level is also specified above the control voltages in the performance diagram.
- ▢ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Installation
Installation possible in any position. Note accessibility/swivelling range.

Explosion-proof design
Thermal motor protection through integrated PTC thermistors which must be connected to a tripping unit MSA. Also approved for speed control, whereby the minimum voltage of 100 V must be respected.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate max.	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temperature at		Wgt net aprx.	Speed controller 5-step				Motor protection circuit breaker for connection of built-in thermal contacts	
								Rat. vol.	Control		without motor prot. circ. brea.		with motor prot. circ. brea.			
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current motor, 230/400 V, 50 Hz, protection category IP44																
KVD 225/4/50/25	05679	1950	1270	43	0.54	1.6/0.93	0860	45	45	17	**TSD 1.5**	01501	**RDS 2**	01315	**MD**	05849
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 400 V, 50 Hz, protection category IP44**																
KVD 225/4/50/25 Ex	06810	1900	1280	43	0.48	0.82	0899	40	40	17	**TSD 1.5**	01501	—	—	**MSA**	01289

Performance curves KVD 225/4/50/25

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	63	47	56	56	57	55	51	44
L_{WA}	Inlet side	dB(A)	72	64	66	62	63	65	64	58
L_{WA}	Outlet side	dB(A)	78	63	66	69	73	72	71	65

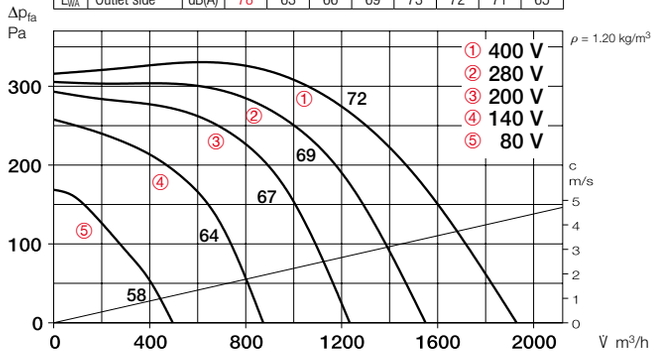

Performance curves KVD 225/4/50/25 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	63	43	56	57	58	54	49	43
L_{WA}	Inlet side	dB(A)	73	65	66	62	63	65	65	60
L_{WA}	Outlet side	dB(A)	79	63	67	70	73	73	72	67

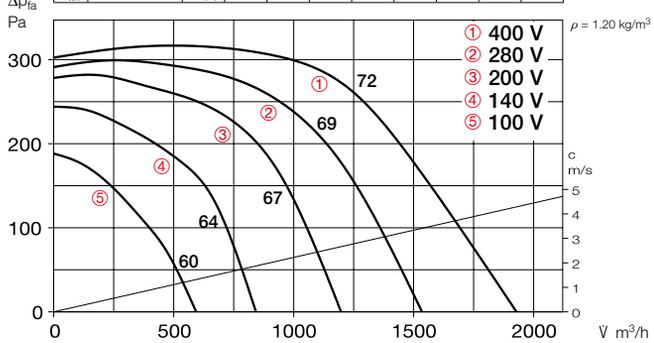

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f.
Speed controllers and motor protection circuit breakers	601 ff.

Accessories

External wall shutter
VK 50/25 Ref. no. 00875
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 50/25 Ref. no. 00110
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 50/25 Ref. no. 06911
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 50/25 Ref. no. 00833
For cost-effective integration of rectangular duct fans in round duct systems with Ø 250 mm.

Flexible connector
VS 50/25 Ref. no. 05695
Flexible rectangular duct connector with double-sided flange frame.
– for explosion-proof fans
VS 50/25 Ex No. 00265

Counter flange
GF 50/25 Ref. no. 06920
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 50/25-30 No. 08729
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 50/25-30 Coarse 70%* 08721
KLF 50/25-30 ePM1 50%* 08645
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Electric heating element [1)]
EHR-K 8/50/25-30 No. 08704
EHR-K 24/50/25-30 No. 08705
Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

Temperature control system for electric heating element [1)]
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 2/50/25-30 No. 08784
WHR 4/50/25-30 No. 08785
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 477 for detailed description.
[1)] Cannot be used for explosion-proof version.

KV 250

Dimensions KV 250

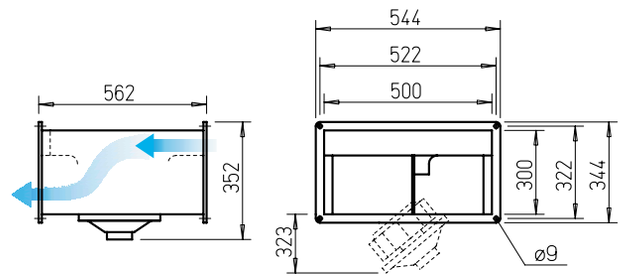

Dim. in mm

Centrifugal rectangular duct fans with forward curved impeller blades. Retractable motor-impeller unit.

- Low-noise impeller in optimised volute casing for high delivery pressures.
- Compact, flat design for versatile use in extract air and intake air systems in commercial and industrial buildings.

Description

- **Casing**
  Double-sided standardised rectangular duct flange profiles, made of galvanised steel sheet, space-saving design.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- **Impeller**
  Forward curved impeller made of galvanised steel, good level of efficiency, low noise, aerodynamically optimised volute casing; inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted.
  Closed design, IP44.
  Winding with moisture proof coating. Ball bearing mounted.
  Dynamic balancing and flexible motor mount for low-vibration and low-noise operation.
- **Electrical connection**
  Terminal box (IP65) mounted to external cable.
- **Motor protection**
  Through built-in thermal contacts which must be connected to a motor protection circuit breaker.
- **Power control**
  Possible through voltage reduction by means of 5-step transformer.
  The performances at corresponding voltages are shown in the performance diagram.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ▢ Case-radiated sound power
  - ▢ Inlet side sound power
  - ▢ Outlet side sound power
  The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - ▢ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.
- **Explosion-proof design**
  Thermal motor protection through integrated PTC thermistors which must be connected to a tripping unit MSA. Also approved for speed control, whereby the minimum voltage of 100 V must be respected.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate max.	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temperature at		Wgt net aprx.	Speed controller 5-step				Motor protection circuit breaker for connection of built-in thermal contacts	
								Rat. vol.	Control		without motor prot. circ. brea.		with motor prot. circ. brea.			
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 400 V, 50 Hz, protection category IP44																
KVD 250/4/50/30 Ex	06811	2300	1240	42	0.9	1.8	0899	40	40	21	**TSD 3**	01502	—	—	**MSA**	01289

Performance curves KVD 250/4/50/30 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	46	56	53	59	52	51	45
L_{WA}	Inlet side	dB(A)	73	68	66	59	64	65	64	58
L_{WA}	Outlet side	dB(A)	80	66	68	70	75	72	72	66

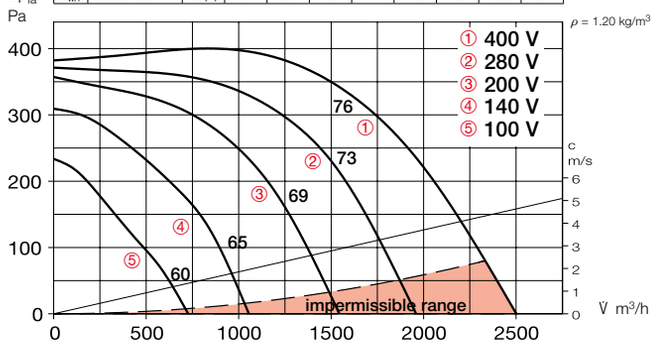

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f.
Speed controllers and motor protection circuit breakers	601 ff.

Accessories

External wall shutter
VK 50/30 Ref. no. 00876
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 50/30 Ref. no. 00111
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 50/30 Ref. no. 06912
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 50/30 Ref. no. 00837
For cost-effective integration of rectangular duct fans in round duct systems with Ø 315 mm.

Flexible connector
VS 50/30 Ex Ref. no. 00266
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 50/30 Ref. no. 06921
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 50/25-30 No. 08729
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 50/25-30 Coarse 70%* 08721
KLF 50/25-30 ePM1 50%* 08645
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/50/25-30 No. 08784
WHR 4/50/25-30 No. 08785
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 477 for detailed description.

KV 280

Dimensions KV 280

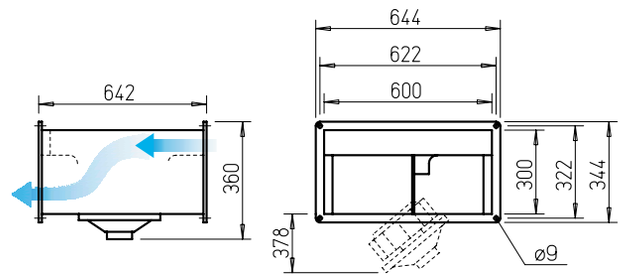

Dim. in mm

Centrifugal rectangular duct fans with forward curved impeller blades. Retractable motor-impeller unit.

- Low-noise impeller in optimised volute casing for high delivery pressures.
- Compact, flat design for versatile use in extract air and intake air systems in commercial and industrial buildings.

Description

- **Casing**
  Double-sided standardised rectangular duct flange profiles, made of galvanised steel sheet, space-saving design.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- **Impeller**
  Forward curved impeller made of galvanised steel, good level of efficiency, low noise, aerodynamically optimised volute casing; inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted.
  Closed design, IP44.
  Winding with moisture proof coating. Ball bearing mounted.
  Dynamic balancing and flexible motor mount for low-vibration and low-noise operation.
- **Electrical connection**
  Terminal box (IP65) mounted to external cable.
- **Motor protection**
  Through built-in thermal contacts which must be connected to a motor protection circuit breaker.
- **Power control**
  Possible through voltage reduction by means of 5-step transformer.
  The performances at corresponding voltages are shown in the performance diagram.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ▢ Case-radiated sound power
  - ▢ Inlet side sound power
  - ▢ Outlet side sound power
  The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - ▢ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.
- **Explosion-proof design**
  Thermal motor protection through integrated PTC thermistors which must be connected to a tripping unit MSA. Also approved for speed control, whereby the minimum voltage of 100 V must be respected.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate max.	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temperature at		Wgt net aprx.	Speed controller 5-step				Motor protection circuit breaker for connection of built-in thermal contacts	
								Rat. vol.	Control		without motor prot. circ. brea.		with motor prot. circ. brea.			
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 230/400 V, 50 Hz, protection category IP44																
KVD 280/4/60/30 Ex	06812	3450	1340	47	1.3	2.2	0899	40	40	34	**TSD 5.5**	01503	—	—	**MSA**	01289

Performance curves KVD 280/4/60/30 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	67	54	59	58	63	60	57	52
L_{WA}	Inlet side	dB(A)	78	71	70	65	72	70	69	64
L_{WA}	Outlet side	dB(A)	86	70	75	75	80	80	79	74

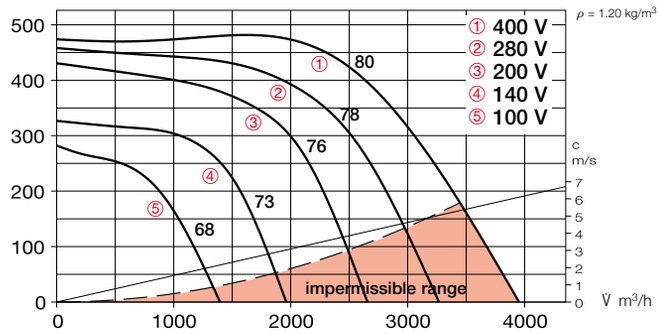

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f.
Speed controllers and motor protection circuit breakers	601 ff.

Accessories

External wall shutter
VK 60/30 Ref. no. 00877
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 60/30 No. 00112
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 60/30 Ref. no. 06913
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 60/30 Ref. no. 00834
For cost-effective integration of rectangular duct fans in round duct systems with Ø 315 mm.

Flexible connector
VS 60/30 Ex No. 00267
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 60/30 Ref. no. 06922
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 60/30-35 No. 08730
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 60/30-35 Coarse 70%* 08722
KLF 60/30-35 ePM2.5 65%* 08646
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/60/30-35 No. 08786
WHR 4/60/30-35 No. 08787
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE[1)] Ref. no. 08319

[1)] With heat output reduced to 2200 l/h for Type WHR 4/60/30-35.

* See product page 477 for detailed description.

KV 315

Dimensions KV 315

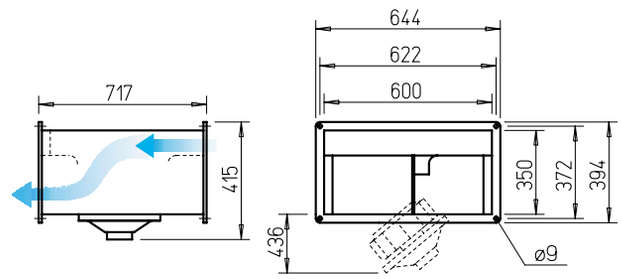

Dim. in mm

Centrifugal rectangular duct fans with forward curved impeller blades. Retractable motor-impeller unit.

- Low-noise impeller in optimised volute casing for high delivery pressures.
- Compact, flat design for versatile use in extract air and intake air systems in commercial and industrial buildings.

Description

- **Casing**
  Double-sided standardised rectangular duct flange profiles, made of galvanised steel sheet, space-saving design.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- **Impeller**
  Forward curved impeller made of galvanised steel, good level of efficiency, low noise, aerodynamically optimised volute casing; inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted.
  Closed design, IP44.
  Winding with moisture proof coating. Ball bearing mounted. Dynamic balancing and flexible motor mount for low-vibration and low-noise operation.
- **Electrical connection**
  Terminal box (IP65) mounted to external cable.
- **Motor protection**
  Through built-in thermal contacts which must be connected to a motor protection circuit breaker.
- **Power control**
  Possible through voltage reduction by means of 5-step transformer.
  The performances at corresponding voltages are shown in the performance diagram.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ▢ Case-radiated sound power
  - ▢ Inlet side sound power
  - ▢ Outlet side sound power
  The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - ▢ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.
- **Explosion-proof design**
  Thermal motor protection through integrated PTC thermistors which must be connected to a tripping unit MSA. Also approved for speed control, whereby the minimum voltage of 100 V must be respected.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate max.	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temperature at		Wgt net aprx.	Speed controller 5-step				Motor protection circuit breaker for connection of built-in thermal contacts	
								Rat. vol.	Control		without motor prot. circ. brea.		with motor prot. circ. brea.			
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 230/400 V, 50 Hz, protection category IP44																
KVD 315/4/60/35 Ex	06813	4200	1370	48	2.0	4.0	0899	40	40	42	**TSD 5.5**	01503	—	—	**MSA**	01289

Performance curves KVD 315/4/60/35 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	56	60	58	64	61	60	56
L_{WA}	Inlet side	dB(A)	79	71	70	67	72	72	71	67
L_{WA}	Outlet side	dB(A)	87	73	75	78	82	81	80	76

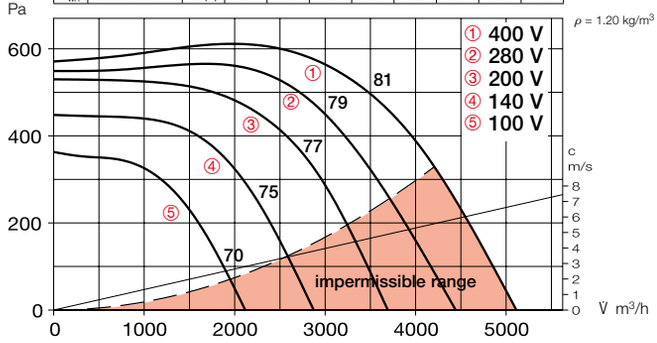

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f.
Speed controllers and motor protection circuit breakers	601 ff.

Accessories

External wall shutter
VK 60/35 Ref. no. 00878
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 60/35 No. 00113
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 60/35 Ref. no. 06914
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 60/35 Ref. no. 00835
For cost-effective integration of rectangular duct fans in round duct systems with Ø 355 mm.

Flexible connector
VS 60/35 Ex No. 00268
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 60/35 Ref. no. 06923
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 60/30-35 No. 08730
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 60/30-35 Coarse 70%* 08722
KLF 60/30-35 ePM2.5 65%* 08646
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/60/30-35 No. 08786
WHR 4/60/30-35 No. 08787
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE[1)] Ref. no. 08319

[1)] With heat output reduced to 2200 l/h for Type WHR 4/60/30-35.

* See product page 477 for detailed description.

KV 355

Also available in version:

Dimensions KV 355

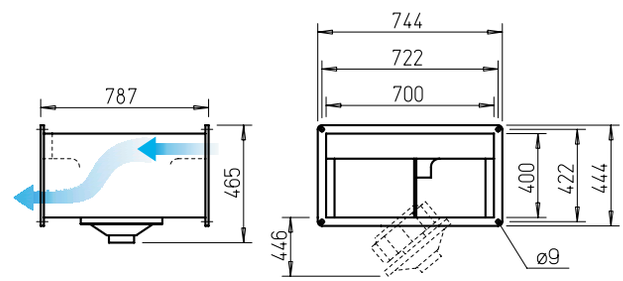

Dim. in mm

Centrifugal rectangular duct fans with forward curved impeller blades. Retractable motor-impeller unit.

- Low-noise impeller in optimised volute casing for high delivery pressures.
- Compact, flat design for versatile use in extract air and intake air systems in commercial and industrial buildings.

Description

- **Casing**
  Double-sided standardised rectangular duct flange profiles, made of galvanised steel sheet, space-saving design.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- **Impeller**
  Forward curved impeller made of galvanised steel, good level of efficiency, low noise, aerodynamically optimised volute casing; inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted.
  Closed design, IP44.
  Winding with moisture proof coating. Ball bearing mounted. Dynamic balancing and flexible motor mount for low-vibration and low-noise operation.
- **Electrical connection**
  Terminal box (IP55 for 3~ or IP65 for explosion-proof types) mounted to external cable.
- **Motor protection**
  Through built-in thermal contacts which must be connected to a motor protection circuit breaker.
- **Power control**
  Possible through voltage reduction by means of 5-step transformer or electronic (continuously variable) controller.
  The performances at corresponding voltages are shown in the performance diagram.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - Case-radiated sound power
  - Inlet side sound power
  - Outlet side sound power
  The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.
- **Explosion-proof design**
  Thermal motor protection through integrated PTC thermistors which must be connected to a tripping unit MSA. Also approved for speed control, whereby the minimum voltage of 100 V must be respected.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate max.	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temperature at		Wgt net aprx.	Speed controller 5-step				Motor protection circuit breaker for connection of built-in thermal contacts	
								Rat. vol.	Control		without motor prot. circ. brea.		with motor prot. circ. brea.			
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current motor, 230/400 V, 50 Hz, protection category IP44																
KVD 355/6/70/40	05688	5000	830	42	1.53	5.5/3.2	0860	60	60	54	**TSD 5.5**	01503	**RDS 4**	01316	**MD**	05849
Ex **Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 230/400 V, 50 Hz, protection category IP44**																
KVD 355/6/70/40 Ex	06814	4800	800	48	1.80	3.7	0899	40	40	49	**TSD 5.5**	01503	—	—	**MSA**	01289

Performance curves KVD 355/6/70/40

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	52	52	55	56	53	51	46
L_{WA}	Inlet side	dB(A)	73	65	64	61	67	65	64	58
L_{WA}	Outlet side	dB(A)	81	69	72	73	74	74	73	67

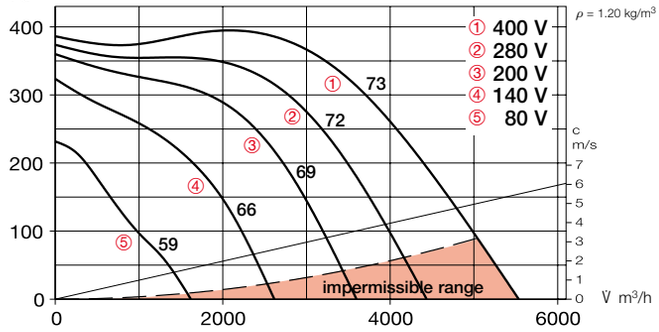

Performance curves KVD 355/6/70/40 Ex

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	51	56	57	62	64	61	52
L_{WA}	Inlet side	dB(A)	75	65	65	63	68	68	66	60
L_{WA}	Outlet side	dB(A)	79	66	69	70	73	72	72	65

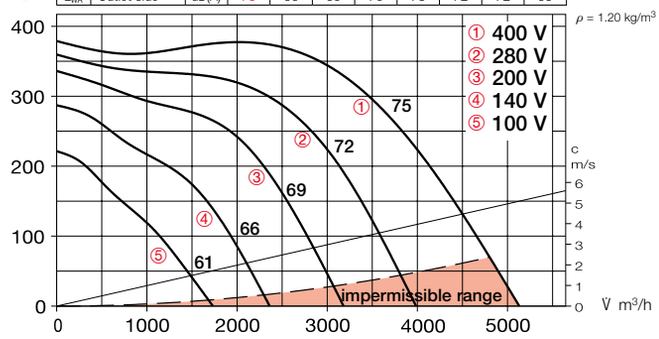

Accessories

External wall shutter
VK 70/40 Ref. no. 00879
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 70/40 No. 00114
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 70/40 Ref. no. 06915
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 70/40 Ref. no. 00840
For cost-effective integration of rectangular duct fans in round duct systems with Ø 400 mm.

Flexible connector
VS 70/40 Ref. no. 05699
Flexible rectangular duct connector with double-sided flange frame.
– for explosion-proof fans
VS 70/40 Ex No. 00269

Counter flange
GF 70/40 Ref. no. 06924
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 70/40 Ref. no. 08731
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 70/40 Coarse 70%* 08723
KLF 70/40 ePM1 50%* 08647
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/70/40 No. 08788
WHR 4/70/40 No. 08789
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE[1)] Ref. no. 08319

[1)] With heat output reduced to 2200 l/h for Type WHR 4/70/40.

* See product page 477 for detailed description.

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f.
Speed controllers and motor protection circuit breakers	601 ff.

KV 400

Dimensions KV 400

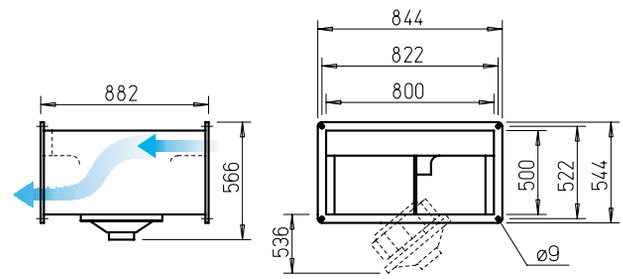

Dim. in mm

Centrifugal rectangular duct fans with forward curved impeller blades. Retractable motor-impeller unit.

- Low-noise impeller in optimised volute casing for high delivery pressures.
- Compact, flat design for versatile use in extract air and intake air systems in commercial and industrial buildings.

Description

- **Casing**
  Double-sided standardised rectangular duct flange profiles, made of galvanised steel sheet, space-saving design.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- **Impeller**
  Forward curved impeller made of galvanised steel, good level of efficiency, low noise, aerodynamically optimised volute casing; inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted.
  Closed design, IP44.
  Winding with moisture proof coating. Ball bearing mounted.
  Dynamic balancing and flexible motor mount for low-vibration and low-noise operation.
- **Electrical connection**
  Terminal box (IP55) mounted to external cable.
- **Motor protection**
  Through built-in thermal contacts which must be connected to a motor protection circuit breaker.
- **Power control**
  Possible through voltage reduction by means of 5-step transformer or electronic (continuously variable) controller.
  The performances at corresponding voltages are shown in the performance diagram.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - Case-radiated sound power
  - Inlet side sound power
  - Outlet side sound power
  The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate max.	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temperature at Rat. vol.	Max. air flow temperature at Control	Wgt net aprx.	Speed controller 5-step without motor prot. circ. brea.		Speed controller 5-step with motor prot. circ. brea.		Motor protection circuit breaker for connection of built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current motor, 230/400 V, 50 Hz, protection category IP44																
KVD 400/6/80/50	05691	7600	860	45	2.81	9.1/5.3	0860	60	60	70	**TSD 7.0**	01504	**RDS 7.0**	01578	**MD**	05849

Performance curves KVD 400/6/80/50

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	53	57	60	61	56	51	44
L_{WA}	Inlet side	dB(A)	80	67	65	70	75	73	71	65
L_{WA}	Outlet side	dB(A)	85	67	68	78	80	78	77	71

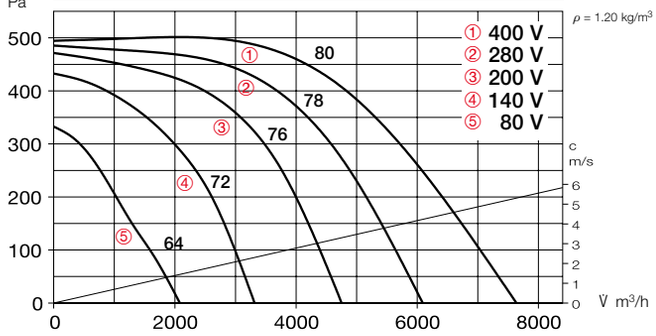

Accessories

External wall shutter
VK 80/50 Ref. no. 00880
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 80/50 No. 00115
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 80/50 Ref. no. 06916
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 80/50 Ref. no. 00842
For cost-effective integration of rectangular duct fans in round duct systems with Ø 500 mm.

Flexible connector
VS 80/50 Ref. no. 05700
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 80/50 Ref. no. 06925
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 80/50 Ref. no. 08732
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 80/50 Coarse 70%* 08670
KLF 80/50 ePM1 50%* 08654
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/80/50 No. 08795
WHR 4/80/50 No. 08796
For installation in rectangular duct system.

* See product page 477 for detailed description.

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Speed controllers and motor protection circuit breakers	601 ff.

KR EC 180

Designed for the delivery of contaminated air.

Dimensions KR EC 180

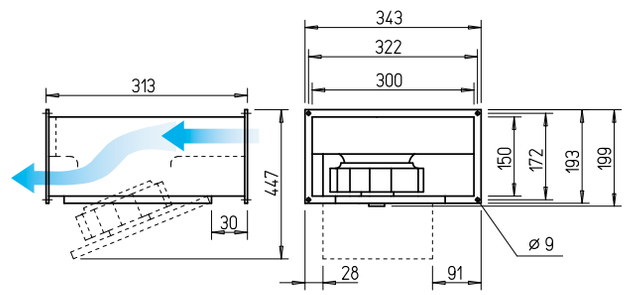

Dim. in mm

Centrifugal EC rectangular duct fans with backward curved impeller blades. Retractable motor-impeller unit.

- Highly efficient EC motor for low operating costs.
- High-performance impellers with high efficiency.
- Use in extract air and intake air systems for the delivery of larger volume flows.
- Non-critical for the delivery of contaminated air.

Special features

- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Compact design, low space requirement, linear rectangular duct throughflow.

Description

Casing
Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.

Impeller
Centrifugal, with backward curved blades made of plastic. Aerodynamically optimised, inlet via nozzle.

Drive
Energy-efficient, speed-controllable EC external rotor motor with IP44 protection and high efficiency. Maintenance-free and equipped with ball bearings. Motor and impeller dynamically balanced.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control with potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) mounted to external cable.

Installation
Installation possible in any position. Note accessibility/swivelling range.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and in the table below the performance curve.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surface-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
KRW EC 180/30/15	08168	720	3560	41	0.10	0.82	979	60	5.2	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories.

Performance curves KRW EC 180/30/15

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	61	45	56	58	50	50	43	36
L_{WA}	Inlet side	dB(A)	77	63	71	75	64	65	65	55
L_{WA}	Outlet side	dB(A)	80	64	71	76	71	73	69	62

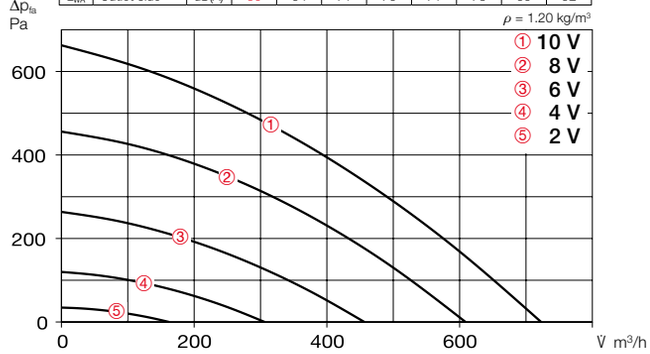

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3630	720	85	0.7	41	0.43
8	3040	610	50	0.5	38	0.30
6	2270	460	20	0.2	33	0.16
4	1510	310	10	0.1	23	0.12

Accessories

External wall shutter
VK 30/15 Ref. no. 00735
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 30/15 Ref. no. 00108
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 30/15 Ref. no. 06927
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 30/15 Ref. no. 00831
For cost-effective integration of rectangular duct fans in round duct systems with Ø 160 mm.

Flexible connector
VS 30/15 Ref. no. 06928
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 30/15 Ref. no. 06918
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

KR EC 225

Designed for the delivery of contaminated air.

Dimensions KR EC 225

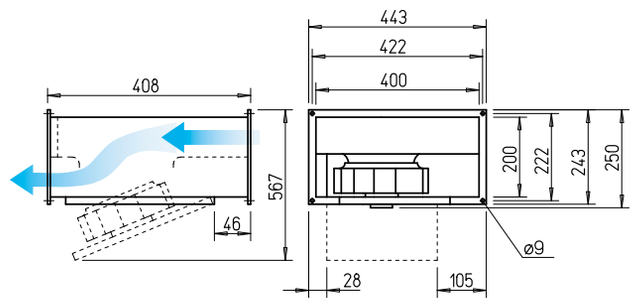

Dim. in mm

Centrifugal EC rectangular duct fans with backward curved impeller blades. Retractable motor-impeller unit.

- Highly efficient EC motor for low operating costs.
- High-performance impellers with high efficiency.
- Use in extract air and intake air systems for the delivery of larger volume flows.
- Non-critical for the delivery of contaminated air.

Special features

- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Compact design, low space requirement, linear rectangular duct throughflow.

Description

Casing
Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.

Impeller
Centrifugal, with backward curved blades made of plastic. Aerodynamically optimised, inlet via nozzle.

Drive
Energy-efficient, speed-controllable EC external rotor motor with IP44 protection and high efficiency. Maintenance-free and equipped with ball bearings. Motor and impeller dynamically balanced.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Power control
Continuously variable speed control with potentiometer or continuously variable speed regulation with universal control system (see table).
Performance levels are shown in the performance curve as an example.

Electrical connection
Terminal box (IP54) mounted to external cable.

Installation
Installation possible in any position. Note accessibility/swivelling range.

Noise
The total level and range are specified above the performance diagram for:
- ▢ Case-radiated sound power
- ▢ Inlet side sound power
- ▢ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and in the table below the performance curve.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surface-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
KRW EC 225/40/20	08169	1200	2820	41	0.15	1.19	979	60	8.1	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories.

Performance curves KRW EC 225/40/20

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	61	44	58	55	51	49	42	34
L_{WA}	Inlet side	dB(A)	72	59	69	64	61	62	56	48
L_{WA}	Outlet side	dB(A)	75	58	69	69	64	69	62	52

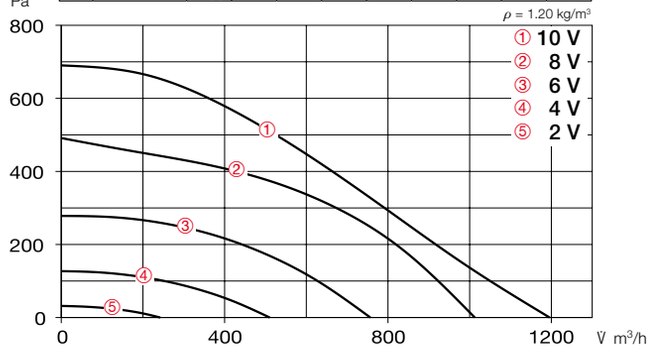

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3000	1200	150	1.2	41	0.45
8	2520	1010	90	0.8	39	0.32
6	1910	760	40	0.4	34	0.19
4	1280	510	20	0.2	25	0.14

Accessory details — Page

Shutters and weather prot. grille 482, 563 ff.
Filters, heating elements and silencers 483 ff.
Temperature control systems for heating elements 489, 494 f
Universal control system, electronic controllers, speed potentiometer 615 ff.

Accessories

External wall shutter
VK 40/20 Ref. no. 00874
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 40/20 Ref. no. 00109
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 40/20 Ref. no. 06910
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 40/20 Ref. no. 00832
For cost-effective integration of rectangular duct fans in round duct systems with Ø 200 mm.

Flexible connector
VS 40/20 Ref. no. 05694
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 40/20 Ref. no. 06919
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 40/20 Ref. no. 08728
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 40/20 Coarse 70%* 08720
KLF 40/20 ePM1 50%* 08644
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Electric heating element
EHR-K 6/40/20 Ref. no. 08702
EHR-K 15/40/20 Ref. no. 08703
Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

Temperature control system for electric heating element
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 2/40/20 Ref. no. 08782
WHR 4/40/20 Ref. no. 08783
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 477 for detailed description.

KR EC 315

Designed for the delivery of contaminated air.

EC

SKR EC 315 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

EC

Dimensions KR EC 315

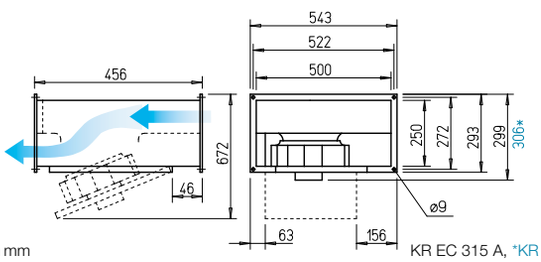

Dim. in mm

KR EC 315 A, *KR EC 315 B

Dimensions SKR EC 315 – sound-insulated

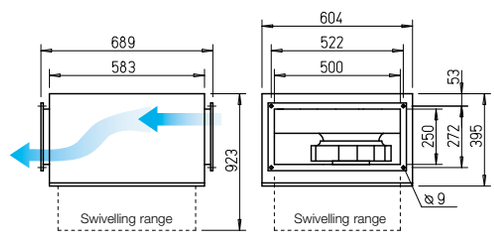

Dim. in mm

Features KR EC and SKR EC

- Highly efficient EC motor for low operating costs.
- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR EC

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR EC**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR EC**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR EC and SKR EC

- **Impeller**
  Centrifugal, with backward curved blades (315 A made of plastic and 315 B made of galvanised steel sheet). Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP44 protection and high efficiency. Maintenance-free and equipped with ball bearings. Motor and impeller dynamically balanced.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.
- **Power control**
  Continuously variable speed control with potentiometer or continuously variable speed regulation with universal control system (see table).
  Performance levels are shown in the performance curve as an example.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivel angle.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ☐ Case-radiated sound power
  - ☐ Inlet side sound power
  - ☐ Outlet side sound power.

  The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and in the table below the performance curve.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surface-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
KRW EC 315/50/25 A	08170	1210	2740	35	0.15	1.17	979	60	11.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
KRW EC 315/50/25 B	07589	2250	2830	44	0.35	2.67	979	60	12.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
SKRW EC 315/50/25 A	07588	1270	2750	29	0.15	1.23	979	60	24.4	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
SKRW EC 315/50/25 B [3)]	08182	2170	2850	36	0.35	2.71	979	60	25.3	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories. [3)] Performance diagram at www.HeliosSelect.de.

Performance curves KRW EC 315/50/25 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	55	46	52	48	45	45	38	31
L_{WA}	Inlet side	dB(A)	69	53	65	55	63	64	60	51
L_{WA}	Outlet side	dB(A)	74	53	69	63	66	70	65	55

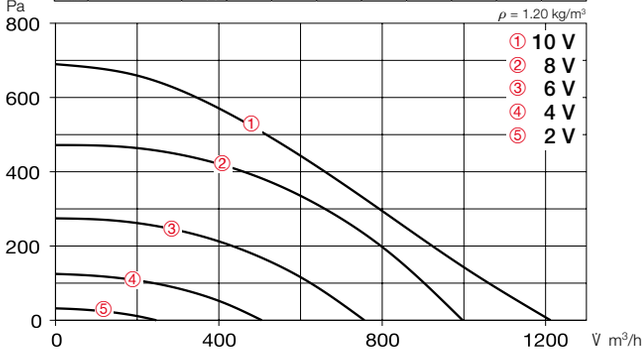

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3030	1210	140	1.1	35	0.42
8	2510	1000	85	0.7	33	0.31
6	1900	760	40	0.4	29	0.19
4	1280	510	20	0.2	22	0.14

Performance curves KRW EC 315/50/25 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	64	54	57	59	55	54	49	44
L_{WA}	Inlet side	dB(A)	77	62	70	68	70	72	69	64
L_{WA}	Outlet side	dB(A)	84	62	72	78	76	79	73	70

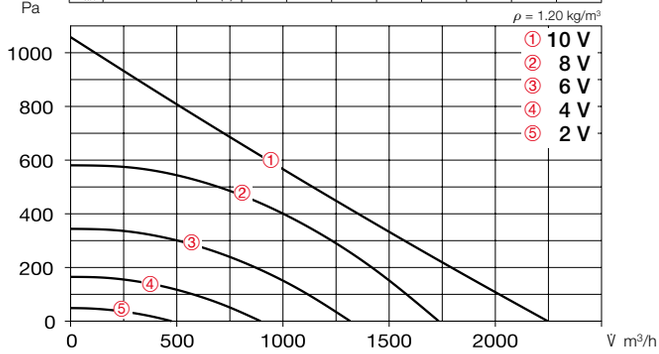

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3030	2250	330	2.5	44	0.53
8	2340	1730	150	1.3	42	0.31
6	1800	1320	70	0.7	36	0.19
4	1240	900	30	0.3	28	0.12

Performance curves SKRW EC 315/50/25 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	49	39	46	40	40	38	33	29
L_{WA}	Inlet side	dB(A)	60	49	57	46	51	50	49	41
L_{WA}	Outlet side	dB(A)	69	51	64	57	61	65	58	50

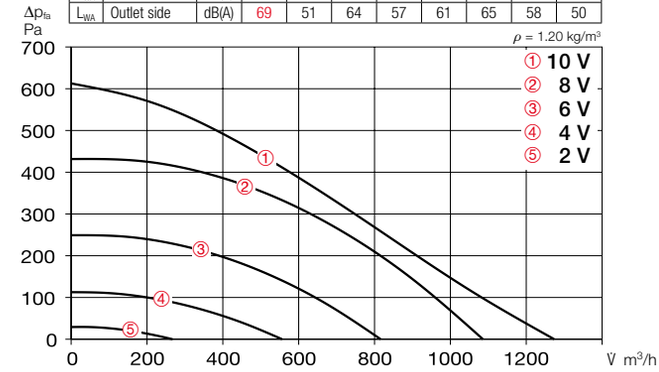

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2990	1270	150	1.2	30	0.43
8	2560	1090	100	0.8	29	0.33
6	1940	820	40	0.4	25	0.18
4	1300	560	20	0.2	17	0.13

Accessories

External wall shutter
VK 50/25 Ref. no. 00875
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 50/25 Ref. no. 00110
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 50/25 Ref. no. 06911
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 50/25 Ref. no. 00833
For cost-effective integration of rectangular duct fans in round duct systems with Ø 250 mm.

Flexible connector
VS 50/25 Ref. no. 05695
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 50/25 Ref. no. 06920
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 50/25-30 Ref. no. 08729
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 50/25-30 Coarse 70%* 08721
KLF 50/25-30 ePM1 50%* 08645
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Electric heating element
EHR-K 8/50/25-30 No. 08704
EHR-K 24/50/25-30 No. 08705
Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

Temperature control system for electric heating element
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 2/50/25-30 No. 08784
WHR 4/50/25-30 No. 08785
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 477 for detailed description.

KR EC 355

Designed for the delivery of contaminated air.

SKR EC 355 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

Dimensions KR EC 355

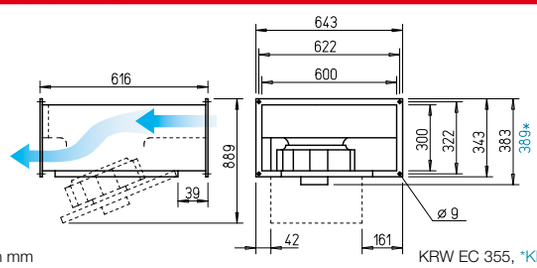

Dim. in mm

KRW EC 355, *KRD EC 355

Dimensions SKR EC 355 – sound-insulated

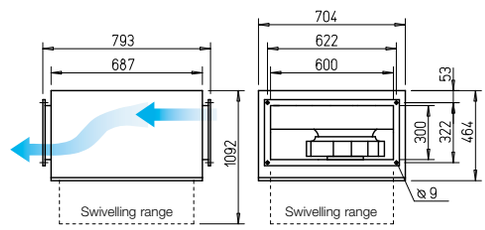

Dim. in mm

Features KR EC and SKR EC

- Highly efficient EC motor for low operating costs.
- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR EC

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR EC**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR EC**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR EC and SKR EC

- **Impeller**
  Centrifugal, with backward curved blades made of aluminium. Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP44 protection and high efficiency. Maintenance-free and equipped with ball bearings. Motor and impeller dynamically balanced.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.
- **Power control**
  Continuously variable speed control with potentiometer or continuously variable speed regulation with universal control system (see table).
  Performance levels are shown in the performance curve as an example.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivel angle.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ☐ Case-radiated sound power
  - ☐ Inlet side sound power
  - ☐ Outlet side sound power.

  The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and in the table below the performance curve.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surface-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
KRW EC 355/60/30	08171	2960	1620	46	0.37	1.61	979	60	20.8	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44															
KRD EC 355/60/30	07590	4380	2500	56	1.30	2.01	1479	60	23.3	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
SKRW EC 355/60/30 [3)]	08176	3860	2210	43	0.90	3.92	979	60	40.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44															
SKRD EC 355/60/30	08296	4340	2510	46	1.26	1.96	1479	60	40.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories. [3)] Performance diagram at www.HeliosSelect.de.

Performance curves KRW EC 355/60/30

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	66	51	64	56	57	52	44	37
L_{WA}	Inlet side	dB(A)	79	65	77	68	66	68	63	55
L_{WA}	Outlet side	dB(A)	83	66	80	73	76	75	69	60

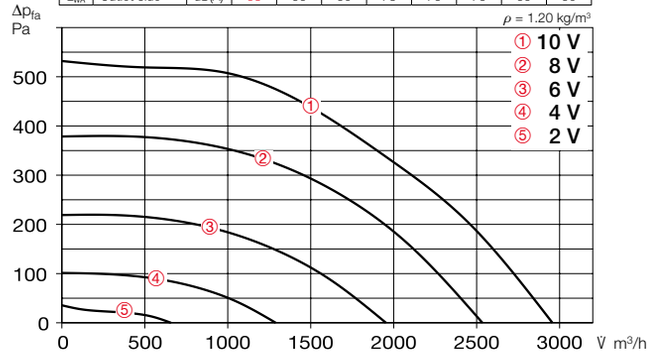

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1660	2960	310	1.4	46	0.38
8	1410	2530	190	0.9	41	0.27
6	1070	1960	90	0.4	35	0.17
4	730	1290	40	0.2	25	0.11

Performance curves KRD EC 355/60/30

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	76	61	71	69	71	65	58	57
L_{WA}	Inlet side	dB(A)	86	74	79	80	79	80	76	69
L_{WA}	Outlet side	dB(A)	94	75	87	87	88	89	82	75

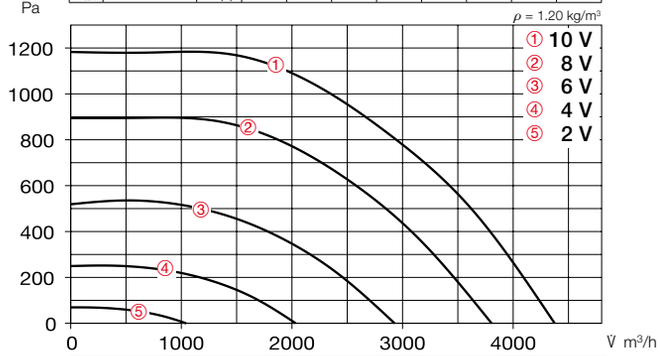

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2500	4380	990	1.6	56	0.81
8	2180	3810	660	1.1	53	0.62
6	1670	2930	310	0.6	47	0.38
4	1150	2040	120	0.3	38	0.21

Performance curves SKRD EC 355/60/30

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	66	57	63	56	58	49	44	41
L_{WA}	Inlet side	dB(A)	75	67	72	66	63	65	60	56
L_{WA}	Outlet side	dB(A)	86	70	79	76	81	80	74	67

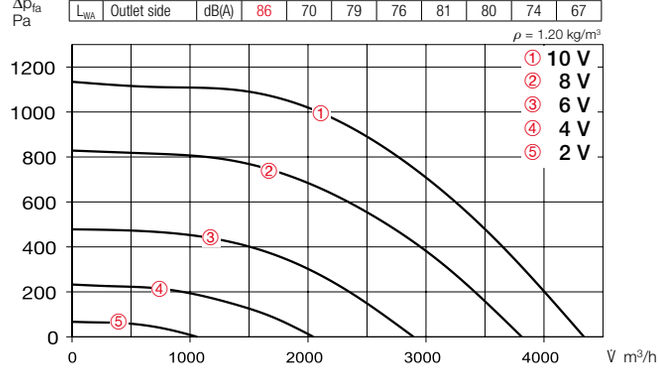

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2500	4340	980	1.5	46	0.81
8	2175	3810	660	1.0	43	0.62
6	1660	2890	310	0.5	39	0.39
4	1145	2050	120	0.3	31	0.21

Accessories

External wall shutter
VK 60/30 Ref. no. 00877
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 60/30 Ref. no. 00112
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 60/30 Ref. no. 06913
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 60/30 Ref. no. 00834
For cost-effective integration of rectangular duct fans in round duct systems with Ø 315 mm.

Flexible connector
VS 60/30 Ref. no. 05697
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 60/30 Ref. no. 06922
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 60/30-35 Ref. no. 08730
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 60/30-35 Coarse 70%* 08722
KLF 60/30-35 ePM2.5 65%* 08646
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Electric heating element
EHR-K 15/60/30-35 No. 08706
EHR-K 30/60/30-35 No. 08707
Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

Temperature control system for electric heating element
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 2/60/30-35 No. 08786
WHR 4/60/30-35 No. 08787
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE[1)] Ref. no. 08319

[1)] With heat output reduced to 2200 l/h for Type WHR 4/60/30-35.

* See product page 477 for detailed description.

KR EC 400

Designed for the delivery of contaminated air.

SKR EC 400 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

Dimensions KR EC 400

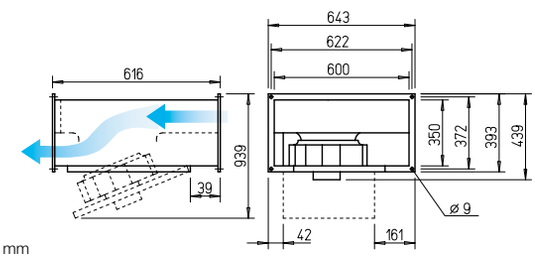

Dim. in mm

Dimensions SKR EC 400 – sound-insulated

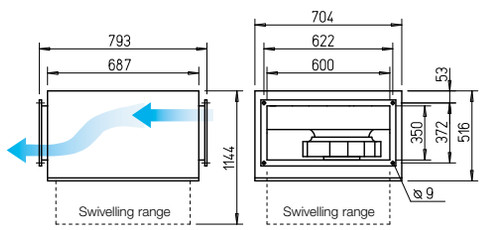

Dim. in mm

Features KR EC and SKR EC

- Highly efficient EC motor for low operating costs.
- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR EC

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR EC**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR EC**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR EC and SKR EC

- **Impeller**
  Centrifugal, with backward curved blades made of aluminium. Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP44 protection and high efficiency. Maintenance-free and equipped with ball bearings. Motor and impeller dynamically balanced.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.
- **Power control**
  Continuously variable speed control with potentiometer or continuously variable speed regulation with universal control system (see table). Performance levels are shown in the performance curve as an example.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivel angle.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ☐ Case-radiated sound power
  - ☐ Inlet side sound power
  - ☐ Outlet side sound power.

  The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and in the table below the performance curve.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surface-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
KRW EC 400/60/35	08172	4100	2210	49	0.92	4.03	979	60	24.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44															
KRD EC 400/60/35	07591	4580	2510	53	1.30	2.01	1479	60	24.4	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
SKRW EC 400/60/35 [3)]	08177	3960	2210	42	0.91	3.96	979	60	42.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44															
SKRD EC 400/60/35	08297	4580	2510	46	1.27	1.98	1479	60	42.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories. [3)] Performance diagram at www.HeliosSelect.de.

Performance curves KRW EC 400/60/35

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	69	54	67	61	62	57	51	47
L_{WA}	Inlet side	dB(A)	82	69	76	73	75	75	71	64
L_{WA}	Outlet side	dB(A)	88	70	83	78	83	81	75	68

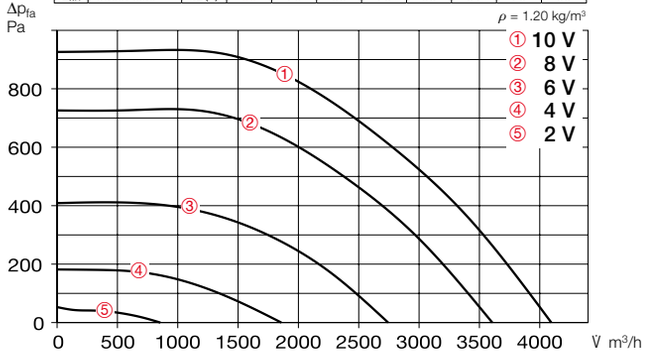

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2210	4100	680	3.0	49	0.60
8	1960	3610	480	2.1	46	0.48
6	1470	2740	220	1.0	40	0.29
4	980	1860	80	0.5	31	0.15

Performance curves KRD EC 400/60/35

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	73	57	68	66	68	63	56	56
L_{WA}	Inlet side	dB(A)	85	71	77	78	79	79	75	68
L_{WA}	Outlet side	dB(A)	92	71	86	84	87	86	80	73

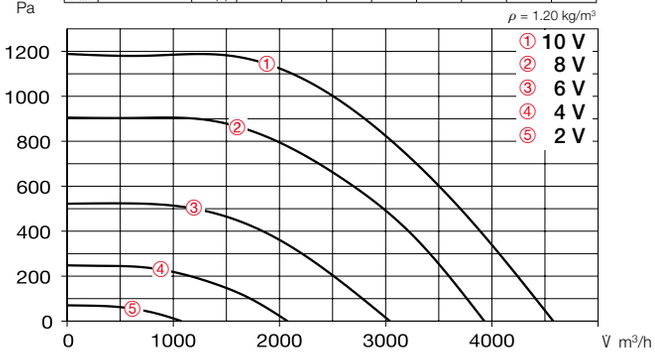

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2510	4580	925	1.4	53	0.73
8	2170	3930	620	1.0	51	0.57
6	1660	3040	290	0.5	44	0.34
4	1130	2080	110	0.3	35	0.19

Performance curves SKRD EC 400/60/35

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	66	57	64	57	57	51	45	41
L_{WA}	Inlet side	dB(A)	77	68	71	68	67	69	67	60
L_{WA}	Outlet side	dB(A)	87	69	80	76	82	81	76	68

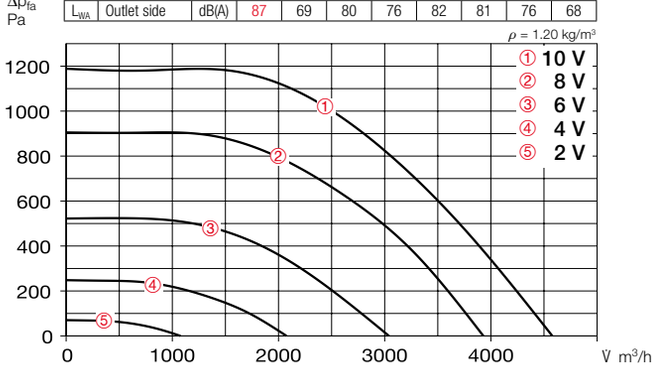

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2510	4580	930	1.4	46	0.73
8	2170	3930	620	1.0	43	0.57
6	1660	3040	290	0.5	40	0.34
4	1130	2080	110	0.3	31	0.19

Accessories

External wall shutter
VK 60/35 Ref. no. 00878
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 60/35 Ref. no. 00113
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 60/35 Ref. no. 06914
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 60/35 Ref. no. 00835
For cost-effective integration of rectangular duct fans in round duct systems with Ø 355 mm.

Flexible connector
VS 60/35 Ref. no. 05698
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 60/35 Ref. no. 06923
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 60/30-35 Ref. no. 08730
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 60/30-35 Coarse 70%* 08722
KLF 60/30-35 ePM2.5 65%* 08646
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Electric heating element
EHR-K 15/60/30-35 No. 08706
EHR-K 30/60/30-35 No. 08707
Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

Temperature control system for electric heating element
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 2/60/30-35 No. 08786
WHR 4/60/30-35 No. 08787
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE[1)] Ref. no. 08319

[1)] With heat output reduced to 2200 l/h for Type WHR 4/60/30-35.

* See product page 477 for detailed description.

KR EC 450

Designed for the delivery of contaminated air.

EC

SKR EC 450 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

EC

Dimensions KR EC 450

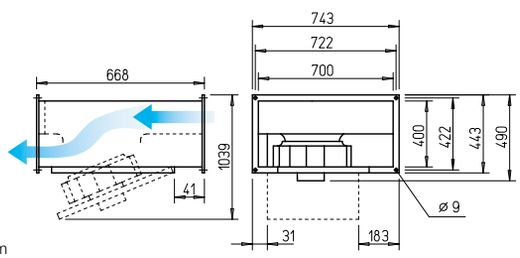

Dim. in mm

Dimensions SKR EC 450 – sound-insulated

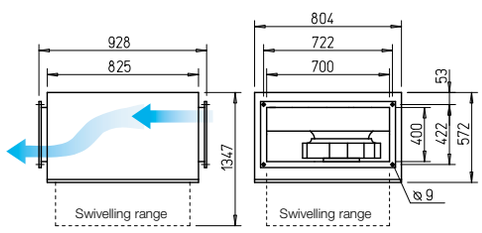

Dim. in mm

Features KR EC and SKR EC

- Highly efficient EC motor for low operating costs.
- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR EC

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR EC**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR EC**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR EC and SKR EC

- **Impeller**
  Centrifugal, with backward curved blades made of aluminium. Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP44 protection and high efficiency. Maintenance-free and equipped with ball bearings. Motor and impeller dynamically balanced.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.
- **Power control**
  Continuously variable speed control with potentiometer or continuously variable speed regulation with universal control system (see table).
  Performance levels are shown in the performance curve as an example.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivel angle.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ☐ Case-radiated sound power
  - ☐ Inlet side sound power
  - ☐ Outlet side sound power.

  The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and in the table below the performance curve.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surface-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
KRW EC 450/70/40	06127	5570	1500	48	0.86	3.80	979	60	37.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44															
KRD EC 450/70/40	08173	7520	1920	54	1.82	2.81	1479	60	38.2	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44															
SKRW EC 450/70/40 [3)]	06129	5390	1510	46	0.84	3.70	979	60	56.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44															
SKRD EC 450/70/40 A	08178	7460	1940	49	1.81	2.81	1479	60	57.2	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories. [3)] Performance diagram at www.HeliosSelect.de.

Performance curves KRW EC 450/70/40

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	56	66	59	57	52	48	43
L_{WA}	Inlet side	dB(A)	81	70	77	72	71	71	67	59
L_{WA}	Outlet side	dB(A)	86	71	83	76	81	76	72	64

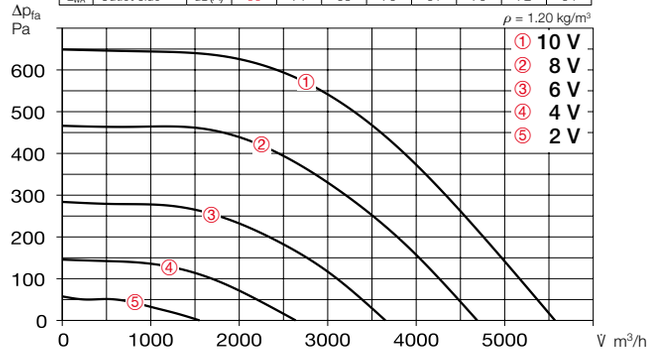

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	5570	630	2.8	48	0.40
8	1270	4690	380	1.7	43	0.29
6	980	3650	180	0.8	37	0.18
4	700	2640	75	0.4	29	0.10

Performance curves KRD EC 450/70/40

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	74	59	73	65	64	59	53	49
L_{WA}	Inlet side	dB(A)	84	74	78	76	76	77	72	66
L_{WA}	Outlet side	dB(A)	91	75	85	81	87	82	78	72

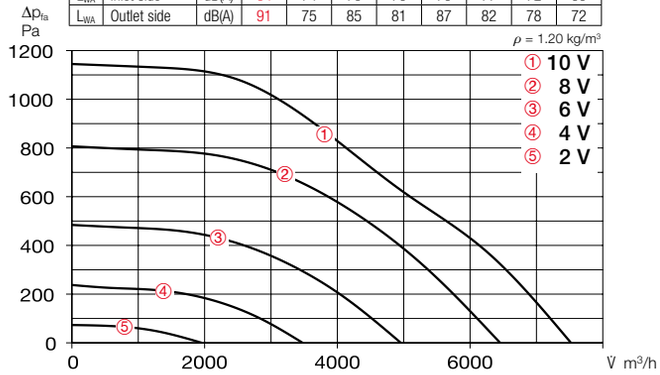

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1970	7520	1560	2.4	54	0.75
8	1670	6450	950	1.5	51	0.53
6	1290	4960	450	0.7	44	0.33
4	900	3480	170	0.4	36	0.18

Performance curves SKRD EC 450/70/40 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	69	61	67	56	56	48	42	39
L_{WA}	Inlet side	dB(A)	79	72	74	72	71	66	61	54
L_{WA}	Outlet side	dB(A)	86	73	80	77	82	77	72	63

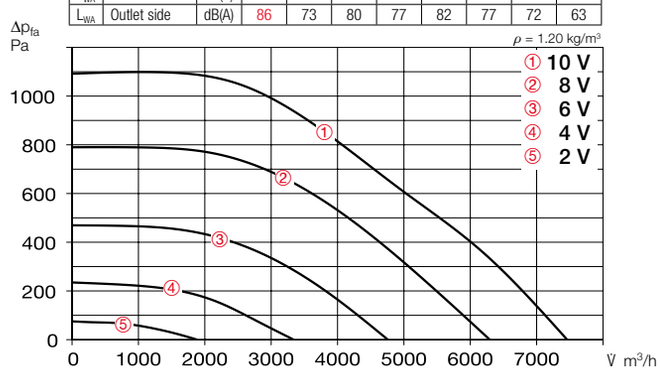

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1970	7460	1500	2.3	49	0.72
8	1670	6290	920	1.4	47	0.53
6	1290	4760	440	0.7	43	0.33
4	900	3340	170	0.3	36	0.18

Accessories

External wall shutter
VK 70/40 Ref. no. 00879
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 70/40 Ref. no. 00114
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 70/40 Ref. no. 06915
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 70/40 Ref. no. 00840
For cost-effective integration of rectangular duct fans in round duct systems with Ø 400 mm.

Flexible connector
VS 70/40 Ref. no. 05699
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 70/40 Ref. no. 06924
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 70/40 Ref. no. 08731
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 70/40 Coarse 70%* 08723
KLF 70/40 ePM1 50%* 08647
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/70/40 Ref. no. 08788
WHR 4/70/40 Ref. no. 08789
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE[1)] Ref. no. 08319

[1)] With heat output reduced to 2200 l/h for Type WHR 4/70/40.

Accessory details	**Page**
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f
Universal control system, electronic controllers, speed potentiometer	615 ff.

* See product page 477 for detailed description.

InlineVent® EC rectangular duct fans
Ø 500 mm, backward curved, for rectangular ducts 80 x 50 cm

KR EC 500

Designed for the delivery of contaminated air.

EC

SKR EC 500 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

EC

Dimensions KR EC 500

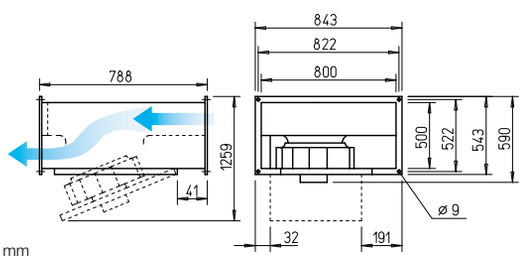

Dim. in mm

Dimensions SKR EC 500 – sound-insulated

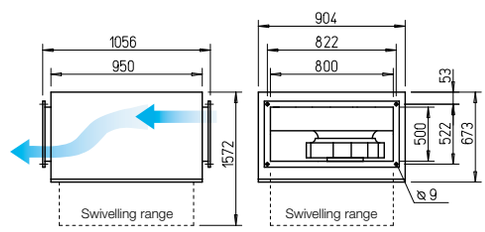

Dim. in mm

Features KR EC and SKR EC

- Highly efficient EC motor for low operating costs.
- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR EC

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR EC**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR EC**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR EC and SKR EC

- **Impeller**
  Centrifugal, with backward curved blades made of aluminium. Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP44 protection and high efficiency. Maintenance-free and equipped with ball bearings. Motor and impeller dynamically balanced.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.
- **Power control**
  Continuously variable speed control with potentiometer or continuously variable speed regulation with universal control system (see table).
  Performance levels are shown in the performance curve as an example.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivel angle.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ☐ Case-radiated sound power
  - ☐ Inlet side sound power
  - ☐ Outlet side sound power.

  The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and in the table below the performance curve.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surface-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44															
KRD EC 500/80/50 A	08174	7990	1350	47	1.24	1.92	1479	60	50.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
KRD EC 500/80/50 B [3)]	06128	9080	1550	51	1.81	2.79	1479	60	50.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44															
SKRD EC 500/80/50 A	08299	7990	1350	45	1.22	1.88	1479	60	73.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SKRD EC 500/80/50 B	08179	8760	1540	48	1.82	2.81	1479	60	73.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories. [3)] Performance diagram at www.HeliosSelect.de.

Performance curves KRD EC 500/80/50 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	67	59	63	60	58	53	46	40
L_{WA}	Inlet side	dB(A)	80	71	75	68	75	72	67	59
L_{WA}	Outlet side	dB(A)	87	74	84	76	81	77	71	62

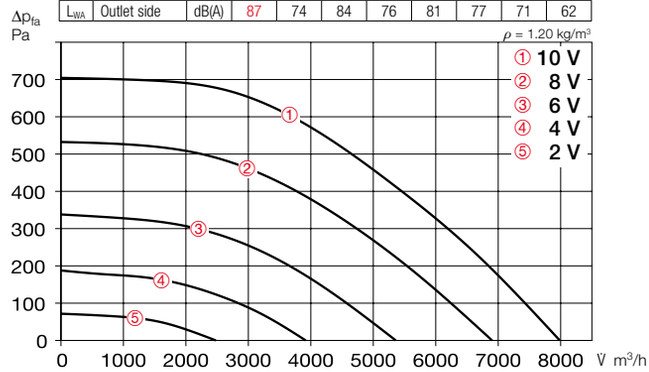

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1358	7990	900	1.4	47	0.40
8	1181	6900	610	1.0	44	0.32
6	935	5360	310	0.6	39	0.21
4	687	3920	140	0.3	32	0.13

Performance curves SKRD EC 500/80/50 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	58	63	51	53	45	44	40
L_{WA}	Inlet side	dB(A)	73	67	71	59	60	61	55	49
L_{WA}	Outlet side	dB(A)	81	71	78	73	75	70	64	57

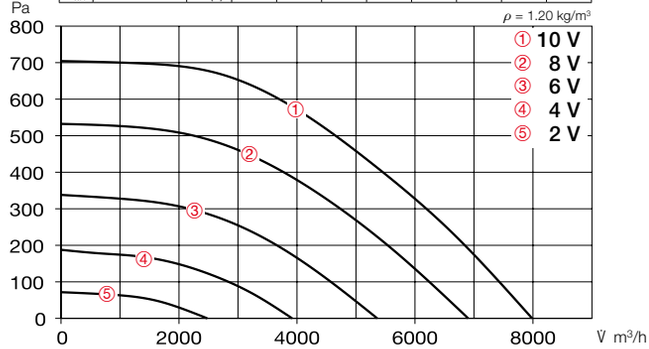

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1360	7990	900	1.4	45	0.40
8	1180	6900	610	1.0	42	0.32
6	930	5360	320	0.6	40	0.21
4	690	3920	140	0.3	31	0.13

Performance curves SKRD EC 500/80/50 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	57	66	54	62	48	47	45
L_{WA}	Inlet side	dB(A)	75	68	73	63	64	64	59	53
L_{WA}	Outlet side	dB(A)	85	71	82	77	80	75	69	61

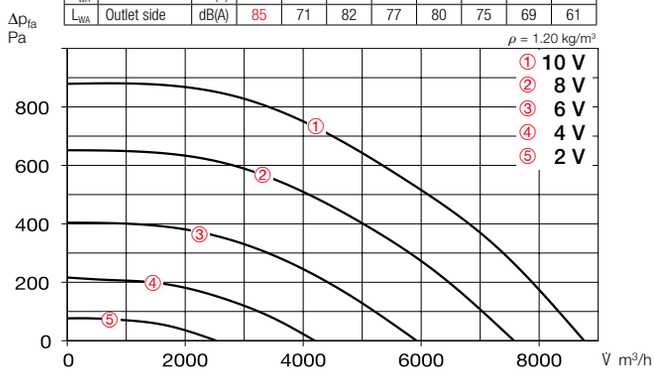

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1560	8760	1420	2.2	51	0.58
8	1340	7570	900	1.4	48	0.43
6	1050	5920	440	0.7	42	0.26
4	760	4200	180	0.4	34	0.15

Accessories

External wall shutter
VK 80/50 Ref. no. 00880
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 80/50 Ref. no. 00115
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 80/50 Ref. no. 06916
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 80/50 Ref. no. 00842
For cost-effective integration of rectangular duct fans in round duct systems with Ø 500 mm.

Flexible connector
VS 80/50 Ref. no. 05700
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 80/50 Ref. no. 06925
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 80/50 Ref. no. 08732
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 80/50 Coarse 70%* 08670
KLF 80/50 ePM1 50%* 08654
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/80/50 Ref. no. 08795
WHR 4/80/50 Ref. no. 08796
For installation in rectangular duct system.

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

* See product page 477 for detailed description.

KR EC 560

Note: Fig. similar. Use two safety arms.
Designed for the delivery of contaminated air.

EC

SKR EC 560 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

EC

Dimensions KR EC 560

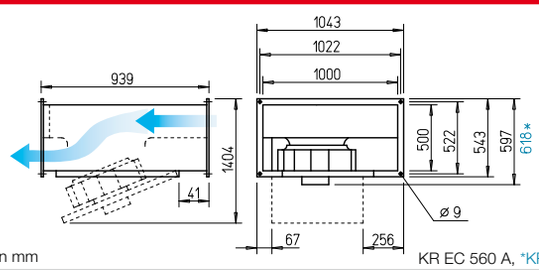

Dim. in mm

KR EC 560 A, *KR EC 560 B

Dimensions SKR EC 560 – sound-insulated

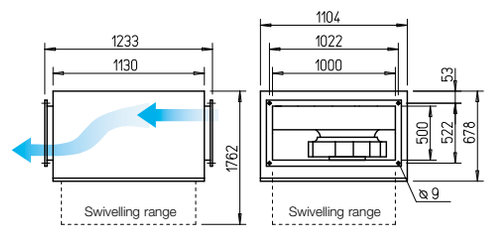

Dim. in mm

Features KR EC and SKR EC

- Highly efficient EC motor for low operating costs.
- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR EC

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR EC**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR EC**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR EC and SKR EC

- **Impeller**
  Centrifugal, with backward curved blades (560 A made of aluminium and 560 B made of plastic). Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Energy-efficient, speed-controllable EC external rotor motor with IP44 protection (KRD EC 560/100/50 B and SKRD EC 560/100/50 B IP54) and high efficiency. Maintenance-free and equipped with ball bearings. Motor and impeller dynamically balanced.
- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.
- **Power control**
  Continuously variable speed control with potentiometer or continuously variable speed regulation with universal control system (see table).
  Performance levels are shown in the performance curve as an example.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivel angle.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ☐ Case-radiated sound power
  - ☐ Inlet side sound power
  - ☐ Outlet side sound power.

  The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and in the table below the performance curve.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power con-sum.	Current con-sum.	Prot. cat.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer flush-mount.		Speed potentiometer surface-mount.	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A		No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor																
KRD EC 560/100/50 A	08167	9370	1540	50	1.81	2.80	IP44	1479	60	68.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
KRD EC 560/100/50 B	08175	13590	1640	56	4.01	6.10	IP54	1479	60	92.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
Sound-insulated SKR EC – Three-phase current, 3~, 400 V, 50/60 Hz, EC motor																
SKRD EC 560/100/50 A [3)]	06130	9370	1540	47	1.81	2.80	IP44	1479	60	92.5	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735
SKRD EC 560/100/50 B	08180	12900	1640	51	3.88	6.00	IP54	1479	60	117.0	**EUR EC** [1)2)]	01347	**PU 10** [1)]	01734	**PA 10** [1)]	01735

[1)] Multiple EC fans can normally be connected. [2)] alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories.
[3)] Performance diagram at www.HeliosSelect.de.

Performance curves KRD EC 560/100/50 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	70	60	67	64	61	56	48	45
L_{WA}	Inlet side	dB(A)	80	66	70	72	75	74	69	61
L_{WA}	Outlet side	dB(A)	88	71	84	80	83	79	73	64

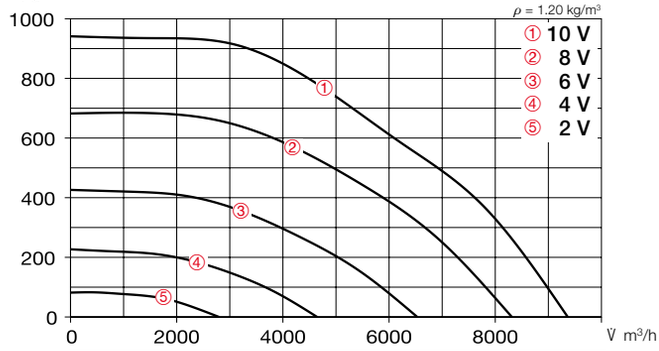

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1560	9370	1250	1.9	50	0.48
8	1340	8310	810	1.3	48	0.35
6	1050	6530	410	0.7	43	0.23
4	760	4650	170	0.4	34	0.13

Performance curves KRD EC 560/100/50 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	76	67	73	68	67	64	59	56
L_{WA}	Inlet side	dB(A)	88	74	77	77	83	82	78	69
L_{WA}	Outlet side	dB(A)	95	78	87	87	91	88	83	75

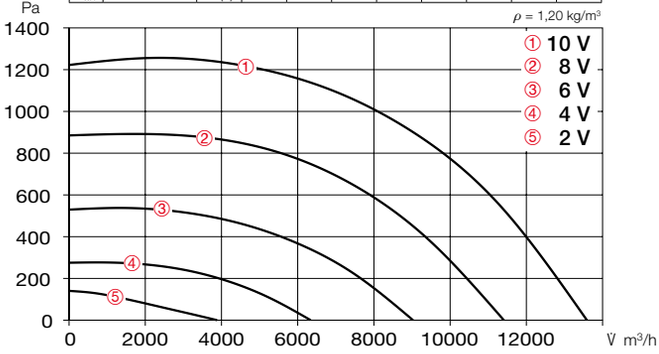

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1640	13590	3049	4,7	56	0,87
8	1380	11364	1801	2,8	52	0,59
6	1060	9023	870	1,41	46	0,35
4	760	6334	350	0,67	39	0,20

Performance curves SKRD EC 560/100/50 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	71	65	68	59	58	51	47	43
L_{WA}	Inlet side	dB(A)	77	69	72	69	67	65	63	59
L_{WA}	Outlet side	dB(A)	90	75	81	83	86	81	77	68

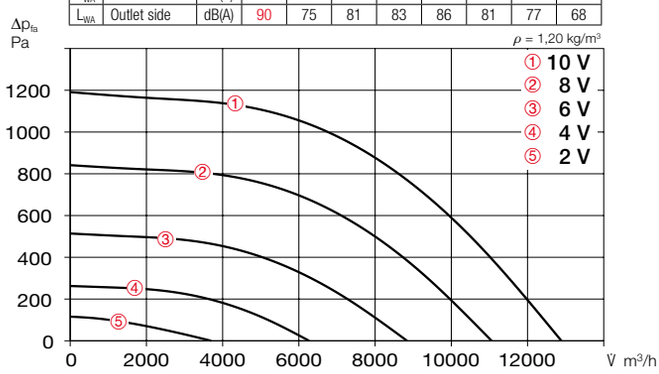

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1640	12900	3019	4,7	51	0,88
8	1380	11060	1802	2,8	47	0,61
6	1070	8840	889	1,43	42	0,38
4	760	6270	343	0,66	35	0,20

Accessories

External wall shutter
VK 100/50 Ref. no. 00881
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 100/50 Ref. no. 00116
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 100/50 Ref. no. 06917
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 100/50 Ref. no. 00843
For cost-effective integration of rectangular duct fans in round duct systems with Ø 500 mm.

Flexible connector
VS 100/50 Ref. no. 05701
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 100/50 Ref. no. 06926
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 100/50 Ref. no. 08733
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 100/50 Coarse 70%* 08671
KLF 100/50 ePM2.5 65%* 08655
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/100/50 Ref. no. 08797
WHR 4/100/50 Ref. no. 08798
For installation in rectangular duct system.

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

* See product page 477 for detailed description.

KR 180

Designed for the delivery of contaminated air.

KR 225

Designed for the delivery of contaminated air.

Dimensions KR 180

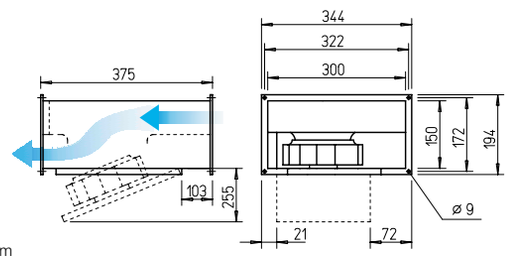

Dim. in mm

Dimensions KR 225

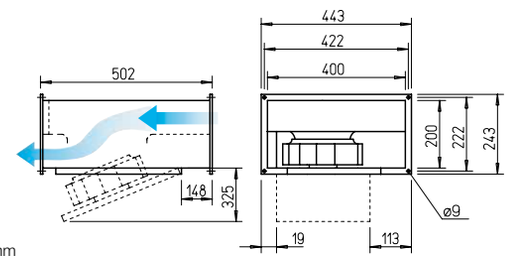

Dim. in mm

Centrifugal EC rectangular duct fans with backward curved impeller blades. Retractable motor-impeller unit.

- High-performance impellers with high efficiency.
- Use in extract air and intake air systems for the delivery of larger volume flows.
- Non-critical for the delivery of contaminated air.

Special features

- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Compact design, low space requirement, linear rectangular duct throughflow.

Description

Casing
Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.

Impeller
Centrifugal, with backward curved blades made of plastic and galvanised steel.
Aerodynamically optimised, inlet via nozzle.

Drive
Through maintenance-free external rotor motor on which the impeller is mounted. Closed design. Protection category IP44. Winding with moisture proof coating. Ball bearing mounted. Motor and impeller dynamically balanced.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatically resetting.

Power control
Through voltage reduction using 5-step transformer or electronically (continuously variable). The performances at corresponding voltages are shown in the performance diagram.

Electrical connection
Terminal box (IP54) mounted to external cable.

Installation
Installation possible in any position. Note accessibility/swivelling range.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power

The inlet side sound power level is also specified above the control voltages in the performance diagram.
- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temp. at Rat. vol.	Max. air flow temp. at Control	Wgt net aprx.	Speed controller: Transformer 5-step		Speed controller: surface-mount., electronic		Speed controller: flush-mount., electronic	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current, Capacitor motor, 230 V, 50 Hz, protection category IP44																
KRW 180/2/30/15	08885	540	2460	37	0.06	0.35	508	70	70	5.5	**TSW 1.5**	01495	**ESA 1**	00238	**ESU 1**	00236
KRW 225/2/40/20	08886	1020	2530	40	0.12	0.46	508	70	70	9.8	**TSW 1.5**	01495	**ESA 1**	00238	**ESU 1**	00236

Performance curves KRW 180/2/30/15

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	36	52	56	47	44	38	34
L_{WA}	Inlet side	dB(A)	71	56	65	69	59	55	50	45
L_{WA}	Outlet side	dB(A)	72	55	65	68	66	61	56	47

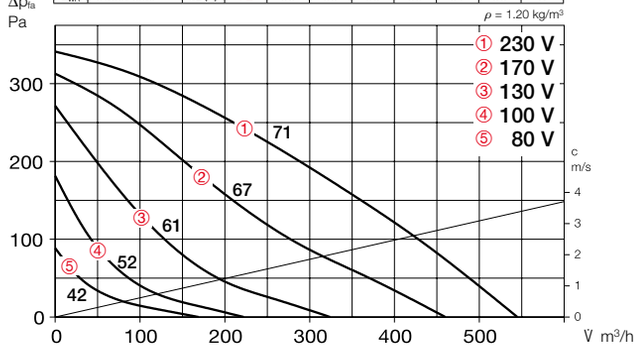

Performance curves KRW 225/2/40/20

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	60	42	54	58	53	52	46	32
L_{WA}	Inlet side	dB(A)	72	60	68	68	65	60	60	49
L_{WA}	Outlet side	dB(A)	75	61	70	71	66	69	65	53

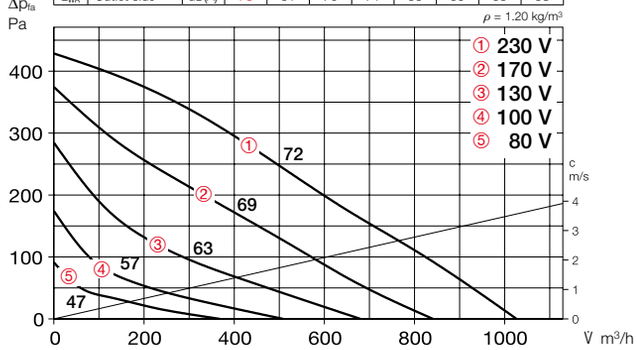

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f.
Speed controllers and motor protection circuit breakers	601 ff.

Accessories

External wall shutter

VK 30/15	Ref. no. 00735
VK 40/20	Ref. no. 00874

Automatic overpressure shutter made of light grey plastic.

Weather protection grille

WSG 30/15	Ref. no. 00108
WSG 40/20	Ref. no. 00109

Stable construction made of extruded aluminium profiles.

Multi-leaf damper for rectangular duct installation

JVK 30/15	Ref. no. 06927
JVK 40/20	Ref. no. 06910

With double-sided flanges. electrical drive see STM, Accessories.

Fitting

FSK 30/15	Ref. no. 00831
FSK 40/20	Ref. no. 00832

For integration of rectangular duct fans in round duct systems with Ø 160 or 200 mm.

Flexible connector

VS 30/15	Ref. no. 06928
VS 40/20	Ref. no. 05694

Flexible rectangular duct connector with double-sided flange frame.

Counter flange

GF 30/15	Ref. no. 06918
GF 40/20	Ref. no. 06919

Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer

KSD 40/20	Ref. no. 08728

For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter

KLF 40/20 Coarse 70%*	08720
KLF 40/20 ePM1 50%*	08644

With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Electric heating element

EHR-K 6/40/20	No. 08702
EHR-K 15/40/20	No. 08703

Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

Temperature control system for electric heating element

EHSD 16	Ref. no. 05003

Warm water heating element

WHR 2/40/20	Ref. no. 08782
WHR 4/40/20	Ref. no. 08783

For installation in rectangular duct system.

Temperature control system for warm water heating element

WHS HE	Ref. no. 08319

* See product page 477 for detailed description.

KR 225

Designed for the delivery of contaminated air.

Dimensions KR 225

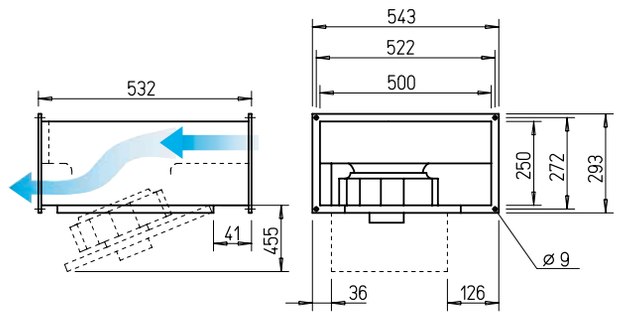

Dim. in mm

Radial rectangular duct fans with backward curved impeller blades. Retractable motor-impeller unit.

- High-performance impellers with high efficiency.
- Use in extract air and intake air systems for the delivery of larger volume flows.
- Non-critical for the delivery of contaminated air.

Special features

- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Description

Casing
Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.

Impeller
Centrifugal, with backward curved blades made of plastic. Aerodynamically optimised, inlet via nozzle.

Drive
Through maintenance-free external rotor motor on which the impeller is mounted. Closed design. Protection category IP44. Winding with moisture proof coating. Ball bearing mounted. Motor and impeller dynamically balanced.

Motor protection
Through built-in thermal contacts wired in series to the winding, automatically resetting.

Power control
Through voltage reduction using 5-step transformer or electronically (continuously variable). The performances at corresponding voltages are shown in the performance diagram.

Electrical connection
Terminal box (IP54) mounted to external cable.

Installation
Note accessibility/swivel angle. May only be installed with the inspection panel at the bottom or at the side.

Noise
The total level and range are specified above the performance diagram for:
- ▢ Case-radiated sound power
- ▢ Inlet side sound power
- ▢ Outlet side sound power

The inlet side sound power level is also specified above the control voltages in the performance diagram.
- ▢ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temp. at Rat. vol.	Control	Wgt net aprx.	Speed controller Transformer 5-step		surface-mount., electronic		flush-mount., electronic	
		V m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current, Capacitor motor, 230 V, 50 Hz, protection category IP44																
KRW 225/2/50/25	08873	1160	2680	45	0.17	0.73	508	70	60	15.0	**TSW 1.5**	01495	**ESA 1**	00238	**ESU 1**	00236

Performance curves KRW 225/2/50/25

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	65	44	63	59	52	51	47	43
L_{WA}	Inlet side	dB(A)	72	57	68	60	64	64	63	60
L_{WA}	Outlet side	dB(A)	78	61	74	71	70	71	67	63

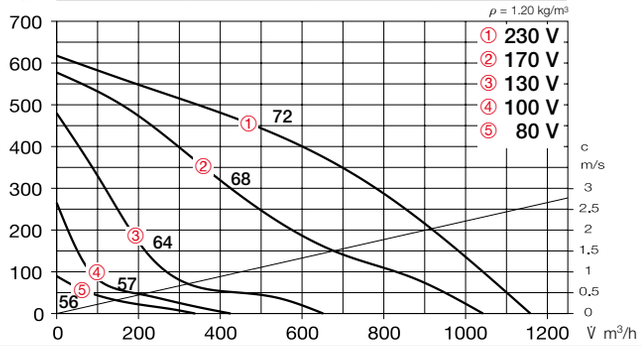

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f.
Speed controllers and motor protection circuit breakers	601 ff.

Accessories

External wall shutter
VK 50/25 Ref. no. 00875
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 50/25 Ref. no. 00110
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 50/25 Ref. no. 06911
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 50/25 Ref. no. 00833
For integration of rectangular duct fans in round duct systems with Ø 250 mm.

Flexible connector
VS 50/25 Ref. no. 05695
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 50/25 Ref. no. 06920
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 50/25-30 Ref. no. 08729
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 50/25-30 Coarse 70%* 08721
KLF 50/25-30 ePM1 50%* 08645
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Electric heating element
EHR-K 8/50/25-30 No. 08704
EHR-K 24/50/25-30 No. 08705
Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

Temperature control system for electric heating element
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 2/50/25-30 No. 08784
WHR 4/50/25-30 No. 08785
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE Ref. no. 08319

* See product page 477 for detailed description.

KR 355

Designed for the delivery of contaminated air.

SKR 355 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

Dimensions KR 355

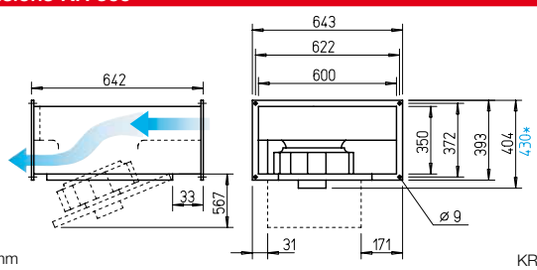

Dim. in mm

KRD, *KRW

Dimensions SKR 355 – sound-insulated

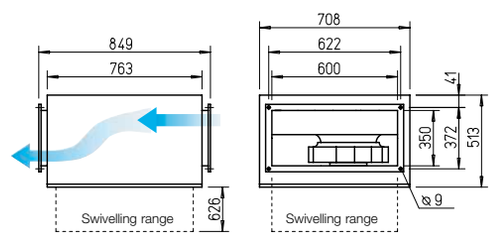

Dim. in mm

Features KR and SKR

- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR and SKR

- **Impeller**
  Centrifugal, with backward curved blades made of plastic. Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted. Closed design. protection category IP54. Winding with moisture proof coating. Ball bearing mounted. Motor and impeller dynamically balanced.
- **Motor protection**
  Through built-in thermal contacts via triggering device (Accessories).
- **Power control**
  Through voltage reduction using 5-step transformer or electronically (continuously variable). The performances at corresponding voltages are shown in the performance diagram.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ☐ Case-radiated sound power
  - ☐ Inlet side sound power
  - ☐ Outlet side sound power
  The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temp. at Rat. vol.	Control	Wgt net aprx.	Speed controller 5-step with motor protection circuit breaker		Motor protection circuit breaker for connection of built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP54														
KRW 355/4/60/35	08692	3600	1390	42	0.37	1.90	536.1	60	60	28.4	**MWS 3**	01948	**MW**	01579
Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
KRD 355/4/60/35	08584	2840	1330	37	0.25	0.80/0.46	860	60	60	27.2	**RDS 1**	01314	**MD**	05849
Sound-insulated SKR – Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP54														
SKRW 355/4/60/35	08681	3580	1400	39	0.35	1.82	536.1	60	60	48.8	**MWS 3**	01948	**MW**	01579
Sound-insulated SKR – Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
SKRD 355/4/60/35	08181	2800	1330	34	0.24	0.78/0.45	860	60	60	49.0	**RDS 1**	01314	**MD**	05849

Performance curves KRW 355/4/60/35

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	54	59	51	51	47	44	36
L_{WA}	Inlet side	dB(A)	75	73	68	58	61	64	58	52
L_{WA}	Outlet side	dB(A)	78	72	72	67	72	69	65	58

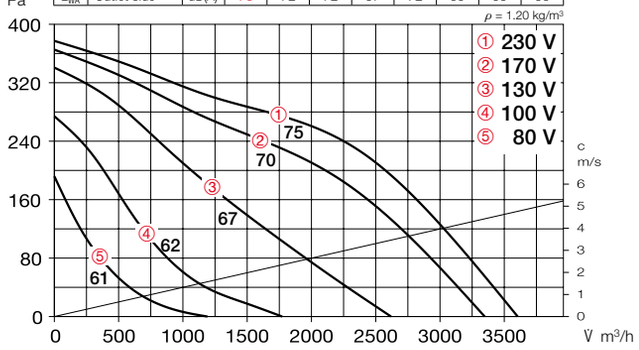

Performance curves KRD 355/4/60/35

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	57	53	53	46	46	40	37	32
L_{WA}	Inlet side	dB(A)	70	68	63	54	55	56	55	47
L_{WA}	Outlet side	dB(A)	74	68	69	64	65	61	59	56

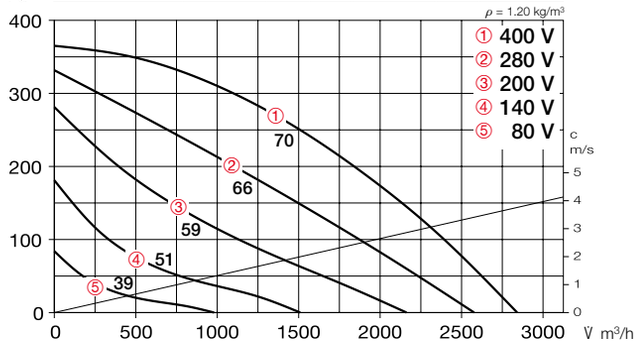

Performance curves SKRW 355/4/60/35

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	59	54	56	46	44	39	35	30
L_{WA}	Inlet side	dB(A)	69	67	62	54	50	49	45	39
L_{WA}	Outlet side	dB(A)	74	68	68	62	69	64	59	53

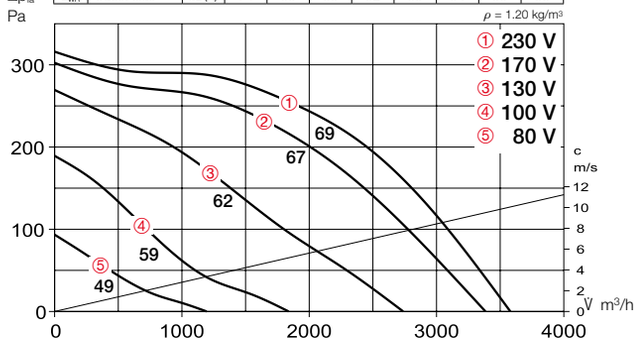

Performance curves SKRD 355/4/60/35

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	54	52	48	38	37	35	33	31
L_{WA}	Inlet side	dB(A)	63	62	54	45	41	42	40	36
L_{WA}	Outlet side	dB(A)	68	66	62	54	57	52	50	44

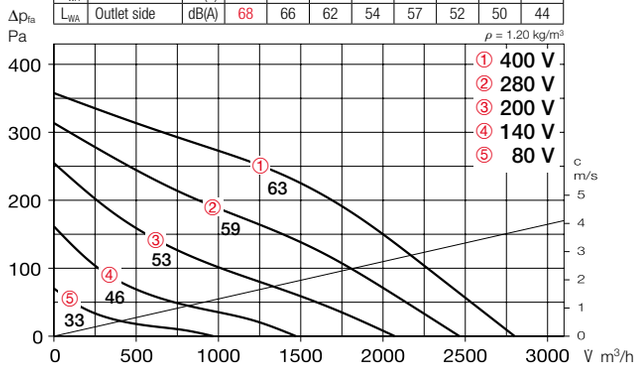

Accessories

External wall shutter
VK 60/35 Ref. no. 00878
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 60/35 Ref. no. 00113
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 60/35 Ref. no. 06914
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 60/35 Ref. no. 00835
For cost-effective integration of rectangular duct fans in round duct systems with Ø 355 mm.

Flexible connector
VS 60/35 Ref. no. 05698
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 60/35 Ref. no. 06923
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 60/30-35 Ref. no. 08730
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 60/30-35 Coarse 70%* 08722
KLF 60/30-35 ePM2.5 65%* 08646
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Electric heating element
EHR-K 15/60/30-35 No. 08706
EHR-K 30/60/30-35 No. 08707
Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

Temperature control system for electric heating element
EHSD 16 Ref. no. 05003

Warm water heating element
WHR 2/60/30-35 No. 08786
WHR 4/60/30-35 No. 08787
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE[1)] Ref. no. 08319

[1)] With heat output reduced to 2200 l/h for Type WHR 4/60/30-35.

* See product page 477 for detailed description.

KR 400/450/500

Designed for the delivery of contaminated air.

SKR 400/450/500 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

Dimensions KR 400/450/500

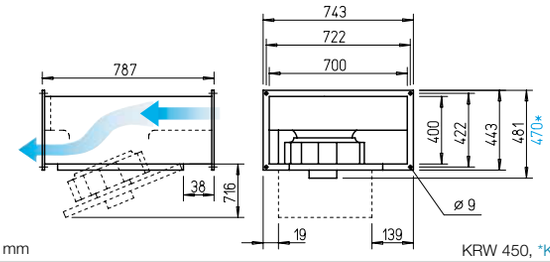

Dim. in mm

KRW 450, *KRW 400

Dimensions SKR 400/450/500 – sound-insulated

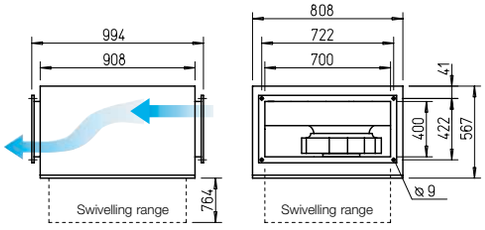

Dim. in mm

Features KR and SKR

- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR and SKR

- **Impeller**
  Centrifugal, with backward curved blades made of plastic. Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted. Closed design. protection category IP54. Winding with moisture proof coating. Ball bearing mounted. Motor and impeller dynamically balanced.
- **Motor protection**
  Through built-in thermal contacts via triggering device (Accessories).
- **Power control**
  Through voltage reduction using 5-step transformer or electronically (continuously variable). The performances at corresponding voltages are shown in the performance diagram.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ▢ Case-radiated sound power
  - ▢ Inlet side sound power
  - ▢ Outlet side sound power. The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - ▢ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temp. at Rat. vol.	Control	Wgt net aprx.	Speed controller 5-step with motor protection circuit breaker		Motor protection circuit breaker for connection of built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP54														
KRW 400/4/70/40	06150	4970	1320	44	0.57	2.60	536.1	60	60	39.0	**MWS 5**	01949	**MW**	01579
KRW 450/4/70/40	06151	6650	1390	51	1.04	4.80	536.1	60	60	38.7	**MWS 7.5**	01950	**MW**	01579
Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
KRD 450/4/70/40 [1)2)]	08694	5830	1430	47	0.82	2.80/1.60	860	60	40	48.5	**RDS 4**	01316	**MD**	05849
Sound-insulated SKR – Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP54														
SKRW 400/4/70/40	06143	4940	1330	42	0.53	2.40	536.1	60	60	62.0	**MWS 5**	01949	**MW**	01579
Sound-insulated SKR – Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
SKRD 450/4/70/40	08196	5430	1430	46	0.82	2.70/1.60	860	60	40	69.3	**RDS 4**	01316	**MD**	05849
SKRD 500/6/70/40 [1)]	08197	4620	920	36	0.40	1.40/0.82	860	60	60	64.1	**RDS 2**	01315	**MD**	05849

1) Performance diagram at www.HeliosSelect.de. 2) Dimensional drawing at www.HeliosSelect.de.

Performance curves KRW 400/4/70/40

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	64	57	61	54	54	50	45	38
L_{WA}	Inlet side	dB(A)	74	71	66	64	66	65	60	53
L_{WA}	Outlet side	dB(A)	84	75	77	74	80	76	70	63

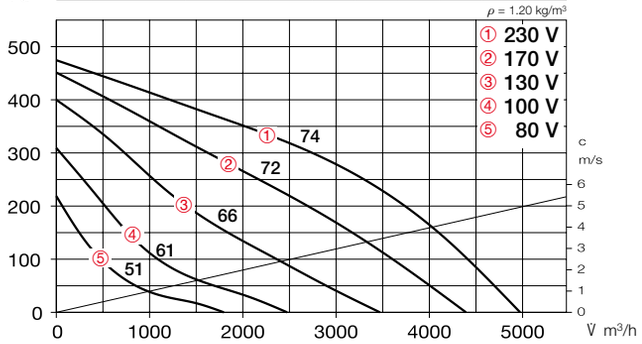

Performance curves KRW 450/4/70/40

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	71	61	70	62	59	53	49	44
L_{WA}	Inlet side	dB(A)	79	74	73	70	70	69	66	58
L_{WA}	Outlet side	dB(A)	90	80	83	81	84	81	76	68

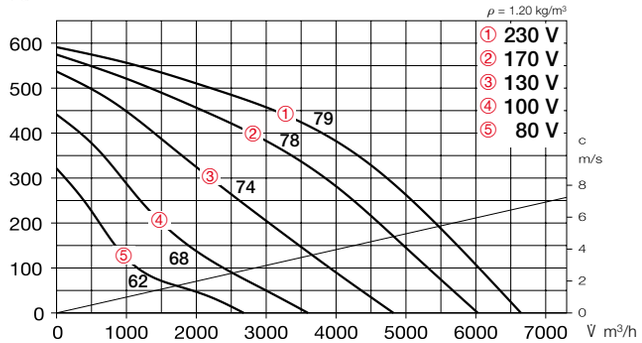

Performance curves SKRW 400/4/70/40

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	62	58	59	47	44	40	36	34
L_{WA}	Inlet side	dB(A)	69	68	61	58	53	51	46	42
L_{WA}	Outlet side	dB(A)	79	73	71	67	73	70	65	58

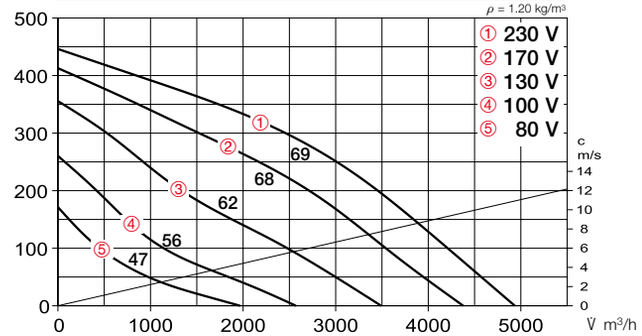

Performance curves SKRD 450/4/70/40

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	66	64	61	49	46	40	37	36
L_{WA}	Inlet side	dB(A)	72	70	65	62	56	51	49	44
L_{WA}	Outlet side	dB(A)	80	76	74	69	68	61	60	56

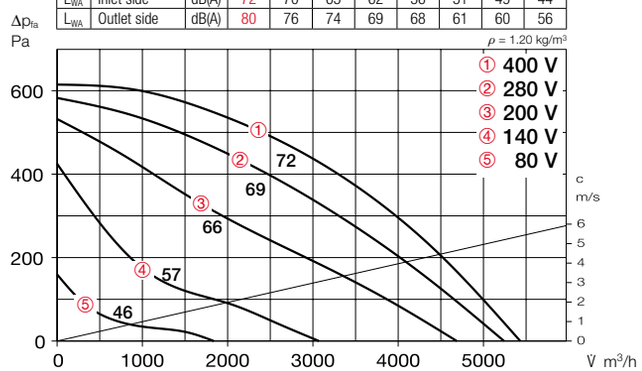

Accessories

External wall shutter
VK 70/40 Ref. no. 00879
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 70/40 Ref. no. 00114
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 70/40 Ref. no. 06915
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 70/40 Ref. no. 00840
For cost-effective integration of rectangular duct fans in round duct systems with Ø 400 mm.

Flexible connector
VS 70/40 Ref. no. 05699
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 70/40 Ref. no. 06924
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 70/40 Ref. no. 08731
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 70/40 Coarse 70%* 08723
KLF 70/40 ePM1 50%* 08647
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/70/40 Ref. no. 08788
WHR 4/70/40 Ref. no. 08789
For installation in rectangular duct system.

Temperature control system for warm water heating element
WHS HE[1)] Ref. no. 08319

[1)] With heat output reduced to 2200 l/h for Type WHR 4/70/40.

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 494 f.
Speed controllers and motor protection circuit breakers	601 ff.

* See product page 477 for detailed description.

KR 500

Designed for the delivery of contaminated air.

SKR 500 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

Dimensions KR 500

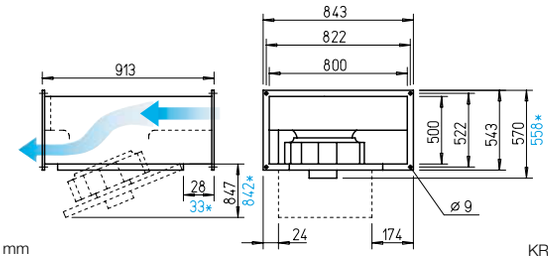

Dim. in mm

KRW, *KRD

Dimensions SKR 500 – sound-insulated

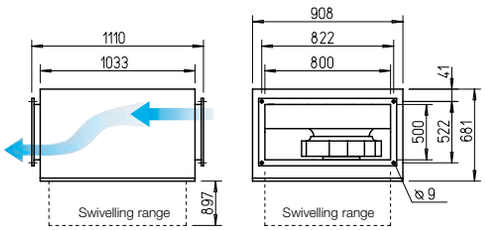

Dim. in mm

Features KR and SKR

- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR and SKR

- **Impeller**
  Centrifugal, with backward curved blades made of plastic. Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted. Closed design. protection category IP54. Winding with moisture proof coating. Ball bearing mounted. Motor and impeller dynamically balanced.
- **Motor protection**
  Through built-in thermal contacts via triggering device (Accessories).
- **Power control**
  Through voltage reduction using 5-step transformer or electronically (continuously variable). The performances at corresponding voltages are shown in the performance diagram.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ☐ Case-radiated sound power
  - ☐ Inlet side sound power
  - ☐ Outlet side sound power
  The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temp. at Rat. vol.	Control	Wgt net aprx.	Speed controller 5-step with motor protection circuit breaker		Motor protection circuit breaker for connection of built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Single-phase alternating current, 230 V, 50 Hz, Capacitor motor, protection category IP54														
KRW 500/4/80/50	06152	9700	1370	52	1.55	6.80	536.1	60	60	66.9	**MWS 10**	01946	**MW**	01579
Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
KRD 500/4/80/50 A	08643	8430	1360	52	1.21	4.70/2.70	860	60	60	64.2	**RDS 7**	01578	**MD**	05849
Sound-insulated SKR – Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
SKRD 500/4/80/50	08198	8050	1360	48	1.19	4.60/2.70	860	60	60	89.2	**RDS 7**	01578	**MD**	05849

Performance curves KRW 500/4/80/50

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	72	65	69	64	61	57	51	45
L_{WA}	Inlet side	dB(A)	82	75	73	75	76	73	69	62
L_{WA}	Outlet side	dB(A)	84	79	83	81	88	84	79	71

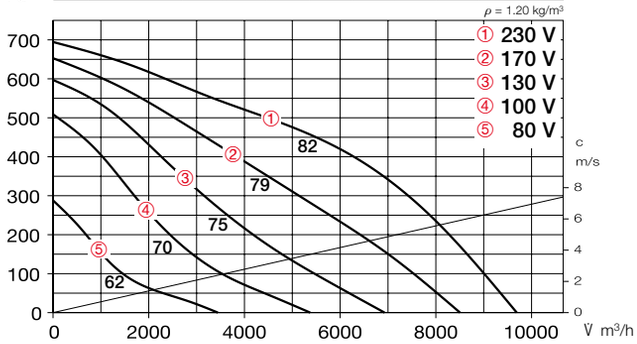

Performance curves KRD 500/4/80/50 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	72	71	65	61	55	47	44	45
L_{WA}	Inlet side	dB(A)	78	74	72	69	68	65	64	63
L_{WA}	Outlet side	dB(A)	85	78	80	78	77	72	69	69

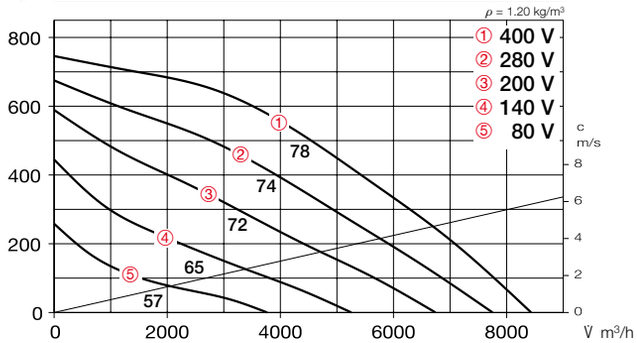

Performance curves SKRD 500/4/80/50

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	68	68	60	52	45	40	40	35
L_{WA}	Inlet side	dB(A)	74	74	62	58	53	51	51	49
L_{WA}	Outlet side	dB(A)	80	76	73	70	69	64	62	60

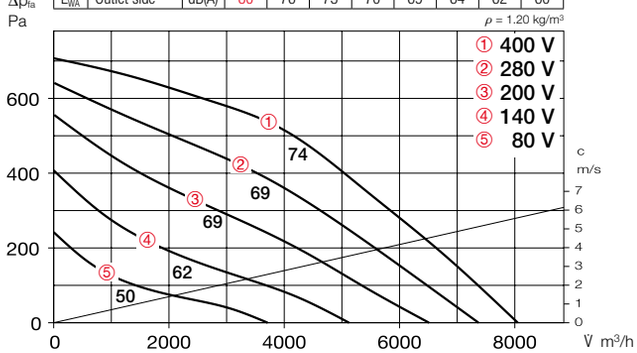

Accessories

External wall shutter
VK 80/50 Ref. no. 00880
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 80/50 Ref. no. 00115
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 80/50 Ref. no. 06916
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 80/50 Ref. no. 00842
For cost-effective integration of rectangular duct fans in round duct systems with Ø 500 mm.

Flexible connector
VS 80/50 Ref. no. 05700
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 80/50 Ref. no. 06925
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 80/50 Ref. no. 08732
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 80/50 Coarse 70%* 08670
KLF 80/50 ePM1 50%* 08654
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/80/50 Ref. no. 08795
WHR 4/80/50 Ref. no. 08796
For installation in rectangular duct system.

* See product page 477 for detailed description.

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Speed controllers and motor protection circuit breakers	601 ff.

KR 560

Designed for the delivery of contaminated air.

SKR 560 – sound-insulated

Low noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

Dimensions KR 560

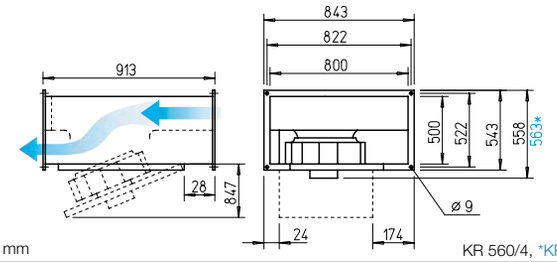

Dim. in mm

KR 560/4, *KR 560/6

Dimensions SKR 560 – sound-insulated

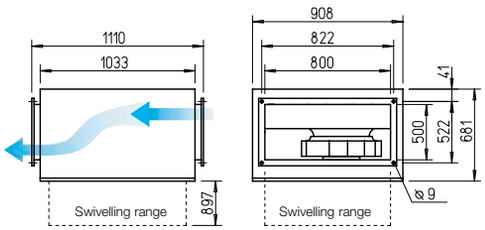

Dim. in mm

Features KR and SKR

- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR

- Low noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR**
  Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR**
  Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR and SKR

- **Impeller**
  Centrifugal, with backward curved blades made of plastic. Aerodynamically optimised, inlet via nozzle.
- **Drive**
  Through maintenance-free external rotor motor on which the impeller is mounted. Closed design. protection category IP54. Winding with moisture proof coating. Ball bearing mounted. Motor and impeller dynamically balanced.
- **Motor protection**
  Through built-in thermal contacts via triggering device (Accessories).
- **Power control**
  Through voltage reduction using 5-step transformer or electronically (continuously variable). The performances at corresponding voltages are shown in the performance diagram.
- **Electrical connection**
  Terminal box (IP54) mounted to external cable.
- **Installation**
  Installation possible in any position. Note accessibility/swivelling range.
- **Noise**
  The total level and range are specified above the performance diagram for:
  - ☐ Case-radiated sound power
  - ☐ Inlet side sound power
  - ☐ Outlet side sound power
  The inlet side sound power level is also specified above the control voltages in the performance diagram.
  - ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temp. at Rat. vol.	Control	Wgt net aprx.	Speed controller 5-step with motor protection circuit breaker		Motor protection circuit breaker for connection of built-in thermal contacts	
		V̇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
KRD 560/6/80/50	08842	7460	880	41	0.64	2.50/1.40	860	60	60	61.9	**RDS 2**	01315	**MD**	05849
KRD 560/4/80/50	06147	11970	1350	55	2.33	7.80/4.50	860	45	45	64.1	**RDS 7**	01578	**MD**	05849
Sound-insulated SKR – Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
SKRD 560/6/80/50	08199	7600	880	36	0.66	2.50/1.50	860	60	60	86.9	**RDS 2**	01315	**MD**	05849

Performance curves KRD 560/6/80/50

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	61	56	57	52	47	40	36	37
L_{WA}	Inlet side	dB(A)	73	70	64	57	60	58	54	53
L_{WA}	Outlet side	dB(A)	78	75	70	66	66	61	58	57

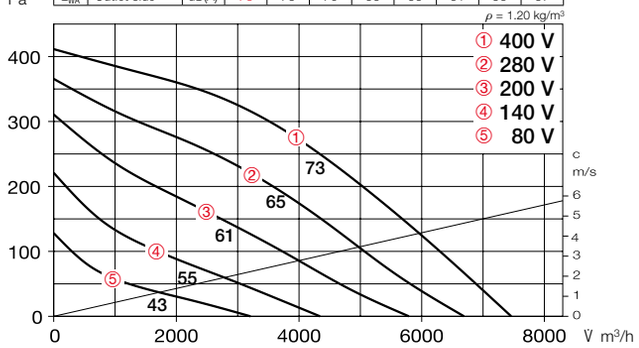

Performance curves KRD 560/4/80/50

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	75	63	73	68	65	60	54	48
L_{WA}	Inlet side	dB(A)	86	76	77	77	81	78	75	67
L_{WA}	Outlet side	dB(A)	93	81	86	83	89	86	82	73

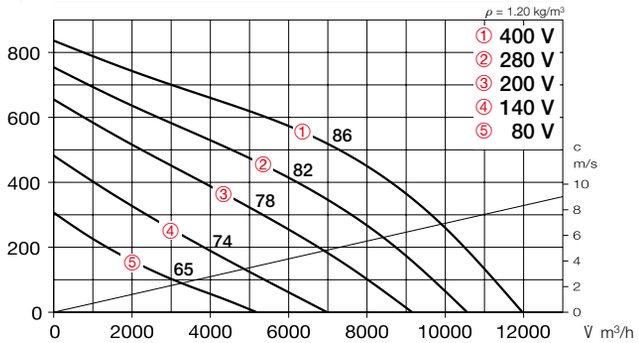

Performance curves SKRD 560/6/80/50

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Radiation	dB(A)	56	55	50	41	40	37	36	33
L_{WA}	Inlet side	dB(A)	66	64	53	44	44	42	40	40
L_{WA}	Outlet side	dB(A)	74	71	63	59	58	54	51	48

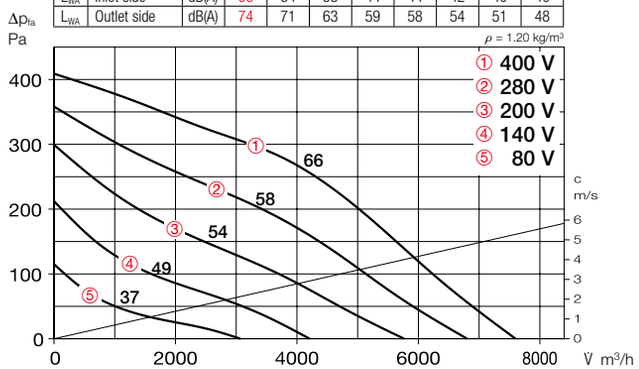

Accessories

External wall shutter
VK 80/50 Ref. no. 00880
Automatic overpressure shutter made of light grey plastic.

Weather protection grille
WSG 80/50 Ref. no. 00115
Stable construction made of extruded aluminium profiles, natural colour anodised.

Multi-leaf damper for rectangular duct installation
JVK 80/50 Ref. no. 06916
Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

Fitting
FSK 80/50 Ref. no. 00842
For cost-effective integration of rectangular duct fans in round duct systems with Ø 500 mm.

Flexible connector
VS 80/50 Ref. no. 05700
Flexible rectangular duct connector with double-sided flange frame.

Counter flange
GF 80/50 Ref. no. 06925
Flange frame made of galvanised steel sheet for connection to the rectangular duct.

Rectangular duct silencer
KSD 80/50 Ref. no. 08732
For outlet and inlet side insertion in the rectangular duct system.

Rectangular duct air filter
KLF 80/50 Coarse 70%* 08670
KLF 80/50 ePM1 50%* 08654
With large bag filter. Galvanised steel sheet casing with double-sided flanges.

Warm water heating element
WHR 2/80/50 Ref. no. 08795
WHR 4/80/50 Ref. no. 08796
For installation in rectangular duct system.

* See product page 477 for detailed description.

Accessory details	Page
Shutters and weather prot. grille	482, 563 ff.
Filters, heating elements and silencers	483 ff.
Speed controllers and motor protection circuit breakers	601 ff.

Reference	Page
Selection table	439
Techn. description	438
Planning information	14 ff.
Modular system	436

GF and VS

Dimensions GF and VS



Dim. in mm see table

Counter flange GF Type	Ref. no.	Connector VS Type	Ref. no.	Connector for explosion-proof fans Type	Ref. no.	Compat. w/ fan rect. duct NS mm i.L.	Dimensions in mm A	B	C	D	Weight aprx. kg GF	VS
GF 30/15	06918	**VS 30/15**	06928	–	–	300 x 150	320	170	338	188	0.7	1.22
GF 40/20	06919	**VS 40/20**	05694	–	–	400 x 200	420	220	438	238	0.8	1.55
GF 50/25	06920	**VS 50/25**	05695	**VS 50/25 Ex**	00265	500 x 250	520	270	538	288	0.9	1.88
GF 50/30	06921	**VS 50/30**	05696	**VS 50/30 Ex**	00266	500 x 300	520	320	538	338	1.0	1.99
GF 60/30	06922	**VS 60/30**	05697	**VS 60/30 Ex**	00267	600 x 300	620	320	638	338	1.1	2.24
GF 60/35	06923	**VS 60/35**	05698	**VS 60/35 Ex**	00268	600 x 350	620	370	638	388	1.1	2.35
GF 70/40	06924	**VS 70/40**	05699	**VS 70/40 Ex**	00269	700 x 400	720	420	738	438	1.2	2.68
GF 80/50	06925	**VS 80/50**	05700	–	–	800 x 500	820	520	838	538	1.5	3.12
GF 100/50	06926	**VS 100/50**	05701	–	–	1000 x 500	1020	520	1038	538	1.7	3.56

Counter flange GF

Flange frame made of galvanised steel sheet, which is dimensionally matched to the rectangular duct fans and their accessories, for rectangular duct connection.

Connector VS

Flexible rectangular duct connection with double-sided flange frame made of galvanised steel sheet and circumferential sealing lip; tightness according to VDI 3803, temperature resistance –30 °C to +70 °C. Central part made of elastic sleeve made of fabric. Dimensionally matched to the rectangular duct fans.
In order to prevent structure-borne noise transmission and to compensate for installation tolerances, the connectors are mounted on the inlet side and outlet side between the fan and air duct.
Types VS Ex are available for explosion-proof rectangular duct fans.

JVK

Dimensions JVK



Dim. in mm see table

Type	Ref. no.	Compat. w/ fan rect. duct NS mm i.L.	Rect. duct fan Ø mm	Dimensions in mm A	B	C	D	Weight aprx. kg
JVK 30/15	06927	300 x 150	180	320	170	340	190	3.5
JVK 40/20	06910	400 x 200	200–250	420	220	440	240	4.0
JVK 50/25	06911	500 x 250	315	520	270	540	290	5.0
JVK 50/30	06912	500 x 300	250	520	320	540	340	6.0
JVK 60/30	06913	600 x 300	285	620	320	640	340	7.0
JVK 60/35	06914	600 x 350	315–400	620	370	640	390	7.2
JVK 70/40	06915	700 x 400	355–450	720	420	740	440	9.0
JVK 80/50	06916	800 x 500	400–500	820	520	840	540	11.7
JVK 100/50	06917	1000 x 500	450–630	1020	520	1040	540	13.5



Multi-leaf dampers JVK

Frame casing with double-sided connection flanges made of galvanised steel sheet. Dimensionally matched to the rectangular duct fans. Blades designed as hollow parts. Axles mounted in plastic, synchronously adjustable with external adjusting lever. Adjusting mechanism also outside of the air flow and thus protected against malfunctions due to contamination. The multi-leaf dampers cause an additional pressure loss, which must be considered when dimensioning the system and can be seen in the adjacent diagram. Note the blade position. Only install with horizontal blade position.

STM 10 / STM 2P

Accessories

Shutter servomotor

STM 10 230 V Ref. no. 08791

Shutter servomotor for the electrical opening and closing of the shutters JVK. Installation in any position by attaching the terminal connections (for Ø 8–26 or ▭ 8–26 mm) and fixation with enclosed anti-twist catch. Shutter position adjustment possible by pressing the gear disengaging button. Two-position control with signal contacts in positions “open” and “closed”. Shutter position indicated on scale (0–95°).

Auxiliary switch

STM 2P Ref. no. 08794

The shutter servomotor STM 10 230 V can also be operated with an auxiliary switch module.
Two adjustable micro switches indicate the switch position. The adjustable angle positions can be changed. Position indication via adjusting ring (mechanical, attachable).

Technical data

Supply voltage	100–240 VAC
Frequency	50/60 Hz
Torque	10 Nm
Rotation angle	0 to 95°
Operation	2.5 W
Runtime (open/closed)	150 s
Clockwise/anticlockwise	switchable
Ambient temp.	–30 to +50 °C
Protection category	IP54
Protection class	II
Dim. mm	W 80 x H 124 x D 62
Weight approx.	0.75 kg
Wiring diagram no.	1087

Flexible and versatile.
Helios components for air treatment.

Helios air treatment components provide for clean, warm and calm air – whether it be in round duct or rectangular duct ventilation systems.

The extensive range includes all sizes and capacities, perfectly tailored to Helios ventilation systems.

This provides the necessary flexibility for planning and installation.

■ Air filters

For wall and ceiling installation in various filter classes.

For installation in rectangular duct systems with double-sided connection flanges as well as air filter boxes in common standard pipe diameters.

484ff

■ Heating elements and temperature control systems

For a pleasant room air temperature, in finely graduated performance ranges.

Available in electric or warm water designs.

487ff

■ Silencers

In all sizes and designs, for installation in rectangular duct or round duct systems.

Made of galvanised steel sheet or flexible aluminium pipe.

496ff

- **Easy to install elements for effective solutions.**
  The planned introduction of outside air is essential for efficient ventilation according to applicable regulations in most cases. The cleaning of supply air can now be regarded as an "absolute necessity".
  Helios offers simple and effective elements for various installations.

- **Accessories for air filters**
  Complete installation set for monitoring pressure loss and thus the contamination of air filters. Suitable for DDC applications due to the gold-plated connection contacts. Applicable in measurement range 50–500 Pa, for ambient temperatures from –20 to + 85 °C and air flow temperatures from –20 to +85 °C.

Differential pressure switch

DDS	Ref. no. 00445

- **LF series**
  For wall and ceiling installation
  Elegant covering of ventilation openings. Volumetric flow rate from 200 to 4000 m³/h.

- **LFBR**
  Filter box for round duct connection
  Installation in round duct system, for standard pipes from 100 to 400 mm Ø. Volumetric flow rate from 100 to 4000 m³/h.

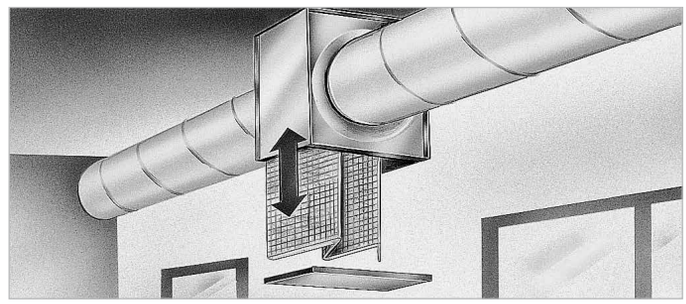

- **KLF**
  Rectangular duct air filter
  For direct installation in the rectangular duct system. Dimensionally matched to rectangular duct fans. Volumetric flow rate up to 5000 m³/h.

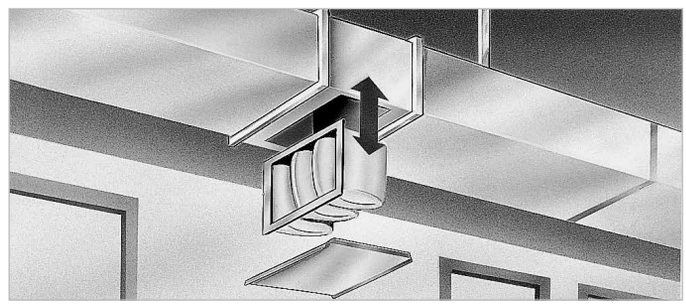

Air filter LF
for wall and ceiling installation

- Particularly suitable for the elegant coverage of fan and rectangular duct openings in walls and ceilings.
  Frame and fixed grille made of high-quality plastic, light grey. Full-surface filter mat throughflow. Large dimensioning reduces pressure loss and increases dust absorption.
- **Filter mat** made of renewable synthetic fibre, class ISO Coarse 30 % (G2), thermally bonded, 100 g/m², fire behaviour according to DIN 53438: F1. Dust absorption: 380 g/m².
- **Installation** Dowel fix in any position via four concealed holes in the frame.
- **Cleaning** Depending on the system, filter replacement is required if the initial pressure loss is exceeded by around 1.5-2 times. Remove filter mat after loosening the grille and clean both parts (e.g. in soap solution). Then replace and fix with the four plastic nuts.
- **Replacement filter mats** In case of signs of degradation, which can occur after frequent cleaning, the filter mat must be replaced with a new one. See table for order information. Delivered in shipping units with 5 pcs each.

LF 200 – 250

LF 315 – 500



Dimensions LF 200 – 250



Dim. in mm see table

Dimensions LF 315 – 500



Dim. in mm see table

- **Pressure loss**
  Air filters create resistance according to the diagram above. This must be taken into account for fan dimensioning.

Type	Ref. no.	Compatible with fan nominal size	Maximum coverable opening	Dimensions A	B	C	D	Weight aprx. kg	Replacement filter mats (shipping unit = 5 pcs) Type	Ref. no.
		mm	mm	mm	mm	mm	mm	kg		
LF 200*	00743	200	Ø 200	287	210	210	39.0	0.80	**ELF 200***	00737
LF 250*	00744	250/280	Ø 300	337	240	240	39.0	1.00	**ELF 250***	00738
LF 315*	00745	315	330 x 300	390	343	317	39.0	0.85	**ELF 315***	00739
LF 355*	00746	355	380 x 350	440	393	367	39.0	0.95	**ELF 355***	00740
LF 400*	00747	400	355 x 400	490	443	417	31.5	1.85	**ELF 400***	00741
LF 500*	00748	450/500	475 x 450	540	493	467	31.5	2.25	**ELF 500***	00742

*ISO Coarse 30 % (G2)

KLF G4[1], filter class ISO Coarse 70 % (G4)

KLF F7[2) 3)], filter class ISO ePM_1 50 % (F7) and ISO $ePM_{2.5}$ 65 % (F7)

Dimensions KLF G4[1]



Dim. in mm see table



Dimensions KLF F7[2) 3)]



Dim. in mm see table



Rectangular duct filter KLF
Air filter with double-sided connection flanges for installation in rectangular duct system.

Casing
Made of galvanised steel sheet. Hinged or removable cover using quick-release catches for filter removal.

Bag filter-cartridge
Filter frame in galvanised steel sheet. Large filter bags for high dust absorption.

Types KLF G4[1] with filter class ISO Coarse 70 % (G4), made of renewable synthetic fibre, heavily reinforced, 190 g/m². DIN 53438 F1, self-extinguishing. Dust absorption: 354 g/m².

Types KLF F7[2) 3)] with filter class ISO ePM_1 50 % (F7) and ISO $ePM_{2.5}$ 65 % (F7), made of synthetic plastic, DIN 53438 F1, self-extinguishing. Dust absorption: 88.6 g/m².

Reference
The integration of air filters in class ISO ePM_1 50 % (F7) and ISO $ePM_{2.5}$ 65 % (F7) and differential pressure switches DDS (Ref. no. 00445) in intake air systems fulfils the requirements of VDI 6022.

Installation
Can be installed horizontally and vertically (air direction from top to bottom) in rectangular duct systems.
Allow clearance according to the specified dimension for filter removal. When space is limited, the cover can be removed without tools and with an opening angle > 45°.

Cleaning
Depending on the system, filter replacement is required if the initial pressure loss is exceeded by around 1.5-2 times.

The filter frame can be easily removed when the casing cover is open. Insert filter frame using guide after cleaning or replacement; the filter frame will be automatically pressed firmly against the casing seal by closing the cover.

Replacement filter cartridges
In case of signs of degradation, cleaning, the filter cartridge must be replaced with a new one. See table for order information.

Pressure loss
Air filters create resistance according to the diagrams above; the grey shaded area shows the resistances of the different sizes. These must be taken into account for fan dimensioning.

Accessories

Differential pressure switch

DDS	Ref. no. 00445

Complete installation set for monitoring air filters.
Measurement range: 50 – 500 Pa.

Type	Ref. no.	Compatible w/ rect. duct fan NS cm	Dimensions A	B	C	D	Weight aprx. kg	Replacement filter cartridges (shipping unit = 2 pcs) Type	Ref. no.
Rectangular duct air filter KLF G4[1], filter class ISO Coarse 70 % (G4)									
KLF 40/20 Coarse 70%	08720	40/20	420	220	440	240	4.5	**EKLF 40/20 Coarse 70%**	08724
KLF 50/25-30 Coarse 70%	08721	50/25-30	520	270/320	540	340	6.0	**EKLF 50/25-30 Coarse 70%**	08725
KLF 60/30-35 Coarse 70%	08722	60/30-35	620	320/370	640	390	7.0	**EKLF 60/30-35 Coarse 70%**	08726
KLF 70/40 Coarse 70%	08723	70/40	720	420	740	440	8.5	**EKLF 70/40 Coarse 70%**	08727
KLF 80/50 Coarse 70%	08670	80/50	820	520	840	540	13.0	**EKLF 80/50 Coarse 70%**	08673
KLF 100/50 Coarse 70%	08671	100/50	1020	520	1040	540	15.0	**EKLF 100/50 Coarse 70%**	08674
Rectangular duct air filter KLF F7[2) 3)], filter class ISO ePM_1 50 % (F7) and ISO $ePM_{2.5}$ 65 % (F7)									
KLF 40/20 ePM1 50%	08644	40/20	420	220	440	240	6.5	**EKLF 40/20 ePM1 50%**	08635
KLF 50/25-30 ePM1 50%	08645	50/25-30	520	270/320	540	340	8.5	**EKLF 50/25-30 ePM1 50%**	08636
KLF 60/30-35 ePM2.5 65%	08646	60/30-35	620	320/370	640	390	10.5	**EKLF 60/30-35 ePM2.5 65%**	08637
KLF 70/40 ePM1 50%	08647	70/40	720	420	740	440	13.5	**EKLF 70/40 ePM1 50%**	08638
KLF 80/50 ePM1 50%	08654	80/50	820	520	840	540	20.5	**EKLF 80/50 ePM1 50%**	08639
KLF 100/50 ePM2.5 65%	08655	100/50	1020	520	1040	540	24.0	**EKLF 100/50 ePM2.5 65%**	08659

[1] ISO Coarse 70 % [2] ISO ePM_1 50 % [3] ISO $ePM_{2.5}$ 65 %

LFBR G4[1], filter class ISO Coarse 70% (G4)

LFBR F7[2], filter class ISO ePM$_1$ 50% (F7)

Dimensions LFBR G4[1]





Dimensions LFBR F7[2]





Air filter box LFBR

- For installation in ventilation system duct system. Connections with double lip seal, compatible with standard duct diameters.

Casing
Made of galvanised steel sheet. Removable cover for filter removal with locking clamp.

Filter
For types LFBR G4[1] made of renewable synthetic fibre, class ISO Coarse 70% (G4).
Temp.-resistant up to +100 °C.
Fire behaviour according to DIN 53438 F1, self-extinguishing.
Regeneration ability: 10–15x.
Dust absorption: 122 g/m².
For types LFBR F7[2] bag filter, class ISO ePM$_1$ 50% (F7), made of synthetic plastic, 64 g/m².
Dust absorption: 88.6 g/m².

Installation
In any position. Allow clearance according to dimension B for filter removal.

Cleaning
Depending on the system, filter replacement is required if the initial pressure loss is exceeded by around 1.5-2 times. Remove filter element after removing the casing cover.

Replacement air filter
In case of signs of degradation, which can occur after frequent cleaning, the filter mat must be replaced with a new one.

Pressure loss
Air filters create resistance according to the diagrams above; the grey shaded area shows the resistances of the different sizes. These must be taken into account for fan dimensioning.

Accessories

Differential pressure switch
DDS Ref. no. 00445
Complete installation set for monitoring air filters.
Measurement range: 50 – 500 Pa.

Type	Ref. no.	Dimensions in mm Connection Ø D	A	B	C	E	Weight aprx. kg	Replacement air filter (shipping unit = 5 pcs) Type	Ref. no.
Air filter box LFBR G4[1]. filter class ISO Coarse 70% (G4)									
LFBR 100 Coarse 70%	08576	100	210	170	120	170	1.0	**ELFBR 100 Coarse 70%**	08585
LFBR 125 Coarse 70%	08577	125	220	209	140	186	1.2	**ELFBR 125 Coarse 70%**	08586
LFBR 160 Coarse 70%	08578	160	270	237	155	222	1.6	**ELFBR 160 Coarse 70%**	08587
LFBR 200 Coarse 70%	08579	200	320	277	180	231	2.1	**ELFBR 200 Coarse 70%**	08588
LFBR 250 Coarse 70%	08580	250	378	325	230	283	2.8	**ELFBR 250 Coarse 70%**	08589
LFBR 315 Coarse 70%	08581	315	431	390	330	463	4.5	**ELFBR 315 Coarse 70%**	08590
LFBR 355 Coarse 70%	08583	355	515	502	455	585	7.0	**ELFBR 355 Coarse 70%**	08592
LFBR 400 Coarse 70%	08582	400	515	502	455	585	7.1	**ELFBR 400 Coarse 70%**	08591
Air filter box LFBR F7[2]. filter class ISO ePM$_1$ 50% (F7)									(shipping unit = 2 pcs)
LFBR 100 ePM1 50%	08530	100	204	207	400	451	2.4	**ELFBR 100 ePM1 50%**	08300
LFBR 125 ePM1 50%	08531	125	215	205	370	447	2.5	**ELFBR 125 ePM1 50%**	08301
LFBR 160 ePM1 50%	08532	160	295	297	400	447	3.6	**ELFBR 160 ePM1 50%**	08302
LFBR 200 ePM1 50%	08533	200	295	297	400	454	3.7	**ELFBR 200 ePM1 50%**	08303
LFBR 250 ePM1 50%	08534	250	425	388	480	534	5.9	**ELFBR 250 ePM1 50%**	08304
LFBR 315 ePM1 50%	08535	315	425	388	480	610	6.1	**ELFBR 315 ePM1 50%**	08305
LFBR 355 ePM1 50%	08536	355	505	507	601	730	9.2	**ELFBR 355 ePM1 50%**	08306
LFBR 400 ePM1 50%	08537	400	505	507	601	730	9.3	**ELFBR 400 ePM1 50%**	08307

[1] ISO Coarse 70% [2] ISO ePM$_1$ 50%

Reference
The integration of air filters in class ISO ePM$_1$ 50% (F7) and differential pressure switches DDS (Ref. no. 00445) in intake air systems fulfils the requirements of VDI 6022.

EHR-K

Dimensions EHR-K

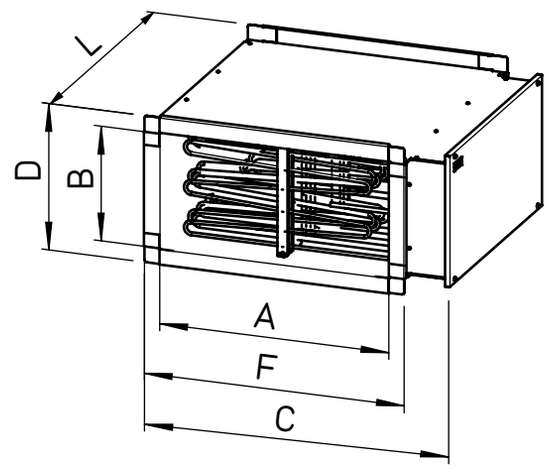

Dim. in mm see table

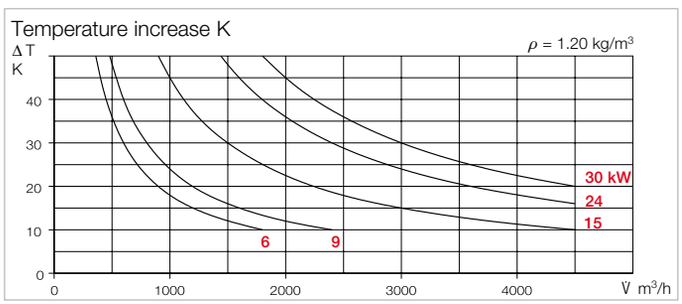



Electric heating element EHR-K

- Closed tubular heating element in aluzinc coated steel casing with double-sided connection flanges for installation in duct system.
- Tubular heating element with low surface temperature wired to external terminal box, switchable in several groups.
- Equipped with an automatically resetting temperature limiter (activation temperature 50 °C) and a manually resettable temperature limiter (activation temperature 100 °C).
- Protection category IP44.

Installation instructions

- Install the heating element in the flow direction downstream of the fan. In case of installation upstream of the fan, ensure that the air flow temperature at the fan does not exceed its maximum permissible temperature.
  A duct piece of at least 1,2 m in length must be installed between the fan and the heating element. The minimum heating element air volume must be maintained. The heating element must be connected so that operation is only possible when the fan is activated. When the temperature monitor is triggered, the control unit must be switched off (by the safety chain to be provided on site).

Selection and operation

- Heating elements create additional pressure loss which must be taken into account for overall system dimensioning.
  An air flow temperature increase depends on the volume flow and heat output (see diagrams above).
  A minimum air flow (see table) must be provided.

Accessories

Electronic temperature control system

EHS See type table

Controls the heat output of the heating element depending on the difference between the setpoint and actual value for supply air temperature, which serves as a reference variable.

Duct sensor (Accessory for EHS)

TFK Ref. no. 05005

Temperature sensor for detecting the air temperature in air ducts.

Room sensor (Accessory for EHS)

TFR Ref. no. 05006

Temperature sensor with integrated setpoint adjuster for surface mounting. Also suitable simply as a temperature sensor or simply as a setpoint adjuster.

Type	Ref. no.	Power	No. of heating coils	Current consumption	Min. volume flow	Compat. with rect. duct fan	Connect. Wiring diagram[1]	Dimensions						Weight approx.	Compatible temperature control system	
		kW	x kW	A	m³/h	NG cm	No.	A	B	C	D	L	F	kg	Type	Ref. no.
3~. 400																
EHR-K 6/40/20	08702	6	6 x 1.0	8.7	435	40/20	1590	400	200	521	270	370	470	11.97	**EHSD 16**	05003
EHR-K 15/40/20	08703	15	6 x 1.5 6 x 1.0	21.7	435	40/20	1590	400	200	521	270	440	470	16.30	**EHSD 16**	05003
EHR-K 9/50/30	08704	9	3 x 3.0	13.0	810	50/30	1591	500	300	621	370	370	570	15.33	**EHSD 16**	05003
EHR-K 24/50/25	08705	24	12 x 1.5 6 x 1.0	34.7	675	50/25	1607	500	250	632	320	600	570	18.00	**EHSD 30**	05004
EHR-K 15/60/30	08706	15	3 x 2.0 3 x 3.0	21.7	972	60/30	1591	600	300	721	370	370	670	18.50	**EHSD 16**	05003
EHR-K 30/60/30	08707	30	6 x 3.0 6 x 2.0	43.4	972	60/30	1592	600	300	721	370	440	670	22.00	**EHSD 30**	05004

[1] Principle connection for all types No. 1567.

Accessories	Page
Electronic temperature control system EHS	489

Reference

DIN VDE 0100-420 must be observed on site; suitable air flow monitoring and electrical locking must be provided.

EHR-R

Dimensions EHR-R

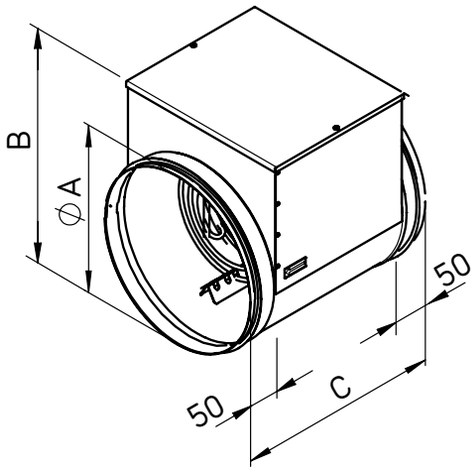

Dim. in mm see table

Temperature increase K

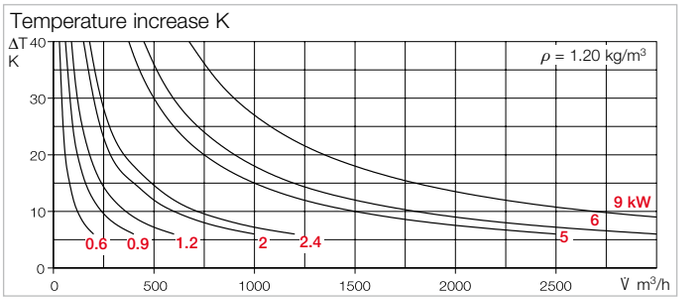

Press. loss EHR-R 100 – 200



Press. loss EHR-R 250 – 400



Electric heating element EHR-R

Closed tubular steel radiator with low surface temperature. Duct casing with terminal box made of aluzinc coated steel sheet for installation in commercial pipe systems. Equipped with an automatically resetting temperature limiter (activation temperature 50 °C) and a manually resettable temperature limiter (activation temperature 100 °C). Protection category IP44.

Installation instructions

Install the heating element in the flow direction downstream of the fan. In case of installation upstream of the fan, ensure that the air flow temperature at the fan does not exceed its maximum permissible temperature. A duct piece of at least 1 m in length must be installed between the fan and the heating element. The minimum heating element air volume must be maintained. The heating element must be connected so that operation is only possible when the fan is activated. If the temperature monitor is triggered, the control unit must be switched off (by the safety chain to be provided by the customer).

Selection and operation

Heating elements create additional pressure loss which must be taken into account for overall system dimensioning. An air flow temperature increase depends on the volume flow and heat output (see diagrams). A minimum air flow (see table) must be provided.

Type		Ref. no.	Power	Number of heating coils	Current consum.	Min. volume flow	Compat. with fan	Wiring diagram[1]	Dimensions Ø A	B	C	Weight approx.	Compatible temperature control system	
			kW	x kW	A	m³/h	NS mm	No.	mm	mm	mm	kg	Type	Ref. no.
1~, 230 V														
EHR-R	**0,6/100**	08708	0.6	2 x 0.3	2.6	40	100	1587	100	171	370	1.62	**EHS**	05002
EHR-R	**0,9/125**	08709	0.9	1 x 0.3 / 1 x 0.6	3.9	70	125	1587	125	196	370	2.00	**EHS**	05002
EHR-R	**1,2/125**	09433	1.2	2 x 0.6	5.2	70	125	1587	125	196	370	2.20	**EHS**	05002
EHR-R	**1,2/160**	09434	1.2	1 x 1.2	5.2	110	160	1587	160	231	370	2.40	**EHS**	05002
EHR-R	**2,4/160**	09435	2.4	2 x 1.2	10.4	110	160	1587	160	231	370	2.75	**EHS**	05002
EHR-R	**1,2/200**	09436	1.2	1 x 1.2	5.2	170	200	1587	200	271	370	2.95	**EHS**	05002
EHR-R	**2/200**	09437	2.0	2 x 1.0	8.7	170	200	1587	200	271	370	3.15	**EHS**	05002
2~, 400 V														
EHR-R	**5/160**	08710	5.0	5 x 1.0	12.5	110	160	1588	160	231	370	3.55	**EHS**	05002
EHR-R	**5/200**	08711	5.0	2 x 1.5 / 2 x 1.0	12.5	170	200	1588	200	271	370	3.95	**EHS**	05002
EHR-R	**6/250**	08712	6.0	4 x 1.5	15.0	270	250	1588	250	321	370	4.70	**EHS**	05002
EHR-R	**6/315**	08713	6.0	4 x 1.5	15.0	415	315	1588	315	386	370	7.15	**EHS**	05002
3~, 400 V														
EHR-R	**9/355**	08656	9.0	6 x 1.5	13.0	550	355	1589	355	426	373	8.65	**EHSD 16**	05003
EHR-R	**9/400**	08657	9.0	6 x 1.5	13.0	690	400	1589	400	471	373	9.30	**EHSD 16**	05003

[1] Principle connection for all types No. 1567.

Accessories

Electronic temperature control system

EHS see type table

Controls the heat output of the heating element depending on the difference between the setpoint and actual value for supply air temperature, which serves as a reference variable.

Duct sensor (Accessory for EHS)

TFK Ref. no. 05005

Temperature sensor for detecting the air temperature in air ducts.

Room sensor (Accessory for EHS)

TFR Ref. no. 05006

Temperature sensor with integrated setpoint adjuster for surface mounting. Also suitable simply as a temperature sensor or simply as a setpoint adjuster.

Reference

DIN VDE 0100-420 must be observed on site; suitable air flow monitoring and electrical locking must be provided.

Accessories	Page
Electronic temperature control system EHS	489

EHS

EHSD

Electronic temperature control system EHS for electric heating elements

- Electronic temperature control system for controlling electric heating elements in rectangular ducts or round ducts in ventilation systems. The heat output of the heating element is controlled depending on the difference between the setpoint and actual value for supply air temperature, which serves as a reference variable.
- The controllers are continuously variable through time-proportional pulse width control. The ratio between activation time and deactivation time is adjusted to the existing power requirement. The max. switching cycles per time unit stipulated by the electricity suppliers are thus maintained even for high switching capacities.
- Contactless power switching via electronic power switch.
- Control using setpoint adjuster (internal or external, room sensor TFR) or using external control signal 0 – 10 V DC (only for EHSD types).

- **Application**
  - The controllers are suitable for constant supply air control and constant room control. In case of rapid temperature changes in the supply air, a PI control behaviour is achieved; in case of slow changes in room air, the control behaviour corresponds to a P-controller. Automatic night-time reduction can be achieved using an external, on-site timer.
  - An air flow monitoring system is also stipulated for safety reasons.

Flow monitor, electronic
SWE Ref. no. 00065
– mechanical, from NW 315
SWT Ref. no. 00080
see product page.

Electronic temperature controller for electric heating elements up to 3.6 kW (230 V) / 6.4 kW (400 V)
EHS Ref. no. 05002
Temperature-controlled, semi-conductor-controlled controller. Elegant, white plastic casing for wall installation. Constant supply air or room control via built-in temperature sensor for temperature detection at the installation location. Can be switched to external duct sensors or room sensors (TFK or TFR, Accessories). Has a minimum and maximum limit for the supply air temperature.

Measurement range	0 – 30 °C
Voltage	230 V, 1~ / 400 V, 2~ (automatic detection)
Load capacity	16 A
Protection category	IP20
Dim. in mm	H 150 x W 94 x D 43
Weight	approx. 0.3 kg
Wiring diagram no.	531.1

Electronic temperature controller for electric heating elements up to 17 kW
EHSD 16 Ref. no. 05003
Temp.-controlled, semi-conductor-controlled controller. Robust aluminium casing for wall or switch cabinet installation. Constant supply air or room control via external duct or room sensor (TFK/TFKB or TFR, Accessories). Remote control possible via external setpoint adjuster TFR or external control voltage 0 – 10 V DC.

Voltage	400 V, 3~
Load capacity	25 A
Protection category	IP40
Dim. in mm	H 207 x W 160 x D 95
Weight	approx. 1.7 kg
Wiring diagram no.	550.2

Electronic temperature controller for electric heating elements up to 34 kW
EHSD 30 Ref. no. 05004
Design like EHSD 16; but max. power 34 kW. The total heat output is divided into a controlled portion (max. 17 kW) and a basic output portion (17 kW). If the heat output requirement of approx. 17 kW is exceeded, the basic output of 17 kW will be permanently activated using the provided switch contactor. The remaining heat output will be temperature-controlled.

Voltage	400 V, 3~
Load capacity	25 A
Protection category	IP40
Dim. in mm	H 207 x W 160 x D 95
Weight	approx. 1.7 kg
Switching relay	Voltage 230 V~
Current	max. 5 A
Switch contactor	Volt. 400 V, 3~
Current	max. 25 A
Wiring diagram no.	550.2

Other access. for EHSD
Duct temperature sensor for limiting function.
TFKB Ref. no. 05009

Reference
Integration in the system control required on site must be carried out according to the specified wiring diagrams.

Installation diagram EHR

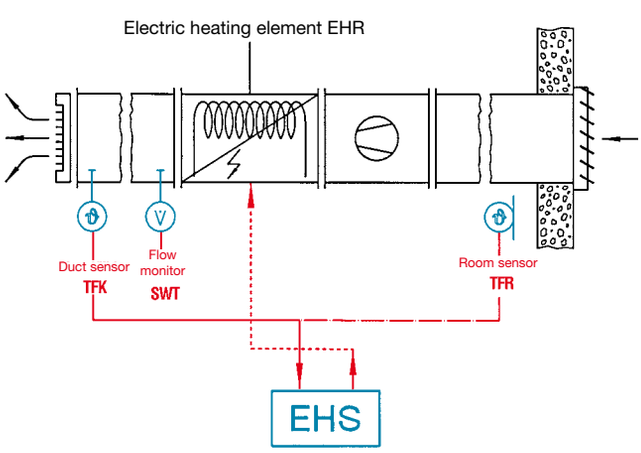

TFK

Duct sensor (Accessory for EHS)
TFK Ref. no. 05005
Temperature sensor for detecting the air temperature in air ducts with installation kit for installation in duct wall.

Temperature range	0 – 30 °C
Protection category	IP20
Length intern./extern.	130 / 50 mm Ø 10 mm
Weight	approx. 0.1 kg

TFR

Room sensor (Access. for EHS)
TFR Ref. no. 05006
Temperature sensor with integrated setpoint adjuster for surface mounting. Also suitable simply as a temperature sensor or simply as a setpoint adjuster. Elegant plastic casing.

Temperature range	0 – 30 °C
Protection category	IP20
Dim. in mm	H 85 x W 85 x D 30
Weight	approx. 0.1 kg

EHR-R TR

Dimensions EHR-R TR

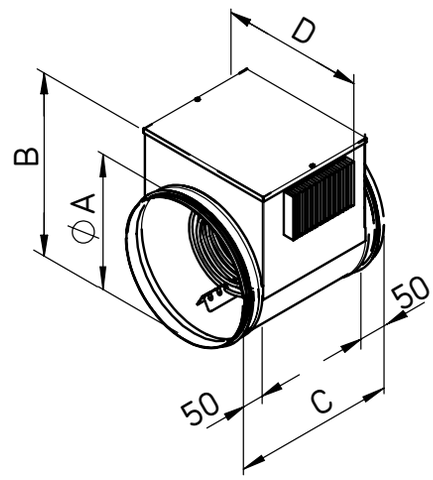

Dim. in mm see table

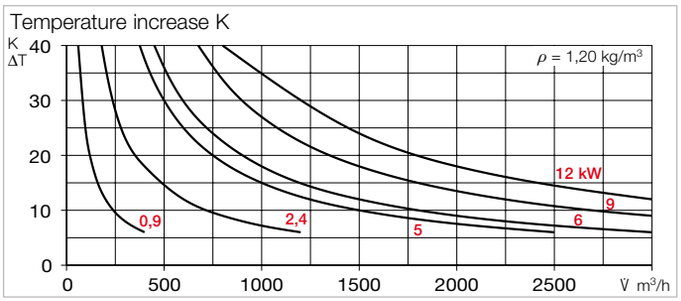



Electric heating element EHR-R TR with integrated temperature control. The convenient and easy to install solution for wherever there is a need for constant supply air. Electric heating elements EHR-R TR have integrated temperature control and they can be installed in almost any position in the duct system. Installation is very easy and space-saving.

Heating element

- Closed tubular heating element (tubular steel heating radiator) with low surface temperature. Duct casing with terminal box made of aluzinc coated steel and integrated temperature control for installation in commercial pipe systems.
  Equipped with an automatically resetting temperature limiter (activation temperature 50 °C) and a manually resettable temperature limiter (activation temperature 100 °C).
- Protection category IP30.

Temperature control

- Constant supply air temperature control by connecting the provided duct sensor. Setpoint setting (0 – 30 °C) via potentiometer on outside of unit.
- The controller works with a time-proportional pulse width control. The ratio between activation time and deactivation time is adjusted to the existing power requirement. The max. switching cycles per time unit stipulated by the electricity suppliers are thus maintained even for high switching capacities.

Application

- EHR-R TR are suitable for constant supply air control. In case of rapid temperature changes in the supply air, a PI control behaviour is achieved.
- An air flow monitoring system is also stipulated for safety reasons.

Flow monitor

– electronic

SWE	Ref. no. 00065

– mechanical, from NW 315

SWT	Ref. no. 00080

see product page.

Installation instructions

- See description EHR-R, page 488.

Selection and operation

- Heating elements create additional pressure loss which must be taken into account for overall system dimensioning.
  An air flow temperature increase depends on the volume flow and heat output (see diagrams above).
  In order to prevent unwanted temperature monitor deactivation, the minimum air flow rate (see table) must be maintained.

Type	Ref. no.	Power	Number of heating coils	Curr. consump.	Minimum volume flow	Compat. with fan	Wiring diagram	Dimensions A	B	C	D	Weight approx.
		kW	x kW	A	m³/h	NS mm	No.	mm	mm	mm	mm	kg
1~, 230 V												
EHR-R 0,9/125 TR	05293	0.9	1 x 0.6 1 x 0.3	3.9	70	125	1597	125	196	370	150	2.30
EHR-R 2,4/160 TR	05294	2.4	2 x 1.2	10.4	110	160	1597	160	231	370	185	3.15
2~, 400 V												
EHR-R 5/200 TR	05295	5.0	2 x 1.5 2 x 1	12.5	170	200	1598	200	271	370	225	4.55
EHR-R 6/250 TR	05296	6.0	4 x 1.5	15	270	250	1598	250	321	370	275	5.30
EHR-R 6/315 TR	05301	6.0	4 x 1.5	15	415	315	1598	315	386	373	340	7.95
3~, 400 V												
EHR-R 9/355 TR	05297	9.0	6 x 1.5	13	550	355	1599	355	426	373	380	9.3
EHR-R 12/355 TR	05298	12.0	6 x 1.5 3 x 1.0	17.3	550	355	1599	355	426	500	380	13.0
EHR-R 9/400 TR	05299	9.0	6 x 1.5	13	690	400	1599	400	471	373	425	10.1

WHR-K

Dimensions WHR-K



Dim. in mm see table

Accessories	Page
Temperature control system WHS HE	494 f.

Warm water heating element for connection to rectangular ventilation ducts.
Dimensionally matched to the Helios rectangular duct fans. Casing made of galvanised steel sheet, double-sided flanges. Air heater with aluminium blades, offset copper pipes.
Operating temp. $t_{max.}$ 100 °C.
Max. operating pressure 8 bar.
Water connection pipes with external thread.
With drain/vent valve.

Installation instructions

Install the heating element in the flow direction downstream of the fan. In case of installation upstream of the fan, ensure that the air flow temperature at the fan does not exceed its maximum permissible temperature.
In order to protect against contamination and to prevent a drop in performance, the installation of an air filter KLF is recommended.
A duct piece of at least 1 m in length must be installed between the fan and the heating element, so that a uniform flow is achieved.
When installing a heating element, make sure that drainage and venting is ensured. Attention: Frost protection should be provided on site.

Selection

The effective temperature increase results from the parameters: Volume throughput, element output and flow temperature.
These parameters can be determined using the adjacent diagrams (in steps ⓐ – ⓒ).
The heat outputs are also specified in the type table for some volume parameters.
When selecting a fan (volume determination), the pressure loss of the heating element, which is shown in the diagrams, must be taken into account (figure ⓓ).

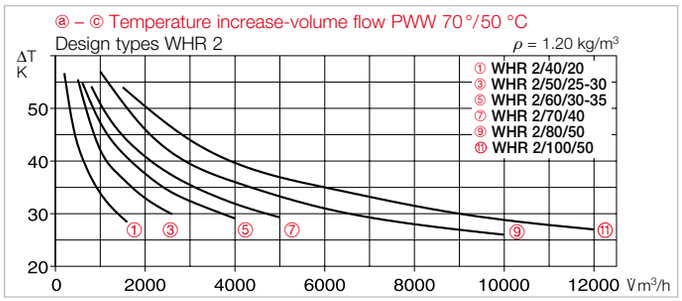



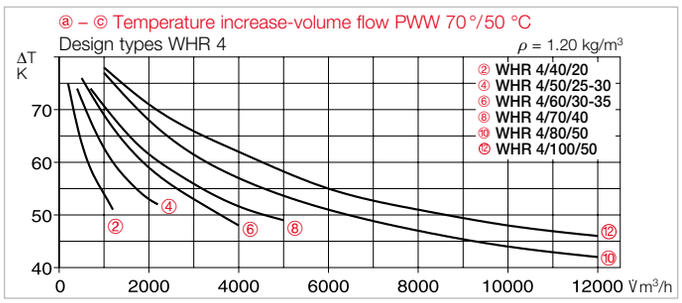



ⓐ Temperature increase

Determination: $\Delta T = \vartheta_i - \vartheta_a$ [K]
ΔT: Air temperature difference [K]
ϑ_i: Air temp., air heater outlet [°C]
ϑ_a: Air temp., air heater inlet [°C]

ⓑ Volume throughput

Given by fan performance curve, whereby system resistances and heating element pressure loss (figure ⓓ) must be taken into account.

ⓒ Determination of heat output

$$Q_H = \frac{\dot{V} \cdot \Delta T \cdot c_{PL} \cdot \rho_L}{3600} \text{ [kW]}$$

V: Volume flow [m³/h]
ΔT: Air temperature difference [K]
c_{PL}: Specific heat capacity of the air (1.0) [KJ/kg K]
ρ_L: Air density (1.2) [kg/m³]

ⓓ Determination of press. loss

The diagrams above show the pressure loss depending on volume flow for the respective heating element.

Type	Ref. no.	Compat. with fan	Air-side data: Heat output		Air-side data: Δ T air		Air-side data: at V̇	Water-side data[1]: Pressure loss	Water-side data[1]: at water volume	Dimensions: A	B	C	D	Connection d"[3]	Weight	Compatible temperature control system: Type	Ref. no.
		NG cm	kW[1]	kW[2]	K[1]	K[2]	m³/h	Δ p_w kPa	l/h	mm	mm	mm	mm	Ø	ca. kg		
WHR 2/40/20	08782	40/20	14	7.7	32	18	1200	10	610	420	220	450	250	3/4	7.0	**WHS HE**	08319
WHR 4/40/20	08783	40/20	22	12.6	51	29	1200	7	980	420	220	450	250	3/4	7.3	**WHS HE**	08319
WHR 2/50/25-30	08784	50/25-30	24	14	33	18	2200	7	1050	520	270/320	550	350	3/4	9.3	**WHS HE**	08319
WHR 4/50/25-30	08785	50/25-30	38	21	52	28	2200	5	1680	520	270/320	550	350	1	11.1	**WHS HE**	08319
WHR 2/60/30-35	08786	60/30-35	32	18	34	19	2600	8	1420	620	320/370	650	400	3/4	11.2	**WHS HE**	08319
WHR 4/60/30-35	08787	60/30-35	51	30	55	32	2600	7	2270	620	320/370	650	400	1	14.0	**WHS HE**[4]	08319
WHR 2/70/40	08788	70/40	50	28	30	17	4500	6	2200	720	420	750	450	1	17.0	**WHS HE**	08319
WHR 4/70/40	08789	70/40	81	44	50	27	4500	4	3570	720	420	750	450	1	17.0	–	–
WHR 2/80/50	08795	80/50	82	46	28	16	8000	11	3630	820	520	850	550	1	15.0	–	–
WHR 4/80/50	08796	80/50	138	80	48	28	8000	15	6110	820	520	850	550	1	20.0	–	–
WHR 2/100/50	08797	100/50	104	59	29	18	10000	19	4630	1020	520	1050	550	1	18.0	–	–
WHR 4/100/50	08798	100/50	172	99	48	28	10000	14	7640	1020	520	1050	550	1	24.0	–	–

The values apply for supply air temperature 0 °C and flow/return temperatures: [1] 90/70 °C, [2] 60/40 °C. [3] 3/4"= 19.05 mm, 1"= 25.4 mm, external thread. [4] with reduced heat output to approx. 2200 l/h.

WHR-R

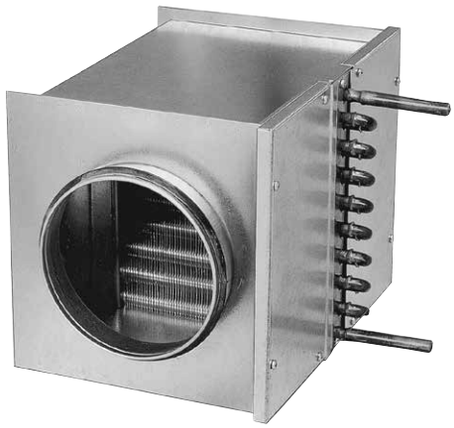

Dimensions WHR-R



Dim. in mm
see table

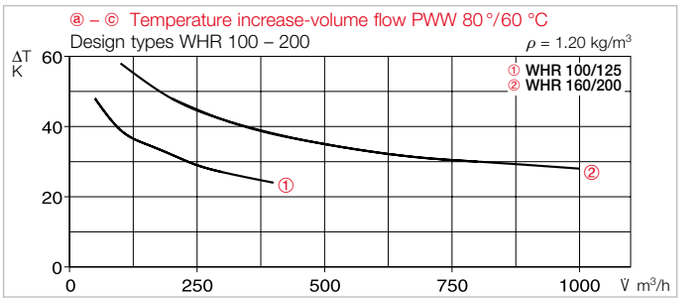



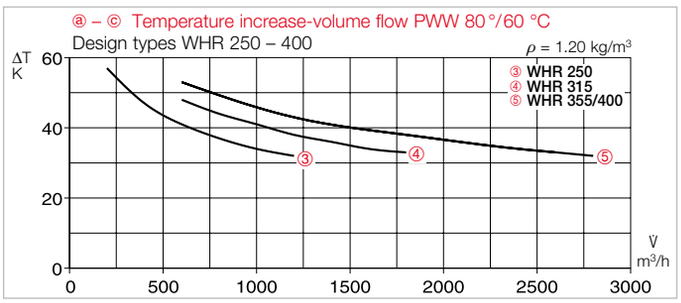



ⓐ Temperature increase

Determination: $\Delta T = \vartheta_i - \vartheta_a$ [K]

ΔT: Air temperature difference [K]
ϑ_i: Air temp., air heater outlet [°C]
ϑ_a: Air temp., air heater inlet [°C]

ⓑ Volume throughput

Given by fan performance curve, whereby system resistances and heating element pressure loss (figure ⓓ) must be taken into account.

ⓒ Determination of heat output

$$Q_H = \frac{\dot{V} \cdot \Delta T \cdot c_{PL} \cdot \rho_L}{3600} \text{ [kW]}$$

V: Volume flow [m³/h]
ΔT: Air temperature difference [K]
c_{PL}: Specific heat capacity of the air (1.0) [KJ/kg K]
ρ_L: Air density (1.2) [kg/m³]

Warm water heating element for installation in vent. ducts.
Dimensionally matched to the Helios round duct fans. Casing made of galvanised steel sheet. Double-sided connections with rubber lip seal for standard ducts. Air heater with aluminium blades, pressed onto copper pipes.
Operating temp. $t_{max.}$ 100 °C. Operating pressure max. 8 bar.
Water connection pipes with external thread. Two inspection covers on water connection side for easy cleaning. With drain/vent valve.

Installation instructions

Install the heating element in the flow direction downstream of the fan. In case of installation upstream of the fan, ensure that the air flow temperature at the fan does not exceed its maximum permissible temperature. In order to protect against contamination and to prevent a drop in performance, the installation of an air filter LFBR is recommended. A duct piece of at least 1 m in length must be installed between the fan and the heating element, so that a uniform flow is achieved. When installing a heating element, make sure that drainage and venting is ensured. Attention: Frost protection should be provided on site.

Selection

The effective temperature increase results from the parameters: Volume throughput, element output and flow temperature. These parameters can be determined using the adjacent diagrams (in steps ⓐ – ⓒ). The heat outputs are also specified in the type table for some volume parameters. When selecting a fan (volume determination), the pressure loss of the heating element, which is shown in the diagrams, must be taken into account (figure ⓓ).

ⓓ Determination of press. loss

The diagrams above show the pressure loss depending on volume flow for the respective heating element.

Accessories	Page
Temperature control system WHST, WHS HE	493 f.

Type	Ref. no.	Compat. with duct	Air-side data: Heat output		Δ T air		at V̇	Water-side data[1]: Pressure loss	at water volume	Dimensions: A	B	C	Ø D	G	F	Connection d"[3]	Weight	Compatible temperature control system: Type	Ref. no.
		Ø mm	kW[1]	kW[2]	K[1]	K[2]	m³/h	Δ p_w kPa	l/h	mm	mm	mm	mm	mm	mm	Ø"	ca. kg		
WHR 100	09479	100	1.9	0.9	35	17	150	1	84	161	180	140	100	45	387	3/4	3.2	**WHST 300 T38[4]**	08817
WHR 125	09480	125	2.6	1.1	29	13	250	2	115	161	180	140	125	45	387	3/4	3.2	**WHST 300 T38[4]**	08817
WHR 160	09481	160	5.5	3.1	38	22	400	11	245	236	255	215	160	45	387	3/4	4.9	**WHST 300 T38[4]**	08817
WHR 200	09482	200	7.2	4.1	33	19	600	17	317	236	255	215	200	45	387	3/4	4.9	**WHST 300 T38[4]**	08817
WHR 250	09483	250	10.7	6	37	21	800	8	470	311	330	290	250	65	427	3/4	6.9	**WHS HE**	08319
WHR 315	09484	315	18.3	10.4	36.2	21	1400	9	810	396	405	365	315	56	410	3/4	9.0	**WHS HE**	08319
WHR 355	08790	355	24.5	14	38	21.6	1800	9	1080	461	480	420	355	56	410	3/4	12.5	**WHS HE**	08319
WHR 400	09524	400	26.2	15	36	21	2000	11	1060	461	480	420	400	71	440	3/4	12.5	**WHS HE**	08319

The values apply for supply air temperature 0 °C and flow/return temperatures: [1] 90/70 °C, [2] 60/40 °C.
[3] 3/4"= 19.05 mm, 1"= 25.4 mm, external thread.
[4] Alternative WHST 300 T50, see p 181 (Ref. no. 08820).

WHST 300 T38

Installation diagram WHR

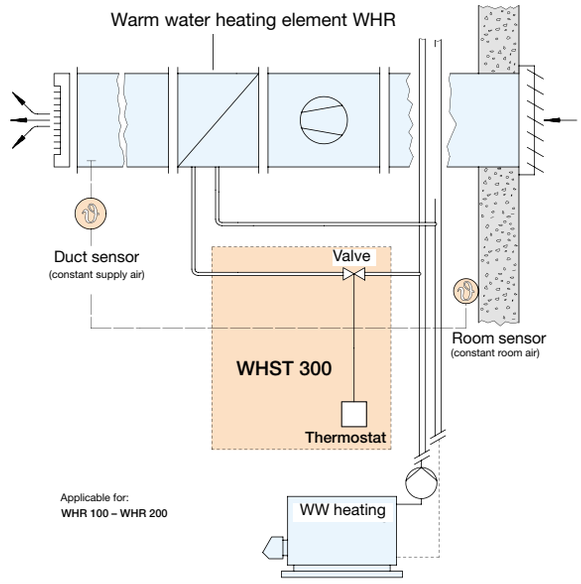

Air temperature control WHST 300 T38 for warm water heating elements.

- For the air heating control of warm water heating elements with smaller outputs up to approx. 5.5 kW and flow rates up to 300 l/h.
- Ideal addition for ventilation units with heat recovery and PWW post-heater as well as for warm water heating elements WHR 100 up to WHR 200.
- Simple, cost-effective and quick-to-install solution.

Description/Application

- WHST 300 T38 consists of a thermostat with remote adjustment and remote sensor and it is suitable for systems where the water pressure of the heating circuit can provide this application.
  The proportional controller, which works like a conventional heating valve and without auxiliary electrical energy, is continuously variable and changes the temperature by varying the heating water flow rate.

Control options

Control options by changing the heating water flow rate:

- **Constant supply air temperature control** by positioning the capillary tube sensor in the air flow.
- **Constant room air temperature control** by positioning the capillary tube sensor in the room.
- **Optional limitation of the temperature range** by defining a minimum and maximum value.
- **Frost protection position** reacts at +8 °C.

Scope of delivery

Complete set, includes

- Thermostat for room installation
- Straight-way valve
- Set piston
- Capillary tube remote sensor
- Mounting material

Installation instructions

- The capillary tube should be laid so that it is not kinked or flattened.
  For a constant room temperature, the remote sensor should be installed at a point in the room where the desired temperature conditions prevail.

Design

- The WHST 300 T38 control can be used for heating elements up to 300 l/h water flow rate.
  The pressure loss to be overcome for dimensioning the on-site pump results from the sum of Δp heating element, Δp valve (see diagram) and Δp duct system.

Valve pressure loss

*Valve position

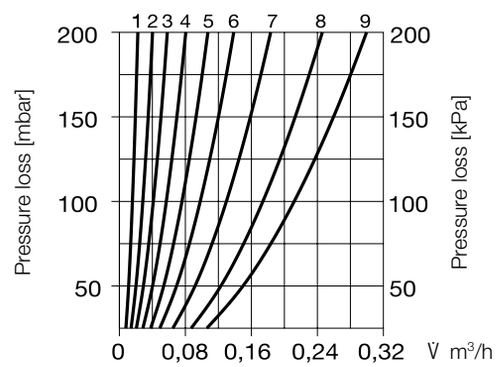

* Note: The valve is delivered ex works in position 9. It can be variably adjusted between 1 and 9 to optimise the control behaviour for smaller water volumes.

Technical data

Type	WHST 300 T38
Ref. no.	08817
Max. operating pressure	10 bar
Max. operating temperature	120 °C
Connection DN 20	3/4"
Max. flow rate	300 l/h
Differential pressure influence	0.4 K/0.5 bar
Setpoint range (thermostat)	8–38 °C
Dimensions in mm	
– Thermostat	W 80 x H 80 x D 50
– Remote sensor	W 35 x H 85 x D 30
Connection thread DN 20	G 3/4"
Capillary tube length	5 m
Weight (complete)	0.5 kg

Reference

Air temp. control for warm water heating element WHR. For constant supply air temp. in the range from 20–50 °C
WHST 300 T50
(see page 181) No. 08820

WHS HE

Hydraulic unit WHSH HE 24 V

Electronic control unit WHSE

Room temp. sensor TFR

Rect. duct temp. sensor TFK

Dimensions WHS HE

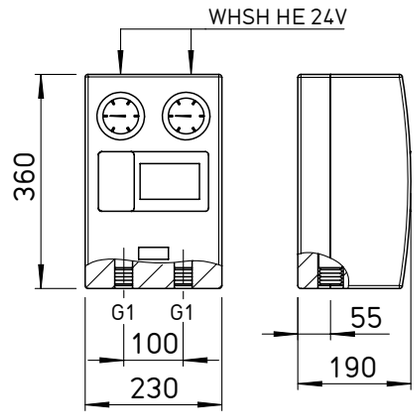

Other dim. in mm see table

Air temperature control WHS HE for warm water heating elements

- For the air heating control of warm water heating elements with a maximum output of approx. 70 kW and a flow rate between 200 and 2200 l/h.
- Compatible with the Helios heating elements WHR-R 250 – 400 and WHR-K up to 2200 l/h.
- Complete system with multiple control options and matched components.

Application

- Connection to existing heating circuits to supply e.g. a separate section. For creating a separate heating circuit using the integrated pump.
- The hydraulic assembly WHSH HE 24 V is used to operate a heating circuit in combination with Helios warm water heating elements. The flow temperature to the heating element is controlled using a 3-way valve, which is operated by a 24 V electric servomotor.
- Delivered as a ready-to-connect, easy-to-install set. With premounted, thermally insulated hydraulic unit.

Control options

- Constant supply air temperature control using duct sensor TFK.
- Constant room temperature control using external room sensor TFR.
- Constant room temperature control with minimum limit for supply air temperature through the room and duct sensors.
- Frost protection for all three variants by using a second duct sensor TFK.
- WHS HE also offers the option of setpoint control e.g. for night and weekend deactivation as well as the connection of additional sensors or setpoint adjusters.

Scope of delivery/Description

- Hydraulic unit WHSH HE 24 V with:
  - Electronic circulating pump with automatic ventilation function, 2 m connection cable.
  - Flow/return shut-off valves with integrated temperature display.
  - 24 Volt servomotor with end switch, manual operation possible. Connection cable (2.2 m).
  - Three-way valve.
  - Thermal cladding made of EPP foam.
  - Sealing kit and two flexible reinforced hoses DN 25 (stainl. steel, 50 cm long) for element-side connection.
  - Reduction nipple, 3/4" – 1".
- Electronic control unit WHSE, for switch cabinet installation. Functions:
  - Setpoint temp. specification for operation with constant supply air temperature.
  - Cascade factor setting.
  - Minimum limit.
  - Setting/selection of control modes.
  - Operating display.
  - Frost protection: Alarm and reset.
  - Servomotor operating display.
  - Potential-free output for alarm 24 V and 230 V circuit.
- Two temperature sensors TFK for rectangular duct installation.
- One room temperature sensor TFR.

Installation diagram WHS HE

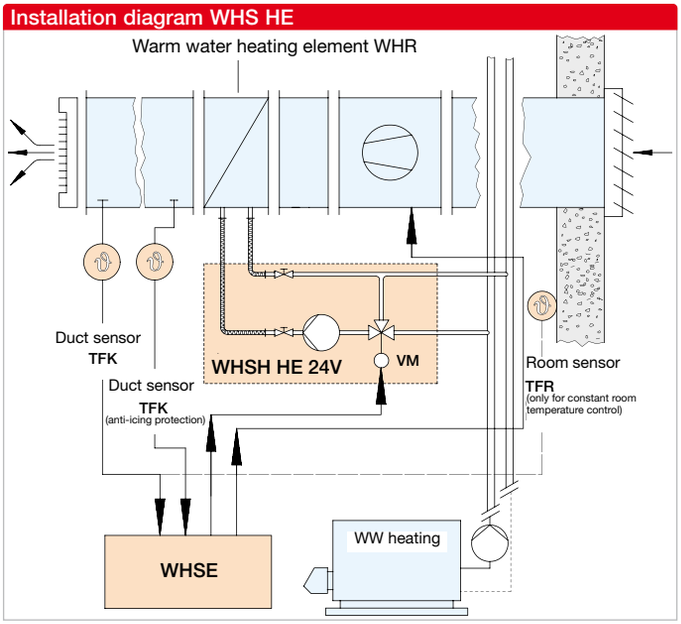

Type		WHS HE
Ref. no		08319
Max. operating pressure		6 bar
Max. operating temperature		120 °C
KVS value		5.1
Min. / Max. flow rate		200 [1] – 2200 l/h
Differential pressure influence		0.1 – 0.7 K / 0.5 bar
Setpoint range (thermostat)		7 – 28 °C
Ambient temperature (control electronics)		0 – 50 °C
Protection category (control electronics)		IP20
Power consumption	– Pump	3 ... 45 W
	– Servomotor	2.5 W
	– Control electronics	5 W
Voltage	– Pump / control electronics	230~ V / 50 Hz
	– Servomotor	24~ V / 50/60 Hz
Wiring diagram no.		953
Dimensions in mm	– Hydraulic unit [3]	See dimensional drawing
	– Control electronics WHSE [3]	H 80 x W 100 x D 85
	– Room sensor TFR	H 80 x W 85 x D 30
	– Duct sensor TFK	130/50 [2], Ø 10
Weight approx. kg		9.0

[1] Low water flow rates can cause control problems. [2] Length internal/external.
[3] One-off orders of WHS HE system components upon request.

Application example

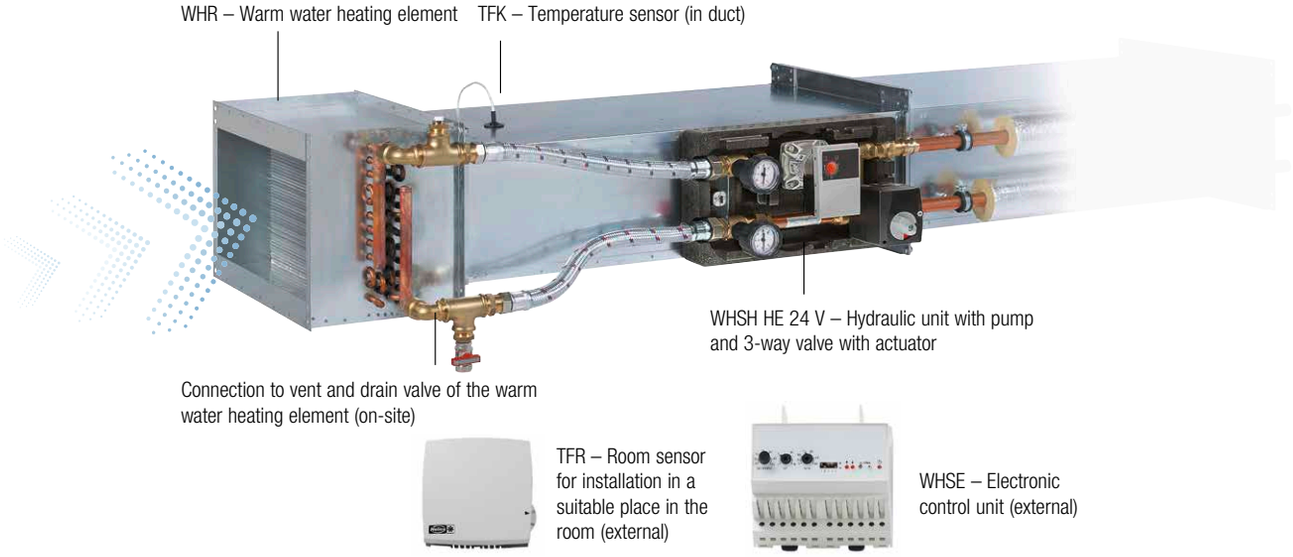

Installation instructions

The heating element WHR and duct sensor TFK must be attached on the air-side in the duct system downstream of the fan. The hydraulic unit WHSH HE 24 V must be fixed independently and securely. Expansion forces or the dead weight of the duct system must not burden the connections.
The vent valve must be attached at the highest point and the drain valve must be attached at the lowest point of the circuit.
The electronic control unit WHSE (IP 20) can be installed in the switch cabinet on DIN profile rails.

Design

① Selection of the desired PWW heating element using the air volume flow, the design (duct dimensions) and the required heat output
– WHR-R, round ducts p. 492
– WHR-K, rect. ducts p. 491

② Determination of the pressure loss of the on-site duct system.

③ Addition of losses from all components:
Δp Total =
Δp heating element
+ Δp duct system
+ Δp WHSH HE

④ Setting the required differential pressure Δp Total at the rotary knob on the circulating pump.

Diagram

Pressure loss Hydraulic unit incl. flexible pipe

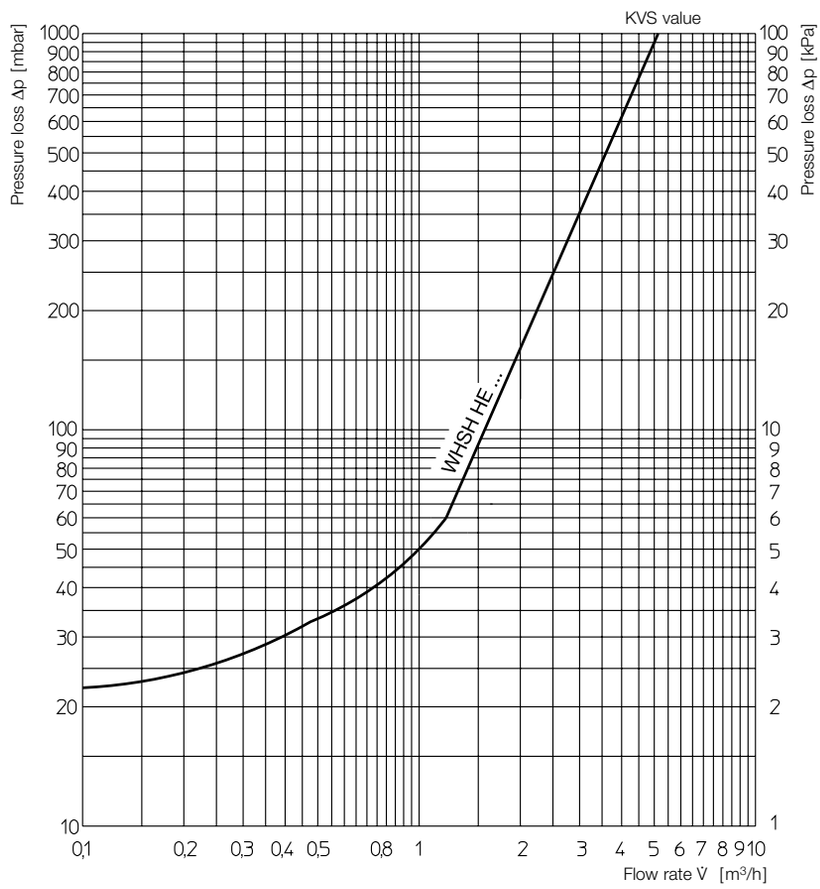

Char. curve Diff. press. – Variable



Char. curve Diff. press. – Constant



Reference

Other hydraulic units

– for KWL units with PWW post-heater **181**
WHSH HE 24 V (0-10 V)
Ref. no.08318

– for ALB EC WW **353 ff.**
WHSH HE 24 V (0-10 V)
Ref. no.08318

General information

- If the fan noise emission exceeds an acceptable level, passive noise reduction measures must be taken. For this purpose, silencers can be used according to the absorption principle. This silencer type ensures good sound insulation with low pressure losses.

  Helios offers silencers which are optimally adapted to the Helios fans. Round duct and rectangular duct silencers are available in corresponding casing shapes. Of course, all silencer types can also be used with fans of other brands.

  Helios silencers have casings made of galvanised steel sheet and they are provided with baffles made of high-quality mineral wool, which are covered with an abrasion-resistant fleece against the air flow.

Technical information
Sound insulation

- The measure for sound insulation is insertion loss according to DIN EN ISO 14163. It shows the reduction in noise level in a round duct or rectangular duct piece with and without silencers determined by a comparison measurement.

  For the measurement without silencers, a sound-reflecting piece is used instead. This determines the insertion loss:

$D_e = L_o - L_m$ dB
L_o: Level without silencer
L_m: Level with silencer

Since the effects of a silencer are highly dependent on the frequency, the insertion loss depending on frequency is specified.
The damping of low frequency noises requires more damper volume than the damping of high frequency noises and is therefore associated with higher costs.

For these reasons, a knowledge of the fan noise spectrum (octave and third octave spectrum) is required for the selection of a silencer. When acoustically assessing a ventilation system, it should be noted that other system components, such as bends, cross-section changes and branches also have a sound-insulating effect.

More detailed information can be found in VDI Guideline 2081 – noise generation and noise reduction in air-conditioning systems.
The lower limit for system noise emission is determined by the generation of flow noise in the silencer and in the system components. These increase significantly with increasing flow velocity. Therefore, the flow velocities should be kept as low as possible.

- **Quick selection of a silencer**

  An average insulation measurement is specified in the type table (red column far right) for the simple selection of round duct and rectangular duct silencers. This value should be deducted from the fan sound power level (L_{WA} tot.).
  The result is the fan sound power level reduced by the sound insulation (L_{WA} reduc.).

  This selection method, which shows differences compared to the frequency band calculation, is based on rounding.
  A calculation according to the octave band (see adjacent example) produces more accurate values.

- **Example:**
  Available:
  Fan type VARD 225/2
  Selected:
  Duct silencer RSD 225/600 (installation length = 600 mm)

  Fan sound power level
  L_{WA} tot. = 81 dB(A)
  Average silencer insulation measurement
  minus = 15 dB(A)
  = Reduced sound power level
  L_{WA} reduc. = 66 dB(A)

- **Terms**
  L_{WA} tot. = Fan sound power level in dB(A) (from table above performance diagram).

  Average insulation measurement = Derived damping capacity of the silencer in dB(A) (from red column in silencer type table).

  L_{WA} reduc. = Sound power level reduced by silencer insertion in dB(A).

Sound level calculation

- In order to calculate the sound level after insertion of a silencer, the insulation loss by frequency band must be deducted from the fan band level and the total sound level can then be calculated. This is normally done in octave bands. Multiple silencers with the same diameter can be arranged one behind the other for larger insertion losses.
  The example below explains the procedure. Given task: Noise reduction of fan type VARD 225/2 (2800 min^{-1}) using silencers RSD 225/600 (basic length 2).

	Octave mid-frequency Hz							
	125	250	500	1000	2000	4000	8000	
A-weighted octave level $L_{WA, Oct}$ of fan VARD 225/2	51	62	74	76	76	72	63	dB(A)
A-weighted total sound power level L_{WA}	L_{WA} = 81 dB(A)							
Insertion loss of silencer D_e RSD 225/600 (2 x basic length)	4	10	17	27	25	17	14	dB
A-weighted octave level $L_{WA, Oct}$ of fan with silencer	47	52	57	49	51	55	49	dB(A)
A-weighted total sound power level L_{WA} of fan with silencer	$L_{WA} = 10 \cdot \lg (10^{47 \cdot 0.1}+10^{52 \cdot 0.1}+10^{57 \cdot 0.1}+10^{49 \cdot 0.1}+10^{51 \cdot 0.1}+10^{55 \cdot 0.1}+10^{49 \cdot 0.1}) = 61$ dB(A)							
Associated A-weighted sound pressure level at 1 m distance	L_{pA} = 53 dB(A)							

KSD

Dimensions KSD



Dim. in mm see table

Pressure loss KSD



Rectangular duct silencer KSD

Design – Installation
Casing made of galvanised steel sheet, with connection flanges, dimensionally matched to the rectangular duct fans, for insertion on the inlet and outlet side of the rectangular duct system. The silencers upstream or downstream of the fan must be provided with a flexible connector (VS or VS Ex) to the further duct system to prevent structure-borne noise transmission.

Pressure loss
Rectangular duct silencers cause flow resistances (adjacent diagram) which must be taken into account for the design. These values apply for uniform flows. In case of non-uniform flows (e.g. for the outflow from rectangular duct fans), a straight duct piece at least 1 m in length must be used or allow for higher resistances.

Reference	Page
Selection - noise calculation	496

Type	Ref. no.	Nom. duct size in cm	No. links	Dimensions in mm A	B	C	D	Weight approx. kg	Insertion loss D_e dB at Hz 125	250	500	1000	2000	4000	8000	Average loss
KSD 40/20	08728	40/20	3	420	220	443	240	13	8	11	23	31	31	26	18	17
KSD 50/25-30	08729	50/25-30	3	520	270/320	540	340	16.5	6	9	19	25	25	20	15	14
KSD 60/30-35	08730	60/30-35	4	620	320/370	640	390	20	7	10	21	28	28	23	16	12
KSD 70/40	08731	70/40	4	720	420	740	440	25	6	8	18	24	24	20	14	12
KSD 80/50	08732	80/50	5	820	520	840	540	31	7	9	19	26	26	21	15	14
KSD 100/50	08733	100/50	5	1020	520	1040	540	35	5	7	16	21	21	17	12	11

FSD

Dimensions FSD



Dim. in mm see table

Pressure loss FSD



Flexible cross talk silencer FSD

Design – Installation
Robust design made of flexible aluminium duct. Perforated inner lining with resin-bonded sound insulation lining approx. 50 mm thick. Double-sided connectors, which can be inserted in the duct or connected to the fan or duct using a pipe clamp connector BM. The flexible design facilitates installation.

Pressure loss
Four times the friction resistance is taken into account for the system calculation.

Type	Ref. no.	Dimensions in mm L	Ø D	Ø d	a	l	Insertion loss D_e dB at Hz 250	500	1000	2000	Weight aprx. kg	Average loss
FSD 100	00676	1000	212	100	34	54	16	25	42	50	1.3	21
FSD 125	00677	1000	236	125	34	54	13	22	39	42	1.7	18
FSD 160	00678	1000	262	160	34	54	10	21	39	30	1.9	16
FSD 200	00679	1000	312	200	34	54	8	16	32	22	2.4	12
FSD 250	00680	1000	367	250	34	54	8	16	32	15	3	12
FSD 315	00681	1000	412	315	39	59	6	12	25	11	3.4	9
FSD 355	00682	1000	462	355	39	59	6	10	25	10	3.8	8
FSD 400	00683	1000	512	400	39	59	6	10	20	9	4.3	8

Reference	Page
Selection - noise calculation	496

RSD

Dimensions RSD



Dim. see table

Design – Installation

Casing made of galvanised steel sheet. Lining with high-quality mineral wool, which is equipped with a fleece on the flow side for protection against abrasion. The dimensions and fixing holes of all sizes are based on the standard fan diameter (R 20). The fixing holes correspond to DIN 24155, p. 2.

Insertion loss

Multiple silencers with the same diameter can be arranged one behind the other for larger insertion losses.

Pressure losses

The flow resistances of the RSD silencer are very low. Twice the friction resistance is taken into account for the system calculation.

Reference	Page
Selection - noise calculation	496

Type Nominal Ø	Ref. no.	Basic length	Dimensions in mm L	A	B	Hole Ø	Weight approx. kg	Insertion loss D_e dB at Hz 125	250	500	1000	2000	4000	8000	Average loss
RSD 225/300	08734	1	300	259	404	6 x M 6	7	2	5	9	14	13	8	6	8
RSD 225/600	08735	2	600	259	404	6 x M 6	12	4	10	17	27	25	17	14	15
RSD 225/900	08736	3	900	259	404	6 x M 6	17	7	13	25	33	31	20	16	20
RSD 250/300	08737	1	300	286	404	6 x M 6	7	3	5	8	8	9	7	5	8
RSD 250/600	08738	2	600	286	404	6 x M 6	12	5	10	16	24	19	14	10	15
RSD 250/900	08739	3	900	286	404	6 x M 6	16	6	12	22	28	21	15	11	18
RSD 280/400	08740	1	400	322	454	8 x M 8	10	4	5	8	14	9	8	6	8
RSD 280/800	08741	2	800	322	454	8 x M 8	18	7	9	16	28	18	17	14	14
RSD 280/1200	08742	3	1200	322	454	8 x M 8	25	9	12	23	37	23	20	16	18
RSD 315/400	08743	1	400	356	504	8 x M 8	11	3	3	7	13	8	7	5	5
RSD 315/800	08744	2	800	356	504	8 x M 8	19	6	8	14	26	16	12	9	12
RSD 315/1200	08745	3	1200	356	504	8 x M 8	28	9	12	21	36	18	17	14	18
RSD 355/400	08746	1	400	395	564	8 x M 8	13	3	4	7	11	7	6	4	6
RSD 355/800	08747	2	800	395	564	8 x M 8	23	6	7	13	22	14	12	8	11
RSD 355/1200	08748	3	1200	395	564	8 x M 8	33	8	11	17	29	18	15	10	17
RSD 400/400	08749	1	400	438	564	12 x M 8	12	3	4	6	9	7	5	3	6
RSD 400/800	08750	2	800	438	564	12 x M 8	21	6	6	12	18	13	12	8	9
RSD 400/1200	08751	3	1200	438	564	12 x M 8	30	7	10	14	22	18	13	9	15
RSD 450/400	08752	1	400	487	634	12 x M 8	17	4	5	8	10	8	7	5	8
RSD 450/800	08753	2	800	487	634	12 x M 8	27	6	7	13	18	13	12	9	11
RSD 450/1200	08754	3	1200	487	634	12 x M 8	38	8	10	18	23	17	14	10	15
RSD 500/600	08755	1	600	541	714	12 x M 8	27	4	5	9	11	9	9	6	8
RSD 500/900	08756	2	900	541	714	12 x M 8	36	6	8	14	16	13	13	9	12
RSD 500/1200	08757	3	1200	541	714	12 x M 8	45	8	11	22	24	17	16	12	17
RSD 560/600	08758	1	600	605	804	8 x M 10	32	3	5	9	9	8	8	6	8
RSD 560/1200	08759	2	1200	605	804	8 x M 10	52	6	10	19	19	16	13	10	15
RSD 630/600	08760	1	600	674	900	8 x M 10	44	3	5	8	8	8	7	5	8
RSD 630/1200	08761	2	1200	674	900	8 x M 10	68	5	10	16	15	15	11	8	15
RSD 710/600	08762	1	600	751	1000	8 x M 10	51	3	5	7	7	7	6	4	8
RSD 710/1200	08763	2	1200	751	1000	8 x M 10	80	5	10	14	13	13	10	7	15
RSD 800/600	08764	1	600	837	1100	12 x M 10	57	2	5	7	6	6	5	4	8
RSD 800/1200	08765	2	1200	837	1100	12 x M 10	88	5	9	13	11	11	9	6	14
RSD 900/900	08766	1	900	934	1220	12 x M 10	82	2	4	10	9	6	5	4	6
RSD 900/1800	08767	2	1800	934	1220	12 x M 10	135	4	9	21	17	13	9	8	14
RSD 1000/900	08768	1	900	1043	1350	12 x M 10	96	2	4	8	7	5	4	3	6
RSD 1000/1800	08769	2	1800	1043	1350	12 x M 10	157	4	7	16	14	10	7	6	11
RSD 1120/900	08770	1	900	1174	1350	12 x M 10	81	2	3	7	6	4	3	3	5
RSD 1120/1800	08771	2	1800	1174	1350	12 x M 10	136	3	6	14	11	8	6	5	9
RSD 1250/900	08772	1	900	1311	1460	12 x M 10	86	1	2	5	4	3	2	2	3
RSD 1250/1800	08773	2	1800	1311	1460	12 x M 10	146	2	4	11	9	7	5	4	6

Firmly at the top.
Helios roof fans.

GERMAN DESIGN AWARD WINNER 2021

- **EC roof fans, diagonal outlet, DV EC**

EC 508ff

Over 150 types in horizontal and vertical outlet designs with AC and efficient EC technology, in explosion-proof, T120 and smoke extraction versions and with volume flows from 540 to 70 000 m³/h – individual solutions are offered for every construction project.

- **EC roof fans, horizontal and vertical outlet, RD and VD**

EC 514ff

- **AC roof fans, horizontal and vertical outlet, also in T120 and explosion-proof versions, RD and VD**

T120 Ex 536ff

- **Smoke extraction roof fans B VDD**



See TGA catalogue Ref. no. 86 979

F400 F600

- **Accessories**

For roof fans.

560ff

EC T120 Ex

DV EC

This information supplements the "General technical information" and the information on the product page.

Series DV EC

Diagonal outlet centrifugal fans for exhaust air operation. With EC drive technology for energy-saving application and low operating costs.

- **Design**
  Extremely weather-resistant EC roof fan in plastic design for an extensive area of application. Aerodynamically designed plastic casing made of grey polypropylene with diagonal air outlet direction.

- **Drive**
  Energy-efficient EC external rotor motor in protection category IP54.
  Optimised efficiency, even with speed control for low operating costs. Continuously variable speed control. Maintenance-free and ball bearing mounted.

- **Impellers**
  Diagonal impeller made of aluminium, the motor-impeller unit is dynamically balanced for low-noise operation.

- **Contact protection**
  All units are delivered with an air outlet side protection grille according to DIN EN ISO 13857 as standard. If the system does not provide protection against touching rotating parts on the inlet side, a protection grille should also be attached here (Accessories).

- **Air flow temperatures**
  Air flow temperatures from −30 to +60 °C.

Power control DV EC Pro

- Ideal as a central exhaust air fan for multi-floor residential construction according to DIN 18017-3.

- A complete central ventilation system according to DIN 18017-3 with demand-controlled ventilation can be constructed in combination with additional components (Accessories).

- Integrated time control for weekly or daily programme.

- Integrated pressure sensor from 0 - 300 Pa for constant pressure maintenance in combined operation with other extract air fans, e.g. Helios ELS.

- Operating modes of the DV EC Pro can be easily set on site via a local web server.

- Integrated Ethernet interface (Modbus TCP) for connection to a building management system or for direct connection to the interface via PC/laptop (no accessories).

Power control DV EC Eco

- All EC types have continuously variable speed control via potentiometer, universal control system or electronic differential pressure/temperature controller (in combination with the mains adapter NG 24, Accessories). Performance levels are shown on the performance curve as examples. Suitable control units can be found in the type table. Further information can be found in the "General technical information".

- **Electrical connection**
  Standard operating switch (protection category IP65) mounted on the outside of the casing. Connection voltage 1~, 230 V, 50 Hz.

- **Motor protection**
  Integrated electronic temperature monitoring system for EC motor and electronics.

- **Base formation, installation, delivery**

  The units are delivered ready for installation in individual shipping boxes or crates. The fans are quick and easy to install; they are equally suitable for mounting on flat, pitched, single pitch, saw-tooth, sloping, trapezoidal or arched roofs. In general, the roof bases must always be designed so that the fan base plate lies flat and horizontal.

  We recommend the use of the flat roof base, sloping roof base or corrugated roof base offered in the accessories range. These bases reduce the costs for planning, design and installation to a minimum.
  The bases can also be created on site e.g. from concrete, wood, bricks or the like. A horizontal and flat surface is just as indispensable as a proper seal with the roof edge. Once positioned, the base plate is fastened to the base with 4 screws.

  Helios flat roof bases and base silencers NS 180–450 mm have a hinge mechanism which is ben-eficial when it comes to cleaning and inspection. With regard to on-site bases, spacers should be used to compensate for any unevenness.
  A gap between the base plate and base should be sealed with elastic tape or similar material. Once the screws have been evenly tightened, check the

- **Noise**
  Further information can be found on the product pages and the "General technical information".

Reference	Page
Planning information, acoustics, explos. protection	14 ff.
General techn. information, power control	19 ff.

RD EC

VD EC

Series RD EC

Horizontal outlet EC centrifugal fans for exhaust air operation with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Series VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Design
Robust and weather-resistant design. Motor support plate and base plate with inlet nozzle made of galvanised steel. Casing made of sea water-resistant aluminium with integrated tamper protection.
Base plate made of galvanised steel sheet with inlet nozzle made of aluminium for all explosion-proof types. Smooth running due to vibration-damping motor suspension. Flat design.

Drive
External rotor motors in protection category IP44, IP54, IP4X and insulation class F according to DIN EN 60034 / VDE 0530 and DIN EN 60335-1 / VDE 0700-1 are used for the EC types. The winding is also protected against moisture. The maintenance-free ball bearings have a lubricant supply for a period of approx. 30000 operat-ing hours. Motor and impeller dynamically balanced as a unit according to DIN ISO 21940-11, quality grade 6.3 for low-vibration operation.

Impellers
High-performance centrifugal impellers with backward curved blades made of plastic, galvanised steel sheet or aluminium. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Contact protection
All units are delivered with an air outlet side protection grille according to DIN EN ISO 13857 as standard. If the system does not provide protection against touching rotating parts on the inlet side, a protection grille should also be attached here (Accessories).

Air flow temperatures
The range of application for EC types is up to +60 °C.

Power control
All EC types have continuously variable speed control via internal (delivery) or external potentiometer, universal control system or electronic differential pressure/temperature controller (in combination with the mains adapter NG24, Accessories). Performance levels are shown on the performance curve as examples. Suitable control units can be found in the type table. Further information can be found in the “General technical information”.

Electrical connection
ND 180 – 250 to external terminal box in protection category IP65. ND 315 – 630 to external terminal box and isolator switch in protection category IP65.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Installation
The installation should be carried out horizontally with a maximum inclination of 5° (no inclination possible with Ex models). In the case of sloping roofs, this must be achieved by means of an appropriate base construction in order to prevent water ingress.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate. Simple positioning with standard crane hook from ND 450 upwards.

Noise
Further information can be found on the product pages and the “General technical information”.

EC roof fans

Reference	Page
Planning information, acoustics, explos. protection	14 ff.
General techn. information, power control	19 ff.

RD

Also available in version: Ex

VD

Also available in version: T120 Ex

Common features RD, VD and VD T120

Design
Robust and weather-resistant design. Motor support plate and base plate with inlet nozzle made of galvanised steel.
Casing made of sea water-resistant aluminium with integrated tamper protection.
Base plate made of galvanised steel sheet with inlet nozzle made of aluminium for all explosion-proof types. Smooth running due to vibration-damping motor suspension. Flat design.

Drive
Speed-controllable external rotor motors located inside the air flow in closed design and protection category IP44 or IP54 and insulation class F according to DIN EN 60034 / VDE 0530 and DIN EN 60335-1 / VDE 0700-1 are used for the AC types. The winding is also protected against moisture. The maintenance-free ball bearings have a lubricant supply for a period of approx. 30000 operating hours. Motor and impeller dynamically balanced as a unit according to DIN ISO 21940-11, quality grade 6.3 for low-vibration operation.

Impellers
High-performance centrifugal impellers with backward curved blades made of galvanised steel sheet, plastic or aluminium. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Contact protection
All units are delivered with an air outlet side protection grille according to DIN EN ISO 13857 as standard. If the system does not provide protection against touching rotating parts on the inlet side, a protection grille should also be attached here (Accessories).

Air flow temperatures
The units can be used in the range from –20 °C to +70 °C. The upper limit value is type-specific and can be found in the table on the product page. If the fan is speed-controllable, this value should be reduced by approx. 10 °C.
Explosion-proof types are approved up to max. +40 °C.
VD T120: The units can be used in the range from –30 °C up to max. +120 °C. Compliant with VDI 2052.

Power control
Further information can be found on the product pages and the “General technical information”. The voltage-controllable types can be identified by a value in the column “Current consumption with control”.

Electrical connection
The supply line can be connected from below via a cable opening in the base plate or from above (via the roof). The connection to the external terminal box or isolator switch must be carried out without dismantling other parts in accordance with the provided wiring diagram.

Motor protection
Further information can be found on the product pages and the “General technical information”.

Incorrect direction of rotation
The units are only suitable for exhaust air operation.
Operation in the incorrect direction of rotation overloads the motor and causes the thermal contacts or PTC thermistor to respond.
Typical concomitant features include virtually non-existent flow rate, vibration and abnormal noise.

Installation
The installation should be carried out horizontally with a maximum inclination of 5° (no inclination possible with Ex models).
In the case of sloping roofs, this must be achieved by means of an appropriate base construction in order to prevent water ingress.
See series DV EC for delivery and base formation.

Explosion protection
The explosion-proof types correspond to unit group II, category 3 G for use in zone 2 in accordance with Directive 2014/34/EU.

The explosion-proof types Ø 315 to Ø 560 correspond to unit group II, category 2G for use in zone 1 in accordance with Directive 2014/34/EU.

The EU declaration of conformity provided with each fan certifies the design according to DIN EN 60079-0 / VDE 0170-1 and DIN EN 60079-7 / VDE 0170-6. The protection category corresponds to Ex e 2G.
The temperature class is noted on the type page.
The external terminal box also corresponds to Ex e 2G.

See “Planning information Explosion protection” and “General technical information” for further information.
In accordance with EU Directive 2014/34/EU, larger air gaps are required, which can lead to a performance reduction of up to 10 %.

Noise
Further information can be found on the product pages and the “General technical information”.

Reference	Page
Planning information, acoustics, explos. protection	14 ff.
General techn. information, power control	19 ff.

By combining the parameters of static pressure increase Δp_{fa}, speed min^{-1} and inlet side air noise as sound pressure at 4 m (free field conditions), the following table facilitates the selection of EC roof fans.

EC	Speed	Sound press. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure = N / m² = freely available pressure											
	min^{-1}	L_{PA} dB(A)	(Δp_{fa}) in Pa											
Type DV EC		at 4 m dist.	**0**	**50**	**100**	**150**	**200**	**250**	**300**	**350**	**400**	**450**	**500**	**550**
DV EC 200	1800	54	2090	1890	1690	1490	1280	1050	820	610	430			
DV EC 250	1640	60	3580	3550	3350	2880	2650	2390	2090	1690	1250	750	230	
DV EC 400 A	1150	53	4550	4130	3750	3280	2880	2450	1980	1450				
DV EC 400 B	1440	64	5550	5300	5150	4750	4300	4050	3750	3400	3050	2500	1750	500

EC	Speed	Sound press. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure = N / m² = freely available pressure											
	min^{-1}	L_{PA} dB(A)	(Δp_{fa}) in Pa											
Type RD EC		at 4 m dist.	**0**	**50**	**100**	**150**	**200**	**300**	**400**	**500**	**600**	**700**	**800**	**1000**
RDW EC 180	3360	57	670	650	620	600	570	500	410	260				
RDW EC 200	2650	57	1180	1120	1040	950	870	670	500	310				
RDW EC 225 A	2550	52	1310	1250	1160	1080	1000	810	600	370	160			
RDW EC 225 B	3020	60	1500	1440	1380	1330	1270	1150	1010	850	550			
RDW EC 250	2705	61	1890	1840	1790	1730	1660	1510	1330	1140	920	600		
RDW EC 315	1650	55	3460	3330	3190	3030	2840	2440	1730	80				
RDD EC 315	1700	55	3450	3320	3190	3060	2910	2540	2000	910				
RDW EC 355	1700	59	5370	5190	5030	4870	4690	4280	3850	3260	2260			
RDD EC 355	1750	60	5310	5160	5000	4820	4650	4300	3870	3350	2610	280		
RDW EC 400	1500	60	6710	6520	6310	6100	5850	5350	4730	3980	2470			
RDD EC 400	1500	60	6420	6250	6080	5870	5660	5180	4600	3800	2360			
RDW EC 450	1300	60	8020	7760	7480	7180	6870	6260	5490	4390	840			
RDD EC 450 A	1425	63	8740	8520	8280	8030	7770	7240	6570	5800	4780	2300		
RDD EC 450 B	1800	69	10730	10540	10360	10160	9970	9560	9120	8690	8230	7680	7100	5380
RDD EC 500 A	1400	65	12680	12370	12070	11770	11470	10750	10010	9160	8130	6820	4350	
RDD EC 500 B	1550	68	13550	13280	13000	12720	12420	11820	11220	10540	9740	8920	7960	3940
RDD EC 560	1100	63	14020	13660	13280	12880	12460	11490	10450	9010	6900	380		
RDD EC 630	940	67	17680	17240	16750	16180	15590	14380	12860	10560	5580			

EC	Speed	Sound press. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure = N / m² = freely available pressure											
	min^{-1}	L_{PA} dB(A)	(Δp_{fa}) in Pa											
Type VD EC		at 4 m dist.	**0**	**50**	**100**	**150**	**200**	**300**	**400**	**500**	**600**	**700**	**800**	**1000**
VDW EC 180	3330	54	670	640	610	570	540	460	370	210				
VDW EC 200	2670	55	1150	1070	1000	920	850	680	500	320	0			
VDW EC 225 A	2500	53	1260	1200	1120	1050	960	780	580	350	150			
VDW EC 225 B	3015	58	1430	1380	1320	1270	1200	1080	930	730	380			
VDW EC 250	2740	59	1820	1770	1720	1670	1600	1450	1280	1080	860	530		
VDW EC 315	1650	55	3440	3310	3170	3020	2860	2400	1630	180				
VDD EC 315	1700	55	3420	3290	3170	3040	2880	2480	1900	720				
VDW EC 355	1700	58	5070	4920	4780	4630	4470	4090	3570	2940	1870			
VDD EC 355	1750	59	5020	4890	4750	4610	4460	4120	3700	3100	2200	790		
VDW EC 400	1500	60	6180	6010	5820	5620	5400	4880	4230	3380	1630			
VDD EC 400	1500	59	6040	5870	5680	5450	5220	4770	4130	3300	1590			
VDW EC 450	1300	59	7350	7110	6870	6630	6330	5580	4640	3090	570			
VDD EC 450 A	1425	62	7990	7780	7560	7340	7090	6490	5810	4840	3360	1030		
VDD EC 450 B	1800	68	9940	9780	9620	9450	9270	8850	8420	7950	7390	6720	5850	3400
VDD EC 500 A	1400	65	11100	10860	10620	10370	10100	9490	8760	7900	6730	5070	2620	
VDD EC 500 B	1550	68	11890	11690	11490	11270	11020	10480	9960	9310	8530	7630	6390	2100
VDD EC 560	1100	62	12380	12050	11730	11380	10990	10050	9000	7390	4560	410		
VDD EC 630	940	67	15910	15500	15070	14570	14000	12710	11070	8370	2510			

By combining the parameters of static pressure increase Δp_{fa}, speed min^{-1} and inlet side air noise as sound pressure at 4 m (free field conditions), the following table facilitates the selection of AC roof fans.

	Speed	Sound press. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure = N / m² = freely available pressure																
	min^{-1}	L_{PA} dB(A)	(Δp_{fa}) in Pa																
Type RD		at 4 m dist.	**0**	**50**	**100**	**150**	**200**	**250**	**300**	**400**	**500**	**600**	**800**	**1000**	**1200**				
RDW 180/2	2295	41	550	490	440	360	290	200	120										
RDW 200/2	2430	48	1060	990	930	840	770	670	580	310									
RDW 200/4	1375	36	550	430	290														
RDW 225/2	2635	52	1310	1250	1200	1130	1060	990	930	760	520	90							
RDW 225/4	1340	36	650	550	410	30													
RDW 250/4	1340	38	920	800	630	440													
RDW 315/4	1385	46	2900	2720	2550	2330	2090	1830	1380										
RDD 315/4	1385	46	2890	2700	2510	2280	2060	1760	1290										
RDW 355/4	1400	46	4450	4260	4030	3790	3560	3280	2890	1870									
RDD 355/4	1350	46	4470	4230	4000	3700	3410	3120	2740	1650									
RDW 400/4	1405	51	6150	5920	5690	5450	5180	4910	4640	3970	2910	650							
RDD 400/4	1375	50	5950	5690	5430	5130	4850	4580	4230	3340	2050	310							
RDD 400/6	905	41	4030	3600	3180	2650	1910	420											
RDW 450/4	1385	54	8630	8340	8060	7770	7500	7200	6880	6220	5360	4240							
RDD 450/4	1400	54	8630	8380	8120	7840	7550	7270	6990	6280	5540	4400							
RDD 450/6	905	45	5830	5430	4910	4410	3780	2910	1530										
RDD 500/4	1340	56	12060	11710	11360	11000	10660	10310	9920	9140	8150	6980	3810						
RDD 500/6	885	47	8300	7750	7200	6670	5970	4990	3930	870									
RDD 560/4	1380	61	15660	15360	15040	14690	14320	13940	13570	12780	11960	11040	8810	5350	1220				
RDD 560/6	920	52	9820	9390	8960	8520	8100	7650	7130	5860	270								
RDD 630/6	930	59	15770	15200	14520	13870	13280	12580	11990	10460	8520	830							
RDD 710/6	968	63	26070	25460	24830	24150	23460	22790	22100	20390	18330	15660	6860						
Type VD																			
VDW 180/2	2315	40	540	500	430	360	290	200	110										
VDW 200/2	2430	48	1000	940	870	790	700	610	500	240									
VDW 200/4	1375	32	530	420	250														
VDW 225/2	2635	51	1290	1240	1170	1100	1030	950	880	680	410	70							
VDW 225/4	1340	37	640	540	370	30													
VDW 250/4	1340	38	900	780	610	380													
VDW 315/4	1385	46	2850	2670	2480	2290	2050	1720	1200	150									
VDD 315/4	1385	45	2870	2680	2500	2270	2020	1660	1130										
VDW 355/4	1400	46	4290	4100	3880	3660	3390	3090	2710	1690	230								
VDD 355/4	1350	46	4280	4050	3830	3600	3300	2990	2550	1470	120								
VDW 400/4	1405	51	5820	5610	5370	5110	4850	4600	4290	3480	2300	760							
VDD 400/4	1375	49	5590	5340	5100	4830	4530	4190	3820	2940	1600	390							
VDD 400/6	905	41	3760	3440	2970	2380	1590	590											
VDW 450/4	1385	53	7740	7520	7290	7030	6760	6450	6110	5390	4360	3000							
VDD 450/4	1400	53	7870	7640	7400	7140	6890	6630	6280	5560	4400	3170							
VDD 450/6	905	44	5210	4860	4390	3840	3150	2200	1100										
VDD 500/4	1340	56	10550	10280	10000	9690	9380	9080	8740	7940	7040	5880	2780						
VDD 500/6	885	47	7240	6760	6290	5710	5090	4310	3220	760									
VDD 560/4	1380	62	14060	13760	13450	13100	12720	12370	12050	11270	10440	9530	7400	4730	1480				
VDD 560/6	920	52	9240	8760	8350	7950	7500	7010	6450	4860	970								
VDD 630/6	930	58	14430	13780	13240	12670	12020	11390	10780	9110	6440	1100							
VDD 710/6	968	62	23760	23210	22630	21980	21260	20470	19700	17940	15800	13000	5000						

By combining the parameters of static pressure increase Δp_{fa}, speed min^{-1} and inlet side air noise as sound pressure at 4 m (free field conditions), the following table facilitates the selection of Ex and T120 roof fans.

	Speed	Sound press. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure = N / m² = freely available pressure																
	min^{-1}	L_{PA} dB(A)	(Δp_{fa}) in Pa																
Type RD Ex		at 4 m dist.	**0**	**50**	**100**	**150**	**200**	**250**	**300**	**400**	**500**	**600**	**700**	**800**	**900**				
RDD 200/4 Ex	1465	41	600	510	380	60													
RDD 225/4 Ex	1445	43	850	760	620	400	0												
RDD 250/4 Ex	1400	46	1350	1230	1070	850	500												
RDD 315/4 Ex	1390	52	2890	2740	2590	2380	2180	1880	1450										
RDD 355/4 Ex	1345	58	4350	4120	3890	3660	3430	3130	2750	1600									
RDD 400/4 Ex	1395	63	6030	5860	5670	5440	5220	4980	4700	3970	2860	630							
RDD 400/6 Ex	930	52	3840	3500	3170	2760	2330	200											
RDD 450/4 Ex	1405	65	8580	8360	8120	7880	7620	7370	7120	6520	5780	4840	2710						
RDD 450/6 Ex	870	55	5640	5140	4650	4150	3560	2670	890										
RDD 500/4 Ex	1420	69	10310	9920	9560	9230	8920	8620	8320	7720	7060	6250	5170	1090					
RDD 500/6 Ex	840	58	6540	5850	5290	4580	3950	3300	690										
RDD 560/6 Ex	865	62	9420	8820	8330	7830	7320	6690	6080	3470									
RDD 630/6 Ex	905	68	16480	15930	15400	14850	14260	13600	12840	11110	8670	4340							
Type VD Ex			**0**	**50**	**100**	**150**	**200**	**250**	**300**	**400**	**500**	**600**	**700**	**800**	**900**				
VDD 200/4 Ex	1465	39	580	480	360	90													
VDD 225/4 Ex	1450	41	810	700	600	340													
VDD 250/4 Ex	1400	45	1280	1150	980	740	400												
VDD 315/4 Ex	1390	51	2760	2620	2470	2280	2030	1740	1310	70									
VDD 355/4 Ex	1350	57	4310	4120	3910	3630	3400	3060	2720	1590	230								
VDD 400/4 Ex	1375	62	5640	5460	5260	5050	4840	4580	4280	3560	2380	750							
VDD 400/6 Ex	930	52	3620	3300	2960	2480	1910	380											
VDD 450/4 Ex	1405	65	7920	7720	7500	7240	6980	6720	6390	5670	4720	3460	1870	240					
VDD 450/6 Ex	875	54	5170	4810	4350	3810	2990	1900	820										
VDD 500/4 Ex	1405	67	9360	9090	8810	8500	8190	7880	7580	6900	6170	5330	4130	990	0				
VDD 500/6 Ex	840	56	5850	5330	4830	4200	3530	2610	1230										
VDD 560/6 Ex	860	60	8460	7920	7480	7040	6580	5950	5210	1780									
VDD 630/6 Ex	910	67	14690	14220	13700	13140	12610	11920	11140	9280	6180	2670	180						

	Speed	Sound press. inlet side	Flow rate $\dot{V}$ m³/h depending on static pressure = N / m² = freely available pressure																
	min^{-1}	L_{PA} dB(A)	(Δp_{fa}) in Pa																
Type VD T120		at 4 m dist.	**0**	**50**	**100**	**150**	**200**	**250**	**300**	**400**	**500**	**600**	**800**	**1000**	**1200**				
VDD 315/4 T120	1450	53	3362	3215	3053	2871	2664	2419	2116	887									
VDD 355/4 T120	1400	55	4540	4385	4217	4035	3834	3610	3352	2657									
VDD 400/4 T120	1400	54	6747	6557	6352	6129	5884	5614	5310	4568	3528	1698							
VDD 400/6 T120	967	46	4531	4232	3887	3475	2947	2155											
VDD 450/4 T120	1355	60	9479	9292	9093	8877	8643	8387	8103	7423	6501	5098							
VDD 450/6 T120	940	53	6398	6105	5762	5348	4824	4111	3038										
VDD 500/4 T120	1465	61	14001	13762	13514	13256	12987	12704	12406	11748	10971	9994	6202						
VDD 500/6 T120	945	52	9405	9038	8621	8131	7527	6719	5461	796									
VDD 560/4 T120	1480	63	16172	15942	15697	15435	15154	14853	14530	13809	12985	12061	9961	7462	2671				
VDD 560/6 T120	965	52	12200	11821	11403	10937	10408	9792	9049	6780	1699								
VDD 630/6 T120	985	63	19467	19039	18588	18110	17598	17043	16435	14976	12873	8159							
VDD 710/6 T120	985	62	24470	23974	23442	22870	22251	21580	20848	19169	17125	14600	6879						

Helios roof fans – versatile all-rounders.

Cafeterias and recreation rooms

Series VD:

The vertical discharge series VD is the perfect partner for various applications in residential, commercial and public buildings. Especially in highly frequented areas, VD demonstrates its advantages and it can be ideally integrated in a comprehensive Helios ventiation system.

Apartment buildings

Series RD:

The roof fans in series RD discharge horizontally and they are also characterised by extremely flexible applications. Ideal for residential buildings, workplaces or public buildings.

Commercial kitchens and production halls

COMPLIANT TO GERMAN VDI 2052

Series VD T120:

Specialising in increased temperatures, the series VD T120 is predestined for areas with high levels of waste heat and for air flow temperatures of up to 120 °C. The exhaust air is extracted directly at its source, safely and hygienically due to the motor located outside of the air flow.

Shopping centres

Series B VD F400/F600:

Developed to withstand the most extreme conditions, the series B VD F400/F600 are invaluable lifesavers in case of fire. Thanks to their dual functionality, they can be used for everyday ventilation, e.g. in assembly areas and sales outlets, in addition to smoke extraction.

Fuel depots

Series RD / VD Ex:

Whether it is fuel depots, battery production or other potentially explosive atmospheres: The RD / VD Ex roof fans are reliable solutions thanks to the explosion protection – even in highly sensitive fuel depots.

Centrifugal roof fan RD, horizontal outlet.
Favourable price/performance ratio. Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

EC roof fans DV, diagonal outlet.
With energy-saving EC drive technology for low operating costs. Extremely weather-resistant in plastic design.
Optionally available in Pro version with integrated pressure control for volume flpw stabilisation (no Figure).

Centrifugal roof fans VD, vertical outlet.
Favourable price/performance ratio. Vertical outlet roof fan with efficiency-optimised aluminium casing or casing made of galvanised steel sheet and newly developed high-performance centrifugal impeller.

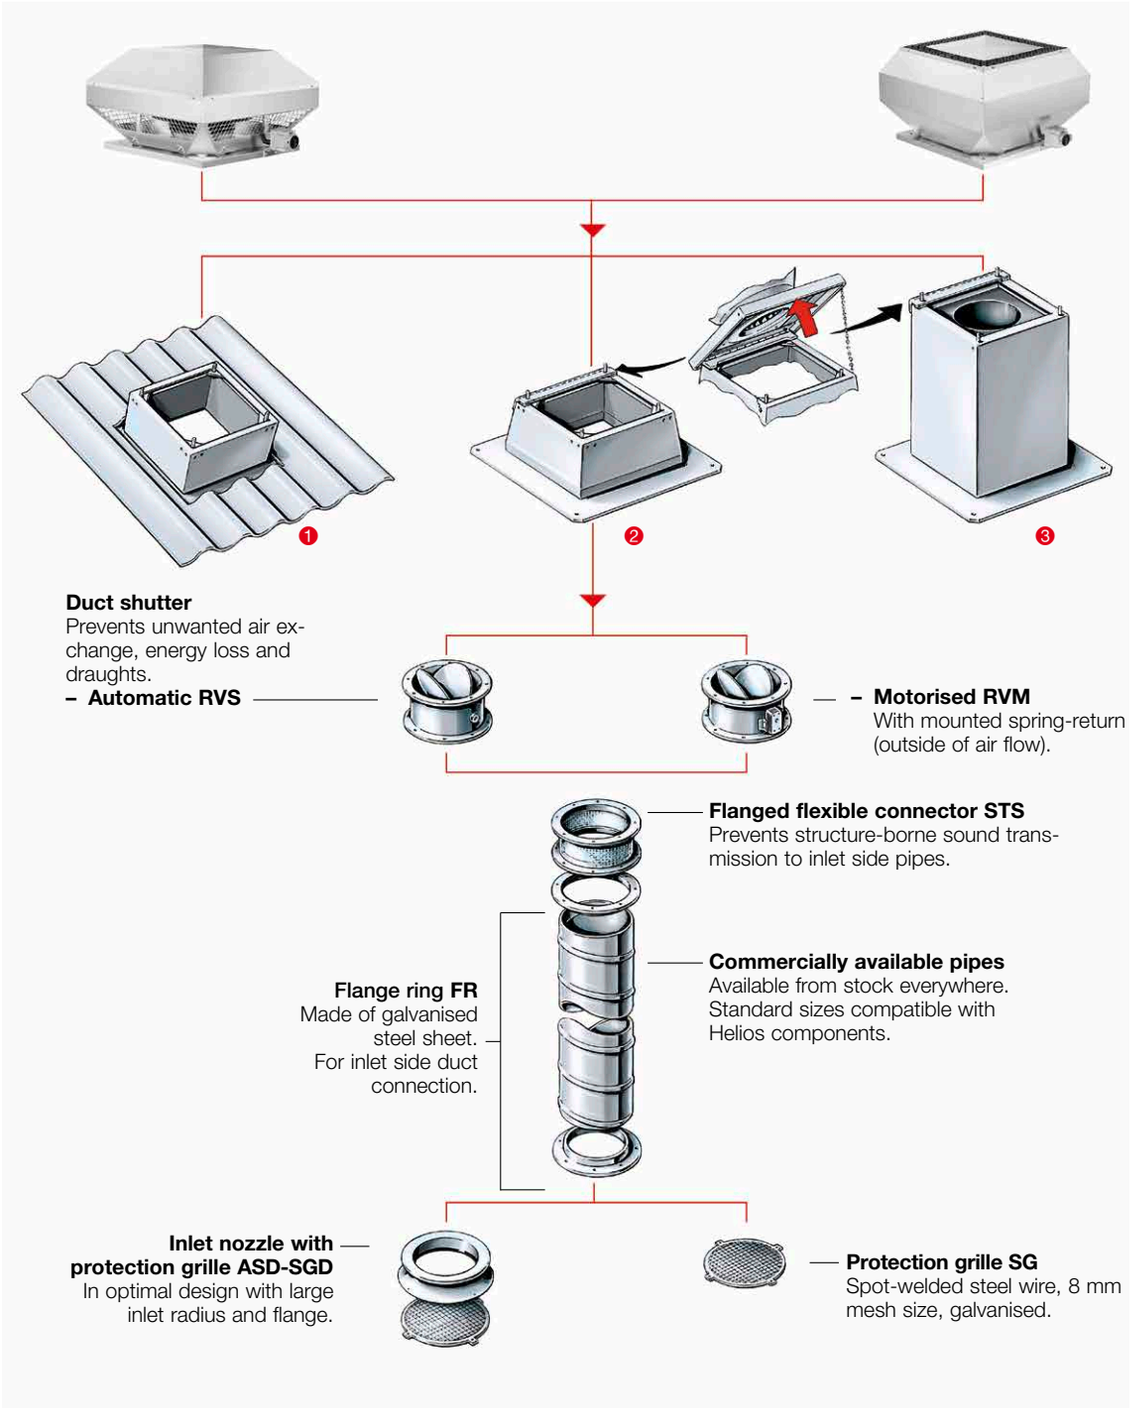

❶
Corrugated roof base WDS
For the installation of roof fans and ventilation hoods on corrugated roofs. Weather-resistant and non-corrosive made of glass fibre reinforced polyester.
Pitched roof base SDS
For the installation of roof fans/ventilation hoods on pitched or trapezoidal roofs. Sound and heat insulated lining on the inside.

❷
Flat roof base FDS
For the cost-effective and efficient installation of roof fans and ventilation hoods on flat roofs. In corrosion-resistant GFK version or made of galvanised steel sheet. NS 180 to 450 mm with hinged mechanism for easy inspection and cleaning.

❸
Base silencer SSD
For inlet side noise reduction.
All metal parts made of galvanised steel sheet. Incl. fixing screws, rubber profile and seal between the base and base plate.
NS 180 to 450 mm with hinged mechanism and foam core with free cross-section.
Allows access to the duct/shaft system.

DV EC 200

Dimensions DV EC 200

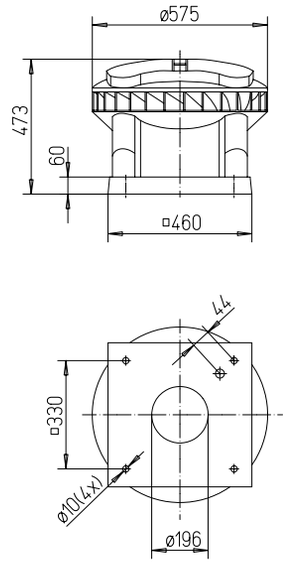

Dim. in mm

Extremely weather-resistant EC roof fan in plastic design for an extensive range of applications, diagonal outlet.

Common features DV EC Pro and DV EC Eco

Casing
Aerodynamically designed plastic casing made of grey polypropylene with diagonal air outlet direction. Air flow temperatures from –30 to +60 °C.

Impeller
Diagonal impeller made of aluminium, the motor impeller unit is dynamically balanced for low-noise operation.

Drive
Energy-efficient EC external rotor motor in protection category IP54. Optimised efficiency even with speed control for low operating costs. Continuously variable speed control. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
Standard operating switch (protection category IP65) mounted on the outside of the casing. Connection voltage 1~, 230 V, 50 Hz.

Installation
Horizontal alignment on the roof. In case of sloping roofs, a corresponding base formation must be used to prevent water ingress. A range of accessories facilitates the installation of the fan in the building duct system.

Noise
The total level and range are specified above the performance diagram for:
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

PRO

Description DV EC Pro

Power control
- Ideal as a central exhaust air fan for multi-floor residential construction in accordance with DIN 18017-3.
- When combined with other components (accessories), a complete central ventilation system in accordance with DIN 18017-3 can be created with demand-driven ventilation.
- Integrated time control for weekly or daily programme.
- Integrated pressure sensor from 0 - 300 Pa for constant pressure maintenance in combined operation with other extract air fans, e.g. Helios ELS.
- Operating modes of the DV EC Pro can be easily set on site via a local web server.
- Integrated Ethernet interface (Modbus TCP) for connection to a building management system or for direct connection to the interface via PC/laptop (no accessories).

ECO

Description DV EC Eco

Power control
- Continuously variable speed control with speed potentiometer PU/PA 10 (accessories, see type table).
- When combined with the universal control system EUR EC or electronic pressure/temperature controllers EDR/ETR (accessories, see type table), the fan can be used for the continuously variable control of differential pressure, differential temperature or flow velocity. Performance levels are shown in the performance curve as an example.

Type	Ref. no.	Maximum speed approx.	Flow rate Free blowing	Noise sound press.	Power consumption at maximum speed		Wiring diagram	Max. air flow-temp.	Wgt net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	V̇ m³/h	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
PRO Type DV EC Pro, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54															
DV EC 200 Pro	08385	1800	2090	54	0.18	1.31	1529	60	15.5	–	–	–	–	–	–
ECO Type DV EC Eco, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54															
DV EC 200 Eco	08320	1800	2090	54	0.18	1.31	1530	60	15.5	**EUR EC** [1)2)]	01347	**PU 10** [3)]	01734	**PA 10** [3)]	01735

1) Multiple EC fans can normally be connected.
2) Alternative elec. pressure/temp. controller (EDR/ETR, no. 01437/01438) in combination with mains adapter NG 24, no. 01439, see accessories.
3) W/o LED supply.

Performance curves DV EC 200

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	70	68	71	66	66	59	54	47
L_{WA}	Outlet side	dB(A)	74	69	71	70	71	66	58	49

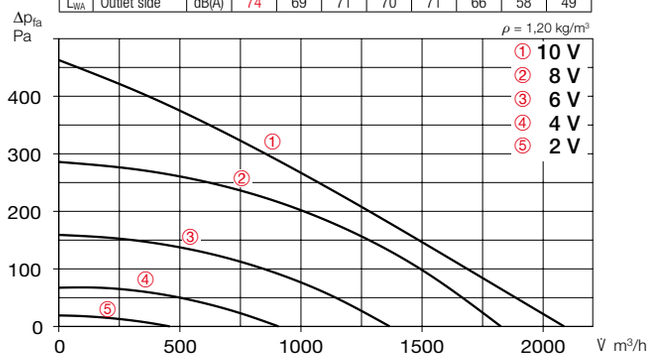

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1870	2100	175	1,28	54	0,30
8	1800	1650	120	0,95	49	0,25
6	1400	1400	55	0,46	43	0,14
4	830	900	20	0,20	33	0,08

Accessories for all types

Base silencer
SSD 200 Ref. no. 05290
With hinge mechanism for easy inspection and cleaning.

Flange connection plate
FAP 200 Ref. no. 08382
Made of galvanised steel sheet. Allows the connection of the duct system and accessories to the roof fans DV EC if no base silencer SSD is used.



Flat roof base
FDS 200 Ref. no. 01378
With hinge mechanism for easy inspection and cleaning.

Counter flange
DFR 200 Ref. no. 01201
Made of galvanised steel sheet, for inlet-side duct connection.

Flanged flexible connector
DSTS 200 Ref. no. 01218
For the prevention of structure-borne noise transmission to inlet-side ducts. Flanges made of galvanised steel sheet.

Duct shutter
DRVS 200 Ref. no. 02591
Automatic, made of galvanised steel sheet. Prevents cold draughts when the fan is at a standstill. For vertical throughflow from bottom to top.

Five-step speed switch
SA-5 10 Ref. no. 40229
Five-step switch for surface mounting. For five-step control of EC fans or frequency inverters. Steps from 2 to 10 V can be set via offset. Protection class IP54.

Accessories for DV EC Eco

Universal control system
EUR EC Ref. no. 01347
For the continuously variable control or regulation of single and three-phase EC fans with a setpoint of 0–10 V DC.

Speed potentiometer
PU/PA 10 See type table
For the direct control/setpoint setting of EC fans with a potentiometer input.

Accessory details	Page
Roof install. accessories	560 f.
Ventilation grilles	562 ff.
Exhaust air elements	576 ff.
Intake air elements	588 ff.
Fire protection systems	592 ff.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

DV EC 250

Dimensions DV EC 250

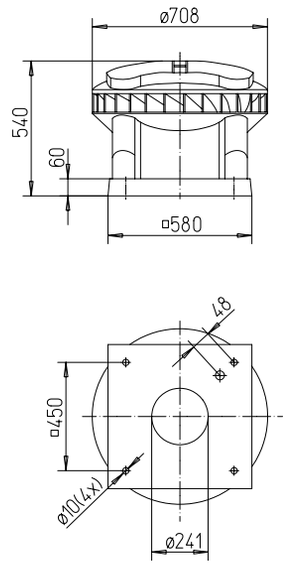

Dim. in mm

Extremely weather-resistant EC roof fan in plastic design for an extensive range of applications, diagonal outlet.

Common features DV EC Pro and DV EC Eco

Casing
Aerodynamically designed plastic casing made of grey polypropylene with diagonal air outlet direction. Air flow temperatures from –30 to +60 °C.

Impeller
Diagonal impeller made of aluminium, the motor impeller unit is dynamically balanced for low-noise operation.

Drive
Energy-efficient EC external rotor motor in protection category IP54. Optimised efficiency even with speed control for low operating costs. Continuously variable speed control. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
Standard operating switch (protection category IP65) mounted on the outside of the casing. Connection voltage 1~, 230 V, 50 Hz.

Installation
Horizontal alignment on the roof. In case of sloping roofs, a corresponding base formation must be used to prevent water ingress. A range of accessories facilitates the installation of the fan in the building duct system.

Noise
The total level and range are specified above the performance diagram for:
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

PRO

Description DV EC Pro

Power control
- Ideal as a central exhaust air fan for multi-floor residential construction in accordance with DIN 18017-3.
- When combined with other components (accessories), a complete central ventilation system in accordance with DIN 18017-3 can be created with demand-driven ventilation.
- Integrated time control for weekly or daily programme.
- Integrated pressure sensor from 0 - 300 Pa for constant pressure maintenance in combined operation with other extract air fans, e.g. Helios ELS.
- Operating modes of the DV EC Pro can be easily set on site via a local web server.
- Integrated Ethernet interface (Modbus TCP) for connection to a building management system or for direct connection to the interface via PC/laptop (no accessories).

ECO

Description DV EC Eco

Power control
- Continuously variable speed control with speed potentiometer PU/PA 10 (accessories, see type table).
- When combined with the universal control system EUR EC or electronic pressure/temperature controllers EDR/ETR (accessories, see type table), the fan can be used for the continuously variable control of differential pressure, differential temperature or flow velocity. Performance levels are shown in the performance curve as an example.

Type	Ref. no.	Maximum speed approx.	Flow rate Free blowing	Noise sound press.	Power consumption at maximum speed		Wiring diagram	Max. air flow-temp.	Wgt net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	V̇ m³/h	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
PRO Type DV EC Pro, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54															
DV EC 250 Pro	08386	1640	3580	60	0.39	1.7	1529	60	30.0	–	–	–	–	–	–
ECO Type DV EC Eco, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54															
DV EC 250 Eco	08322	1640	3580	60	0.39	1.7	1530	60	30.0	**EUR EC** [1)2)]	01347	**PU 10** [3)]	01734	**PA 10** [3)]	01735

1) Multiple EC fans can normally be connected.
2) Alternative elec. pressure/temp. controller (EDR/ETR, no. 01437/01438) in combination with mains adapter NG 24, no. 01439, see accessories.
3) W/o LED supply.

Performance curves DV EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	76	72	70	71	72	69	63	56
L_{WA}	Outlet side	dB(A)	80	73	72	77	77	72	63	54

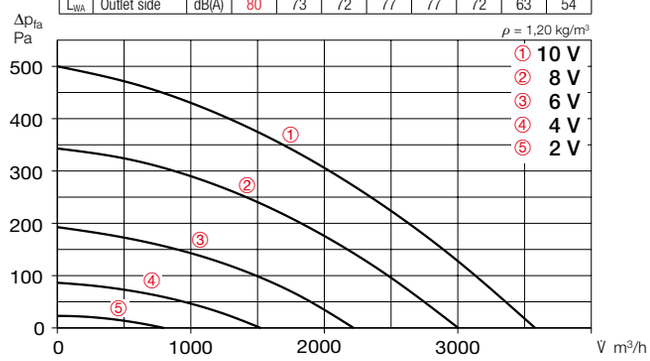

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1650	3600	346	1,54	60	0,35
8	1390	3000	207	0,96	55	0,26
6	1040	2250	95	0,46	49	0,15
4	700	1500	38	0,24	36	0,09

Accessories for all types

Base silencer
SSD 250 Ref. no. 05292
With hinge mechanism for easy inspection and cleaning.

Flange connection plate
FAP 250 Ref. no. 08383
Made of galvanised steel sheet. Allows the connection of the duct system and accessories to the roof fans DV EC if no base silencer SSD is used.



Flat roof base
FDS 250 Ref. no. 01379
With hinge mechanism for easy inspection and cleaning.

Counter flange
FR 250 Ref. no. 01203
Made of galvanised steel sheet, for inlet-side duct connection.

Flanged flexible connector
STS 250 Ref. no. 01220
For the prevention of structure-borne noise transmission to inlet-side ducts. Flanges made of galvanised steel sheet.

Duct shutter
RVS 250 Ref. no. 02592
Automatic, made of galvanised steel sheet, shutters made of aluminium. Prevents cold draughts when the fan is at a standstill. For vertical throughflow from bottom to top.

Five-step speed switch
SA-5 10 Ref. no. 40229
Five-step switch for surface mounting. For five-step control of EC fans or frequency inverters. Steps from 2 to 10 V can be set via offset. Protection class IP54.

Accessories for DV EC Eco

Universal control system
EUR EC Ref. no. 01347
For the continuously variable control or regulation of single and three-phase EC fans with a setpoint of 0–10 V DC.

Speed potentiometer
PU/PA 10 See type table
For the direct control/setpoint setting of EC fans with a potentiometer input.

Accessory details	Page
Roof install. accessories	560 f.
Ventilation grilles	562 ff.
Exhaust air elements	576 ff.
Intake air elements	588 ff.
Fire protection systems	592 ff.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

DV EC 400

Dimensions DV EC 400

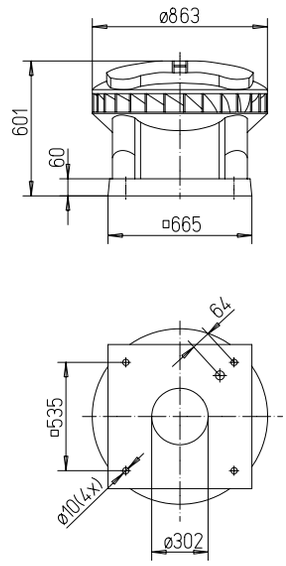

Dim. in mm

Extremely weather-resistant EC roof fan in plastic design for an extensive range of applications, diagonal outlet.

Common features DV EC Pro and DV EC Eco

Casing
Aerodynamically designed plastic casing made of grey polypropylene with diagonal air outlet direction. Air flow temperatures from –30 to +60 °C.

Impeller
Diagonal impeller made of aluminium, the motor impeller unit is dynamically balanced for low-noise operation.

Drive
Energy-efficient EC external rotor motor in protection category IP54. Optimised efficiency even with speed control for low operating costs. Continuously variable speed control. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
Standard operating switch (protection category IP65) mounted on the outside of the casing. Connection voltage 1~, 230 V, 50 Hz.

Installation
Horizontal alignment on the roof. In case of sloping roofs, a corresponding base formation must be used to prevent water ingress. A range of accessories facilitates the installation of the fan in the building duct system.

Noise
The total level and range are specified above the performance diagram for:
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

PRO

Description DV EC Pro

Power control
- Ideal as a central exhaust air fan for multi-floor residential construction in accordance with DIN 18017-3.
- When combined with other components (accessories), a complete central ventilation system in accordance with DIN 18017-3 can be created with demand-driven ventilation.
- Integrated time control for weekly or daily programme.
- Integrated pressure sensor from 0 - 300 Pa for constant pressure maintenance in combined operation with other extract air fans, e.g. Helios ELS.
- Operating modes of the DV EC Pro can be easily set on site via a local web server.
- Integrated Ethernet interface (Modbus TCP) for connection to a building management system or for direct connection to the interface via PC/laptop (no accessories).

ECO

Description DV EC Eco

Power control
- Continuously variable speed control with speed potentiometer PU/PA 10 (accessories, see type table).
- When combined with the universal control system EUR EC or electronic pressure/temperature controllers EDR/ETR (accessories, see type table), the fan can be used for the continuously variable control of differential pressure, differential temperature or flow velocity. Performance levels are shown in the performance curve as an example.

Type	Ref. no.	Maximum speed approx.	Flow rate Free blowing	Noise sound press.	Power consumption at maximum speed		Wiring diagram	Max. air flow-temp.	Wgt net aprx.	Universal control system		Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	V̇ m³/h	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
PRO Type DV EC Pro, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54															
DV EC 400 A Pro	08387	1150	4550	53	0.39	1.70	1529	60	32.0	–	–	–	–	–	–
DV EC 400 B Pro	08389	1440	5550	64	0.73	3.15	1529	60	35.0	–	–	–	–	–	–
ECO Type DV EC Eco, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54															
DV EC 400 A Eco	08324	1150	4550	53	0.39	1.70	1530	60	32.0	**EUR EC** [1)2)]	01347	**PU 10** [3)]	01734	**PA 10** [3)]	01735
DV EC 400 B Eco	08326	1440	5550	64	0.73	3.15	1530	60	35.0	**EUR EC** [1)2)]	01347	**PU 10** [3)]	01734	**PA 10** [3)]	01735

1) Multiple EC fans can normally be connected.
2) Alternative elec. pressure/temp. controller (EDR/ETR, no. 01437/01438) in combination with mains adapter NG 24, no. 01439, see accessories.
3) W/o LED supply.

Performance curves DV EC 400 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	70	69	69	67	66	60	52	45
L_{WA}	Outlet side	dB(A)	73	70	68	72	69	62	53	44

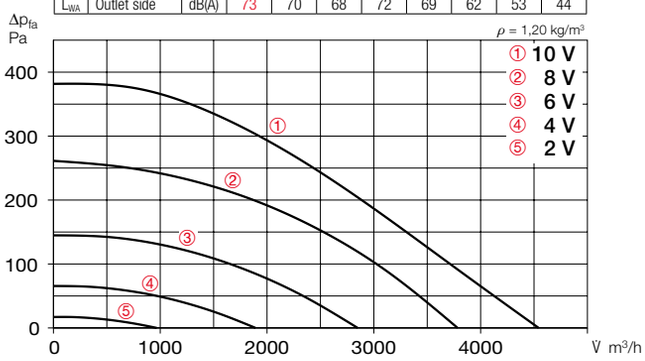

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1150	4550	386	1,71	52	0,31
8	990	3800	228	1,03	47	0,22
6	750	2800	105	0,50	41	0,14
4	500	2000	38	0,24	32	0,07

Performance curves DV EC 400 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	80	76	76	76	74	74	65	60
L_{WA}	Outlet side	dB(A)	84	79	78	84	80	74	65	58

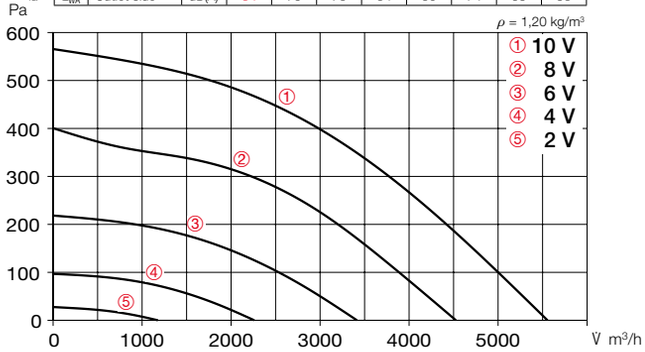

	Free blowing					
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1450	5500	680	2,91	64	0,45
8	1180	4700	380	1,70	59	0,34
6	895	3400	176	0,82	53	0,19
4	600	2200	65	0,40	42	0,11

Accessories for all types

Base silencer
SSD 400 Ref. no. 05291
With hinge mechanism for easy inspection and cleaning.

Flange connection plate
FAP 400 Ref. no. 08384
Made of galvanised steel sheet. Allows the connection of the duct system and accessories to the roof fans DV EC if no base silencer SSD is used.



Flat roof base
FDS 400 Ref. no. 01380
With hinge mechanism for easy inspection and cleaning.

Counter flange
FR 400 Ref. no. 01206
Made of galvanised steel sheet, for inlet-side duct connection.

Flanged flexible connector
STS 400 Ref. no. 01223
For the prevention of structure-borne noise transmission to inlet-side ducts. Flanges made of galvanised steel sheet.

Duct shutter
RVS 400 Ref. no. 02596
Automatic, made of galvanised steel sheet, shutters made of aluminium. Prevents cold draughts when the fan is at a standstill. For vertical throughflow from bottom to top.

Five-step speed switch
SA-5 10 Ref. no. 40229
Five-step switch for surface mounting. For five-step control of EC fans or frequency inverters. Steps from 2 to 10 V can be set via offset. Protection class IP54.

Accessories for DV EC Eco

Universal control system
EUR EC Ref. no. 01347
For the continuously variable control or regulation of single and three-phase EC fans with a setpoint of 0–10 V DC.

Speed potentiometer
PU/PA 10 See type table
For the direct control/setpoint setting of EC fans with a potentiometer input.

Accessory details	Page
Roof install. accessories	560 f.
Ventilation grilles	562 ff.
Exhaust air elements	576 ff.
Intake air elements	588 ff.
Fire protection systems	592 ff.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Horiz. outlet RD EC 180

Vert. outlet VD EC 180

Dimensions RD EC 180

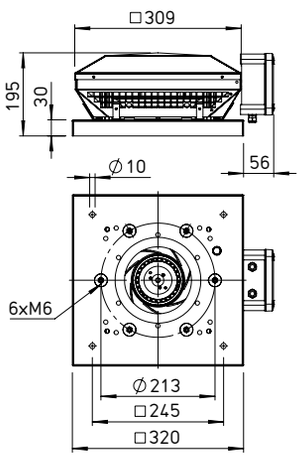

Dim. in mm

Dimensions VD EC 180

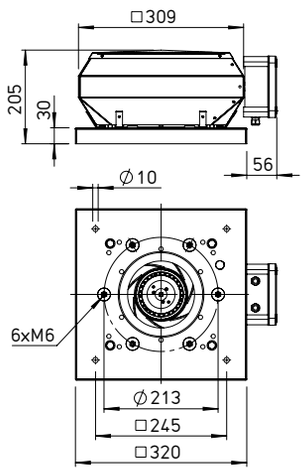

Dim. in mm

Dimensions Accessories for RD EC 180 / VD EC 180

Counter flange
FR 180 Ref. no. 01200



Corrugated roof base, profile 5
WDS 180 Ref. no. 01559



Flanged flexible connector
STS 180 Ref. no. 01217





Shutter, automatic
DVS 180 Ref. no. 01247



Base silencer, hinged
SSD 180 Ref. no. 05289



Flat roof base, hinged
FDS 180 Ref. no. 01377



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 180 – 250 to external terminal box in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDW EC 180

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	72	54	60	64	66	67	64	58
L_{WA} Outlet side	dB(A)	75	56	64	66	69	70	67	62

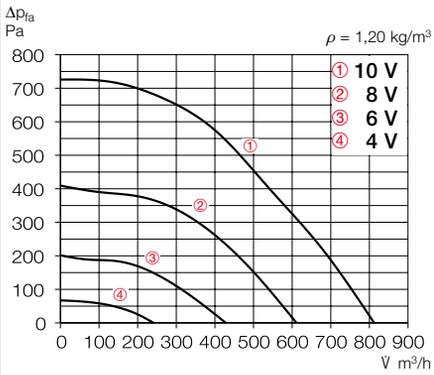

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3962	812	138	1.19	60	0.61
8	2967	611	63	0.55	53	0.37
6	2077	428	25	0.22	43	0.21
4	1199	241	7	0.08	30	0.11

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP44															
RDW EC 180	07125	3820	810	58	150	1.24	1.24	1149	50	–	4.9	**PU 10**	01734	**PA 10**	01735

Performance curves VDW EC 180

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	70	52	58	62	64	65	62	56
L_{WA} Outlet side	dB(A)	73	54	62	64	67	68	65	60

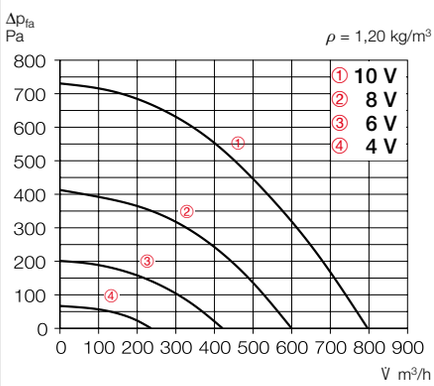

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3952	797	139	1.17	58	0.62
8	2967	600	62	0.55	51	0.37
6	2077	421	24	0.22	41	0.21
4	1195	236	7	0.08	28	0.11

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP44															
VDW EC 180	07123	3870	795	56	150	1.24	1.24	1149	50	–	5.2	**PU 10**	01734	**PA 10**	01735

Horiz. outlet RD EC 200

Vert. outlet VD EC 200

Dimensions RD EC 200

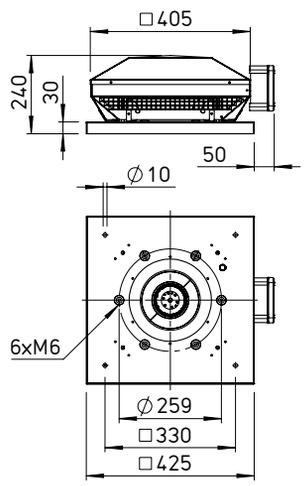

Dim. in mm

Dimensions VD EC 200

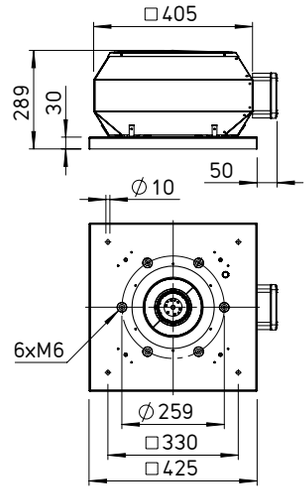

Dim. in mm

Dimensions Accessories for RD EC 200 / VD EC 200

Counter flange
DFR 200 Ref. no. 01201



Flanged flexible connector
DSTS 200 Ref. no. 01218



Shutter, automatic
DRVS 200 Ref. no. 02591



Shutter, motorised
DRVM 200 Ref. no. 02575



Flat roof base, hinged
FDS 200 Ref. no. 01378



Corrugated roof base, profile 5
WDS 200 Ref. no. 01560



Base silencer, hinged
SSD 200 Ref. no. 05290



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of galvanised steel sheet. Dynam-ically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 180 – 250 to external terminal box in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDW EC 200

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	71	43	64	65	65	63	61	57
L_{WA}	Outlet side	dB(A)	74	45	67	67	68	66	65	61

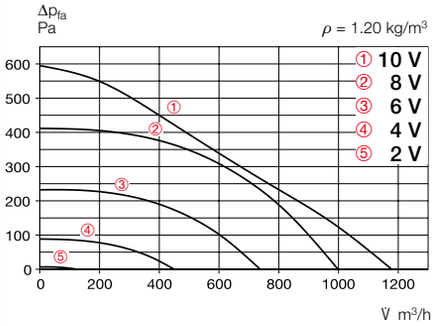

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3000	1180	125	0.90	57	0.38
8	2545	1000	75	0.60	54	0.27
6	1925	740	35	0.27	48	0.17
4	1185	450	10	0.10	39	0.08

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP44															
RDW EC 200	07195	2650	1180	56.5	129	0.93	0.93	1149	50	–	6.8	**PU 10**	01734	**PA 10**	01735

Performance curves VDW EC 200

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	69	52	58	64	63	61	61	52
L_{WA}	Outlet side	dB(A)	72	56	65	67	64	64	63	55

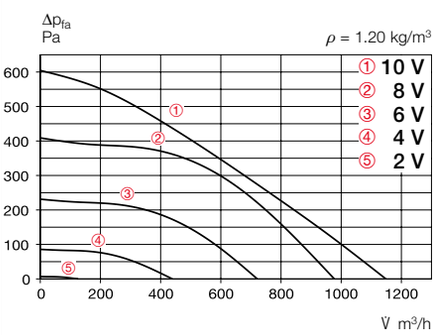

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2960	1150	130	0.90	55	0.41
8	2520	975	80	0.60	52	0.30
6	1900	720	35	0.25	46	0.18
4	1170	440	10	0.09	36	0.08

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP44															
VDW EC 200	07192	2670	1150	55	129	0.94	0.94	1149	50	–	7.4	**PU 10**	01734	**PA 10**	01735

Horiz. outlet RD EC 225

Vert. outlet VD EC 225

Dimensions RD EC 225

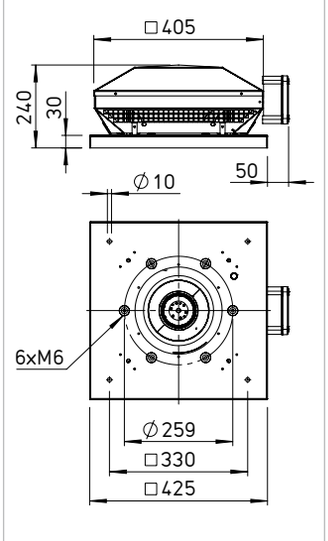

Dim. in mm

Dimensions VD EC 225

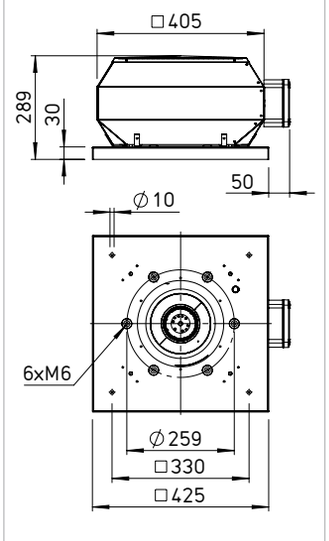

Dim. in mm

Dimensions Accessories for RD EC 225 / VD EC 225

Counter flange
FR 225 Ref. no. 01201



Flanged flexible connector
STS 225 Ref. no. 01218



Shutter, automatic
RVS 225 Ref. no. 02591



Shutter, motorised
RVM 225 Ref. no. 02575



Flat roof base, hinged
FDS 225 Ref. no. 01378



Corrugated roof base, profile 5
WDS 225 Ref. no. 01560



Base silencer, hinged
SSD 225 Ref. no. 05290



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic or galvanised steel sheet (Type B). Dynam-ically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 180 – 250 to external terminal box in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDW EC 225 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	67	50	56	61	62	59	59	49
L_{WA}	Outlet side	dB(A)	69	49	60	66	62	58	58	48

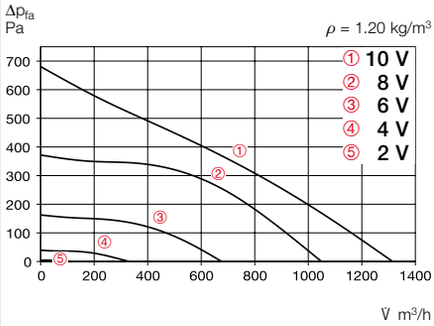

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2700	1300	145	1.05	52	0.40
8	2160	1050	75	0.55	48	0.26
6	1430	680	25	0.20	39	0.13
4	720	330	5	0.05	28	0.05

Performance curves RDW EC 225 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	75	49	66	69	68	67	67	64
L_{WA}	Outlet side	dB(A)	77	55	69	70	70	70	69	66

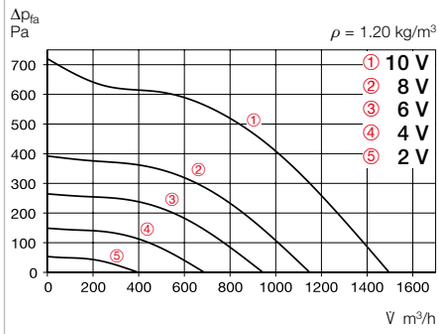

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3020	1500	205	0.90	60	0.49
8	2350	1150	105	0.45	55	0.33
6	1940	945	65	0.30	51	0.25
4	1450	690	35	0.20	45	0.18

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP44															
RDW EC 225 A	07262	2550	1310	52	163	1.14	1.14	1149	50	–	6.7	**PU 10**	01734	**PA 10**	01735
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
RDW EC 225 B	07243	3020	1500	60	246	1.06	1.06	1149	50	–	8	**PU 10**	01734	**PA 10**	01735

Performance curves VDW EC 225 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	68	43	59	61	62	61	60	56
L_{WA}	Outlet side	dB(A)	70	46	61	62	64	64	62	57

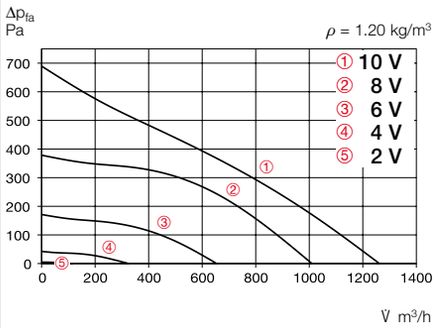

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2690	1260	150	1.05	53	0.43
8	2160	1000	75	0.60	49	0.27
6	1430	650	25	0.20	40	0.14
4	720	330	5	0.05	27	0.05

Performance curves VDW EC 225 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	74	47	65	68	67	67	66	62
L_{WA}	Outlet side	dB(A)	75	50	66	68	69	68	67	63

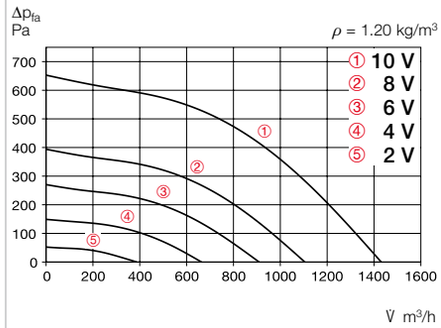

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	3020	1430	205	0.9	58	0.52
8	2350	1100	105	0.5	53	0.34
6	1950	910	65	0.3	49	0.26
4	1450	670	35	0.2	43	0.19

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP44															
VDW EC 225 A	07241	2500	1260	53	161	1.14	1.14	1149	50	–	7.3	**PU 10**	01734	**PA 10**	01735
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
VDW EC 225 B	07240	3015	1430	58	244	1.06	1.06	1149	50	–	8.5	**PU 10**	01734	**PA 10**	01735

Horiz. outlet RD EC 250

Vert. outlet VD EC 250

Dimensions RD EC 250

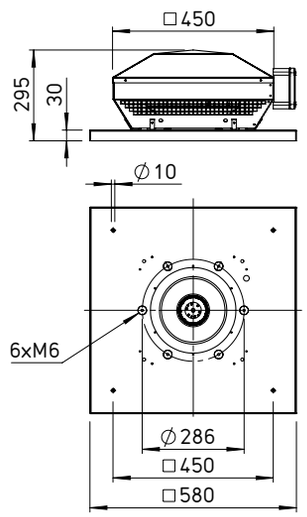

Dim. in mm

Dimensions VD EC 250

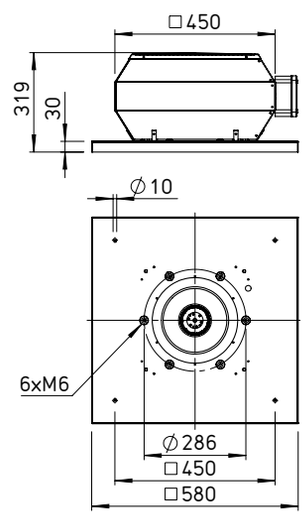

Dim. in mm

Dimensions Accessories for RD EC 250 / VD EC 250

Counter flange
FR 250 Ref. no. 01203



Flanged flexible connector
STS 250 Ref. no. 01220



Shutter, automatic
RVS 250 Ref. no. 02592



Shutter, motorised
RVM 250 Ref. no. 02576



Flat roof base, hinged
FDS 250 Ref. no. 01379



Corrugated roof base, profile 5
WDS 250 Ref. no. 01561



Base silencer, hinged
SSD 250 Ref. no. 05292



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of galvanised steel sheet. Dynam-ically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 180 – 250 to external terminal box in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDW EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	76	50	67	70	69	68	68	65
L_{WA}	Outlet side	dB(A)	78	56	70	71	71	71	70	67

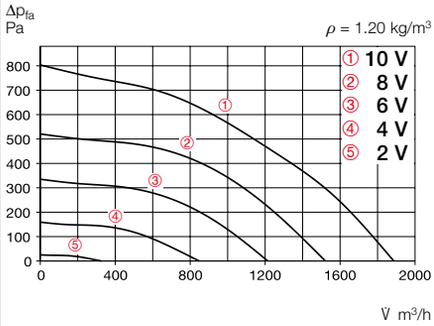

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2870	1895	230	1.00	61	0.44
8	2300	1520	125	0.55	57	0.30
6	1840	1215	70	0.32	52	0.21
4	1290	860	30	0.15	45	0.13

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
RDW EC 250	07278	2705	1900	60.5	319	1.34	1.34	1149	50	–	11	**PU 10**	01734	**PA 10**	01735

Performance curves VDW EC 250

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	75	48	66	69	68	68	67	63
L_{WA}	Outlet side	dB(A)	76	51	67	69	70	69	68	64

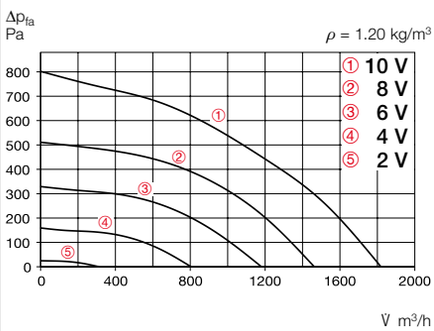

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	2860	1830	240	1.05	59	0.47
8	2300	1460	130	0.60	55	0.32
6	1840	1180	75	0.35	50	0.23
4	1280	810	30	0.20	43	0.13

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
VDW EC 250	07276	2740	1825	59	321	1.36	1.36	1149	50	–	11.5	**PU 10**	01734	**PA 10**	01735

Horiz. outlet RD EC 315

Verti. outlet VD EC 315

Dimensions RD EC 315

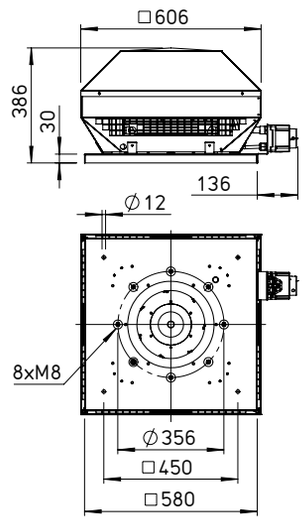

Dim. in mm

Dimensions VD EC 315

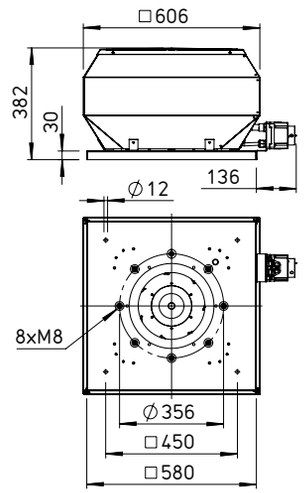

Dim. in mm

Dimensions Accessories for RD EC 315 / VD EC 315

Counter flange
FR 315 Ref. no. 01204



Flanged flexible connector
STS 315 Ref. no. 01221



Shutter, automatic
RVS 315 Ref. no. 02594



Shutter, motorised
RVM 315 Ref. no. 02578



Flat roof base, hinged
FDS 315 Ref. no. 01379



Corrugated roof base, profile 5
WDS 315 Ref. no. 01561



Base silencer, hinged
SSD 315 Ref. no. 05292



Hood silencer
HSDV 315 Ref. no. 07476
only for type VD



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 315 – 630 to external terminal box and isolator in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDW EC 315

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	70	58	62	64	62	63	62	51
L_{WA}	Outlet side	dB(A)	72	59	66	67	66	62	54	50

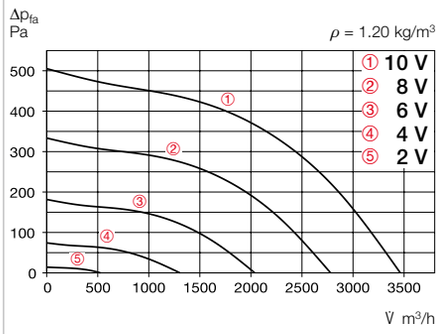

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1641	3463	316	1.8	55	0.33
8	1325	2779	169	1.0	50	0.22
6	973	2039	72	0.5	44	0.13
4	621	1309	25	0.2	34	0.07

Performance curves RDD EC 315

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	70	57	61	63	61	62	61	50
L_{WA}	Outlet side	dB(A)	72	59	65	66	65	61	53	50

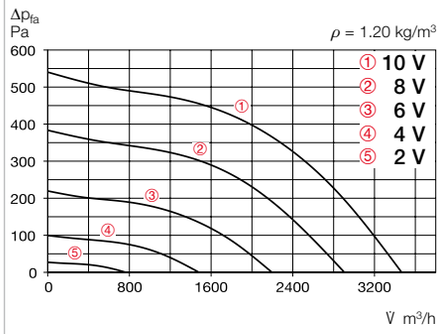

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1700	3460	380	0.65	55	0.40
8	1430	2900	240	0.45	51	0.30
6	1040	2100	110	0.25	44	0.19
4	670	1350	45	0.15	35	0.12

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
RDW EC 315	07306	1650	3465	55	450	2	2	1149	40	–	18	**PU 24**	01736	**PA 24**	01737
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
RDD EC 315	07314	1700	3484	54.5	460	1.0	0.9	1148	60	–	21.3	**PU 24**	01736	**PA 24**	01737

Performance curves VDW EC 315

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	72	61	66	66	65	64	59	53
L_{WA}	Outlet side	dB(A)	77	67	68	68	72	67	60	53

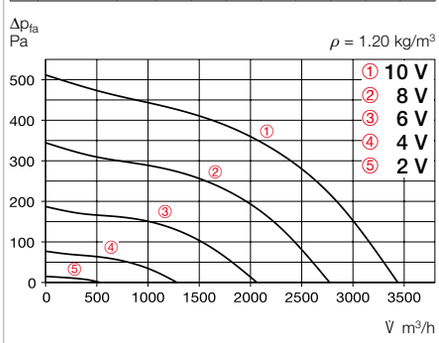

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1645	3441	316	1.80	55	0.33
8	1329	2783	176	1.04	50	0.23
6	990	2060	76	0.48	44	0.13
4	612	1276	23	0.19	35	0.07

Performance curves VDD EC 315

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	75	64	69	69	68	67	62	56
L_{WA}	Outlet side	dB(A)	80	70	71	71	75	70	63	56

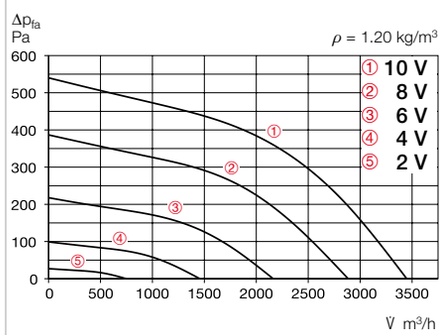

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1700	3420	370	0.69	55	0.39
8	1430	2890	240	0.50	51	0.30
6	1040	2090	110	0.25	44	0.19
4	655	1320	45	0.15	35	0.12

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
VDW EC 315	07304	1650	3440	55	450	2	2	1149	40	–	17.2	**PU 24**	01736	**PA 24**	01737
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
VDD EC 315	07312	1700	3453	54.5	460	1.0	0.9	1148	60	–	21.5	**PU 24**	01736	**PA 24**	01737

Horiz. outlet RD EC 355

Verti. outlet VD EC 355

Dimensions RD EC 355

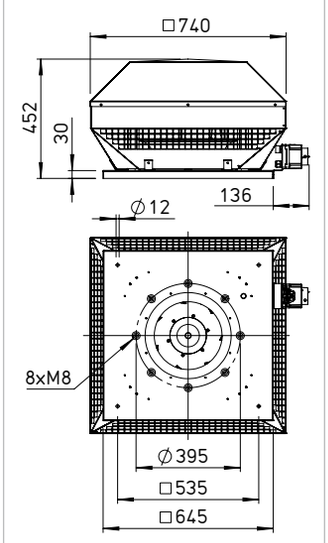

Dim. in mm

Dimensions VD EC 355

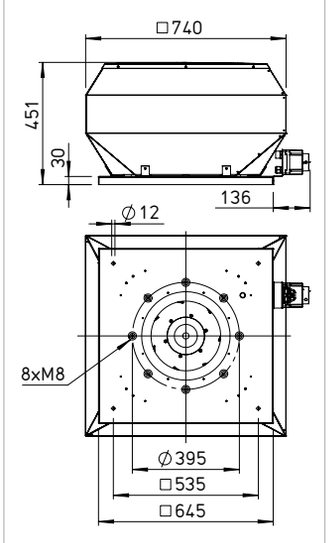

Dim. in mm

Dimensions Accessories for RD EC 355 / VD EC 355

Counter flange
FR 355 Ref. no. 01205



Flanged flexible connector
STS 355 Ref. no. 01222



Shutter, automatic
RVS 355 Ref. no. 02595



Shutter, motorised
RVM 355 Ref. no. 02579



Flat roof base, hinged
FDS 355 Ref. no. 01380



Corrugated roof base, profile 5
WDS 355 Ref. no. 01562



Base silencer, hinged
SSD 355 Ref. no. 05024



Hood silencer
HSDV 355 Ref. no. 07480
only for type VD



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 315 – 630 to external terminal box and isolator in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDW EC 355

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	70	60	65	64	62	60	57	52
L_{WA} Outlet side	dB(A)	76	67	70	70	70	66	57	51

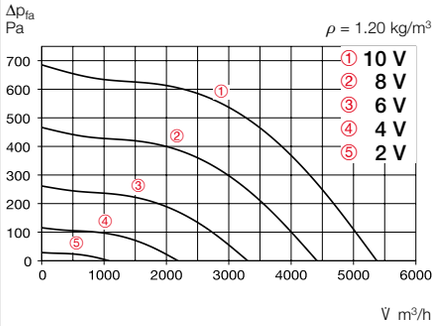

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1700	5400	580	2.50	59	0.39
8	1400	4420	330	1.50	55	0.27
6	1050	3320	150	0.75	49	0.16
4	670	2170	60	0.45	40	0.10

Performance curves RDD EC 355

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	72	62	67	66	64	62	59	54
L_{WA} Outlet side	dB(A)	77	68	71	71	71	67	58	52

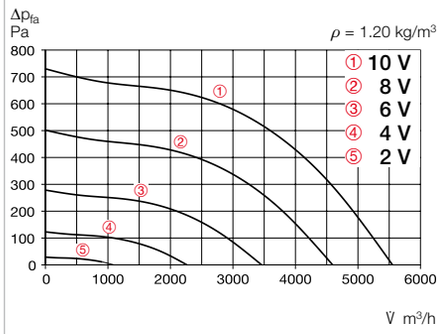

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1750	5340	670	1.20	60	0.45
8	1450	4420	410	0.75	56	0.33
6	1060	3200	175	0.35	50	0.20
4	670	2000	60	0.15	41	0.11

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP55															
RDW EC 355	07333	1700	5400	58.5	810	3.47	3.47	1147	50	–	26.5	**PU 24**	01736	**PA 24**	01737
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP55															
RDD EC 355	07335	1750	5558	59.5	870	1.6	1.49	1148	60	–	28.5	**PU 24**	01736	**PA 24**	01737

Performance curves VDW EC 355

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	70	60	65	64	62	60	57	52
L_{WA} Outlet side	dB(A)	75	65	69	69	69	66	57	53

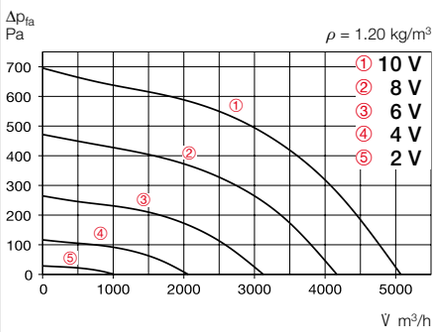

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1700	5080	590	2.50	58	0.42
8	1400	4180	335	1.50	54	0.29
6	1050	3130	155	0.80	48	0.18
4	700	2070	60	0.50	40	0.10

Performance curves VDD EC 355

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	71	61	66	65	63	61	58	53
L_{WA} Outlet side	dB(A)	76	67	70	70	70	66	58	52

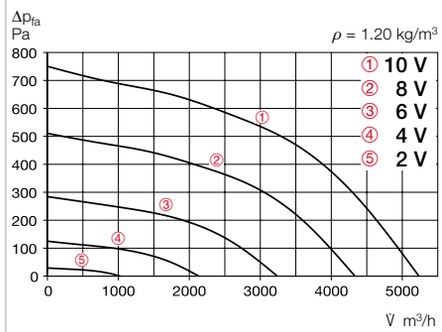

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1750	5030	650	1.20	59	0.47
8	1460	4180	390	0.75	55	0.34
6	1070	3040	170	0.35	49	0.20
4	667	1900	60	0.15	39	0.11

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP55															
VDW EC 355	07331	1700	5080	58	800	3.45	3.45	1147	50	–	27	**PU 24**	01736	**PA 24**	01737
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP55															
VDD EC 355	07334	1700	5234	59	835	1.45	1.45	1148	60	–	29	**PU 24**	01736	**PA 24**	01737

Horiz. outlet RD EC 400

Verti. outlet VD EC 400

Dimensions RD EC 400

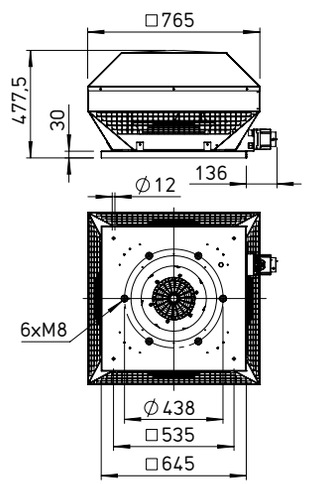

Dim. in mm

Dimensions VD EC 400

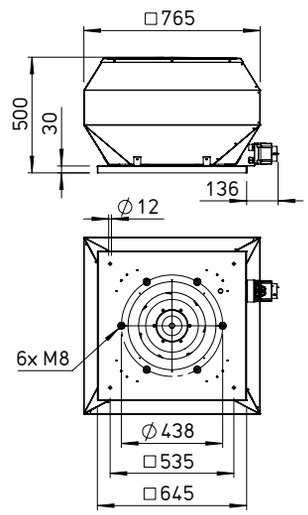

Dim. in mm

Dimensions Accessories for RD EC 400 / VD EC 400

Counter flange
FR 400 Ref. no. 01206



Flanged flexible connector
STS 400 Ref. no. 01223



Shutter, automatic
RVS 400 Ref. no. 02596



Shutter, motorised
RVM 400 Ref. no. 02580



Flat roof base, hinged
FDS 400 Ref. no. 01380



Corrugated roof base, profile 5
WDS 400 Ref. no. 01562



Base silencer, hinged
SSD 400 Ref. no. 05291



Hood silencer
HSDV 400 Ref. no. 07481
only for type VD



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 315 – 630 to external terminal box and isolator in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDW EC 400

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	72	62	66	67	64	63	57	53
L_{WA} Outlet side	dB(A)	77	68	71	71	71	67	60	53

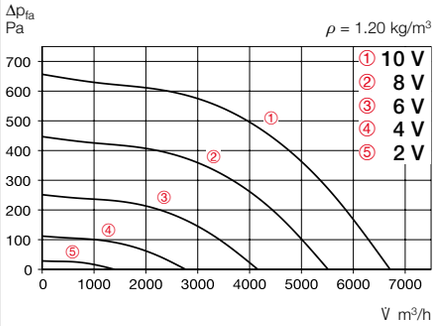

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	6695	691	2.90	60	0.37
8	1237	5522	388	1.68	56	0.25
6	927	4168	173	0.83	50	0.15
4	617	2761	62	0.45	41	0.08

Performance curves RDD EC 400

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	72	62	66	67	64	63	57	53
L_{WA} Outlet side	dB(A)	77	68	71	71	71	67	60	53

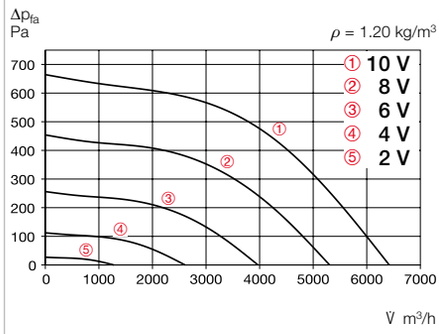

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	6450	715	1.20	60	0.40
8	1250	5350	445	0.80	56	0.30
6	910	3910	210	0.45	50	0.19
4	580	2500	80	0.20	40	0.12

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
RDW EC 400	07365	1500	6695	59.5	1050	4.4	4.4	1147	40	–	28	**PU 24**	01736	**PA 24**	01737
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
RDD EC 400	07369	1500	6421	59.5	950	1.6	1.7	1148	60	–	33	**PU 24**	01736	**PA 24**	01737

Performance curves VDW EC 400

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	73	63	67	68	65	64	58	54
L_{WA} Outlet side	dB(A)	77	64	72	71	71	67	61	55

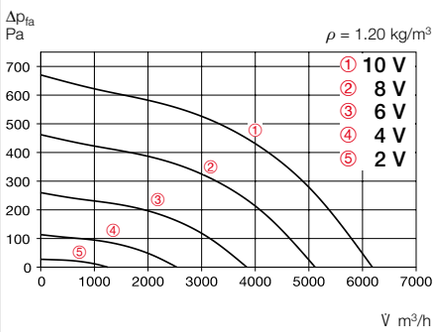

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1499	6198	726	3,0	60	0,42
8	1246	5132	416	2,0	56	0,29
6	935	3859	187	1,0	50	0,17
4	619	2544	67	0,47	41	0,09

Performance curves VDD EC 400

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	71	60	65	65	64	63	58	52
L_{WA} Outlet side	dB(A)	76	66	67	67	71	66	59	52

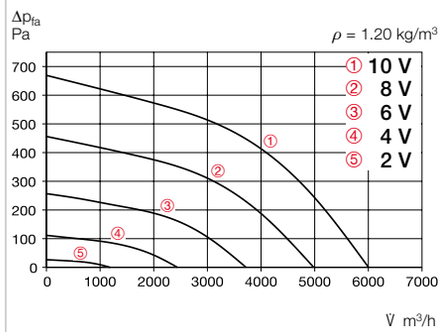

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1500	6060	755	1.25	59	0.45
8	1250	5050	465	0.85	55	0.33
6	910	3680	220	0.45	49	0.22
4	580	2350	80	0.20	39	0.12

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
VDW EC 400	07364	1500	6200	59.5	1000	4.2	4.2	1147	40	–	33	**PU 24**	01736	**PA 24**	01737
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
VDD EC 400	07368	1500	6022	58.5	950	1.7	1.7	1148	60	–	33	**PU 24**	01736	**PA 24**	01737

Horiz. outlet RD EC 450

Verti. outlet VD EC 450

Dimensions RD EC 450

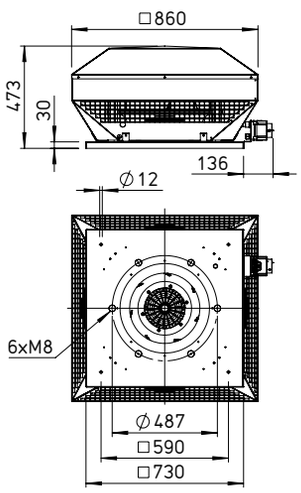

Dim. in mm

Dimensions VD EC 450

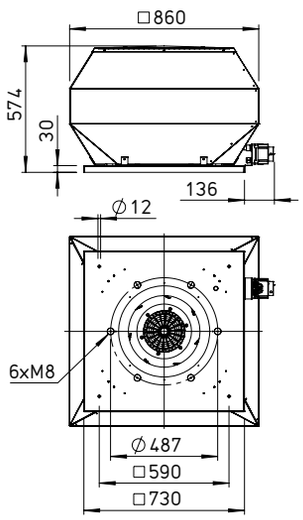

Dim. in mm

Dimensions Accessories for RD EC 450 / VD EC 450

Counter flange
FR 450 Ref. no. 01207



Flanged flexible connector
STS 450 Ref. no. 01224



Shutter, automatic
RVS 450 Ref. no. 02597



Shutter, motorised
RVM 450 Ref. no. 02581



Flat roof base, hinged
FDS 450 Ref. no. 01381



Corrugated roof base, profile 5
WDS 450 Ref. no. 01563



Base silencer, hinged
SSD 450 Ref. no. 05288



Hood silencer
HSDV 450 Ref. no. 07482
only for type VD



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 315 – 630 to external terminal box and isolator in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDW EC 450

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	72	61	66	66	65	64	59	53
L_{WA}	Outlet side	dB(A)	77	67	68	68	72	67	60	53

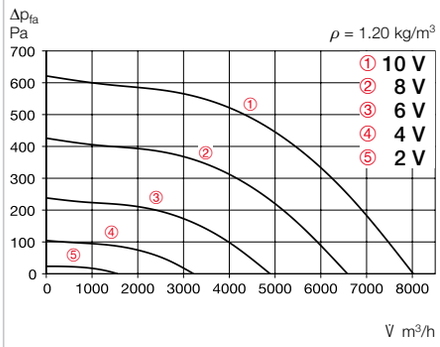

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1300	8042	738	3.10	60	0.33
8	1074	6595	421	1.80	56	0.23
6	802	4891	191	0.91	50	0.14
4	535	3221	70	0.51	37	0.08

Performance curves RDD EC 450 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	75	64	69	69	68	67	62	56
L_{WA}	Outlet side	dB(A)	80	70	71	71	75	70	63	56

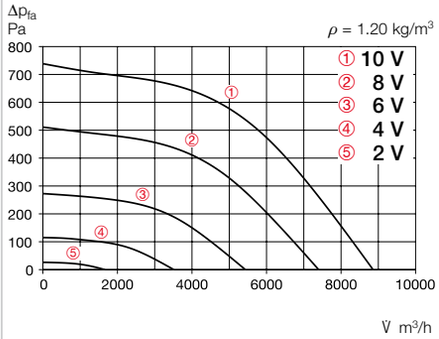

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1430	8760	980	1.60	63	0.40
8	1190	7230	590	1.05	59	0.29
6	870	5360	265	0.50	52	0.18
4	550	3380	90	0.20	42	0.10

Performance curves RDD EC 450 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	81	70	75	75	74	73	68	62
L_{WA}	Outlet side	dB(A)	86	76	77	77	81	76	69	62

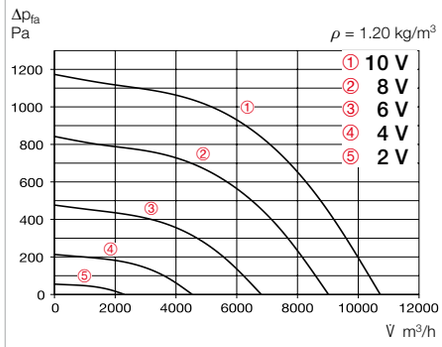

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1800	10760	2015	2.95	69	0.67
8	1490	8860	1180	1.80	65	0.48
6	1100	6430	525	0.92	58	0.29
4	700	4115	180	0.35	48	0.16

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
RDW EC 450	07397	1300	8050	59.5	1100	4.9	4.9	1147	40	–	39	**PU 24**	01736	**PA 24**	01737
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
RDD EC 450 A	07382	1425	8865	62.5	1400	2.2	2.4	1148	45	–	39	**PU 24**	01736	**PA 24**	01737
RDD EC 450 B	07395	1800	10736	68.5	2810	4.3	4.2	1148	60	–	45	**PU 24**	01736	**PA 24**	01737

Performance curves VDW EC 450

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	70	59	64	64	63	62	57	51
L_{WA}	Outlet side	dB(A)	76	67	68	68	72	67	60	53

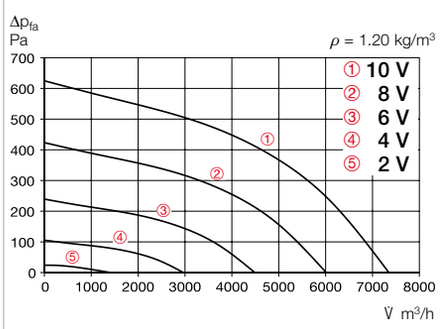

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1300	7354	862	4,0	59	0,42
8	1068	6018	487	2,0	55	0,29
6	802	4493	217	1,0	49	0,17
4	533	2966	78	0,5	36	0,10

Performance curves VDD EC 450 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	73	62	67	67	66	65	60	54
L_{WA}	Outlet side	dB(A)	79	70	71	71	75	70	63	56

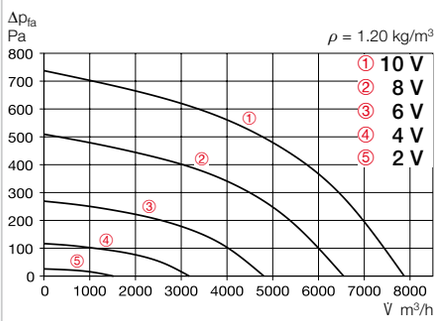

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1430	7990	1130	1.80	62	0.51
8	1190	6690	670	1.15	58	0.36
6	870	4850	290	0.55	51	0.22
4	550	3090	95	0.20	42	0.11

Performance curves VDD EC 450 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	79	68	73	73	72	71	66	60
L_{WA}	Outlet side	dB(A)	85	76	77	77	81	76	69	62

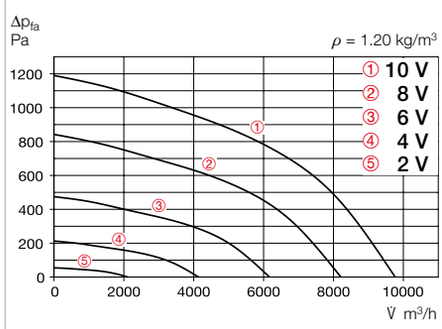

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1800	9960	2250	3.3	68	0.81
8	1500	8110	1330	2.0	64	0.59
6	1090	5980	570	0.95	57	0.34
4	690	3780	190	0.38	47	0.18

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, EC motor, protection category IP54															
VDW EC 450	07396	1300	7355	59	1120	4.7	4.7	1147	40	–	41	**PU 24**	01736	**PA 24**	01737
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
VDD EC 450 A	07381	1410	7883	62	1450	2.2	2.3	1148	45	–	41	**PU 24**	01736	**PA 24**	01737
VDD EC 450 B	07392	1800	9771	68	2800	4.3	4.2	1148	60	–	47	**PU 24**	01736	**PA 24**	01737

Horiz. outlet RD EC 500

Verti. outlet VD EC 500

Dimensions RD EC 500

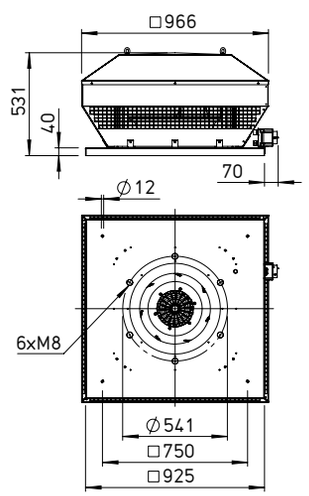

Dim. in mm

Dimensions VD EC 500

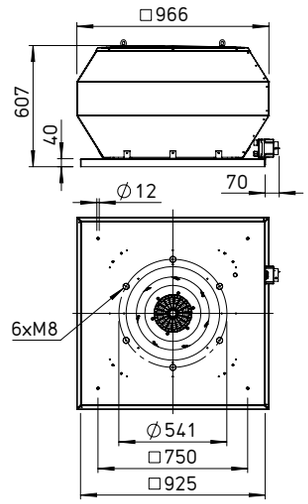

Dim. in mm

Dimensions Accessories for RD EC 500 / VD EC 500

Counter flange
FR 500 Ref. no. 01208



Flanged flexible connector
STS 500 Ref. no. 01225



Shutter, automatic
RVS 500 Ref. no. 02598



Shutter, motorised
RVM 500 Ref. no. 02582



Flat roof base
FDS 500 Ref. no. 01382



Corrugated roof base, profile 5
WDS 500 Ref. no. 01564



Base silencer
SSD 500 Ref. no. 05017



Hood silencer
HSDV 500 Ref. no. 07483
only for type VD



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 315 – 630 to external terminal box and isolator in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDD EC 500 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	76	64	70	70	69	68	63	59
L_{WA}	Outlet side	dB(A)	82	70	76	77	76	72	64	58

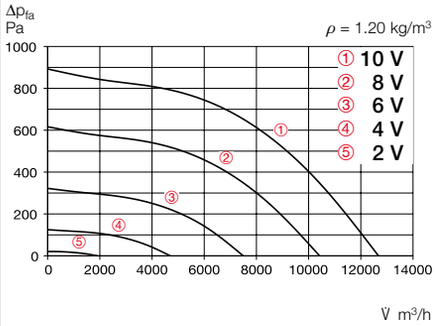

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1400	12650	1760	2.70	65	0.50
8	1160	10400	1030	1.65	61	0.36
6	840	7480	450	0.85	54	0.22
4	530	4690	160	0.35	44	0.12

Performance curves RDD EC 500 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	80	68	74	74	73	72	67	63
L_{WA}	Outlet side	dB(A)	85	73	79	80	79	75	67	61

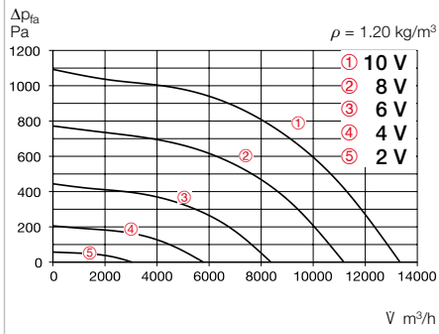

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1550	13530	2430	3.55	68	0.65
8	1280	11040	1370	2.05	64	0.45
6	920	7910	560	0.97	57	0.25
4	560	4810	165	0.35	46	0.12

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
RDD EC 500 A	07425	1400	12411	64.5	2410	3.7	3.7	1148	50	–	63	**PU 24**	01736	**PA 24**	01737
RDD EC 500 B	07417	1550	13333	67.5	3200	4.9	4.8	1148	50	–	67	**PU 24**	01736	**PA 24**	01737

Performance curves VDD EC 500 A

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	76	67	71	69	69	66	62	58
L_{WA}	Outlet side	dB(A)	82	71	75	76	76	74	69	61

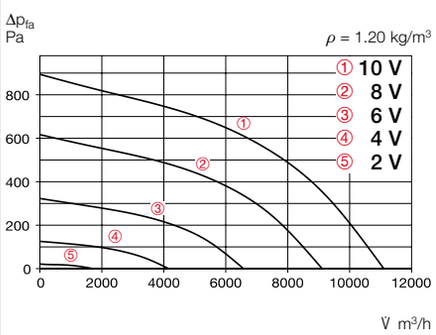

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1400	11100	1910	2.90	65	0.62
8	1160	9120	1135	1.80	61	0.45
6	840	6585	480	0.90	54	0.26
4	530	4160	170	0.35	44	0.15

Performance curves VDD EC 500 B

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	79	70	76	77	76	72	64	58
L_{WA}	Outlet side	dB(A)	85	74	78	79	79	77	72	64

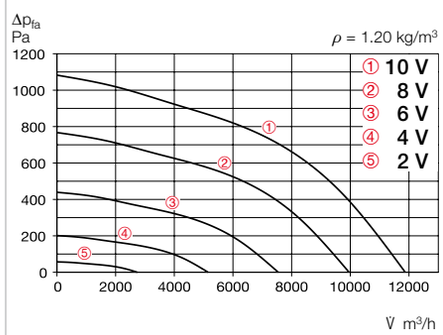

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1550	11905	2575	3.80	68	0.78
8	1280	9820	1460	2.20	64	0.54
6	920	6990	595	1.00	57	0.31
4	560	4270	170	0.35	46	0.14

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
VDD EC 500 A	07424	1400	11042	65	2400	3.7	3.7	1148	50	–	65	**PU 24**	01736	**PA 24**	01737
VDD EC 500 B	07415	1550	11870	68	3180	4.9	4.7	1148	50	–	69	**PU 24**	01736	**PA 24**	01737

Horiz. outlet RD EC 560

Verti. outlet VD EC 560

Dimensions RD EC 560

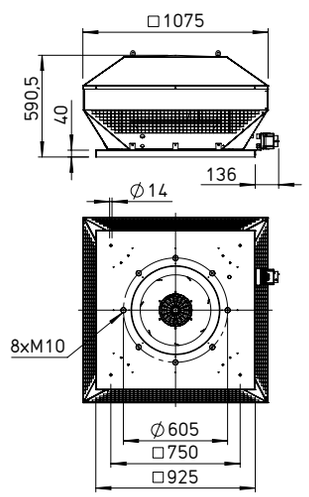

Dim. in mm

Dimensions VD EC 560

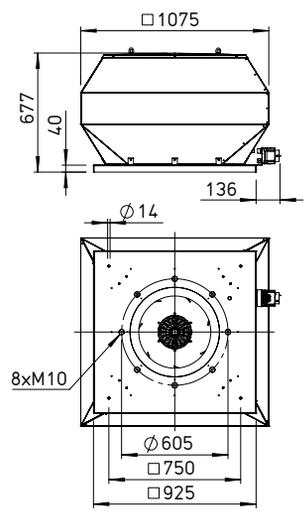

Dim. in mm

Dimensions Accessories for RD EC 560 / VD EC 560

Counter flange
FR 560 Ref. no. 01209



Flanged flexible connector
STS 560 Ref. no. 01226



Shutter, automatic
RVS 560 Ref. no. 02599



Shutter, motorised
RVM 560 Ref. no. 02583



Flat roof base
FDS 560 Ref. no. 01382



Corrugated roof base, profile 5
WDS 560 Ref. no. 01564



Base silencer
SSD 560 Ref. no. 05017



Hood silencer
HSDV 560 Ref. no. 07484
only for type VD



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of aluminium. Dynam-ically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 315 – 630 to external terminal box and isolator in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDD EC 560

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	80	69	71	72	73	72	68	61
L_{WA}	Outlet side	dB(A)	85	73	76	78	79	76	69	60

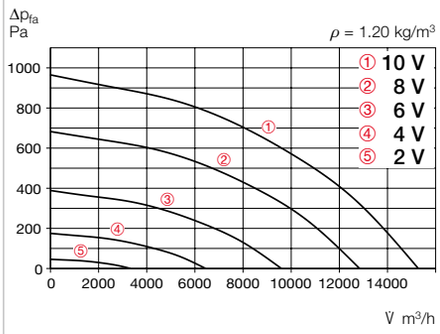

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1300	15290	1970	3.10	67	0.46
8	1100	13860	1180	2.00	64	0.33
6	820	9600	530	1.10	57	0.19
4	550	6550	180	0.51	47	0.10

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
RDD EC 560	07435	1300	15287	67	2900	4.45	4.45	1148	60	–	75	**PU 24**	01736	**PA 24**	01737

Performance curves VDD EC 560

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	75	65	67	68	69	68	64	57
L_{WA}	Outlet side	dB(A)	79	68	72	74	73	69	65	58

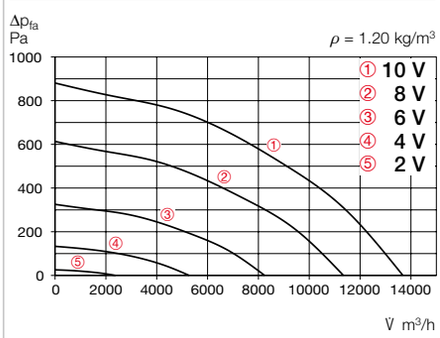

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	1260	13680	1914	2.93	62	0.50
8	1046	11345	1156	1.82	58	0.37
6	765	8246	534	1.02	51	0.23
4	489	5279	200	0.44	41	0.14

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
VDD EC 560	07433	1300	13680	62	2660	4.1	4.1	1148	60	–	75	**PU 24**	01736	**PA 24**	01737

Horiz. outlet RD EC 630

Verti. outlet VD EC 630

Dimensions RD EC 630

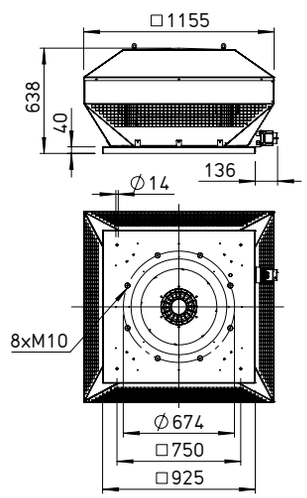

Dim. in mm

Dimensions VD EC 630

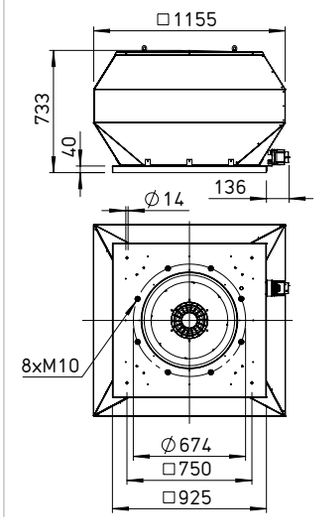

Dim. in mm

Dimensions Accessories for RD EC 630 / VD EC 630

Counter flange
FR 630 Ref. no. 01211



Flanged flexible connector
STS 630 Ref. no. 01228



Shutter, automatic
RVS 630 Ref. no. 02600



Shutter, motorised
RVM 630 Ref. no. 02609



Flat roof base
FDS 630 Ref. no. 01382



Corrugated roof base, profile 5
WDS 630 Ref. no. 01565



Base silencer
SSD 630 Ref. no. 05017



Hood silencer
HSDV 630 Ref. no. 07489
only for type VD



Dim. in mm

Description RD EC

Horizontal outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD EC

Vertical outlet EC roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Common features RD EC and VD EC

Casing
Made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of aluminium. Dynam-ically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Energy-saving, speed-controllable EC external rotor motor with a high level of efficiency. Maintenance-free and ball bearing mounted.

Motor protection
Integrated electronic temperature monitoring system for EC motor and electronics.

Electrical connection
ND 315 – 630 to external terminal box and isolator in protection category IP65.

Protection grille
On outlet side as standard according to DIN EN ISO 13857.

Power control
Continuously variable speed control via internal (delivery) or external potentiometer or continuously variable speed control with universal control system.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box /wooden crate.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and the table below the performance curve.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	503 f.
Accessories, details	560 f.
Universal control systems, electronic controllers, speed potentiometer	615 ff.

Performance curves RDD EC 630

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	80	63	70	74	75	73	71	62
L_{WA}	Outlet side	dB(A)	84	68	73	80	79	75	69	63

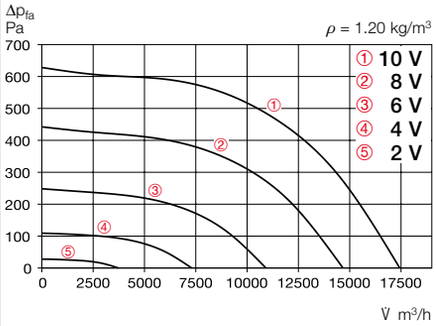

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	940	17710	2150	3.20	67	0.44
8	780	14650	1250	1.95	63	0.31
6	570	10580	490	0.90	56	0.17
4	350	6660	140	0.30	46	0.08

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power con-sumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
RDD EC 630	07455	940	17457	67	2730	4.2	4.3	1148	60	–	87	**PU 24**	01736	**PA 24**	01737

Performance curves VDD EC 630

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA}	Inlet side	dB(A)	80	63	70	74	75	73	71	62
L_{WA}	Outlet side	dB(A)	84	68	73	80	79	75	69	63

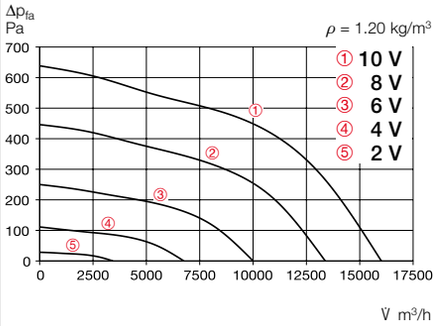

Free blowing						
Voltage V	**n** min⁻¹	**V̇** m³/h	**P** W	**I** A	**Lp** dB(A)	**SFP** kW/m³/s
10	940	16000	2380	3.55	67	0.54
8	780	13180	1370	2.15	63	0.37
6	570	9530	540	0.95	56	0.20
4	350	5890	150	0.32	46	0.09

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power con-sumption	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Wgt net	Speed potentiometer Flush-mounted		Speed potentiometer Surf.-mounted	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, EC motor, protection category IP54															
VDD EC 630	07451	940	16013	66.5	2700	4.2	4.2	1148	60	–	90	**PU 24**	01736	**PA 24**	01737

Horiz. outlet RD 180

Vert. outlet VD 180

Dimensions RD 180

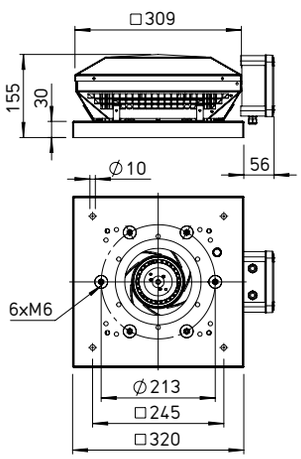

Dim. in mm

Dimensions VD 180

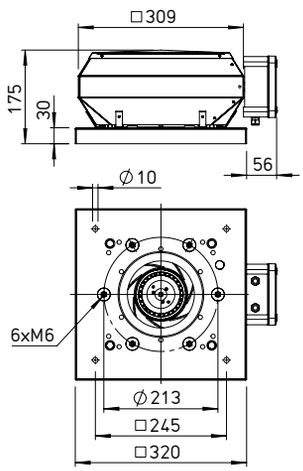

Dim. in mm

Dimensions Accessories for RD / VD 180

Counter flange
FR 180 Ref. no. 01200



Corrugated roof base, profile 5
WDS 180 Ref. no. 01559



Flanged flexible connector
STS 180 Ref. no. 01217





Shutter, automatic
DVS 180 Ref. no. 01247



Base silencer, hinged
SSD 180 Ref. no. 05289



Flat roof base, hinged
FDS 180 Ref. no. 01377



Dim. in mm

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP44). Ball bearing mounted with moisture protection. Maintenance-free and radio interference-free.

Motor protection
Through built-in thermal contacts which are wired in series to the winding and automatically deactivate and reactivate after cooling when the motor temperature is too high.

Electrical connection
To external terminal box in protection category IP65. Isolator switch is optionally available (see Accessories).

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All types have continuously variable speed control in the range from 0 – 100 % through electronic speed controllers or five-step control units. Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDW 180/2

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	61	37	48	53	56	55	54	44
L_{WA} Outlet side	dB(A)	65	38	52	58	62	57	54	45

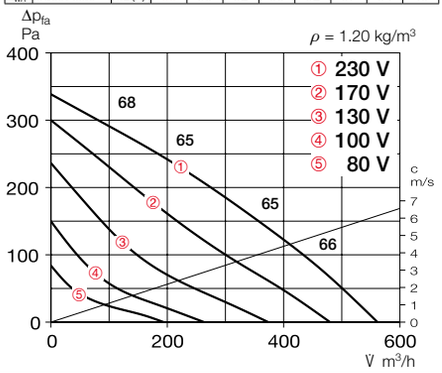

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
RDW 180/2	07122	2320	566	46	58	0.25	0.25	923	70	70	4.6	—	—	**TSW 1.5**	01495

Performance curves VDW 180/2

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	60	36	47	52	55	54	53	43
L_{WA} Outlet side	dB(A)	63	38	51	56	59	57	52	43

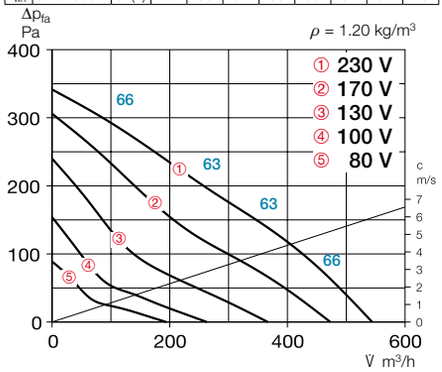

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
VDW 180/2	07120	2320	545	46	56	0.25	0.25	923	70	70	4.6	—	—	**TSW 1.5**	01495

Horiz. outlet RD 200

Also available in version:

Vert. outlet VD 200

Also available in version:

Dimensions RD 200

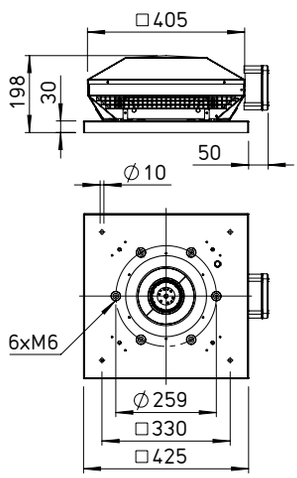

Dim. in mm

Dimensions VD 200

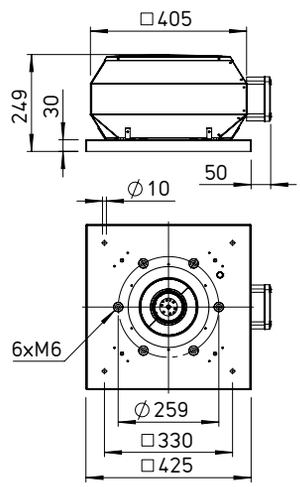

Dim. in mm

Dimensions Accessories for RD / VD 200

Counter flange
DFR 200 Ref. no. 01201



Flanged flexible connector
DSTS 200 Ref. no. 01218
For explosion-proof fans
DSTS 200 Ex Ref. no. 02500



Shutter, automatic
DRVS 200 Ref. no. 02591



Shutter, motorised
DRVM 200 Ref. no. 02575



Flat roof base, hinged
FDS 200 Ref. no. 01378



Corrugated roof base, profile 5
WDS 200 Ref. no. 01560



Base silencer, hinged
SSD 200 Ref. no. 05290



Dim. in mm

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of galvanised steel sheet (explosion-proof version made of aluminium).
Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP44).
Ball bearing mounted with moisture protection.
Maintenance-free and radio interference-free.

Motor protection
Through built-in thermal contacts which are wired in series to the winding and automatically deactivate and reactivate after cooling when the motor temperature is too high. Explosion-proof version with thermal motor protection through built-in PTC thermistors.

Electrical connection
To external terminal box in protection category IP65.
Isolator switch is optionally available (see Accessories).

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All types have continuously variable speed control in the range from 0 – 100 % through electronic speed controllers (except for explosion-proof version) or five-step control units. Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDW 200/2

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	68	44	57	61	63	60	60	57
L_{WA} Outlet side	dB(A)	71	45	62	66	65	62	62	58

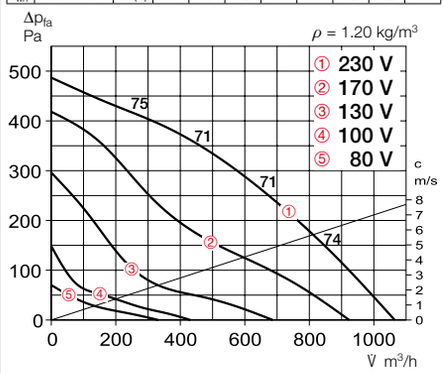

Performance curves RDW 200/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	56	32	45	49	51	48	48	45
L_{WA} Outlet side	dB(A)	59	33	50	54	53	50	50	46

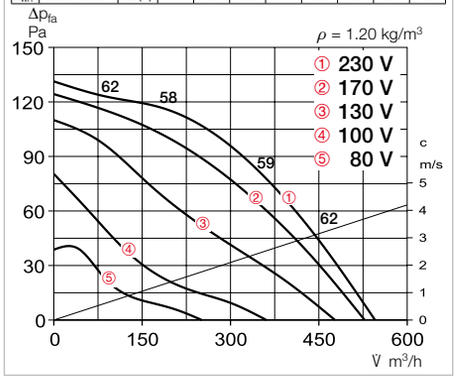

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
RDW 200/4	07177	1375	545	42	34	0.16	0.16	923	70	70	7.3	—	—	**TSW 1.5**	01495
RDW 200/2	07176	2430	1070	54	125	0.56	0.56	923	70	70	7.5	—	—	**TSW 1.5**	01495
Ex Explosion-proof, II 3G Ex h IIB + H_2 T3 Gc, Motor Ex nA, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 200/4 Ex[1)]	07191	1465	610	41	80	0.37	0.37	1156	40	40	9.5	**MSA**	01289	**TSD 0.8**	01500

[1)] Performance diagram at www.HeliosSelect.de.

Performance curves VDW 200/2

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	68	43	58	60	63	61	60	56
L_{WA} Outlet side	dB(A)	70	46	63	64	63	62	61	58

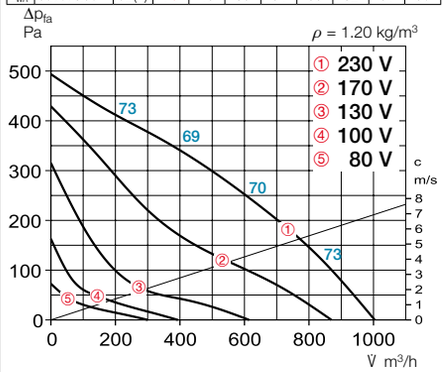

Performance curves VDW 200/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	52	35	41	47	46	44	44	35
L_{WA} Outlet side	dB(A)	54	38	47	49	46	46	45	37

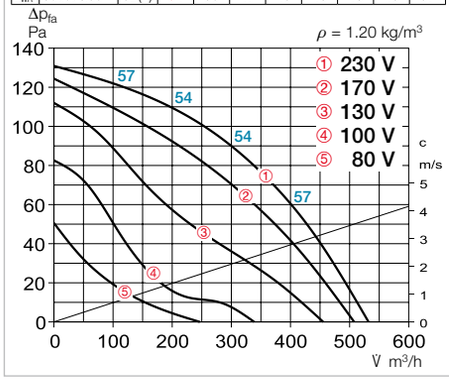

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
VDW 200/4	07134	1375	535	37	34	0.16	0.16	923	70	70	7.2	—	—	**TSW 1.5**	01495
VDW 200/2	07126	2430	1000	53	125	0.56	0.56	923	70	70	7.8	—	—	**TSW 1.5**	01495
Ex Explosion-proof, II 3G Ex h IIB + H_2 T3 Gc, Motor Ex nA, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 200/4 Ex[1)]	07178	1465	580	39	80	0.38	0.38	1156	40	40	9.5	**MSA**	01289	**TSD 0.8**	01500

[1)] Performance diagram at www.HeliosSelect.de.

Horiz. outlet RD 225

Also available in version:

Vert. outlet VD 225

Also available in version:

Dimensions RD 225

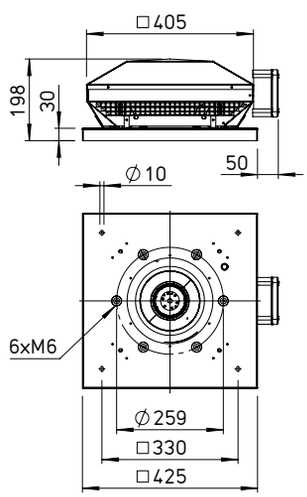

Dim. in mm

Dimensions VD 225

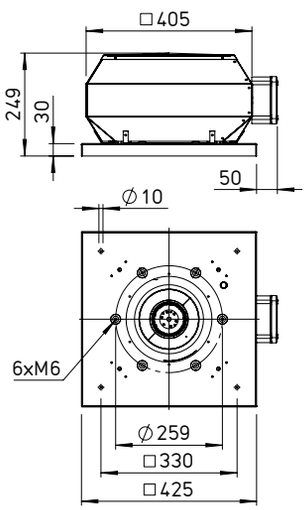

Dim. in mm

Dimensions Accessories for RD / VD 225

Counter flange
FR 225 Ref. no. 01201



Flanged flexible connector
STS 225 Ref. no. 01218
For explosion-proof fans
STS 225 Ex Ref. no. 02500



Shutter, automatic
RVS 225 Ref. no. 02591



Shutter, motorised
RVM 225 Ref. no. 02575



Flat roof base, hinged
FDS 225 Ref. no. 01378



Corrugated roof base, profile 5
WDS 225 Ref. no. 01560



Base silencer, hinged
SSD 225 Ref. no. 05290



Dim. in mm

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of galvanised steel sheet (explosion-proof version made of aluminium).
Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP44).
Ball bearing mounted with moisture protection.
Maintenance-free and radio interference-free.

Motor protection
Through built-in thermal contacts which are wired in series to the winding and automatically deactivate and reactivate after cooling when the motor temperature is too high. Explosion-proof version with thermal motor protection through built-in PTC thermistors.

Electrical connection
To external terminal box in protection category IP65.
Isolator switch is optionally available (see Accessories).

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All types have continuously variable speed control in the range from 0 – 100 % through electronic speed controllers (except for explosion-proof version) or five-step control units. Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDW 225/2

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	70	48	63	64	64	63	59	51
L_{WA} Outlet side	dB(A)	72	50	62	66	67	65	62	56

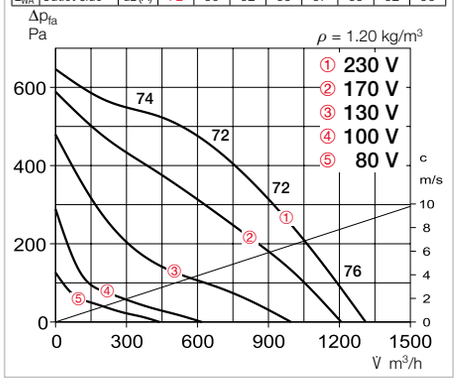

Performance curves RDW 225/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	56	37	49	53	54	52	49	43
L_{WA} Outlet side	dB(A)	59	37	49	53	54	52	49	43

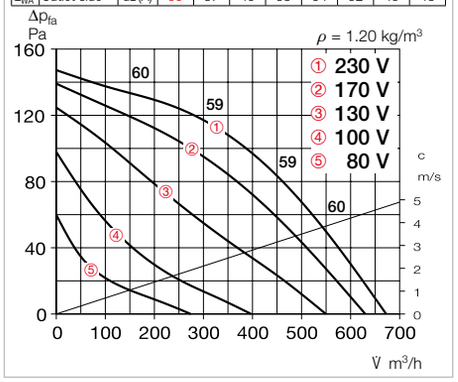

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
RDW 225/4	07235	1340	650	43	43	0.2	0.2	923	70	70	7.8	—	—	**TSW 1.5**	01495
RDW 225/2	07234	2635	1330	58	208	0.9	1.0	923	70	70	8.3	—	—	**TSW 1.5**	01495
Ex Explosion-proof, II 3G Ex h IIB + H_2 T3 Gc, Motor Ex nA, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 225/4 Ex[1)]	07239	1445	845	43	100	0.37	0.37	1156	40	40	9.5	**MSA**	01289	**TSD 0.8**	01500

1) Performance diagram at www.HeliosSelect.de.

Performance curves VDW 225/2

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	69	47	62	63	63	62	58	50
L_{WA} Outlet side	dB(A)	71	49	61	65	66	64	61	55

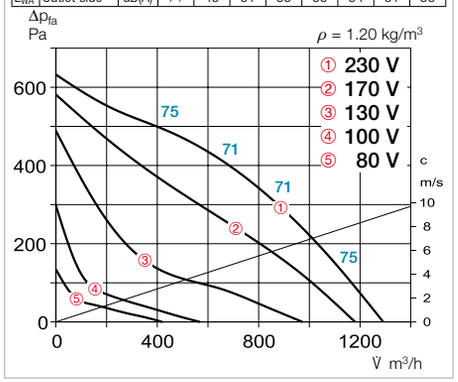

Performance curves VDW 225/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	56	34	49	50	50	49	45	37
L_{WA} Outlet side	dB(A)	58	36	48	52	53	51	48	42

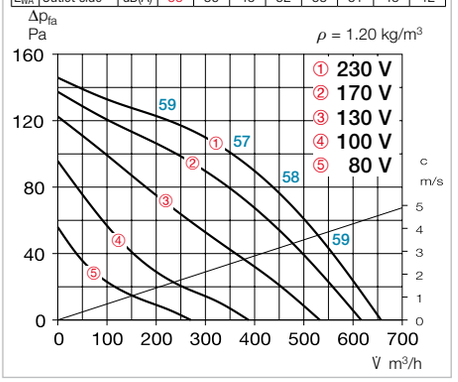

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
VDW 225/4	07221	1340	640	42	43	0.2	0.2	923	70	70	8.0	—	—	**TSW 1.5**	01495
VDW 225/2	07196	2635	1295	56	208	0.9	1.0	923	70	70	8.3	—	—	**TSW 1.5**	01495
Ex Explosion-proof, II 3G Ex h IIB + H_2 T3 Gc, Motor Ex nA, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 225/4 Ex[1)]	07237	1450	810	41	100	0.37	0.37	1156	40	40	9.5	**MSA**	01289	**TSD 0.8**	01500

1) Performance diagram at www.HeliosSelect.de.

Horiz. outlet RD 250

Also available in version:

Vert. outlet VD 250

Also available in version:

Dimensions RD 250

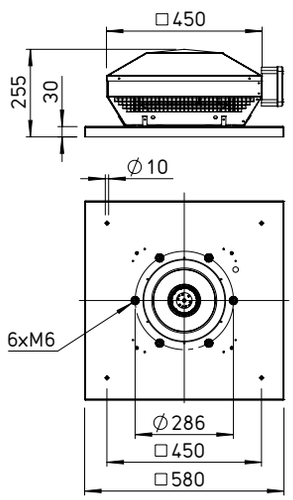

Dim. in mm

Dimensions VD 250

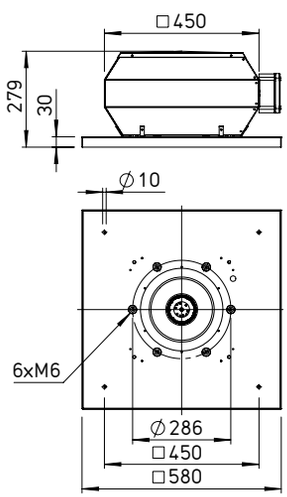

Dim. in mm

Dimensions Accessories for RD / VD 250

Counter flange
FR 250 Ref. no. 01203



Flanged flexible connector
STS 250 Ref. no. 01220
For explosion-proof fans
STS 250 Ex Ref. no. 02501



Shutter, automatic
RVS 250 Ref. no. 02592



Shutter, motorised
RVM 250 Ref. no. 02576



Flat roof base, hinged
FDS 250 Ref. no. 01379



Corrugated roof base, profile 5
WDS 250 Ref. no. 01561



Base silencer, hinged
SSD 250 Ref. no. 05292



Dim. in mm

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of galvanised steel sheet (explosion-proof version made of aluminium).
Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP44).
Ball bearing mounted with moisture protection.
Maintenance-free and radio interference-free.

Motor protection
Through built-in thermal contacts which are wired in series to the winding and automatically deactivate and reactivate after cooling when the motor temperature is too high. Explosion-proof version with thermal motor protection through built-in PTC thermistors.

Electrical connection
To external terminal box in protection category IP65.
Isolator switch is optionally available (see Accessories).

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All types have continuously variable speed control in the range from 0 – 100 % through electronic speed controllers (except for explosion-proof version) or five-step control units. Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDW 250/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	58	46	48	52	52	50	50	41
L_{WA} Outlet side	dB(A)	61	50	52	55	54	54	52	44

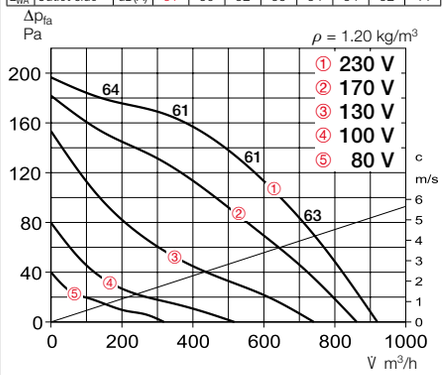

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker Type	Motor protection circuit breaker Ref. no.	Speed controller 5-step Type	Speed controller 5-step Ref. no.
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg				
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
RDW 250/4	07264	1340	920	44	63	0.28	0.28	923	70	70	11.5	—	—	**TSW 1.5**	01495
Ex Explosion-proof, II 3G Ex h IIB + H_2 T3 Gc, Motor Ex nA, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 250/4 Ex[1)]	07273	1400	1350	46	130	0.38	0.38	1156	40	40	12.0	**MSA**	01289	**TSD 0.8**	01500

1) Performance diagram at www.HeliosSelect.de.

Performance curves VDW 250/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	58	40	49	51	52	51	51	39
L_{WA} Outlet side	dB(A)	60	47	52	54	53	52	52	44

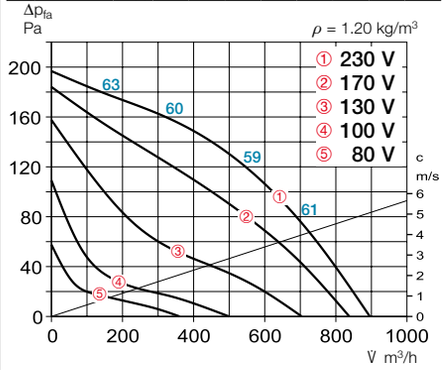

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker Type	Motor protection circuit breaker Ref. no.	Speed controller 5-step Type	Speed controller 5-step Ref. no.
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg				
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
VDW 250/4	07244	1340	900	43	63	0.28	0.28	923	70	70	11.5	—	—	**TSW 1.5**	01495
Ex Explosion-proof, II 3G Ex h IIB + H_2 T3 Gc, Motor Ex nA, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 250/4 Ex[1)]	07265	1400	1280	45	120	0.37	0.37	1156	40	40	12.5	**MSA**	01289	**TSD 0.8**	01500

1) Performance diagram at www.HeliosSelect.de.

Horiz. outlet RD 315

Vert. outlet VD 315

Vert. outlet VD 315 T120

Dimensions RD 315

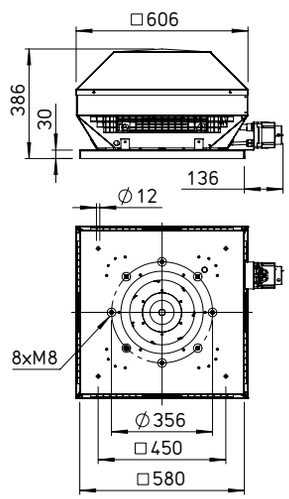

Dim. in mm

Dimensions VD 315

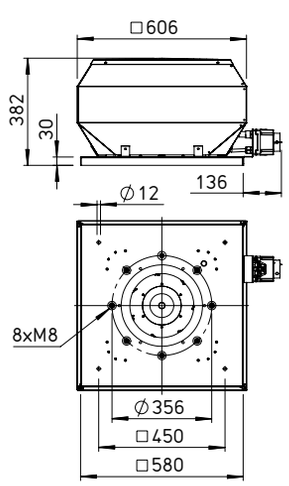

Dim. in mm

Dimensions VD 315 T120

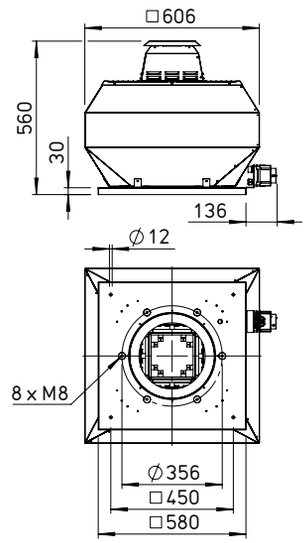

Dim. in mm

Dimensions Accessories for RD / VD 315*

Counter flange
FR 315 Ref. no. 01204



Flanged flexible connector*
STS 315 Ref. no. 01221
For explosion-proof fans
STS 315 Ex Ref. no. 02503



Shutter, automatic
RVS 315 Ref. no. 02594



Shutter, motorised
RVM 315 Ref. no. 02578



Flat roof base, hinged
FDS 315 Ref. no. 01379



Corrugated roof base, profile 5
WDS 315 Ref. no. 01561



Base silencer, hinged
SSD 315 Ref. no. 05292



Hood silencer
HSDV 315 Ref. no. 07476
only for type VD



Dim. in mm

* Accessories VD T120 see installation accessories p. 561 f. Other accessories upon request.

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD T120

Designed for the delivery of process air up to +120 °C.
Enclosed motor located outside of the air flow. Compliant with VDI 2052.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic (T120 and explosion-proof version made of aluminium). Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP54) (explosion-proof version in IP44). Flange motor with self-ventilation (T120 version) in IP54. Ball bearing mounted with moisture protection. Maintenance-free.

Motor protection
Through built-in thermal contacts or built-in PTC thermistors, which must be connected to a motor protection circuit breaker. Assignment see type table.

Electrical connection
No dismantling of casing, to external isolator switch (explosion-proof version to terminal box) in protection category IP65.

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All 1~ types have continuously variable speed control in the range from 0 – 100 % through electronic speed controllers or five-step control units. All 3~ types have continuously variable speed control in the range 0 – 100 % with a frequency inverter with integrated, all-pole effective sine filter (except for explosion-proof version) or five-step control units. Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table. Hood silencer see Accessories.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDW 315/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	66	54	58	60	58	59	58	47
L_{WA} Outlet side	dB(A)	68	55	62	63	62	58	50	46

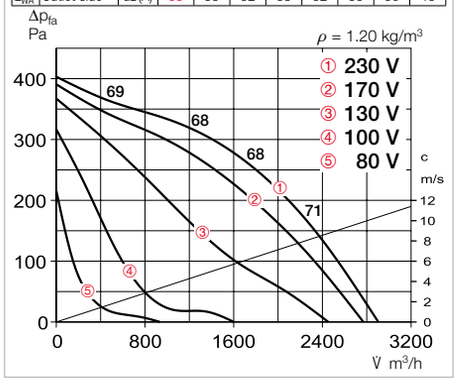

Performance curves RDD 315/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	66	53	57	59	57	58	57	46
L_{WA} Outlet side	dB(A)	68	55	61	62	61	57	49	46

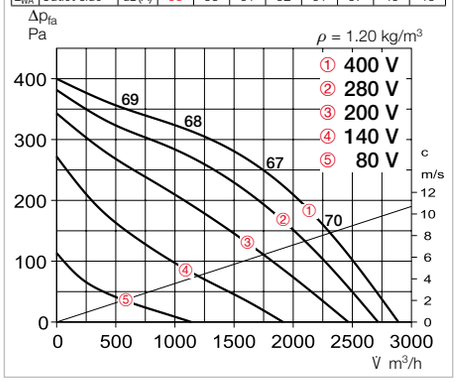

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54															
RDW 315/4	07287	1385	2900	51	300	1.47	2.0	1128	60	60	16.0	**MW**	01579	**MWS 3**[2]	01948
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
RDD 315/4	07288	1385	2890	51	290	0.67	0.67	1129	60	60	19.0	**MD**	05849	**RDS 1**[2]	01314
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 315/4 Ex[1]	07303	1390	2890	51.5	340	0.73	0.73	1157	40	40	19.0	**MSA**	01289	**TSD 1.5**	01501

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Performance curves VDW 315/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	66	53	57	59	57	58	57	46
L_{WA} Outlet side	dB(A)	69	58	61	62	63	58	53	45

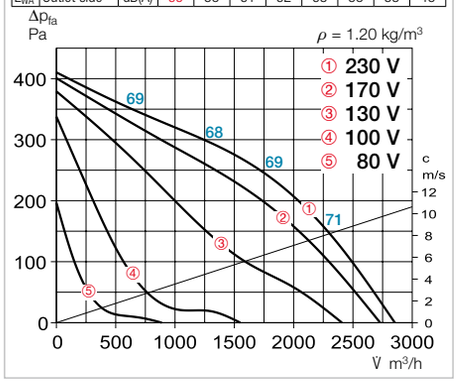

Performance curves VDD 315/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	65	53	57	59	57	58	57	46
L_{WA} Outlet side	dB(A)	68	58	61	62	63	58	52	42

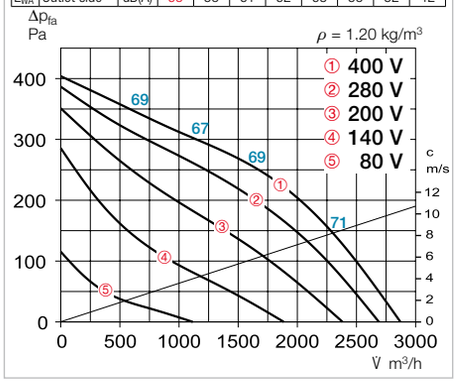

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54															
VDW 315/4	07279	1385	2860	52	300	1.47	2.0	1128	60	50	21.0	**MW**	01579	**MWS 3**[2]	01948
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 315/4	07282	1385	2880	51	290	0.67	0.67	1129	60	60	20.0	**MD**	05849	**RDS 1**[2]	01314
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 315/4 Ex[1]	07293	1390	2770	50.5	330	0.71	1.71	1157	40	40	19.5	**MSA**	01289	**TSD 1.5**	01501
T120 Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 315/4 T120[1]	07315	1450	3372	55	395	0.89	1.1	1264	120	100	25.0	**MD**	05849	**RDS 2**[2]	01315

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Horiz. outlet RD 355

Vert. outlet VD 355

Vert. outlet VD 355 T120

Dimensions RD 355

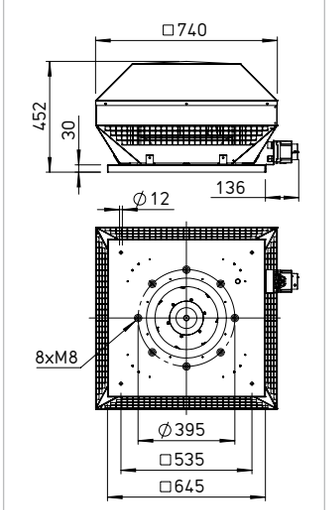

Dim. in mm

Dimensions VD 355

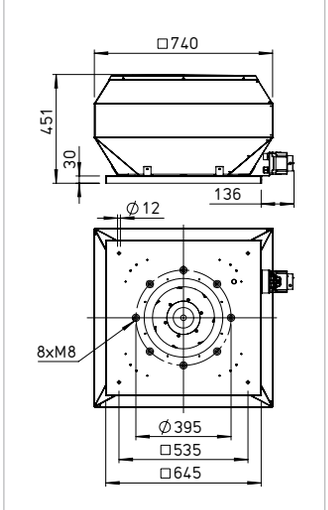

Dim. in mm

Dimensions VD 355 T120

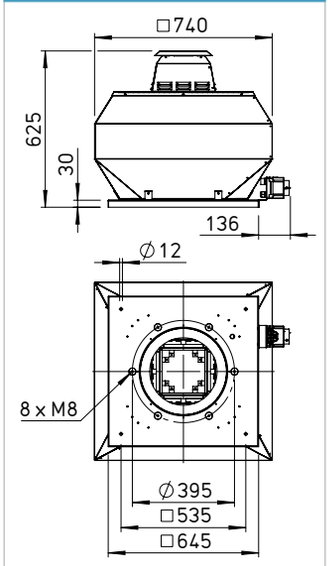

Dim. in mm

Dimensions Accessories for RD / VD 355*

Counter flange
FR 355 Ref. no. 01205



Flanged flexible connector*
STS 355 Ref. no. 01222
For explosion-proof fans
STS 355 Ex Ref. no. 02504



Shutter, automatic
RVS 355 Ref. no. 02595



Shutter, motorised
RVM 355 Ref. no. 02579



Flat roof base, hinged
FDS 355 Ref. no. 01380



Corrugated roof base, profile 5
WDS 355 Ref. no. 01562



Base silencer, hinged
SSD 355 Ref. no. 05024



Hood silencer
HSDV 355 Ref. no. 07480
only for type VD



Dim. in mm

* Accessories VD T120 see installation accessories p. 561 f. Other accessories upon request.

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD T120

Designed for the delivery of process air up to +120 °C.
Enclosed motor located outside of the air flow. Compliant with VDI 2052.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic (T120 and explosion-proof version made of aluminium). Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP54) (explosion-proof version in IP44). Flange motor with self-ventilation (T120 version) in IP54. Ball bearing mounted with moisture protection. Maintenance-free.

Motor protection
Through built-in thermal contacts or built-in PTC thermistors, which must be connected to a motor protection circuit breaker. Assignment see type table.

Electrical connection
No dismantling of casing, to external isolator switch (explosion-proof version to terminal box) in protection category IP65.

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All 1~ types have continuously variable speed control in the range from 0 – 100 % through electronic speed controllers or five-step control units. All 3~ types have continuously variable speed control in the range 0 – 100 % with a frequency inverter with integrated, all-pole effective sine filter (except for explosion-proof version) or five-step control units. Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table. Hood silencer see Accessories.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDW 355/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	66	56	61	60	58	56	53	48
L_{WA} Outlet side	dB(A)	72	63	66	66	66	62	53	47

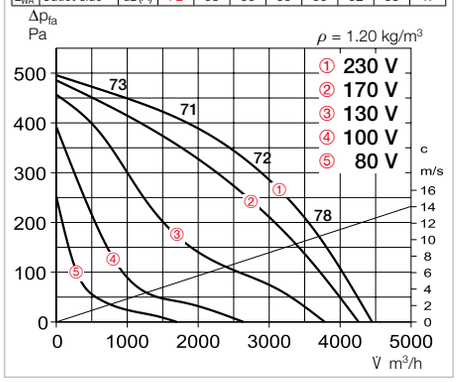

Performance curves RDD 355/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	66	56	61	60	58	56	53	48
L_{WA} Outlet side	dB(A)	72	63	66	66	66	62	53	47

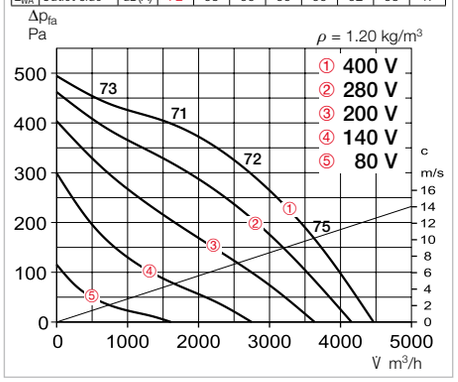

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54															
RDW 355/4	07323	1400	4480	55	520	2.55	3.4	1128	70	55	27.0	**MW**	01579	**MWS 5**[2]	01949
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
RDD 355/4	07326	1350	4470	55	460	0.92	1.0	1129	60	60	25.0	**MD**	05849	**RDS 2**[2]	01315
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 355/4 Ex[1]	07329	1345	4345	58	540	1.21	1.21	1157	40	40	25.0	**MSA**	01289	**TSD 3**	01502

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Performance curves VDW 355/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	66	56	61	60	58	56	53	48
L_{WA} Outlet side	dB(A)	71	61	65	65	65	62	53	49

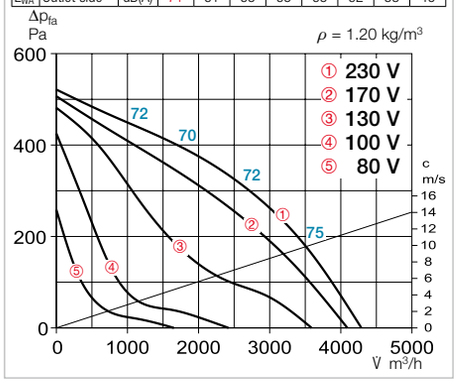

Performance curves VDD 355/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	66	56	61	60	58	56	53	48
L_{WA} Outlet side	dB(A)	71	61	64	64	64	60	52	46

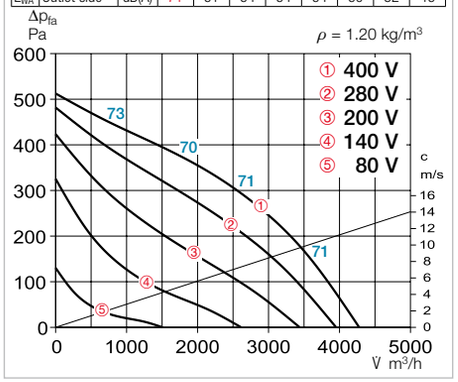

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54															
VDW 355/4	07317	1400	4300	54	520	2.55	3.4	1128	60	55	27.0	**MW**	01579	**MWS 5**[2]	01949
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 355/4	07318	1350	4290	54	460	0.92	1.0	1129	60	60	25.5	**MD**	05849	**RDS 2**[2]	01315
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 355/4 Ex[1]	07327	1350	4320	57	520	1.17	1.17	1157	40	40	25.5	**MSA**	01289	**TSD 3**	01502
T120 Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 355/4 T120[1]	07336	1400	4597	58	584	1.3	1.4	1264	120	100	34.0	**MD**	05849	**RDS 4**[2]	01316

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Horiz. outlet RD 400

Vert. outlet VD 400

Vert. outlet VD 400 T120

Dimensions RD 400

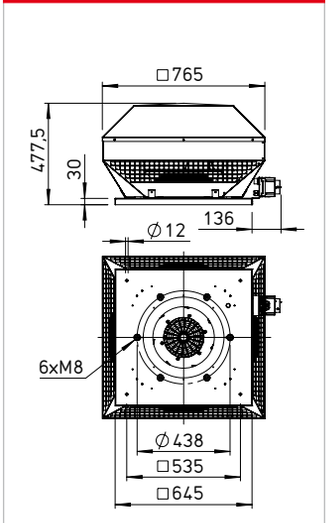

Dim. in mm

Dimensions VD 400

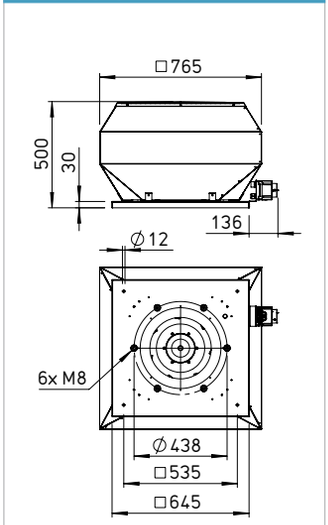

Dim. in mm

Dimensions VD 400 T120

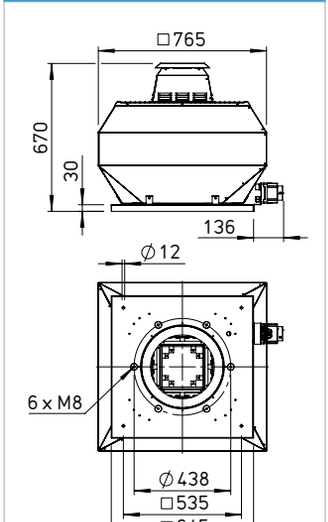

Dim. in mm

Dimensions Accessories for RD / VD 400*

Counter flange
FR 400 Ref. no. 01206



Flanged flexible connector*
STS 400 Ref. no. 01223
For explosion-proof fans
STS 400 Ex Ref. no. 02505



Shutter, automatic
RVS 400 Ref. no. 02596



Shutter, motorised
RVM 400 Ref. no. 02580



Flat roof base, hinged
FDS 400 Ref. no. 01380



Corrugated roof base, profile 5
WDS 400 Ref. no. 01562



Base silencer, hinged
SSD 400 Ref. no. 05291



Hood silencer
HSDV 400 Ref. no. 07481
only for type VD



Dim. in mm

* Accessories VD T120 see installation accessories p. 561 f. Other accessories upon request.

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD T120

Designed for the delivery of process air up to +120 °C.
Enclosed motor located outside of the air flow. Compliant with VDI 2052.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic (T120 and explosion-proof version made of aluminium). Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP54) (explosion-proof version in IP44). Flange motor with self-ventilation (T120 version) in IP54. Ball bearing mounted with moisture protection. Maintenance-free.

Motor protection
Through built-in thermal contacts or built-in PTC thermistors, which must be connected to a motor protection circuit breaker. Assignment see type table.

Electrical connection
No dismantling of casing, to external isolator switch (explosion-proof version to terminal box) in protection category IP65.

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All 1~ types have continuously variable speed control in the range from 0 – 100 % through electronic speed controllers or five-step control units. All 3~ types have continuously variable speed control in the range 0 – 100 % with a frequency inverter with integrated, all-pole effective sine filter (except for explosion-proof version) or five-step control units. Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table. Hood silencer see Accessories.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDW 400/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	71	61	65	66	63	62	56	52
L_{WA} Outlet side	dB(A)	76	55	62	62	62	60	50	39

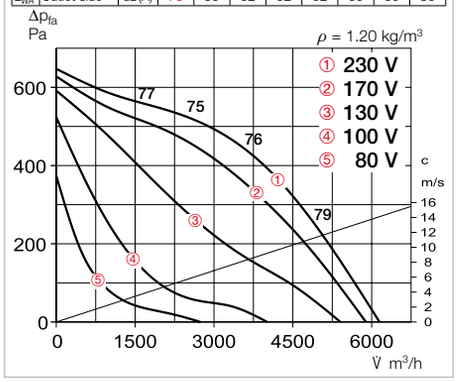

Performance curves RDD 400/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	70	60	64	65	62	61	55	51
L_{WA} Outlet side	dB(A)	75	55	62	62	62	59	50	39

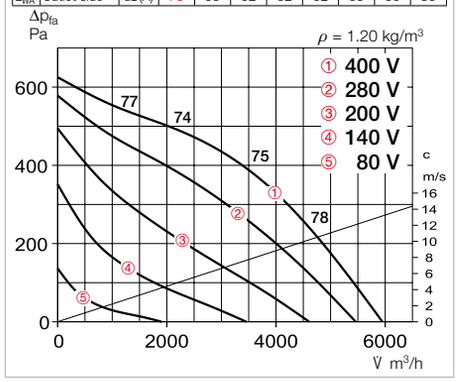

Performance curves RDD 400/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	61	51	55	56	53	52	46	42
L_{WA} Outlet side	dB(A)	66	55	62	62	62	59	50	39

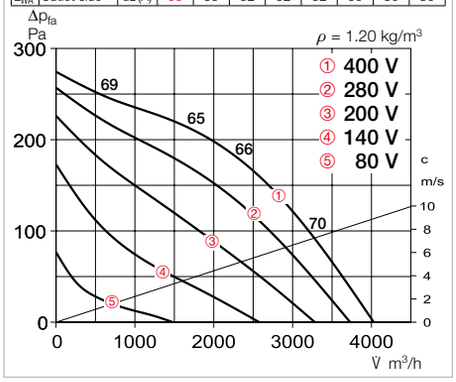

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54															
RDW 400/4	07350	1405	6150	59	875	4.3	6.0	1128	60	40	33.0	**MW**	01579	**MWS 7.5**[2]	01950
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
RDD 400/6	07352	905	4030	49	260	0.6	0.6	1129	60	60	27.0	**MD**	05849	**RDS 1**[2]	01314
RDD 400/4	07351	1375	5970	58	765	1.55	1.6	1129	60	55	27.0	**MD**	05849	**RDS 2**[2]	01315
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 400/6 Ex[1]	07363	930	3840	52	330	0.86	0.86	1157	40	40	24.0	**MSA**	01289	**TSD 1.5**	01501
RDD 400/4 Ex[1]	07358	1395	6030	62.5	950	1.9	2.1	1157	40	40	33.0	**MSA**	01289	**TSD 3.0**	01502

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Performance curves VDW 400/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	71	61	65	66	63	62	56	52
L_{WA} Outlet side	dB(A)	76	63	71	70	70	66	60	54

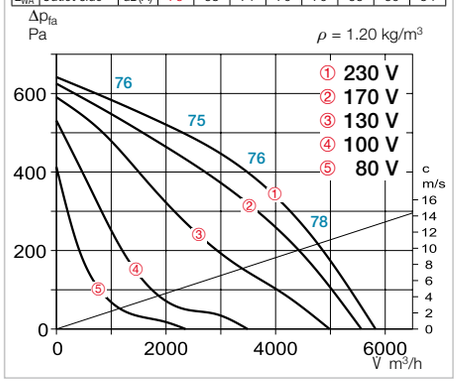

Performance curves VDD 400/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	69	59	63	64	61	60	54	50
L_{WA} Outlet side	dB(A)	74	61	69	68	68	64	58	52

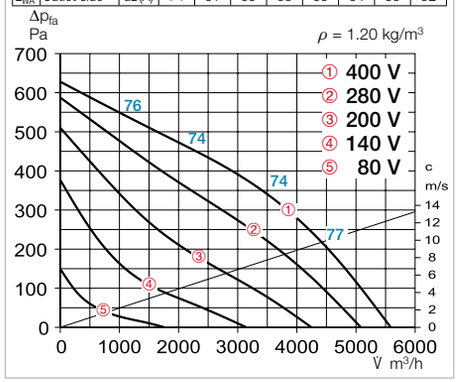

Performance curves VDD 400/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	61	51	55	56	53	52	46	42
L_{WA} Outlet side	dB(A)	66	53	61	60	60	56	50	44

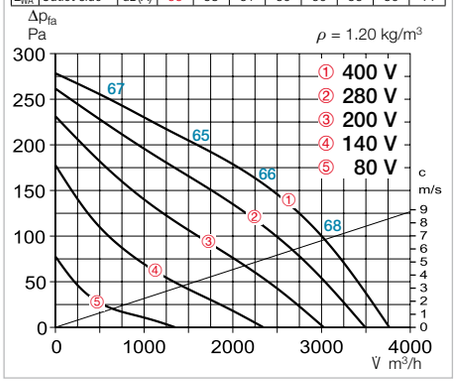

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54															
VDW 400/4	07338	1405	5830	59	875	4.3	6.0	1128	60	40	33.0	**MW**	01579	**MWS 7.5**[2]	01950
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 400/6	07343	905	3780	49	260	0.6	0.6	1129	60	60	28.0	**MD**	05849	**RDS 1**[2]	01314
VDD 400/4	07342	1375	5590	57	765	1.55	1.6	1129	60	55	29.5	**MD**	05849	**RDS 2**[2]	01315
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 400/6 Ex[1]	07359	930	3630	51.5	320	0.89	0.89	1157	40	40	25.0	**MSA**	01289	**TSD 1.5**	01501
VDD 400/4 Ex[1]	07353	1375	5350	57	1000	2.1	2.2	1129	40	40	29.5	**MSA**	01289	**TSD 3**	01502
T120 Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 400/6 T120[1]	07366	967	4535	54	353	2.17	1.02	1264	120	100	36.0	**MD**	05849	**TSD 1.5**	01501
VDD 400/4 T120[1]	07370	1400	6824	62	1045	4.2	2.28	1264	120	100	36.0	**MD**	05849	**TSD 5.5**	01503

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Horiz. outlet RD 450

Vert. outlet VD 450

Vert. outlet VD 450 T120

Dimensions RD 450

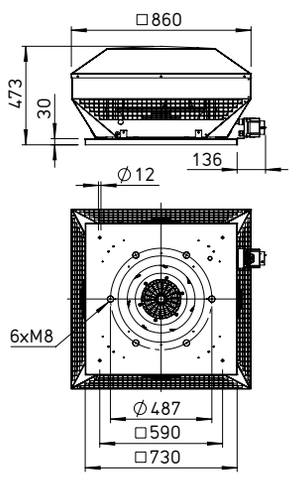

Dim. in mm

Dimensions VD 450

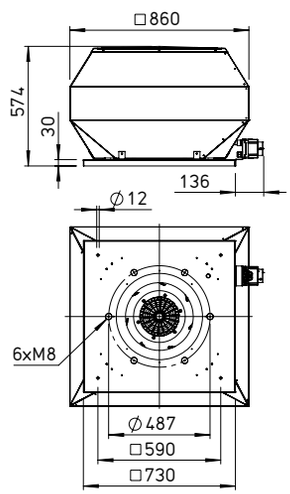

Dim. in mm

Dimensions VD 450 T120

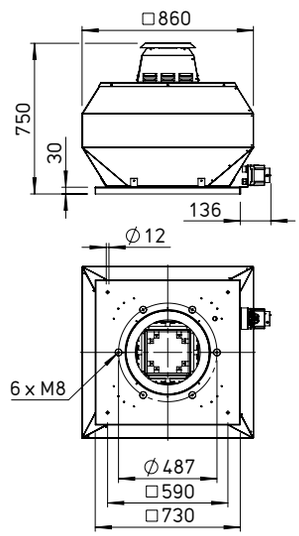

Dim. in mm

Dimensions Accessories for RD / VD 450*

Counter flange
FR 450 Ref. no. 01207



Flanged flexible connector*
STS 450 Ref. no. 01224
For explosion-proof fans
STS 450 Ex Ref. no. 02506



Shutter, automatic
RVS 450 Ref. no. 02597



Shutter, motorised
RVM 450 Ref. no. 02581



Flat roof base, hinged
FDS 450 Ref. no. 01381



Corrugated roof base, profile 5
WDS 450 Ref. no. 01563



Base silencer, hinged
SSD 450 Ref. no. 05288



Hood silencer
HSDV 450 Ref. no. 07482
only for type VD



Dim. in mm

* Accessories VD T120 see installation accessories p. 561 f. Other accessories upon request.

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD T120

Designed for the delivery of process air up to +120 °C.
Enclosed motor located outside of the air flow. Compliant with VDI 2052.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic (T120 and explosion-proof version made of aluminium). Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP54) (explosion-proof version in IP44). Flange motor with self-ventilation (T120 version) in IP54. Ball bearing mounted with moisture protection. Maintenance-free.

Motor protection
Through built-in thermal contacts or built-in PTC thermistors, which must be connected to a motor protection circuit breaker. Assignment see type table.

Electrical connection
No dismantling of casing, to external isolator switch (explosion-proof version to terminal box) in protection category IP65.

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All 1~ types have continuously variable speed control in the range from 0 – 100 % through electronic speed controllers or five-step control units. All 3~ types have continuously variable speed control in the range 0 – 100 % with a frequency inverter with integrated, all-pole effective sine filter (except for explosion-proof version) or five-step control units. Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.
Easy positioning due to standard crane hook.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table. Hood silencer see Accessories.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDW 450/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	74	63	68	68	67	66	61	55
L_{WA} Outlet side	dB(A)	79	69	70	70	74	69	62	55

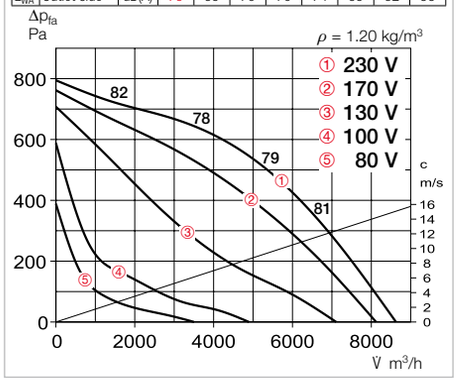

Performance curves RDD 450/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	74	63	68	68	67	66	61	55
L_{WA} Outlet side	dB(A)	79	69	70	70	74	69	62	55

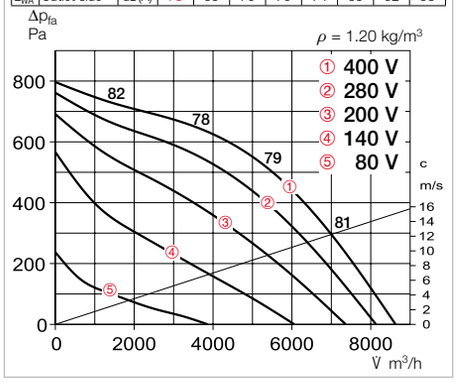

Performance curves RDD 450/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	65	54	59	59	58	57	52	46
L_{WA} Outlet side	dB(A)	70	60	61	61	65	60	53	46

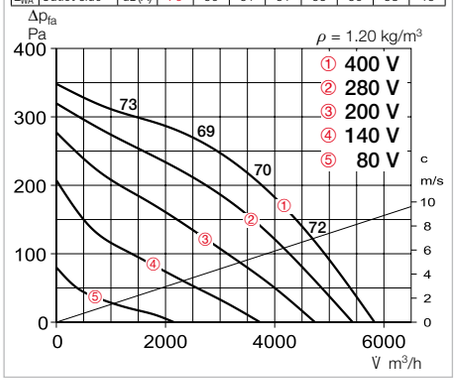

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54															
RDW 450/4	07377	1385	8650	62	1470	6.6	8.7	1128	60	40	46.0	**MW**	01579	**MWS 10**[2]	01946
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
RDD 450/6	07385	905	5850	53	425	1.1	1.1	1129	60	60	39.0	**MD**	05849	**RDS 2**[2]	01315
RDD 450/4	07384	1400	8650	62	1350	2.9	2.9	1129	60	60	45.0	**MD**	05849	**RDS 4**[2]	01316
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 450/6 Ex[1]	07391	870	5630	54.5	470	1.13	1.13	1129	60	60	39.0	**MSA**	01289	**TSD 1.5**	01501
RDD 450/4 Ex[1]	07390	1405	8580	64.5	1620	3.3	3.66	1157	40	40	46.0	**MSA**	01289	**TSD 5.5**	01503

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Performance curves VDW 450/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	73	62	67	67	66	65	60	54
L_{WA} Outlet side	dB(A)	79	69	70	70	74	69	62	55

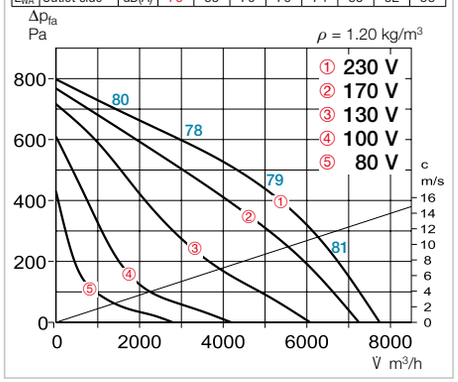

Performance curves VDD 450/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	73	62	67	67	66	65	60	54
L_{WA} Outlet side	dB(A)	79	70	71	71	75	70	63	56

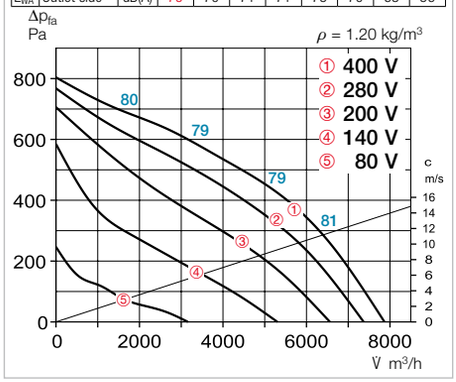

Performance curves VDD 450/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	64	53	58	58	57	56	51	45
L_{WA} Outlet side	dB(A)	70	60	61	61	65	60	53	46

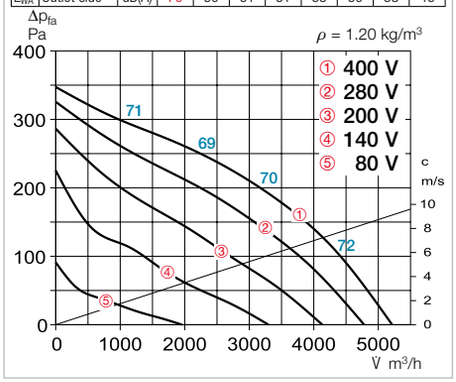

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54															
VDW 450/4	07372	1385	7750	62	1470	6.6	8.7	1128	60	40	47.0	**MW**	01579	**MWS 10**[2]	01946
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 450/6	07380	905	5200	53	425	1.06	1.06	1129	60	60	40.0	**MD**	05849	**RDS 2**[2]	01315
VDD 450/4	07379	1400	7900	62	1350	2.9	2.9	1129	60	60	47.0	**MD**	05849	**RDS 4**[2]	01316
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 450/6 Ex[1]	07387	875	5170	54	460	1.1	1.1	1157	40	40	40.0	**MSA**	01289	**TSD 1.5**	01501
VDD 450/4 Ex[1]	07386	1405	7930	65	1570	3.3	3.66	1157	40	40	47.0	**MSA**	01289	**TSD 5.5**	01503
T120 Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 450/6 T120[1]	07399	940	6515	62	660	2.05	2.05	1264	90	—	54.0	**MD**	05849	**RDS 4**[2]	01316
VDD 450/4 T120[1]	07398	1355	9792	69	1830	3.8	3.8	1264	80	—	60.0	**MD**	05849	**RDS 7**[2]	01578

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Horiz. outlet RD 500

Vert. outlet VD 500

Vert. outlet VD 500 T120

Dimensions RD 500

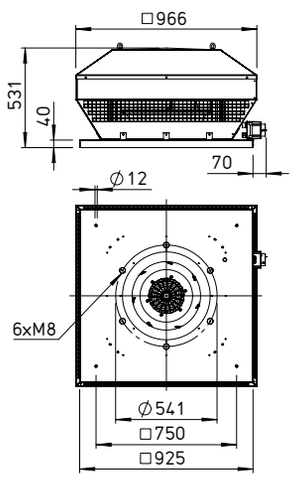

Dim. in mm

Dimensions VD 500

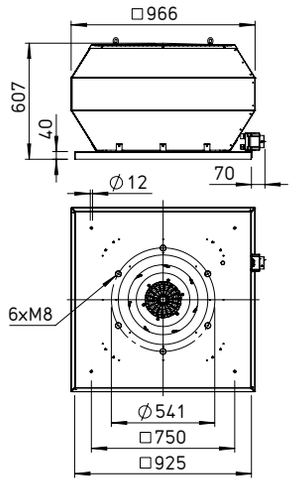

Dim. in mm

Dimensions VD 500 T120

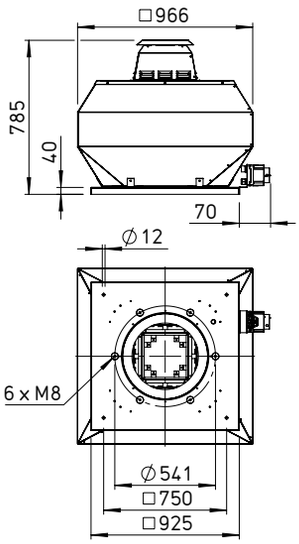

Dim. in mm

Dimensions Accessories for RD / VD 500*

Counter flange
FR 500 Ref. no. 01208



Flanged flexible connector*
STS 500 Ref. no. 01225
For explosion-proof fans
STS 500 Ex Ref. no. 02507



Shutter, automatic
RVS 500 Ref. no. 02598



Shutter, motorised
RVM 500 Ref. no. 02582



Flat roof base
FDS 500 Ref. no. 01382



Corrugated roof base, profile 5
WDS 500 Ref. no. 01564



Base silencer
SSD 500 Ref. no. 05017



Hood silencer
HSDV 500 Ref. no. 07483
only for type VD



Dim. in mm

* Accessories VD T120 see installation accessories p. 561 f. Other accessories upon request.

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD T120

Designed for the delivery of process air up to +120 °C.
Enclosed motor located outside of the air flow. Compliant with VDI 2052.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of plastic (T120 and explosion-proof version made of aluminium). Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP54) (explosion-proof version in IP44). Flange motor with self-ventilation (T120 version) in IP54/55. Ball bearing mounted with moisture protection. Maintenance-free.

Motor protection
Through built-in thermal contacts or built-in PTC thermistors, which must be connected to a motor protection circuit breaker. Assignment see type table.

Electrical connection
No dismantling of casing, to external isolator switch (explosion-proof version to terminal box) in protection category IP65.

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All types have continuously variable speed control in the range from 0 – 100 % with a frequency inverter with integrated, all-pole effective sine filter (except for explosion-proof version) or five-step control units (except for units with FU). Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.
Easy positioning due to standard crane hook.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table. Hood silencer see Accessories.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDD 500/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	76	67	71	69	69	66	62	58
L_{WA} Outlet side	dB(A)	81	72	74	75	76	70	65	58

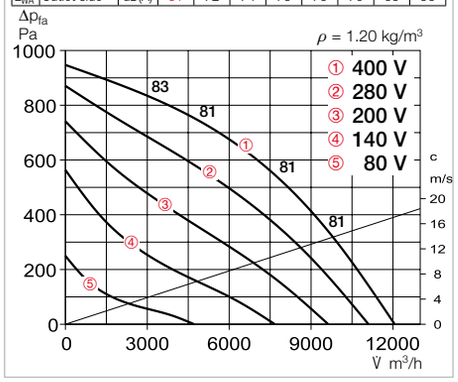

Performance curves RDD 500/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	67	58	62	60	60	57	53	49
L_{WA} Outlet side	dB(A)	72	63	65	66	67	61	56	49

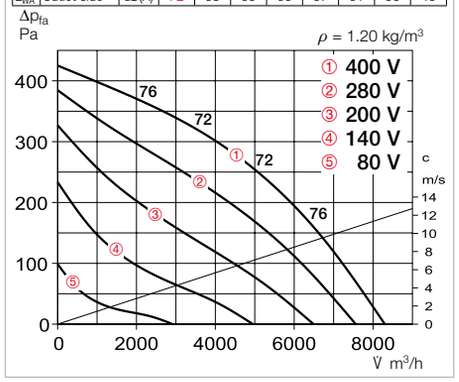

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
RDD 500/6	07410	885	8300	55	680	1.55	1.55	1129	50	50	55.0	**MD**	05849	**RDS 2**[2]	01315
RDD 500/4	07409	1340	12100	64	2150	4.15	4.25	1129	55	50	58.0	**MD**	05849	**RDS 7**[2]	01578
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 500/6 Ex[1]	07414	840	6550	57.5	570	1.21	1.21	1157	40	40	51.0	**MSA**	01289	**TSD 1.5**	01501
RDD 500/4 Ex[1]	07416	1420	13030	64	2250	4.5	5.8	—	40	40	58.0	**MSA**	01289	**TSD 1.5**	01501

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Performance curves VDD 500/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	76	67	71	69	69	66	62	58
L_{WA} Outlet side	dB(A)	82	71	75	76	76	74	69	61

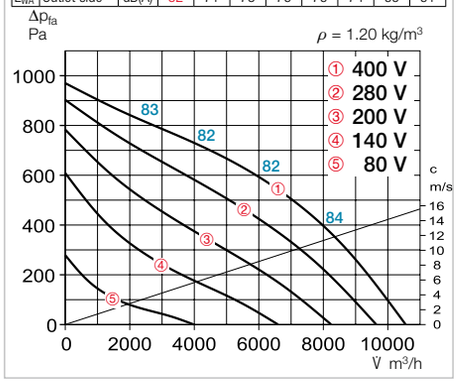

Performance curves VDD 500/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	67	58	62	60	60	57	53	49
L_{WA} Outlet side	dB(A)	73	62	66	67	67	65	60	52

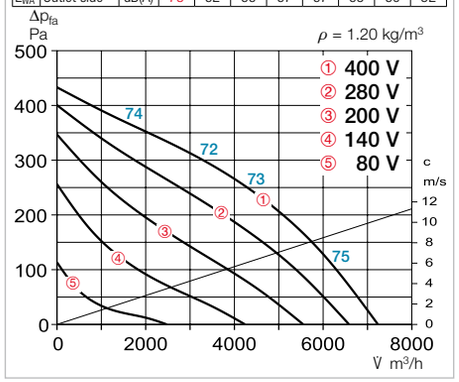

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 500/6	07402	885	7250	56	680	1.55	1.55	1129	50	50	56.0	**MD**	05849	**RDS 2**[2]	01315
VDD 500/4	07401	1340	10550	65	2150	4.15	4.25	1129	55	50	65.0	**MD**	05849	**RDS 7**[2]	01578
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 500/6 Ex[1]	07412	840	5850	56	560	1.2	1.2	1157	40	40	53.0	**MSA**	01289	**TSD 1.5**	01501
VDD 500/4 Ex[1]	07413	1405	9350	66.5	2250	4.3	5.1	1157	40	40	68.0	**MSA**	01289	**TSD 7**	01504
T120 Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54 or IP55*															
VDD 500/6 T120[1]	07419	945	9568	61	100	2.1	2.1	1264	100	—	62.0	**MSA**	01289	**TSD 7**	01504
VDD 500/4 T120[1]	07418	1465	14078	70	3060	5.8	5.8	1130	95	—	71.0	**MSA**	01289	—	—

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Horiz. outlet RD 560

Vert. outlet VD 560

Vert. outlet VD 560 T120

Dimensions RD 560

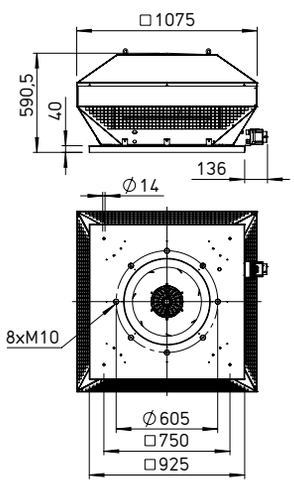

Dim. in mm

Dimensions VD 560

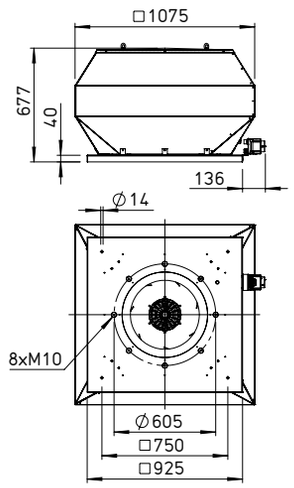

Dim. in mm

Dimensions VD 560 T120

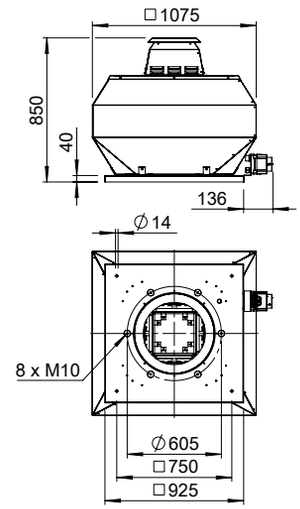

Dim. in mm

Dimensions Accessories for RD / VD 560*

Counter flange
FR 560 Ref. no. 01209



Flanged flexible connector*
STS 560 Ref. no. 01226
For explosion-proof fans
STS 560 Ex Ref. no. 02508



Shutter, automatic
RVS 560 Ref. no. 02599



Shutter, motorised
RVM 560 Ref. no. 02583



Flat roof base
FDS 560 Ref. no. 01382



Corrugated roof base, profile 5
WDS 560 Ref. no. 01564



Base silencer
SSD 560 Ref. no. 05017



Hood silencer
HSDV 560 Ref. no. 07484
only for type VD



Dim. in mm

* Accessories VD T120 see installation accessories p. 561 f. Other accessories upon request.

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD T120

Designed for the delivery of process air up to +120 °C.
Enclosed motor located outside of the air flow. Compliant with VDI 2052.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of aluminium. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP54) (explosion-proof version in IP44). Flange motor with self-ventilation (T120 version) in IP54/55. Ball bearing mounted with moisture protection. Maintenance-free.

Motor protection
Through built-in thermal contacts or built-in PTC thermistors, which must be connected to a motor protection circuit breaker. Assignment see type table.

Electrical connection
No dismantling of casing, to external isolator switch (explosion-proof version to terminal box) in protection category IP65.

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All types have continuously variable speed control in the range from 0 – 100 % with a frequency inverter with integrated, all-pole effective sine filter (except for explosion-proof version) or five-step control units (except for units with FU). Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.
Easy positioning due to standard crane hook.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table. Hood silencer see Accessories.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curve RDD 560/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	81	70	72	73	74	73	69	62
L_{WA} Outlet side	dB(A)	86	74	77	79	80	77	70	61

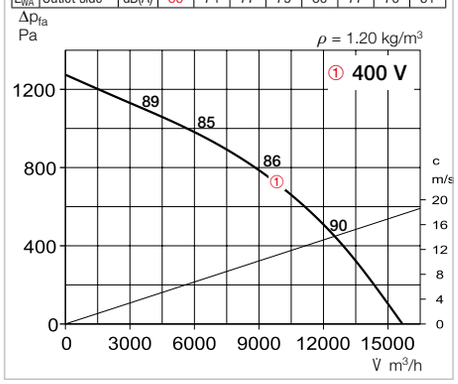

Performance curves RDD 560/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	72	62	64	65	66	65	61	54
L_{WA} Outlet side	dB(A)	77	66	69	71	72	69	62	53

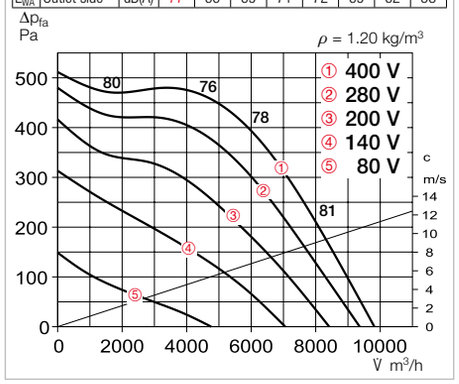

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
RDD 560/6	07429	920	9850	60	1180	3.2	3.2	1129	60	60	72.0	**MD**	05849	**RDS 7**[2]	01578
RDD 560/4	07426	1380	15700	69	3610	6.4	7.8	1130	60	40	88.0	**MD**	05849	**RDS 11**[2]	01332
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 560/6 Ex[1]	07432	865	9410	61.5	1100	2.12	2.12	1157	40	40	67.0	**MSA**	01289	**TSD 3**	01502

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Performance curve VDD 560/4

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	82	71	73	74	75	74	70	63
L_{WA} Outlet side	dB(A)	86	75	79	81	80	76	72	65

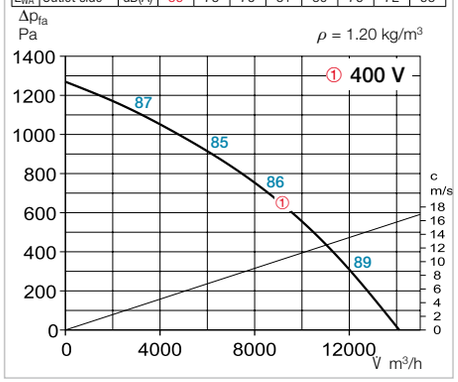

Performance curves VDD 560/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	72	61	63	64	65	64	60	53
L_{WA} Outlet side	dB(A)	77	66	70	72	71	67	63	56

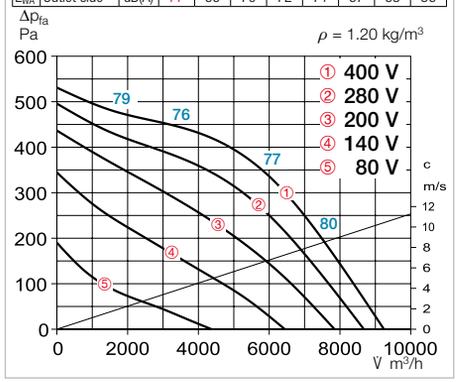

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 560/6	07422	920	9250	60	1180	3.2	3.2	1129	60	60	75.0	**MD**	05849	**RDS 7**[2]	01578
VDD 560/4	07420	1385	14100	69	4430	6.4	—	1130	55	55	77.0	**MD**	05849	**FU-BS 8.0**	05461
Ex Explosion-proof, II 2G Ex h IIB + H_2 T3 Gb, Motor Ex e, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 560/6 Ex[1]	07430	860	8455	60	1090	2.1	2.1	1157	40	40	70.0	**MSA**	01289	**TSD 3**	01502
T120 Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54 or IP55*															
VDD 560/6 T120[1]	07439	965	12323	60	1640	3.6	3.5	1264	120	100	92.0	**MD**	05849	**RDS 7**[2]	01578
VDD 560/4 T120[1]	07436	1460	16224	69	5500	11.5	—	1130	120	100	102.0	**MSA**	01289	**FU-BS 10**	05462

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Horiz. outlet RD 630

Vert. outlet VD 630

Vert. outlet VD 630 T120

Dimensions RD 630

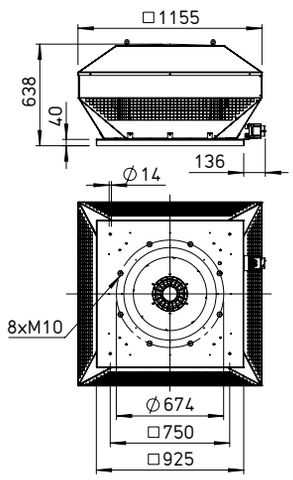

Dim. in mm

Dimensions VD 630

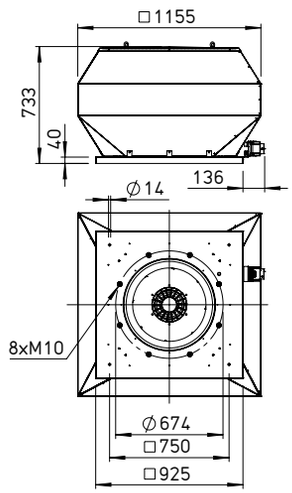

Dim. in mm

Dimensions VD 630 T120

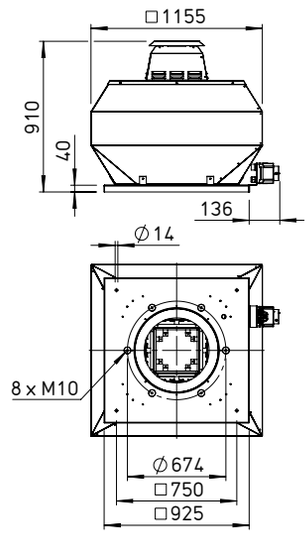

Dim. in mm

Dimensions Accessories for RD / VD 630*

Counter flange
FR 630 Ref. no. 01211



Flanged flexible connector*
STS 630 Ref. no. 01228
For explosion-proof fans
STS 630 Ex Ref. no. 02509



Shutter, automatic
RVS 630 Ref. no. 02600



Shutter, motorised
RVM 630 Ref. no. 02609



Flat roof base
FDS 630 Ref. no. 01382



Corrugated roof base, profile 5
WDS 630 Ref. no. 01565



Base silencer
SSD 630 Ref. no. 05017



Hood silencer
HSDV 630 Ref. no. 07489
only for type VD



Dim. in mm

* Accessories VD T120 see installation accessories p. 561 f. Other accessories upon request.

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD T120

Designed for the delivery of process air up to +120 °C.
Enclosed motor located outside of the air flow. Compliant with VDI 2052.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel (explosion-proof version inlet nozzle made of aluminium). Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of aluminium. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP54) (explosion-proof version in IP44). Flange motor with self-ventilation (T120 version) in IP55. Ball bearing mounted with moisture protection. Maintenance-free.

Motor protection
Through built-in thermal contacts or built-in PTC thermistors, which must be connected to a motor protection circuit breaker. Assignment see type table.

Electrical connection
No dismantling of casing, to external isolator switch (explosion-proof version to terminal box) in protection category IP65.

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All types have continuously variable speed control in the range from 0 – 100 % with a frequency inverter with integrated, all-pole effective sine filter (except for explosion-proof version) or five-step control units (except for units with FU). Assignment see type table.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.
Easy positioning due to standard crane hook.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table. Hood silencer see Accessories.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDD 630/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	79	62	69	73	74	72	70	61
L_{WA} Outlet side	dB(A)	83	67	73	79	78	74	67	62

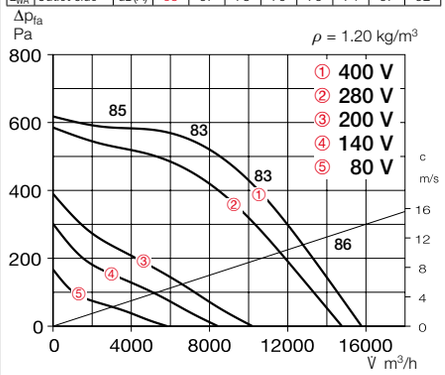

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
RDD 630/6	07447	875	16650	66	2380	4.7	5.2	1129	55	45	92.0	**MD**	05849	**RDS 7**[2]	01578
Ex Explosion-proof, II 3G Ex h IIB + H_2 T3 Gc, Motor Ex nA, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
RDD 630/6 Ex[1]	07450	905	16500	67.5	2690	5.4	5.6	1157	40	40	97.0	**MSA**	01289	**TSD 7**	01504

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Performance curves VDD 630/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	78	65	71	72	72	71	64	57
L_{WA} Outlet side	dB(A)	83	67	76	77	77	76	71	63

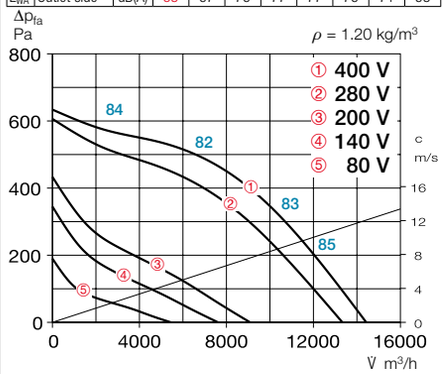

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 630/6	07441	930	14430	66	2130	4.6	4.95	1129	60	60	96.0	—	—	**RDS 7**[2]	01578
Ex Explosion-proof, II 3G Ex h IIB + H_2 T3 Gc, Motor Ex nA, Three phase current, 3~, 400 V, 50 Hz, Protection category IP44															
VDD 630/6 Ex[1]	07448	910	14700	67	2660	5.3	5.5	1157	40	40	101.0	**MSA**	01289	**TSD 7**	01504
T120 Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP55															
VDD 630/6 T120[1]	07456	985	19540	69	3160	7.5	7.5	1130	105	—	105.0	**MSA**	01289	**FU-BS 10**	05462

1) Performance diagram at www.HeliosSelect.de. 2) Includes motor protection circuit breaker.

Horiz. outlet RD 710

Vert. outlet VD 710 / T120

Dimensions RD 710

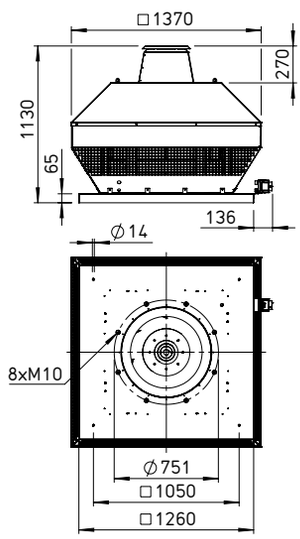

Dim. in mm

Dimensions VD 710 / T120

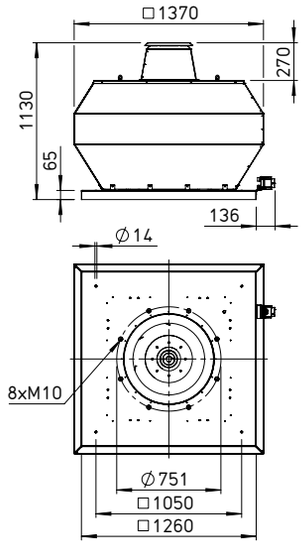

Dim. in mm

Dimensions Accessories for RD / VD 710*

Counter flange
FR 710 Ref. no. 01212



Base silencer
SSD 710 Ref. no. 05287



Flanged flexible connector*
STS 710 Ref. no. 01229



Shutter, automatic **
RVS 710 Ref. no. 02601



Shutter, motorised **
RVM 710 Ref. no. 02610



Flat roof base
FDS 710 Ref. no. 06658



Dim. in mm

* Accessories VD T120 see installation accessories p. 561 f. Other accessories upon request.
** When used directly under FDS or SSD, an intermediate piece is required (VR 710 K Ref. no. 01429).

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD T120

Designed for the delivery of process air up to +120 °C. Enclosed motor located outside of the air flow. Compliant with VDI 2052.

Description of all series

Casing
Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

Impeller
High-performance centrifugal impeller with backward curved blades made of aluminium. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

Drive
Speed-controllable external rotor motor in closed design (IP54). Flange motor with self-ventilation (T120 version) in IP55. Ball bearing mounted with moisture protection. Maintenance-free.

Motor protection
Through built-in thermal contacts or built-in PTC thermistors, which must be connected to a motor protection circuit breaker. Assignment see type table.

Electrical connection
No dismantling of casing, to external isolator switch in protection category IP65.

Protection grille
On the outlet side as standard according to DIN EN ISO 13857.

Power control
All types have continuously variable speed control in the range from 0 – 100 % with a frequency inverter with integrated, all-pole effective sine filter.

Delivery
Units are ready-for-connection, fully pre-assembled in the shipping box.
Easy positioning due to standard crane hook.

Noise
The total level and range are specified above the performance diagram for:
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

References	Page
Planning information	14 ff.
Technical description	502 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curve RDD 710/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	83	72	75	75	76	78	72	63
L_{WA} Outlet side	dB(A)	87	72	75	75	76	78	72	63

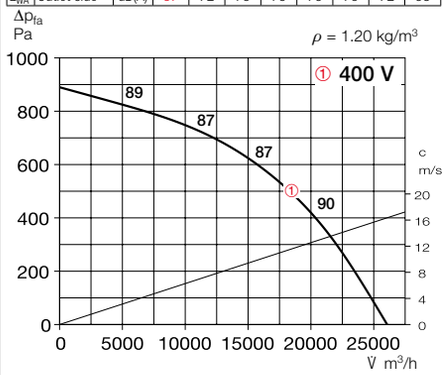

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step / Frequency inverter	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
RDD 710/6	07460	980	26066	70	4300	9.4	—	1130	50	40	187.0	**MSA**	01289	**FU-BS 16**	05463

Performance curve VDD 710/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L_{WA} Inlet side	dB(A)	82	71	74	74	75	77	71	62
L_{WA} Outlet side	dB(A)	86	74	76	79	80	81	73	65

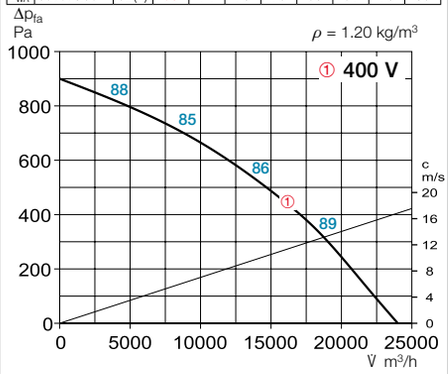

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump. at rated voltage	Current consump. with control	Wiring diagram	Max. air flow temp. at rated voltage	Max. air flow temp. with control	Weight net	Motor protection circuit breaker		Speed controller 5-step / Frequency inverter	
		min⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	**Type**	Ref. no.	**Type**	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 710/6	07458	985	23800	69	4270	9.4	—	1130	60	—	185.0	**MSA**	01289	**FU-BS 16**	05463
T120 **Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP55**															
VDD 710/6 T120[1]	07466	985	24536	69	4270	9.4	9.4	1130	106	—	185.0	**MSA**	01289	**FU-BS 16**	05463

[1] Performance diagram at www.HeliosSelect.de.

HDH

Roof ventilation hoods HDH

For covering convection vents and supply air openings in the roof. Same design as horizontal outlet roof fans RD.
With regard to mechanical ventilation, the resulting flow losses must be taken into account (see diagrams).
Accessories same as roof fans.

Dimensions HDH

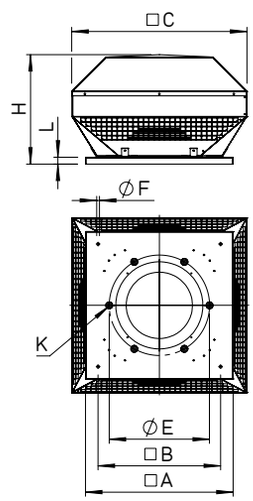

Dim. in mm

Supply air HDH 180 – 400



Supply air HDH 450 – 710



Exhaust air HDH 180 – 355



Exhaust air HDH 400 – 710



Type	Ref. no.	Nominal size	□A	□B	□C	Ø E	Ø F	H	K	L	Weight net
		mm	mm	mm	mm	mm	mm	mm	mm	mm	approx. kg
HDH 180	07492	180	320	245	309	213	10	155	6 x M6	30	3.5
HDH 200	07493	200	425	330	405	259	10	198	6 x M6	30	5.0
HDH 225	07495	225	425	330	405	259	10	198	6 x M6	30	5.0
HDH 250	07496	250	580	450	450	286	10	255	6 x M6	30	8.0
HDH 315	07497	315	580	450	606	356	12	386	8 x M8	30	12.5
HDH 355	07498	355	645	535	740	395	12	452	8 x M8	30	17.5
HDH 400	07499	400	645	535	765	438	12	478	6 x M8	30	17.5
HDH 450	07491	450	730	590	860	487	12	473	6 x M8	30	26.0
HDH 500	07513	500	925	750	966	541	12	531	6 x M8	40	30.0
HDH 560	07517	560	925	750	1075	605	14	591	8 x M10	40	44.0
HDH 630	07518	630	925	750	1155	674	14	633	8 x M10	40	47.0
HDH 710	07519	710	1260	1050	1370	751	14	860	8 x M10	65	52.0

HSDV



Dim. in mm

Hood silencer HSDV for outlet side noise reduction

Average insulation vale 8 dB. Available for series VD, nominal sizes 315 – 630.
The construction is placed on the roof fan and it can also be retrofitted without structural alteration. Can only be installed on series VD.

Type	Ref. no.	A	B
HSDV 315	07476	606	310
HSDV 355	07480	740	350
HSDV 400	07481	765	400
HSDV 450	07482	860	450
HSDV 500	07483	966	500
HSDV 560	07484	1075	550
HSDV 630	07489	1155	620

RS

Isolator switch RS

RS 3+1+2 Ref. no. 07536
– 3 main contacts
– 1 auxiliary contact
– 2 contacts for TB/TP

For fans with direct start-up. Plastic casing for surface-mounting. Locking options in “0 OFF” position.

Technical data

Voltage	400 V, 3~, 50/60 Hz
Operating current	20 A
Load capacity	AC-23 B, 7.5 kW
Protection category	IP 65
Protection class	II
Operation	Rotary drive
Temp. range	–25 to +60 °C
Weight approx.	0.3 kg
Dim. mm	W 90.5 x H 90.5 x D 102
Casing	UV and weather-resistant
Wiring diagram no.	1131

FR / DFR



Dim. in mm

Also suitable for: T120

Flange ring FR

Made of galvanised steel sheet, for inlet side duct connection. Directly screwed to the fan base plate.

Dimensions according to DIN 24155, p. 2.

Type	Ref. no.	Ø LK	l	Ø d	Weight approx. kg
FR 180	01200	213	25	186	0.4
DFR 200	01201	259	30	233	0.5
FR 225	01201	259	30	233	0.5
FR 250	01203	286	25	256	0.6
FR 315	01204	356	30	326	0.9
FR 355	01205	395	30	365	1.1
FR 400	01206	438	30	408	1.2
FR 450	01207	487	35	457	1.8
FR 500	01208	541	35	511	1.8
FR 560	01209	605	35	574	2.0
FR 630	01211	674	35	642	2.2
FR 710	01212	751	35	715	3.3

STS / DSTS



* Type STS 180 = 130 mm

Dim. in mm

Also suitable for: Ex

Flanged flexible connector STS

For the prevention of structure-borne sound transmission to inlet side pipes. Flange made of galvanised steel sheet. Elastic sleeve made of PVC fabric. Use type STS Ex for explosion-proof fans. Directly screwed to the fan base plate. Flange dimensions according to DIN 24155, p. 2. Ambient temperature –30 °C to +80 °C.

Type	Ref. no.	Type*	Ref. no.	Ø D i.L.	Ø LK	Wgt aprx. kg
STS 180	01217	–	–	183	213	0.9
DSTS 200	01218	**DSTS 200 Ex**	02500	229	259	1.1
STS 225	01218	**STS 225 Ex**	02500	229	259	1.1
STS 250	01220	**STS 250 Ex**	02501	252	286	1.3
STS 315	01221	**STS 315 Ex**	02503	322	356	1.8
STS 355	01222	**STS 355 Ex**	02504	358	395	2.1
STS 400	01223	**STS 400 Ex**	02505	404	438	2.5
STS 450	01224	**STS 450 Ex**	02506	453	487	3.8
STS 500	01225	**STS 500 Ex**	02507	507	541	3.4
STS 560	01226	**STS 560 Ex**	02508	570	605	4.5
STS 630	01228	**STS 630 Ex**	02509	638	674	4.6
STS 710	01229	–	–	711	751	7.0

* For explosion-proof fans.

RVS / DVS



Dim. in mm

Also suitable for: T120

Automatic duct shutter with spring-return RVS [1)]

For the prevention of cold draughts when the fan is at a standstill. For vertical throughflow from bottom to top (otherwise use type RVM). Automatic function through fan operation. Spring mechanism outside of the air flow. Locking force corresponds to fan power and the installation position can be adjusted. Shutter and casing made of galvanised steel sheet, shutter made of aluminium for NS 225 – 560 mm. Directly screwed to the fan base plate. Double-sid-ed flange. Holes pursuant to DIN 24155, p. 2.

Ambient temp. –30 to +100 °C

Type	Ref. no.	Ø D i.L.	A	E	L	Ø LK	Weight aprx. kg
DVS 180	01247	180	15	–	140	213	1.2
DRVS 200	02591	225	–	–	300	259	3.0
RVS 225	02591	225	–	115	300	259	3.0
RVS 250	02592	250	–	115	300	286	3.4
RVS 315	02594	315	–	115	300	356	4.3
RVS 355	02595	355	–	115	300	395	5.8
RVS 400	02596	400	–	115	330	438	7.2
RVS 450	02597	454	10	115	330	487	10.4
RVS 500	02598	504	40	115	330	541	11.7
RVS 560	02599	560	65	115	330	605	16.1
RVS 630	02600	630	115	200	400	674	19.5
RVS 710	02601	710	155	200	400	751	26.5

[1)] Pressure loss diagram see Page 566.

RVM / DRVM



Dim. in mm

Motorised shutter RVM [1) 2)]

Like RVS, but for vertical throughflow in any direction and with a mounted spring return motor (outside of air flow). Allows static ventilation when fan is at standstill. Supply air control in combination with a roof ventilation hood. Elec. control parallel with fan; cable length 0.9 m, normally closed.

Ambient temp.	–30 to +60 °C
Protection category	IP54
Volt./Frequency	230 V AC, 50/60 Hz
Power consumption	
– up to Ø560/from Ø630	14 W/6.5 W
Shutter opening time, aprx.	75 sec.
Wiring diagram no. 380.1	

Type	Ref. no.	Ø D i.L.	B	C	L	A	Ø LK	Wgt aprx. kg
DRVM 200	02575	225	95	130	300	–	259	3.3
RVM 225	02575	225	95	130	300	–	259	3.3
RVM 250	02576	250	95	130	300	–	286	3.7
RVM 315	02578	315	95	130	300	–	356	4.6
RVM 355	02579	355	95	130	300	–	395	6.1
RVM 400	02580	400	95	130	330	–	438	7.5
RVM 450	02581	454	95	130	330	15	487	10.7
RVM 500	02582	504	95	130	330	40	541	12.0
RVM 560	02583	560	95	130	330	65	605	16.4
RVM 630	02609	630	150	225	400	115	674	21.0
RVM 710	02610	710	150	225	400	155	751	28.0

[2)] Types DRVM/RVM not suitable for use in potentially explosive atmospheres.

FDS



Hinged
Dim. in mm

Flat roof base FDS

For the placement of roof fans and ventilation hoods on flat roofs. Horizontal installation. Use of this base reduces costs and installation expenses to a minimum in comparison to handcrafted designs. Corrosion-resistant GFK version (NS 710 made of galvanised steel sheet) with abrasion-resistant, sound and heat insulation. Snow-safe base height.

Installation

Attach base above the roof opening (roof). Full roof coating over adhesive edge of the base and seal with bitumen fibre filler. Fixing screws, rubber profile and seal between base and base plate included in delivery.

Type	Ref. no.	A	B	C	D
FDS 180*	01377	645	285	245	285
FDS 200*	01378	750	392	330	285
FDS 225*	01378	750	392	330	285
FDS 250*	01379	870	520	450	285
FDS 315*	01379	870	520	450	285
FDS 355*	01380	950	605	535	285
FDS 400*	01380	950	605	535	285
FDS 450*	01381	1000	660	590	285
FDS 500	01381	1160	820	750	285
FDS 560	01382	1160	820	750	285
FDS 630	01382	1160	820	750	285
FDS 710	06658	1550	1190	1050	285

* With hinge mechanism for easy inspection and cleaning.

SSD



Hinged
Dim. in mm

Base silencer SSD for inlet-side sound insulation

Average insulation value 15 dB.
All metal parts made of galvanised steel sheet. For installation on flat roofs in the same way as the flat roof base.
Fixing screws, rubber profile and seal between base and base plate included in delivery.
For NS 500–710: Sound insulation baffles with insulation board made of non-combustible material, class A2, wrapped in glass fibre mat on both sides.
NS 180–450: With hinge for folding the fan down for inspection purposes. Foam core with free cross-section allows access to the duct/shaft system. Base plate is equipped with threaded bushes (according to DIN 24155, p. 2) for the connection of inlet side accessories.

Type	Ref. no.	A	B	C	D	E	F
SSD 180*	05289	280	160	750	213	600	245
SSD 200*	05290	400	133	735	259	666	330
SSD 225*	05290	400	133	735	259	666	330
SSD 250*	05292	520	150	835	286	795	450
SSD 315*	05292	520	150	835	356	795	450
SSD 355*	05024	600	150	985	395	900	535
SSD 400*	05291	600	150	985	438	900	535
SSD 450*	05288	675	158	985	487	990	590
SSD 500	05017	860	160	1200	–	1180	750
SSD 560	05017	860	160	1200	–	1180	750
SSD 630	05017	860	160	1200	–	1180	750
SSD 710	05287	1220	130	1500	–	1480	1050

* With hinge mechanism for easy inspection and cleaning.

WDS





Dim. in mm

Corrugated roof base WDS

For the placement of roof fans and ventilation hoods on corrugated roofs. Weather-resistant and non-corrosive design made of glass-fibre reinforced polyester with a low deadweight. No risk of breakage during shipping and on the construction site. Low thermal transmittance value. Corrugation spacing 177 mm (profile no. 5). Use of this base costs for planning, design and installation to a minimum. Rain drains on the front and back grooves between the square base and the corrugated plate allow installation of the corrugated roof plate regardless of the assembly direction.
Screws, washers and rubber profile for attaching and sealing the fan-base plate included in the delivery.

Type	Ref. no.	A	B	C	D	E	F	G
WDS 180	01559	920	1600	200	245	655	240x230	M 6
WDS 200/225	01560	920	1600	200	330	655	290	M 10
WDS 250/315	01561	920	1600	200	450	655	390	M 10
WDS 355/400	01562	920	1600	155	535	620	480	M 10
WDS 450	01563	1400	2000	200	590	1020	530	M 12
WDS 500/560/630	01564	1400	2000	200	750	1020	650	M 12

SDS



Installation

Attach base to roof construction. Seal against roofing with surrounding lead collar. Screws, washers and seal between base and fan/hood base plate included in the delivery.

Pitched roof base SDS

For the placement of roof fans and ventilation hoods on pitched roofs with up to 45° inclination. Made of galvanised steel sheet, with sound and heat insulated 50 mm thick lining on the inside.

All SDS types are available upon request. Please specify the fan type or nominal size of the ventilation hood, roof inclination angle, brick type or, if applicable, the profile shape and height (for profile roofs) when ordering.

References	Page
All centrifugal roof fans do not have protection grilles on the inlet side. If the installation does not ensure protection against unintentional contact, the corresponding contact protection (grille type ASD-SGD or SG) must be attached.	279

Other accessories	Page
Speed controllers, controllers and switches	601 ff.

Mechanical accessories for your individual building projects.

The development and production of accessory components which are optimally matched to the corresponding fan series are part of the company philosophy of Helios.

Shutters, grilles, wall and roof outlets

These Helios components impress with appealing designs, practical handling and robustness.

564ff

Extract air, supply air, intake air elements and disc valves

The Helios range offers multiple design award-winning ventilation valves, extract air elements, attachment filter elements, disc valves for supply and extract air operation as well as inlet elements for the controlled supply of intake air.

576ff

Fire protection systems and shutter elements

Helios offers various components in all required classifications and for various installation situations for the prevention of fire propagation to adjacent floors and rooms in multi-floor buildings.

592ff

VK 200 – 900

RVK

EVK 200 – 710

EVK 630 – 710

Automatic

Overpressure shutters in flat design for the external closure of extract air openings.

- Made of plastic in light grey.
- Automatic function; opens and closes when fan is activated/ deactivated.
- Installation on building wall using screws (four concealed fastenings in the corners).
- Delivered in individual shipping box.
- Nominal sizes 630 and 710 are provided with a centre bar and nominal sizes 800 and 900 are provided with two intermediate bars to increase stability. Accordingly, this results in multiple blade sections.
- Maximum flow velocity: Extract air = 8 m/s.

Manually adjustable

For the closure of extract and supply air openings in external walls. Suitable for reversible axial fans (supply and extract air) as throughflow possible in both directions.

- Rattle-free and tight closing as blades over centre bar are closed by spring force.
- Manual operation using drawcord via pulley.
- Delivery incl. cord protection tube, pulley and holdback hooks.
- Frame, blades with axles and adjustment slider made of plastic in light grey.
- The shutter has one blade section up to NS 500. In case of larger dimensions (see “Custom sizes”), there are multiple blade sections to increase stability. Each section must be operated with a separate drawcord.
- Maximum flow velocity: Supply air = 6 m/s, extract air = 8 m/s.

Electrically adjustable for Ø 200 – 500 mm

External wall shutters for covering extract and supply air openings.

- Automatic function coupled with the fan control. Wired in such a way that the fan only starts up when the shutter is fully open.
- Fan and shutter controlled by on-site changeover switch. End switch in servomotor enables the fan circuit when fully open. Max. load 1 A (ind.). Auxiliary contactor required for higher load or three-phase current fans (contactor, Ref. no. 99611).
- In case of operation with speed controller, shutter control is required via an on-site relay.
- Delivered ready-for-connection with external cable (4 x 1.0 mm², approx. 1.5 m long). Connection according to wiring diagram no. 39 and 73.
- Waterproof interlocking casing in protection category IP45 made of plastic; including maintenance-free drive motor 230 V~, 50 Hz.
- Maximum flow velocity: Supply air = 6 m/s, extract air = 8 m/s.

Electrically adjustable for Ø 630 – 710 mm

External wall shutters for covering extract and supply air openings.

- Automatic function coupled with the fan control. Wired in such a way that the fan only starts up when the shutter is fully open.
- Fan and shutter controlled by on-site changeover switch. End switch in servomotor enables the fan circuit when fully open. Max. load 1 A (ind.). Auxiliary contactor required for higher load or three-phase current fans (contactor, Ref. no. 99611).
- In case of operation with speed controller, shutter control is required via an on-site relay.
- Delivered ready-for-connection with external cable (4 x 1.0 mm², approx. 1.5 m long). Connection according to wiring diagram no. 73.
- Waterproof interlocking casing in protection category IP45 made of plastic; including maintenance-free drive motor 230 V~, 50 Hz.
- Maximum flow velocity: Supply air = 6 m/s, extract air = 8 m/s.

Pressure losses

System resistances which are caused by individual components, such as e.g. shutters, must be taken into account for the fan design. The diagram below shows the resistance depending on the flow velocity.

Dimensions VK, RVK



Dim. in mm – see table

Dimensions EVK



Dim. in mm – see table

Dimensions EVK 630 – 710



Dim. in mm – see table

Performance curve

Pressure loss diagram



Accessories

Fitting F allows the installation of this shutter (up to NS 710) on round ducts. Selection and description see page 572.

Automatic Type	Ref. no.	Manually adjustable Type	Ref. no.	Electrically controlled Type	Ref. no.	Compatible with fan NS mm	Dimensions A mm	B mm	C mm	D mm	E mm
VK 200[1]	00758	**RVK 200**	00766	**EVK 200**	00774	180/200	240	240	28	193	167
VK 250	00759	**RVK 250**	00767	**EVK 250**	00775	225/250	290	290	28	243	217
VK 315	00760	**RVK 315**	00768	**EVK 315**	00776	280/315	340	340	28	293	267
VK 355	00761	**RVK 355**	00769	**EVK 355**	00777	355	390	390	28	343	317
VK 400	00762	**RVK 400**	00770	**EVK 400**	00778	400	440	440	28	393	367
VK 450	00763	**RVK 450**	00771	**EVK 450**	00779	450	490	490	30	443	417
VK 500	00764	**RVK 500**	00772	**EVK 500**	00780	500	540	540	30	493	467
VK 630	00836					560/630	686	690	40	520	630
				EVK 630	00781	560/630	685	690	40	671	590
VK 710	00838					710	785	785	40	771	685
				EVK 710	00784	710	785	790	40	771	690
VK 800	00839					800	876	885	40	862	785
VK 900	00841					900	1026	985	40	1012	885

Larger dimensions (VK and RVK) upon request, see also custom sizes.

[1] Description, design and dimensions of smaller shutters see following page.

VK 100, 125, 160

EVK 100, 150

VK duct

Custom sizes

Small automatic shutters made of plastic for Ø 100, 125 and 160 mm

Overpressure shutters for the external closure of air outlet openings.

- Compatible with small fan, extraction hood, tumble dryer outlets etc.
- Made of plastic.
- Attachment by conical plug-in connectors or dowels. Foam sealing strip included in delivery.
- Maximum flow velocity: Extract air = 8 m/s.

Product range

Type	Ref. no.	Col.	Open. Ø mm	Unit
VK 100	00757	White	100	1
VK 100 B	00765	Brown	100	1
VK 100 VE*	00885	White	100	24
VK 125	00857	White	120-125	1
VK 160	00892	White	150/160	1

* Economical bulk pack.

Small electrical shutters

For covering supply and extract air openings in interior rooms of any kind.

- Modern design, elegant even in sophisticatedly designed rooms. The view into dirty openings remains concealed, even when open.
- Maximum flow velocity: Supply air = 6 m/s
- Silent function with switching delay of approx. 60 s.
- Control via on/off switch, fan preferably connected in parallel.

Product range

Type	Ref. no.	Open. Ø mm	Weight KG
EVK 100	00453	100	0.26
EVK 150	00251	150	0.44

Break-resistant plastic, alpine white.
Wiring diagram no. 479.
Voltage/Frequency 230 V~, 50/60 Hz.
Power consumption approx. 6 W.

Rectangular shutters

In horizontal format for the closure of air outlet openings in external walls.

- Dimensionally matched to the Helios rectangular duct fans.
- Automatic function.
- Made of UV-resistant, break-proof plastic.
- Attachment by dowels.
- Maximum flow velocity: Extract air = 8 m/s.

Product range

Type	Ref. no.	Rect. duct fan NS cm
VK 30/15	00735	30 x 15
VK 40/20	00874	40 x 20
VK 50/25	00875	50 x 25
VK 50/30	00876	50 x 30
VK 60/30	00877	60 x 30
VK 60/35	00878	60 x 35
VK 70/40	00879	70 x 40
VK 80/50	00880	80 x 50
VK 100/50	00881	100 x 50

Custom sizes

The shutter types
– automatic (overpressure)
– manually adjustable
are also available in property-related custom sizes.

- The dimensions are optional within a grid gradation of 50 mm. All rectangular vertical and horizontal formats as well as all square formats can be delivered.
  Production is made to order, exchange or return is excluded. Therefore, the dimensions must be precisely defined.
- A vertical intermediate bar is used from a blade length of approx. 40 cm and a horizontal bar is used for vertical formats from 100 cm upwards to increase stability.
  Large shutter surfaces are delivered in segments, which must be mounted on a frame, for reasons of stability and shipping.
- The maximum flow velocity for the standard design is 8 m/s.
- All parts (frame, blades and their storage) made of high-quality plastic in light grey.

Dimensions VK 100, 125, 160



Dim. in mm – see table

Type	Dimensions in mm			
	A	B	Ø C	D
VK 100	140	15	98	91
VK 125	160	20	120-125	110
VK 160	190	25	145	131

Dimensions EVK 100, 150



Dim. in mm – see table

Type	Dimensions in mm			
	□ A	B	C	Ø D
EVK 100	140	58	38.5	97
EVK 150	190	62	43	145

Dimensions VK duct



Dim. in mm – see table

Type	Dimensions in mm			
	A	B	H	Weight kg
VK 30/15	381	395	235	1.0
VK 40/20	473	485	285	1.3
VK 50/25	574	585	335	2.0
VK 50/30	574	585	385	2.2
VK 60/30	674	685	385	2.4
VK 60/35	674	685	435	2.6
VK 70/40	774	785	485	3.1
VK 80/50	864	876	585	4.4
VK 100/50	1162	1176	585	5.5

Reference

Operating temperature
EVK 100, EVK 150: 0 to +40 °C,
for all other plastic shutters:
–30 to +60 °C.

Reference

The number of blades depends on the dimensions of the corresponding shutter.

RVE

RSK



RVS

RVM

Airtight duct insertion shutter RVE

Ideal for retrofitting through simple insertion into ventilation duct.

- Plastic ring with circumferential double lip seal and close-fitting rubber membrane which opens in case of underpressure or overpressure.
- Delivered with two membranes for flow velocities up to approx. 3.5 m/s or up to approx. 6 m/s.
- Place axis of rotation upright for horizontal flow.
- Temperature operating range –20 to +90 °C.

Duct shutters RSK

Automatic shutters for insertion in the duct system.

- Prevents the outflow of warm air and the entry of unwanted draughts when fan is deactivated.
- Automatic function in underpressure and overpressure operation (rotatable installation position) through spring locking. Place axis of rotation upright for horizontal flow. In case of vertical flow, only functions in ascending air flow. Use types RVS, RVM to meet additional requirements and in case of difficult circumstances.

Automatic duct shutter with spring return

Can be installed horizontally in any direction and vertically with throughflow from bottom to top. Shutter opening in flow direction; automatic function through fan operation.
Spring mechanism outside of air flow. Locking force adjustable corresponding to fan power and installation position. Shutters and casing made of galvanised steel sheet, shutters made of aluminium for NS 225 – 560 mm. Double-sided flanges. Holes acc. to DIN 24155, p. 2.

Ambient temperature –30 to +100 °C

Motorised duct shutter[1)]

Like RVS, but can be installed horizontally and vertically in any position and with mounted spring return motor (outside of air flow). Electr. control parallel with fan Ventilator; cable length 0.9 m, normally closed.

Ambient temperature	–20 to +50 °C
Protection category	IP54
Voltage/frequency	230 V AC, 50/60 Hz
Power consumption	
▢ up to Ø 560	14 W
▢ from Ø 630 upwards	6.5 W
Shutter opening time, approx.	75 sec.
Wiring diagram no.	380.1

Type	Ref. no.	Dimensions in mm Ø D 1	Ø D 2	L	Wgt. kg
RVE 80	02584	75	83	20	0.1
RVE 100	02587	95	103	20	0.1
RVE 125	02588	120	128	20	0.1
RVE 160	02589	155	163	20	0.2
RVE 200	02618	195	203	20	0.2

Type	Ref. no.	Dimensions in mm Ø D	L	S	Wgt. kg
RSKK 100*	05106	97	57	2.0	0.1
RSKK 125*	05107	121	57	2.0	0.1
RSK 150	05073	149	100	1.25	0.5
RSK 160	05669	159	100	1.25	0.5
RSK 180	05662	170	70	0.5	0.3
RSK 200	05074	199	140	1.25	1.0
RSK 250	05673	248.5	140	1.25	1.2
RSK 315	05674	312.5	140	1.25	1.5
RSK 355	05650	352	160	0.75	1.3
RSK 400	05651	397	160	0.75	1.4

* made of plastic (temp. max. +70 °C).
Other types made of galvanised steel sheet, aluminium shutters, stainless steel spring.

Automatic		Motorised[1)]		Dimensions in mm							Weight
Type	Ref. no.	**Type**	Ref. no.	Ø D i.L.	A	B	C	E	L	Ø LK	aprx. kg
RVS 225	02591	**RVM 225**	02575	225	–	95	130	115	300	259	3.3
RVS 250	02592	**RVM 250**	02576	250	–	95	130	115	300	286	3.7
RVS 280	02593	**RVM 280**	02577	280	–	95	130	115	300	322	4.2
RVS 315	02594	**RVM 315**	02578	315	–	95	130	115	300	356	4.6
RVS 355	02595	**RVM 355**	02579	355	–	95	130	115	300	395	5.3
RVS 400	02596	**RVM 400**	02580	400	–	95	130	115	330	438	7.5
RVS 450	02597	**RVM 450**	02581	454	10	95	130	115	330	487	10.7
RVS 500	02598	**RVM 500**	02582	504	40	95	130	115	330	541	12.0
RVS 560	02599	**RVM 560**	02583	560	65	95	130	115	330	605	16.4
RVS 630	02600	**RVM 630**	02609	630	115	150	225	200	400	674	21.0
RVS 710	02601	**RVM 710**	02610	710	155	150	225	200	400	751	28.0
RVS 800	02602	**RVM 800**	02614	800	200	150	225	210	420	837	37.8
RVS 900	02603	**RVM 900**	02615	900	250	150	225	210	420	934	42.3
RVS 1000	02604	**RVM 1000***	02616	1000	300	150	225	210	420	1043	47.8

1) Types RVM not for use in explosive atmospheres. * RVM 1000 only for horizontal throughflow.

Dimensions RVE



Dim. in mm – see table

Dimensions RSK



Dim. in mm – see table

Dimensions RVS



Dim. in mm – see table

Dimensions RVM



Dim. in mm – see table

Pressure loss RVE



Pressure loss RSK



Pressure loss RVS



Pressure loss RVM



RVMD

RAG

WSG

Motorised duct shutter tight RVMD[2)]
Like RVS, but can be installed horizontally and vertically in any position and with mounted spring return motor (outside of air flow). Electr. control parallel with fan; cable length 0,9 m, normally closed. Corresponds to tightness class 4 to DIN EN 1751.

Ambient temperature	−32 to +55 °C
Protection category	IP54
Voltage/Frequency	24 V AC, 50/60 Hz
	24 V DC
	230 V AC, 50/60 Hz
Power consumption	
☐ 24 VDC/AC	2.7 W
☐ 230 VAC	2.9 W
Shutter opening time, approx.	60 sec.
Wiring diagram no.	1484

Type	Ref. no.	Dimensions in mm Ø A	B	C	D	E
RVMD 225/24V	40245	225	137	79	158	31
RVMD 250/24V	40246	250	137	79	158	44
RVMD 315/24V	40247	315	137	79	158	76
RVMD 355/24V	40248	355	137	126	251	50
RVMD 400/24V	40249	400	137	126	251	72
RVMD 450/24V	40250	450	137	146	291	78
RVMD 225/230V	40251	225	137	79	158	31
RVMD 250/230V	40252	250	137	79	158	44
RVMD 315/230V	40253	315	137	79	158	76
RVMD 355/230V	40254	355	137	126	251	50
RVMD 400/230V	40255	400	137	126	251	72
RVMD 450/230V	40256	450	137	146	291	78

[2)] Types RVMD not for use in explosive atmospheres.

Rain-repellent grille RAG
Plastic design for placement on air inlet and outlet openings in facades.
- ☐ Elegant finish in light grey colour tone, corrosion-resistant and weather-resistant, prevents the ingress of rain, snow and small animals.
- ☐ Frame with fixed blades made of UV-resistant, break-resistant plastic. Set-back mesh grille made of galvanised and plastic-coated steel. Mesh width 8 mm.
- ☐ Simple (can also be surface-mounted or integrated in facade cladding) installation with dowels. Can also be placed on round duct using fitting F (accessories, see product page).

Type	Ref. no.	Dimensions in mm ☐B	C	D	E	Wgt. kg
RAG 200	00750	240	28	193	167	0.35
up to NS 180/200 mm						
RAG 250	00751	290	28	243	217	0.45
up to NS 225/250 mm						
RAG 315	00752	340	28	293	267	0.60
up to NS 280/315 mm						
RAG 355	00753	390	28	343	317	0.75
up to NS 355 mm						
RAG 400	00754	440	28	393	367	1.00
up to NS 400 mm						
RAG 450	00755	490	30	443	417	1.35
up to NS 450 mm						
RAG 500	00756	540	30	493	467	1.60
up to NS 500 mm						

Weather protection grille WSG
In square or rectangular horizontal format; for attachment on air inlet and outlet openings in facades.
- ☐ Architecturally attractive closing against rain, snow, animals and protection against contact and ingress. Can be attached on square, rectangular and round duct outlets.
- ☐ Robust design made of extruded aluminium profile, natural colour anodised.
- ☐ Installation: To be recessed into masonry or facade cladding.
- ☐ Fixed blades and set-back mesh grille made of galvanised steel wire.
  Mesh width: 16 mm.

The rectangular types
are dimensionally matched to the Helios rectangular duct fans and thus can be inserted into the cross-section of the ventilation duct.

Type	Ref. no.	Compatible with fan NS	openings mm i.L.	Dimensions in mm ☐ b	☐ B	Weight kg
WSG 200	00117	180/200	☐ 200	195	271	0.8
WSG 250	00118	225/250	☐ 250	245	321	1.0
WSG 315	00119	280/315	☐ 315	310	386	1.5
WSG 355	00120	355	☐ 355	350	426	2.0
WSG 400	00121	400	☐ 400	395	471	2.5
WSG 450	00122	450	☐ 450	445	521	3.0
WSG 500	00123	500	☐ 500	495	571	3.5
WSG 630	00124	600/630	☐ 630	625	701	4.0
WSG 710	00125	710	☐ 710	705	781	4.5

Type	Ref. no.	Compatible with rect. duct NS i.L. mm	Dimensions in mm b	B	h	H	Weight kg
WSG 30/15	00108	300 x 150	296	370	146	220	0.9
WSG 40/20	00109	400 x 200	396	470	196	270	1.2
WSG 50/25	00110	500 x 250	496	570	246	320	1.9
WSG 50/30	00111	500 x 300	496	570	296	370	2.0
WSG 60/30	00112	600 x 300	596	670	296	370	2.2
WSG 60/35	00113	600 x 350	596	670	346	420	2.4
WSG 70/40	00114	700 x 400	696	770	396	470	2.9
WSG 80/50	00115	800 x 500	796	870	496	570	4.0
WSG 100/50	00116	1000 x 500	996	1070	496	570	5.0

Dimensions RVMD



Dim. in mm – see table

Dimensions RAG



Dim. in mm – see table

Pressure loss RVMD



Pressure loss RAG



Dimensions WSG



Dim. in mm – see table

Pressure loss WSG



LGR

Ventilation grille LGR
Rectangular, with adjustable blades.

- For covering rectangular air inlet and outlet openings, preferably in flat rectangular ducts.
- Centrally adjustable blades allow the individual modification of the passage area and thus the alignment and adjustment of the volume flow.
- Corrosion-resistant design made of galvanised steel and white stove enamelling.
- Delivery incl. installation frame which provides universal installation possibilities. In case of installation in thin-walled ducts, attachment with four screws.

Product range

Type	Ref. no.	Compatible with rect. duct opening mm i.L.
LGR 250/150	00927	228 x 128
LGR 450/150	00928	428 x 128
LGR 350/230	00929	328 x 208
LGR 450/230	00930	428 x 208

Dimensions LGR



Dim. in mm – see table

Type	Free cross-section cm²	Dim. in mm B	b	Wgt. kg
LGR 250/150	160	250	150	0.6
LGR 450/150	320	450	150	1.0
LGR 350/230	430	350	230	1.2
LGR 450/230	575	450	230	1.5

QVK

Ventilation grille QVK
Square, with adjustable blades.

- Can be used to cover supply and extract air openings with square cross-section.
- Centrally adjustable blades allow the individual modification of the passage area and thus the alignment and adjustment of the volume flow.
- Corrosion-resistant design made of galvanised steel and white stove enamelling.
- Delivery incl. plaster frame. Therefore suitable for flush-mounted wall installation and screw attachment without a frame.

Product range

Type	Ref. no.	Applicable up to fan NS mm
QVK 200	00791	200
QVK 250	00792	250
QVK 315	00793	315
QVK 355	00794	355
QVK 400	00795	400

Dimensions QVK



Dim. in mm – see table

Type	Free cross-section cm²	Dim. in mm B	Wgt. kg
QVK 200	320	□ 250	0.8
QVK 250	490	□ 300	1.0
QVK 315	680	□ 350	1.3
QVK 355	920	□ 400	1.8
QVK 400	1190	□ 450	3.2

G 200 – 500

Ventilation grille G fixed
For attachment to ventilation openings in ceilings and walls.

- Made of high-quality, UV-resistant and break-resistant plastic.
- Flat design. Simple attachment with dowels.
- Sight screening with appropriate installation.

Product range

Type	Ref. no.	Colour	Compatible w/ fan NS mm
G 200	00255	White	200
G 250	00256	White	250/280
G 315	00798	White	315
G 355	00799	White	355
G 400	00800	White	400
G 500	00801	Li. grey	450/500

Dimensions G 200 and 250



Dim. in mm – see table

Dimensions G 315 – 500



Dim. in mm – see table

Type	Dimensions in mm □ A	B	C	D	Ø	Wgt. kg
G 200	287	210	210	39	5.2	0.7
G 250	337	240	240	39	5.2	0.9
G 315	340	300	300	22	5.2	0.4
G 355	390	350	350	22	5.2	0.4
G 400	440	400	400	22	5.2	0.6
G 500	540	490	465	30	5.2	1.8

G 100, 160

Ventilation grille G fixed
For covering and insertion in round ventilation openings.

- Made of high-quality, break-resistant plastic. Corrosion-resistant and thus ideally suitable for external and internal installation.
- Simple installation in round ducts due to rear conical plug-in connectors. Foam strip included in delivery for press-fit attachment. Fixed installation possible with four holes in the corners. When the grille is permanently mounted, the grille insert can be easily removed and replaced for cleaning.

Product range

Type	Ref. no.	NW in mm	Colour	VE
G 100	00796	90/100	White	1
G 100 B	00782	90/100	Brown	1
G 100 VE*	00828	90/100	White	12
G 160	00893	150/160	White	1

* Cost-effective bulk pack.

Dimensions G 100 and 160



Dim. in mm – see table

Type	Dimensions in mm □ b	□ B	C	S	Ø D	Wgt. kg
G 100	90	140	28	15	100	0.8
G 160	130	190	40	24	150	0.3

FGR

Round facade grille

For the flush coverage of ventilation openings on the facade. Applicable for round intake and exhaust air ducts. Two holes in the duct connector enable secure fastening with screws to be provided by the customer. Stable aluminium construction. Fixed blades with stainless steel wire mesh grille behind them, mesh size 10 x 10 mm.

Product range

Type	Ref. no.	Weight in grammes
FGR 80	40195	100
FGR 100	40196	150
FGR 125	40197	180
FGR 160	40198	300
FGR 200	40199	400
FGR 250	40181	900
FGR 315	40182	1600

Type	Dimensions in mm			
	A	B	C	D
FGR 80	98	81	12	4
FGR 100	124	99	17	3
FGR 125	151	125	17	3
FGR 160	182	160	14	4
FGR 200	224	199	16	4
FGR 250	275	250	15	5
FGR 315	345	314	14	7

LG

Ventilation grille LG

With diagonally positioned blades for covering round ventilation openings Ø 80, 100, 125 and 160 mm.

- High-quality and attractively designed covering.
- Diagonally positioned blades act as a sight screen (with appropriate installation).
- Made of corrosion-resistant die-cast aluminium, powder-coated, colour: white. LGK 80 made of high-quality, break-resistant plastic, colour: white.
- Simple installation in ducts due to rear plug-in connectors with clamp springs and sealing strip.

Product range

Type	Ref. no.	Weight in grammes
LGK 80*	00259	120
LGM 100	00254	300
LGM 125	00258	450
LGM 160	00261	750

* Made of plastic.

Type	Dimensions in mm			
	A	B	C	D
LGK 80	135	105	14	80
LGM 100	155	127	16	95
LGM 125	195	150	25	120
LGM 160	252	190	25	155

LTG

Door ventilation grille LTG

Fixed overflow grille for installation in door leaves.

- Pleasant and unobtrusive design. Made of high-quality break-resistant plastic, in light grey or brown.
- With wide circumferential edge and diagonally positioned blades, sight screening. Only 3 mm high.
- Two-part, telescopic. Installation: Insert both sides of each element into the recess and tighten against each other using the screws supplied.

Product range

Type	Ref. no.	Colour
LTGW	00246	White
LTGB	00247	Brown

Dimensions FGR



Dim. in mm – see table

Dimensions LG



Dim. in mm – see table

Dimensions LTG



Dim. in mm Door leaf depth min. 30 mm

Pressure loss FGR



Pressure loss LG



Pressure loss LTG



FDH

Roof hood DH with roof pan tiles FDP, UDP and pipe joints STV

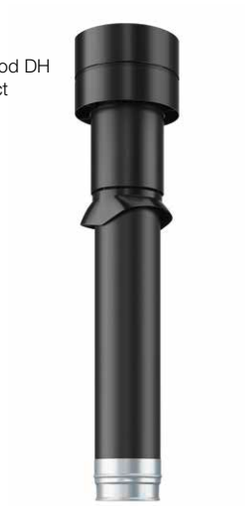

Pipe joint STV

Flat roof pan tile FDP

Dimensions FDH



Dim. in mm

Dimensions DH + UDP



Dim. in mm – see table

Dimensions DH + FDP



Dim. in mm – see table

Pressure loss FDH



Pressure loss DH



Flat roof hood FDH

For the connection of ventilation ducts, up to NW 160, above the roof. Made of weather-resistant plastic with wide adhesive edge. cold and heat-resistant up to +200 °C. Removable hood head for inserting the supplied spacer band or insulation to be provided by the customer. The insulation prevents condensation.

FDH	Ref. no. 01477

Roof hood DH

The optimal ventilation solution without static pressure loss. Made of weather-resistant polypropylene, with driving rain-resistant, removable outlet hood. Air flow temperatur range from -20° to +60°C. Connection to ventilation duct using pipe joint STV (accessories) which prevents the outlet of condensate at the connection point. The following roof pan tiles should be used for the installation of the roof hood:

- **Universal roof pan tile UDP**
  Compatible with almost all tile types, in black or brick red. For roofs with slope angles of 25–45°.
- **Flat roof pan tile FDP**
  Made of aluminium for flat roofs.

Product range: Order hoods, pan tiles, pipe joints separately.

ND mm	Roof hood*		Universal roof pan tile *		Roof pan tile for flat roof, alum.		Pipe joint	
Main pipe	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
100	**DH 100 R**	02014	**UDP 100 R**	02020	**FDP 100**	02024	**STV 100**	02026
	DH 100 S	02015	**UDP 100 S**	02021				
125	**DH 125 R**	02016	**UDP 125 R**	02020	**FDP 125**	02013	**STV 125**	02027
	DH 125 S	02017	**UDP 125 S**	02021				
160	**DH 160 R**	02018	**UDP 160 R**	02022	**FDP 160**	02025	**STV 160**	02028
	DH 160 S	02019	**UDP 160 S**	02023				

* R = brick red, S = black.

Dimensions: Roof hood DH with roof pan tile UDP or FDP.

ND mm	Dimensions in mm					
Main pipe	A	Ø B	C	D	Ø E	F
100	114	173	313	780	110	225
125	140	206.5	389	1020	131	255
160	180	264	379	1111	166	345

DDF

SDH

TMK

Dimensions DDF



Dimensions SDH



Dimensions TMK



Performance curves Pressure loss DDF for extract air operation

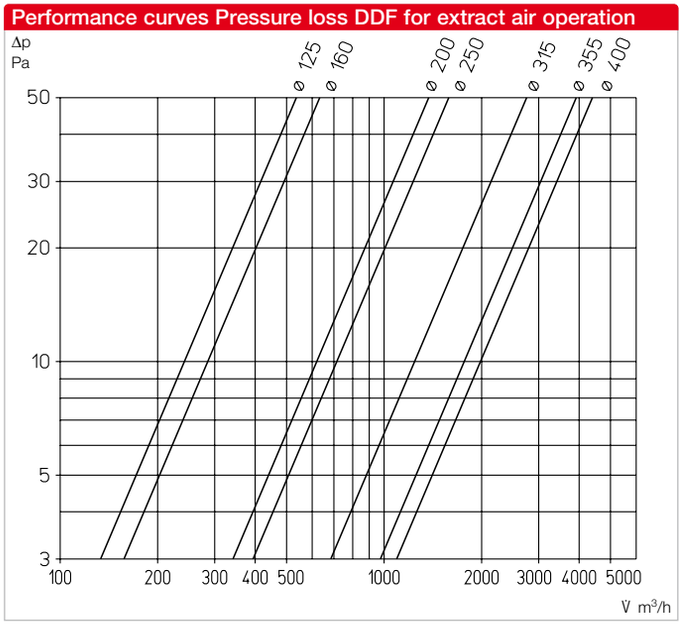

Universal roof outlets

For air inlets/outlets or for the connection of ventilation ducts Ø 125–400 mm. Hoods available in brick red or slate grey.
Can be adapted to all tile types and shapes on gable roofs due to the large, circumferential lead sheet flashing. Support plate for attachment and remaining parts made of galvanised steel sheet.
Max. slope angle of 45°.

Gable roof hood SDH

Universal design suitable for almost all roof tile types. Can be adapted to different shapes due to the lead sheet edge. Hood and plate made of galvanised steel sheet.
Flexible plastic bellows with step connectors for the connection of all duct Ø from 70 – 115 mm.
Duct attachment with supplied hose clamp.

SDH	Ref. no. 01476

Telescopic wall kit

For supply and extract air ducting through walls. Two telescopic plastic ducts can be adjusted to the wall thickness.
Optional external cover with automatic shutter or ventilation grille.
Room-side connectors for connecting the pipe.
Type TMK 125/150 with step connectors Ø 125, 150 and 160 mm.
Type TMK 100 for duct Ø 100 mm.

Product range and dim.

Type	TMK 100	TMK 125/150
Ref. no.	00844	00845
Dim. A mm	140 □	190 □
B max.	500	500
Ø D	100	125/150/160
Ø E	108.5	155

Product range and dimensions DDF

Type [1]	Ref. no.	Type [2]	Ref. no.	Dimensions in mm A	B	C	Ø D	E	F	G	Weight kg
DDF 125	01964	**DDF 125 G**	01848	165	200	328	125	110	500	390	4
DDF 160	01965	**DDF 160 G**	01849	175	248	386	160	110	500	390	4
DDF 200	01966	**DDF 200 G**	01850	210	333	495	200	110	600	600	8
DDF 250	01967	**DDF 250 G**	01851	210	333	495	250	110	600	600	8
DDF 315	01968	**DDF 315 G**	01852	220	420	666	315	110	600	600	9
DDF 355	01969	**DDF 355 G**	01853	360	550	900	355	215	900	750	17
DDF 400	01970	**DDF 400 G**	01854	360	550	900	400	215	900	750	17

[1] Hood painted brick red (RAL 8012). [2] Hood painted slate grey (RAL 7024).

TS

T-pieces
made of steel sheet, galvanised.

Type	Ref. no.	Nominal Ø mm
TS 100	01479	100
TS 125	05720	125
TS 160	05805	160

RVB

Duct connector
made of steel sheet, galvanised.

Type	Ref. no.	Nominal Ø mm
RVB 80	05993	80
RVB 100	05994	100
RVB 125	05995	125
RVB 160	05987	160
RVB 200	05997	200
RVB 250	05998	250
RVB 315	05999	315
RVB 355	05991	355
RVB 400	05992	400

RZ

Duct reductions
made of galvanised steel sheet or plastic*.

Type	Ref. no.	Nominal Ø mm	Reduced Ø mm
RZ 100/80*	05223	100	80
RZ 125/100*	05222	125	100
RZ 160/125	05729	160	125
RZ 160/150*	07684	160	150
RZ 200/160	05710	200	160

SCH

Hose clips
Metal band with turnbuckle. Delivered as a packaging unit with 10 pcs.

Type	Ref. no.	Nom. Ø mm
SCH 80/100	05722	80 – 115
SCH 125/160	05723	115 – 165
SCH 200	05724	165 – 215
SCH 250	05725	215 – 265
SCH 315/355	05727	265 – 375
SCH 400	05728	375 – 425

Helioflex ALF

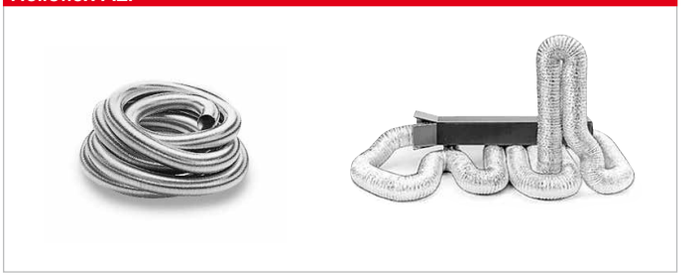

Fully flexible ventilation duct Universally applicable for various industrial, commercial and residential building applications (e.g. for general air and air-conditioning technology, extract air ducts from extraction hoods, tumble dryers etc.).

Special features
- Eliminates storage, shipping and volume problems.
- One box approx. 60 cm in length contains 10 rm duct.
- Optimal in handling and processing.
- Smallest poss. bending radius.
- Superelastic, optionally rebendable, no material fatigue and no leakage.
- Self-extinguishing in case of fire.

Design
- Two-layer polyester film, aluminium-coated.
- Integrated spring steel spiral for reinforcement.
- No toxic gas release in case of fire.
- Operating temp. from –20 to +120 °C.
- Max. operating pressure: 2500 Pa
- Max. permissible flow velocity: 30 m/s.

Type	Ref. no.	Nom. Ø mm	Internal Ø mm	Weight for 10 m	Shipping unit
ALF 80	05711	80	80	1.2	10 m
ALF 100	05712	100	102	1.4	10 m
ALF 125	05713	125	127	1.9	10 m
ALF 160	05757	160	160	2.5	10 m
ALF 200	05715	200	203	4.8	10 m
ALF 250	05716	250	254	5.3	10 m
ALF 315	05717	315	315	9.3	10 m
ALF 355	05758	355	356	9.7	10 m
ALF 400	05759	400	406	11.2	10 m

Fitting F



Fitting F
For square shutters for transition to round.

- Application: This can be used for attaching shutters in series VK, RVK, EVK and RAG directly to round ducts or fan connectors (series HQ/HW).
- Installation: The four holes in the corners correspond to the attachment points on the shutters. The round connector can be placed on the fan casing and attached using self-tapping screws.
- Material: Galvanised steel sheet.

Product range

Type	Ref. no.	Shutter NS cm	Dim. in mm □ A	B	ØD.i.L.
F 200	00804	20	240	55	210
F 250	00805	25	290	55	259
F 315	00807	30	340	55	324
F 355	00808	35	390	55	364
F 400	00809	40	440	55	409
F 450	00810	45	490	55	460
F 500	00811	50	540	55	510
F 560/630	00257	63	685	55	570
F 630[1]	00813	63	685	55	640
F 630[2]	00826	63	685	55	634
F 710[1]	00824	71	785	55	717

[1] For Type HQ. [2] For Type HW.

AS

Connectors AS
With square flange plate (102 x 102 mm) and round connector (50 mm long), made of plastic. For attaching ducts (ND 100) on flat surfaces.

AS 100	Ref. no. 05224

SVE















The innovative SVE elements solve two tasks cost-effectively:

- **Volume flow adjustment and optimised distribution in central ventilation system duct networks.**
- **Sound level reduction through the absorption of flow and fan noises. In order to increase sound level reduction, multiple elements can be connected in series. Two elements cause a doubling of the insertion loss.**

Performance data and insertion loss

The diagrams provide an overview of air volumes and resistances with corresponding numbers of openings. The red lines and dB(A) values document the intrinsic element noise (L_{WA}). The sound power values are available in the installation and operating instructions above the frequency and as total levels (intrinsic noise of SVE elements). The values in the table specify the insertion loss D_e above the frequency.

Material

- Flame-resistant and mould-resistant foam.
- Meets the requirements of emission class M1.
- No noxious fume and toxic gas release in case of fire.
- Meets fire class B2 according to DIN 4102-1 and fire class D according to DIN EN 13501-1.
- Applicable from -40 to +110 °C.

Advantages

- Cost-effective solution for preventing noise transmission to ventilation ducts or pipes.
- Simple installation through insertion into the duct system.
- Simple adjustment thanks to pre-punched openings.
- Minimisation of system construction costs through the use of cost-effective duct systems.
- Can be used with disc valves of any kind.
- Easy to clean with vacuum cleaner.

Delivery

Each element separately in polybag.

Installation

Insert SVE into the duct and prefix the disc valve or extract air element as a wall closure. Set the desired volume flow pursuant to the diagrams above by removing the elliptical cut-outs.

Order data						Insertion loss D_e dB at Hz						
Type	Ref. no.	for NW (mm)	Thick. in mm	Weight in g	Openings	125	250	500	1000	2000	4000	8000
SVE 80	08309	80	50	46	0*	9.0	5.0	11.5	14.5	18.0	20.0	24.0
					1	4.5	3.5	7.5	11.5	10.5	17.5	21.0
					3	4.5	2.5	5.0	8.0	9.5	13.0	15,
SVE 100	08310	100	50	70	1	7.0	4.0	9.5	12.5	16.0	17.5	22.0
					3	3.5	2.5	5.5	8.5	8.5	14.5	19.0
					5	2.5	1.5	3.5	6.0	6.5	12.0	16,
SVE 125	08311	125	50	90	2	6.0	5.0	5.0	12.0	12.5	19.0	21.0
					5	2.0	2.5	3.0	8.5	8.0	13.5	19.0
					8	1.5	1.5	2.5	6.0	5.0	11.0	17.5
SVE 160	08312	160	50	160	1	7.0	4.0	9.5	12.5	16.0	17.5	22.0
					3	3.5	2.5	5.5	8.5	8.5	14.5	19.5
					5	2.5	1.5	3.5	6.0	6.0	12.0	16.5
SVE 200	08313	200	50	180	2	6.5	2.5	5.5	13.0	14.0	18.0	15.5
					5	3.0	1.5	2.5	9.5	8.5	14.0	14.5
					8	2.0	1.0	1.5	7.0	7.0	13.0	13.5
SVE 250	08314	250	75	400	0*	4.0	3.0	7.0	13.0	18.0	18.0	17.0
					5	2.0	2.0	5.0	9.0	13.0	15.0	15.0
					10	2.0	1.0	3.0	7.0	11.0	14.0	13,
SVE 315	08315	315	75	640	0*	5.0	3.0	6.0	12.0	15.0	16.0	18.0
					8	3.0	2.0	3.0	8.0	12.0	13.0	15.0
					14	1.0	1.0	2.0	7.0	8.0	10.0	13.0

* Minimum volume flow ensured by side recesses.

VKH

Dimensions VKH

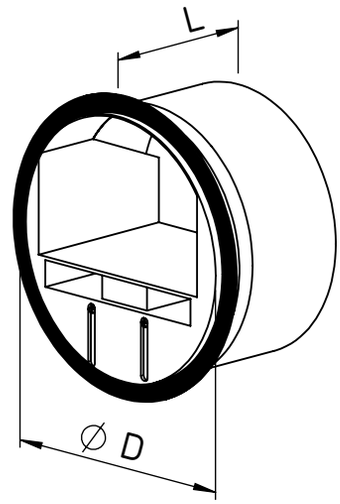

Dim. in mm – see table

The automatic volume flow stabilisers VKH are a convincing and cost-effective solution for ensuring a constant volume flow.

Application

Automatic volume flow stabiliser for insertion into ventilation ducts, duct fittings, in duct sections and in air inlets and outlets. The VKH stabilise the specified nominal output in a differential pressure range from approx. 50–250 Pa.

Advantages

- There is no need for calibration and adjustment on site; thus rapid commissioning of the ventilation system.
- Security in planning and facilitation in design.
- Guaranteed constant volume flow, even with low counterpressure.
- Simple volume flow adjustment by moving the adjustment unit. This does not affect the functionality of other system inlets and outlets.
- Automatic compensation for pressure fluctuations.
- Installation within seconds.
- Made of flame retardant plastic, class B1, DIN 4102-1.

Function

- In case of increasing pressure, the flow velocity will increase. The pressure against the control shutter reduces the opening cross-section and thus maintains the volume flow.
- In case of minimal static pressure, the control shutter will open to the full opening cross-section.
- The guide cylinder ensures the even movement of the shutter and thus controls the ratio of pressure to volume flow.

Installation

- Simple insertion into vertical or horizontal ducts with the matching standard diameter.
- The direction arrow for the flow direction must be observed.
- The precision fit and tightness to the inner duct circumference are ensured by the rubber seal ring.

Installation extract air Outlet = 1xD



Installation supply air Outlet = 3xD



Product range	Dimensions in mm			Volume flow range
Type	Ø duct ND	Ø D	L	m³/h
VKH 80	80	76	55	15-50
VKH 100	100	96	70	15-100
VKH 125	125	120	86	100-180
VKH 150-160	150 - 160	146	91	180-300
VKH 200	200	190	91	300-500
VKH 250	250	245	127	500-700

Selection table						
m³/h	**Ø 80**	**Ø 100**	**Ø 125**	**Ø 150 – 160**	**Ø 200**	**Ø 250**
15-50	**80/15-50**	**100/15-50**	**125/15-50**			
50-100		**100/50-100**	**125/50-100**	**150-160/50-100**		
100-180			**125/100-180**	**150-160/100-180**	**200/100-180**	
180-300				**150-160/180-300**	**200/180-300**	**250/180-300**
300-500					**200/300-500**	**250/300-500**
500-700						**250/500-700**

Design

Ø 80 mm duct ND

Ref. no.	Type	Volume flow*	Noise L_W in dB(A) at			
		m³/h	50 Pa	100 Pa	150 Pa	250 Pa
00001	**VKH 80/15-50**	15-50	25	29	32	35

* Tolerance range (50-250 Pa) for nominal volume flow +/- 10%.

Ø 100 mm duct ND

Ref. no.	Type	Volume flow*	Noise L_W in dB(A) at			
		m³/h	50 Pa	100 Pa	150 Pa	250 Pa
00002	**VKH 100/15-50**	15-50	25	29	32	35
00003	**VKH 100/50-100**	50-100	32	37	39	42

* Tolerance range (50-250 Pa) for nominal volume flow +/- 10%.

Performance curves VKH 80

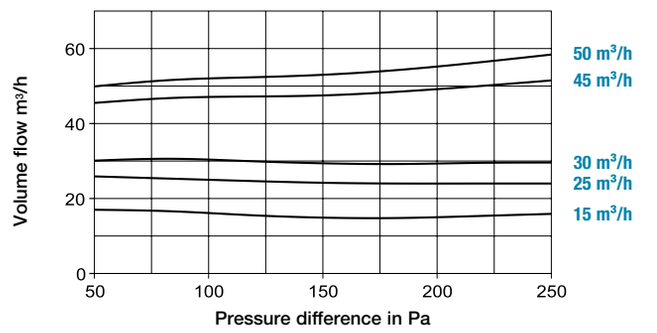

Performance curves VKH 100

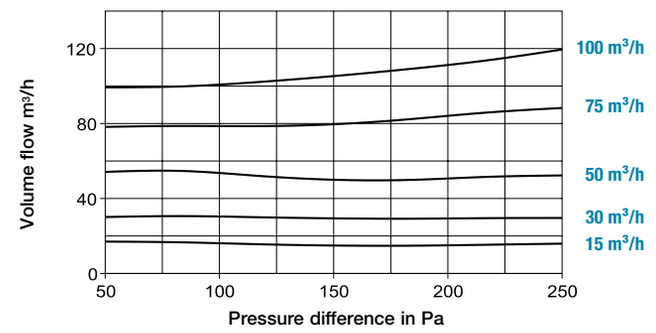

Ø 125 mm duct ND

Ref. no.	Type	Volume flow*	Noise L_W in dB(A) at			
		m³/h	50 Pa	100 Pa	150 Pa	250 Pa
00004	**VKH 125/15-50**	15-50	25	29	32	35
00005	**VKH 125/50-100**	50-100	32	37	39	42
00006	**VKH 125/100-180**	100-180	30	37	39	42

* Tolerance range (50-250 Pa) for nominal volume flow +/- 10%.

Ø 150-160 mm duct ND

Ref. no.	Type	Volume flow*	Noise L_W in dB(A) at			
		m³/h	50 Pa	100 Pa	150 Pa	250 Pa
00007	**VKH 150-160/50-100**	50-100	32	37	39	42
00008	**VKH 150-160/100-180**	100-180	30	37	39	42
00009	**VKH 150-160/180-300**	180-300	34	40	42	44

* Tolerance range (50-250 Pa) for nominal volume flow +/- 10%.

Performance curves VKH 125

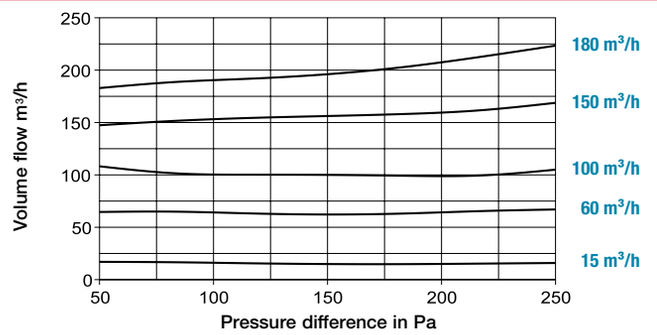

Performance curves VKH 150-160

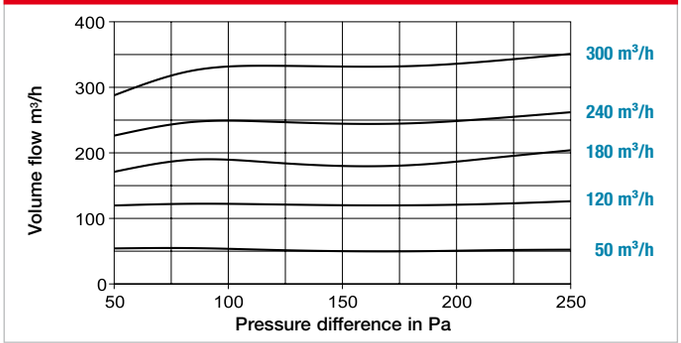

Ø 200 mm duct ND

Ref. no.	Type	Volume flow*	Noise L_W in dB(A) at			
		m³/h	50 Pa	100 Pa	150 Pa	250 Pa
00010	**VKH 200/100-180**	100-180	30	37	39	42
00011	**VKH 200/180-300**	180-300	34	40	42	44
00012	**VKH 200/300-500**	300-500	35	40	44	47

* Tolerance range (50-250 Pa) for nominal volume flow +/- 10%.

Ø 250 mm duct ND

Ref. no.	Type	Volume flow*	Noise L_W in dB(A) at			
		m³/h	50 Pa	100 Pa	150 Pa	250 Pa
00013	**VKH 250/180-300**	180-300	30	37	39	42
00014	**VKH 250/300-500**	300-500	35	40	44	47
00015	**VKH 250/500-700**	500-700	36	40	46	49

* Tolerance range (50-250 Pa) for nominal volume flow +/- 10%.

Performance curves VKH 200

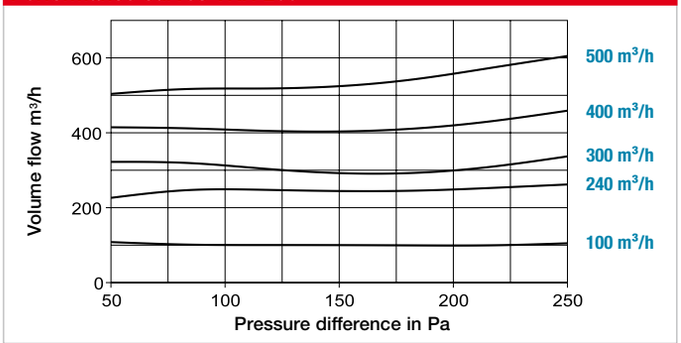

Performance curves VKH 250

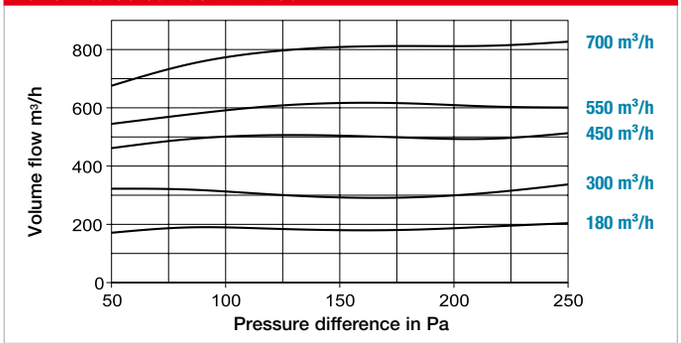

The ideal solution.

For any type of room and application.

Extract air elements

Along with the fan, extract air elements form the basis for needs-optimised functionality in central ventilation systems.

Equipped with varying air volume flows or time, motion and humidity controls, the innovative extract air elements AE from Helios meet these requirements perfectly.

577f

Filter elements, silencers

Attachment filter elements prevent grease and dust deposits on extract air elements and disc valves as well as inside the duct system.

Plug-in cross talk silencers reduce the noise level from the duct system and the cross talk from one residential unit to another.

580f

Ventilation valves, disc valves

The multiple award-winning design ventilation valves DLV integrate elegantly and unobtrusively in any living environment.

Conventional disc valves for extract and supply air operation are ideal for various industrial and commercial applications.

582f

Intake air elements

The planned, standard air inflow is best met with intake air elements. The number, dimensioning and positioning of the elements should be determined so that the required regulated volumes can flow in without draughts.

In accordance with DIN 1946-6, it should be noted that a room underpressure of approx. 8 Pa in comparison to outside is not exceeded for the dimensioning of intake air elements.

588f

Selection

Extract air elements only fulfil the required function optimally when they are matched to the task.
The following table should help you make the right choice of elements depending on the type of room and function.
There is a choice of elements with constant volume flow, with and without demand-controlled ventilation, with time, motion or humidity controls.

Bathroom		WC		Kitchen	
Type	Ref. no.	**Type**	Ref. no.	**Type**	Ref. no.
Volume flow stabilisation, self-regulating					
AE 45*	02031	**AE 30***	02030	**AE 75***	02033
Two volume flows, (demand-controlled and basic ventilation), volume flow stabilisation, self-regul.					
AE GB 20/75*	02036	**AE GB 15/30***	02035	**AE GB 45/120***	02038
With electr. time control and two volume flows (without volume flow stabilisation)					
AE GBE 30/60*	02047	**AE GBE 15/30***	02044	**AE GBE 45/120***	02048
With motion sensor, electr. time control and two volume flows					
		AE B 15/30*	02055	(without volume flow stabilisation)	
Humidity-controlled with variable, limited volume flow					
AE Hygro 10/45*	02049				
Humidity-controlled with electrically controlled demand-controlled ventilation level					
AE Hygro GBE 5/40/75*	02053			**AE Hygro GBE 10/45/120***	02054
With filter and volume adjustment					
AE FV 125	09478			**AE FV 125**	09478

* Volume flow in m^3/h

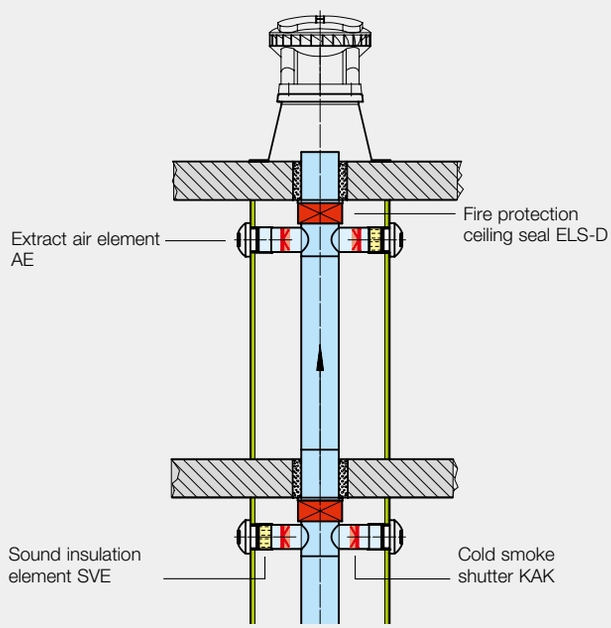

Acoustic data for extract air elements in series AE

The following noise data is relevant for the extract air elements:
- Sound power with permanent throughflow (L_W in dB (A))
- Sound insulation between duct system and room to be ventilated ($D_{n,e}$ in dB (A)).

This noise data is specified in the respective type table.
It has been measured according to standard EN 13141. The sound insulation value can be increased by using duct silencers “AESD” or “AESE” (accessories). These are positioned and easily inserted downstream of the extract air element.
Cross talk silencers (p. 581) are available for further noise reduction.

AE

Dimensions AE



Dim. in mm

Application

Extract air elements with self-regulating volume flow stabilisation are ideal components for the ventilation of kitchens, bathrooms and toilets for central ventilation systems in residential constructions.

Advantages

- Constant volume flow between 40 and 160 Pa.
- No need for system adjustment or calibration.
- Attractive design.
- High-quality construction in aerodynamic design with low noise levels.
- Cover and optimised height of the inlet ring prevent dirty marks.
- Easy cleaning without the risk of changes in air volume.

Design

Ready-to-install extract air element with mounting ring, made of white plastic, for insertion in ducts ND 125 mm. Lip seal on mounting ring to prevent air leakage from the side. Contamination of the surrounding environment is thereby minimised.

Function

Ensures constant volume flow in different pressure conditions between 40 and 160 Pa.

Delivery

Each element incl. mounting ring in separate polybag.

Accessories

- Silencer AESD for insertion downstream of the element (Ref. no. 02059).
- Attachment filter element VFE 70 (Ref. no. 02552).

Installation

Suitable for wall and ceiling installation. Attach mounting ring to duct or wall opening using screws and insert extract air element.
A straight duct section of at least 300 mm is required for uniform inflow and outflow.

Volume flow performance curve AE

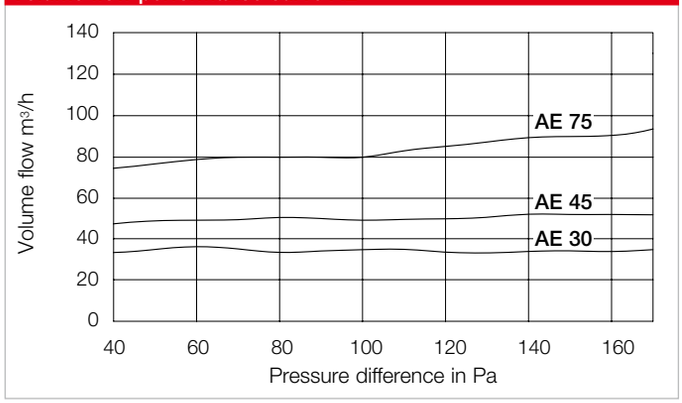

Order data		Sound power L_W in dB (A)			Sound insulation $D_{n,e}$ in dB (A)	
Type	Ref. no.	100 Pa	130 Pa	160 Pa	w/o AESD	w/ AESD
AE 30*	02030	30	33	36	60	64 [1]
AE 45*	02031	33	34	37	56	63 [1]
AE 75*	02033	35	36	39	57	64 [1]

[1] Equipped with silencer AESD (accessories). * Volume flows in m^3/h.

AE GB

AE GBE

Dimensions AE GB



Dim. in mm

Dimensions AE GBE



Dim. in mm

Description AE GB

Application
Extract air elements for two volume flows (demand-controlled and basic ventilation) with self-regulating volume flow stabilisation are ideal components for the ventilation of kitchens, bathrooms and toilets for central ventilation systems in residential buildings.

Function
The self-regulating volume flow limitation maintains the set nominal volume (between 40 and 160 Pa) (see performance diagram).
Two levels allow basic and demand-controlled ventilation.
Manual setting and resetting of the high volume flow via draw-cord.

Description AE GBE

Application
Extract air element with electric time control for two volume flows (demand-controlled and basic ventilation).
Ideal for the ventilation of kitchens, bathrooms and toilets for central ventilation systems in residential buildings.

Function
The basic volume flow is increased to the demand-controlled volume flow via an on-site switch. Resets to "basic ventilation" after 30 minutes, regardless of the position of the on-site switch.
230 V, AC 0.5/3 W, IPX1 ⧈

Common features AE GB and AE GBE

Advantages
- ▢ Two volume flows for basic and demand-controlled ventilation e.g. via on-site switch(at AE GBE).
- ▢ No need for system adjustment or calibration.
- ▢ Attractive design.
- ▢ High-quality construction in aerodynamic design with low noise levels.
- ▢ Cover and optimised height of the inlet ring prevent dirty marks.
- ▢ Easy cleaning without the risk of changes in air volume.

Design
Ready-to-install extract air element with mounting ring, made of white plastic, for insertion in ducts ND 125 mm. Lip seal on mounting ring to prevent air leakage from the side. Contamination of the surrounding environment is thereby minimised.

Installation
AE GB suitable for wall installation, AE GBE also for ceiling installation. Attach mounting ring or base body to duct or wall opening using screws, insert extract air element. A straight duct section of at least 300 mm is required for uniform inflow and outflow.

Delivery
Each element incl. mounting ring in separate polybag.

Accessories
- ▢ Silencer:
  AE GB: AESD, Ref. no. 02059.
  AE GBE: AESE, Ref. no. 02058.
- ▢ Attachment filter element
  AE GBE: VFE 90, Ref. no. 02553.
  Prevents grease and dust deposits on extract air elements and inside the duct system.

Upon request
AE FV 125
Extract air element with filter and volume setting, Ref. no. 09478.

Volume flow performance curves AE GB — Nominal volume flow(m³/h)

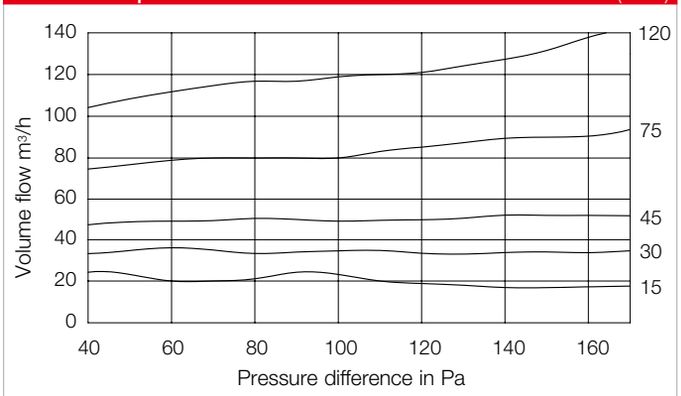

Volume flow performance curves AE GBE — Nom. volume flow (m³/h)

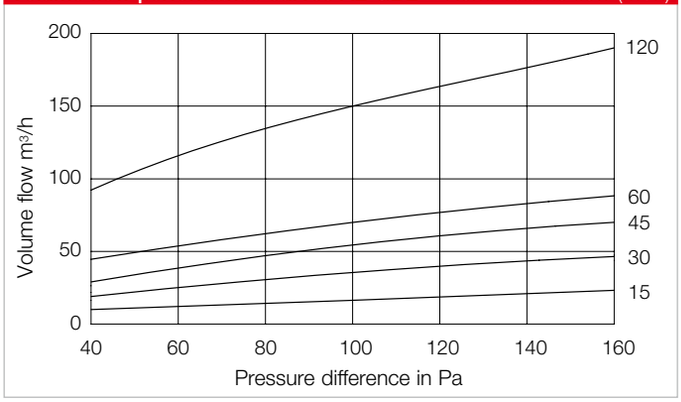

Order data		Sound power [3]			Sound insulation	
		L_W in dB (A)			$D_{n,e}$ in dB (A)	
Type	Ref. no.	100 Pa	130 Pa	160 Pa	w/o AESD	w/ AESD
AE GB 15/30*	02035	27	31	34	60	64 [1]
AE GB 20/75*	02036	27	30	33	57	64 [1]
AE GB 45/120*	02038	33	34	37	56	63 [1]

Order data		Sound power [3]			Sound insulation	
		L_W in dB (A)			$D_{n,e}$ in dB (A)	
Type	Ref. no.	100 Pa	130 Pa	160 Pa	w/o AESD	w/ AESD
AE GBE 15/30*	02044	30	33	36	60	64 [2]
AE GBE 30/60*	02047	27	30	33	57	64 [2]
AE GBE 45/120*	02048	29	32	35	57	62 [2]

[1] Equipped with silencer AESD (accessories). [2] Equipped with silencer AESE (accessories). [3] Values apply for basic ventilation level. * Volume flows in m³/h.

AE B – With motion sensor

AE Hygro – Humid. controlled

Dimensions AE B



Dim. in mm

Dimensions AE Hygro



Dim. in mm

Description AE B

Application
Extract air element with motion sensor and time control for two volume flows (demand-controlled and basic ventilation).
Ideal for the ventilation of toilets for central ventilation systems in residential buildings.

Function
The basic volume flow is increased to the demand-controlled volume flow after the response of the integrated motion sensor. Resets to "basic ventilation" after 30 minutes.
Electrical power supply through two batteries (on-site, type LR6/AA (1.5 V), service life approx. 18 months).

Description AE Hygro

Application
The hygrostatically controlled extract air elements allow a variable volume flow depending on the relative room humidity. They are ideal for controlling the extract air volume in bathrooms and kitchens for central ventilation systems in residential buildings.

Function
The volume flow is automatically controlled between the minimum and maximum limits depending on the relative room humidity. Realisation of the defined basic volume flow at Δp of 80 Pa depending on the relative room humidity. No electrical connection necessary.

Additional function AE Hygro GBE
The basic volume flow is increased to the demand-controlled volume flow via an on-site switch. Resets to "basic ventilation" after 30 minutes, regardless of the position of the on-site switch.
230 V, AC 0.5/3 W, IPX1 ⧈

Common features AE B and AE Hygro

Advantages
- No need for system adjustment or calibration.
- Attractive design.
- High-quality construction in aerodynamic design with low noise levels.
- Cover and optimised height of the inlet ring prevent dirty marks.
- Easy cleaning without the risk of changes in air volume.

Design
Ready-to-install extract air element with mounting ring, made of white plastic, for insertion in ducts ND 125 mm. Lip seal on mounting ring to prevent air leakage from the side. Contamination of the surrounding environment is thereby minimised.

Installation
AE GB suitable for wall installation, AE GBE also for ceiling installation. Attach mounting ring or base body to duct or wall opening using screws, insert extract air element. A straight duct section of at least 300 mm is required for uniform inflow and outflow.

Delivery
Each element incl. mounting ring in separate polybag.

Accessories
- Silencer AESE for insertion downstream of the element (Ref. no. 02058).
- Attachment filter element VFE 90 for insertion upstream of the element (Ref. no. 02553).

Volume flow performance curve AE B

Nominal volume flow (m³/h)

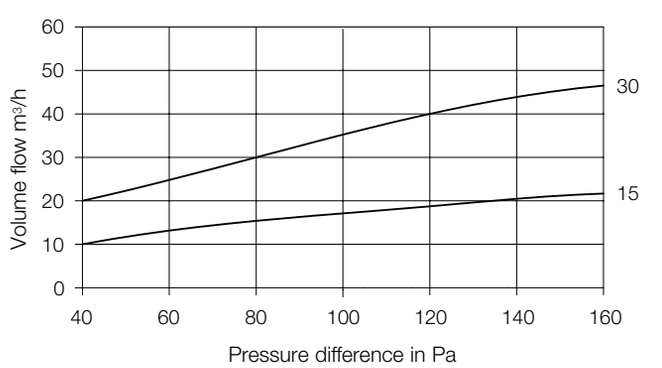

Operating range AE Hygro

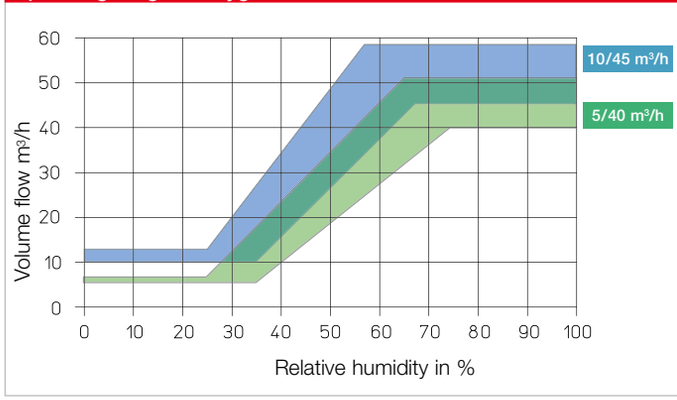

Order data		Sound power [3]			Sound insulation	
		L_W in dB (A)			$D_{n,e}$ in dB (A)	
Type	Ref. no.	100 Pa	130 Pa	160 Pa	w/o AESD	w/ AESD
AE B 15/30*	02055	20	25	28	60	64 [1]

Order data		Sound power [3]			Sound insulation	
		L_W in dB (A)			$D_{n,e}$ in dB (A)	
Type	Ref. no.	100 Pa	130 Pa	160 Pa	w/o AESD	w/ AESD
AE Hygro 10/45*	02049	29	32	35	57	61 [2]
AE Hygro GBE 5/40/75[4]*	02053	28	31	34	56	64 [2]
AE Hygro GBE 10/45/120[4]*	02054	29	32	35	56	62 [2]

[1] Equipped with silencer AESD (accessories). [2] Equipped with silencer AESE (accessories). [3] Values apply for basic ventilation level. [4] Demand-control. vent. performance curve see AE GBE left page.
* Volume flows in m³/h.

ABV 100

VFE

Dimensions ABV 100

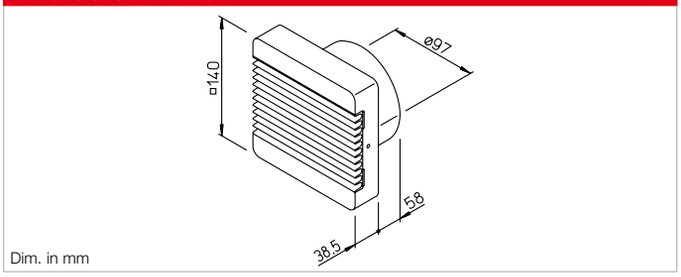

Dimensions VFE

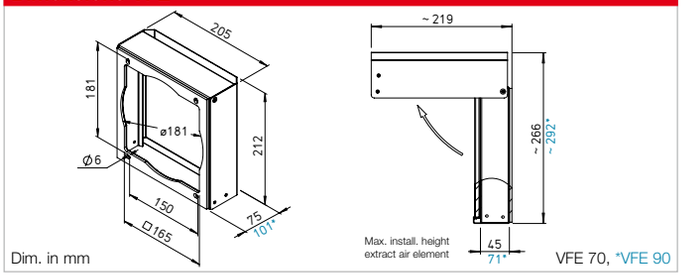

AbluVent ABV 100

Can be used in central ventilation systems according to DIN 18017-3 with variable volume flow in residential buildings. For the demand-controlled ventilation e.g. of windowless bathrooms and WCs. All elements in the system must be the same type and design. Made of high-quality plastic, colour: white.

Function
AbluVent is operated via the light switch. The blades open when the room is occupied. Basic ventilation is also guaranteed when the room is not occupied, since a minimum air flow rate is provided by the closed blades.

Advantages
- Energy saving.
- Low price.
- Rapid installation.
- Always the optimal solution.
- Shutter delay of approx. 5 minutes.
- Continuously variable volume flow setting.
- Silent function.
- Replaceable filter prevents clogging of the ventilation duct.

Volume throughput
The blade opening angle can be variably adjusted using a slider (covered by the facade) in the range from 15 – 80 degrees.

ABV Volume adjustment



The throughflow depending on the setting and underpressure is shown in the diagram above.

Technical data – Connection
Control via commercially available on/off switch, preferably coupled with the light switch. Operating voltage: ~220/240 V, 3 W.
Insulated, radio interference-free, protection category IP44.
Casing: Plastic, alpine white.
The thermo-metal spring causes a short switching delay when opening (approx. 30 sec.) and time-delayed closing after deactivation (approx. 5 min.).
With ISO Coarse 30 % filter.

ABV 100	Ref. no. 00452

Accessories

Replacement filter mats
ISO Coarse 30 % unit = 5 pcs

ELF/ABV	Ref. no. 06906

Attachment filter element VFE

Simple and cost-effective solution for filtering greasy, contaminated room air. For installation upstream of extract air elements or disc valves.

Application
Filter element for covering ventilation openings and preventing dirt deposits on disc valves, extract air elements and connected duct systems. Ideal for use in domestic kitchens with central ventilation systems according to DIN 18017.

Advantages
- Prevents grease and dust deposits on extract air elements or disc valves and connected duct systems.
- Filter change in just a few simple steps.
- Permanent filter can be cleaned in the dishwasher.
- Unobtrusive design in pleasant white.
- Easy installation using four screws.
- Conceals possible clogging zones.
- Lower maintenance costs for duct systems due to extended cleaning intervals.

Casing
Robust casing made of galvanised steel sheet, white, plastic powder-coated. The 90° retractable front panel prevents the view of the filter and clogging zone.

Filter
Dimensionally stable aluminium. Filter fabric with 295 cm² free filter surface and aluminium frame.

VFE Pressure loss in pure state



Installation
Suitable for wall and ceiling installation. Simple attachment with four screws. Long slot attachment points allow simple perpendicular adjustment. Attachment directly upstream of the installed extract air element (max. external Ø 180 mm). Front panel is 90° retractable; there should be free space between the upper edge of the casing and ceiling (see dimensional drawing) for easy filter removal.

Delivery
Each element incl. installation accessories individually packed.

Product range

VFE 70	Ref. no. 02552

Compatible with extract air elements with max. 45 mm installation depth, such as e.g. AE, MTVA, KTVA, BTV, BTK.

VFE 90	Ref. no. 02553

Compatible with extract air elements with max. 71 mm installation depth, such as e.g. AE GBE, AE Hygro.

Accessories

ELF/VFE	Ref. no. 02554

Replacement air filter, compatible with types VFE 70 and VFE 90. Unit = 2 pcs.

ETS

Installation example Cross talk silencer ETS (cut open)

Dimensions ETS

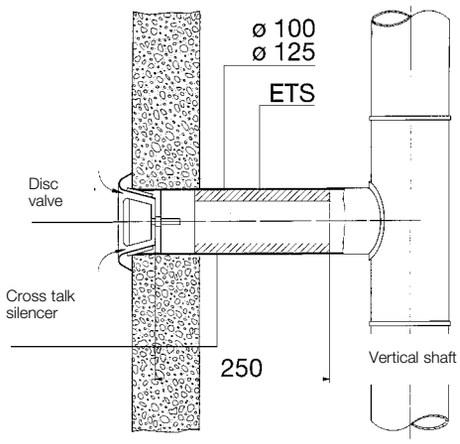

Dimensions in mm

Surprisingly simple and cost-effective solution for reducing cross talk sound transmissions in central ventilation systems. Easy installation directly downstream of the disc valve in the duct.

Advantages

- Optimal solution for preventing sound transmissions through ventilation ducts or pipes.
- Excellent damping values.
- Easy installation through insertion into the duct downstream of the disc valve.
- No increase in system resistance since the resistance value is below the set value of a disc valve.
- Minimisation of system construction costs due to the use of cost-effective duct systems.
- Can be used with disc valves from any manufacturer.

Vertical system section

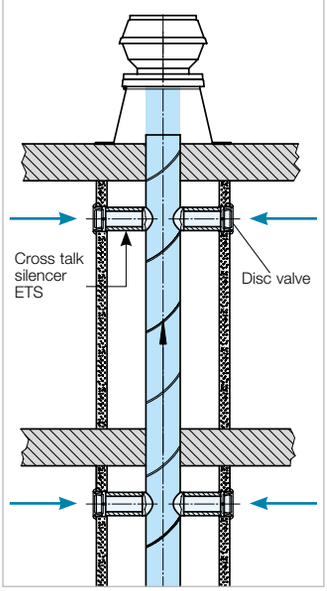

Horizontal system section

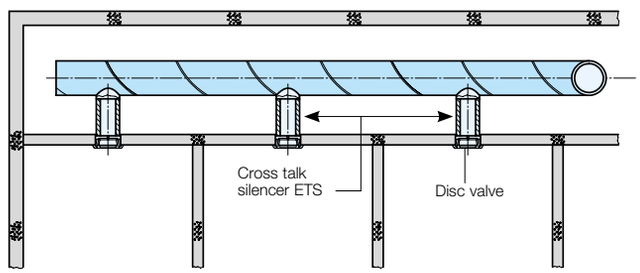

Product range

ETS 100 Ref. no. 04521
Nominal duct size Ø 100 mm

ETS 125 Ref. no. 04522
Nominal duct size Ø 125 mm

Damping values

Damping values should be doubled before cross talk sound transmissions from room to room if each opening is equipped with an ETS.

Material

Open-cell foam with improved behaviour in case of fire, complies with DIN 4102, class B1.

Type	Ref. no.	Insertion loss D_e dB at Hz 63	125	250	500	1000	2000	4000	8000
ETS 100	04521	23	17	13	8	8	12	23	16
MTVA 100	08869	22	16	11	7	5	3	5	7
MTVZ 100	09604	22	17	11	8	5	5	6	6
ETS 100 + MTVA 100	04521 + 08869	23	18	13	10	11	15	29	24
ETS 100 + MTVZ 100	04521 + 09604	23	18	13	10	11	16	28	22
ETS 125	04522	21	16	11	7	8	12	22	11
MTVA 125	08870	20	14	9	6	4	4	4	6
MTVZ 125	09605	20	14	10	6	5	4	5	7
ETS 125 + MTVA 125	04522 + 08870	21	17	11	9	11	16	28	19
ETS 125 + MTVZ 125	04522 + 09605	20	14	9	6	4	5	9	12

DLVZ

Dimensions DLVZ

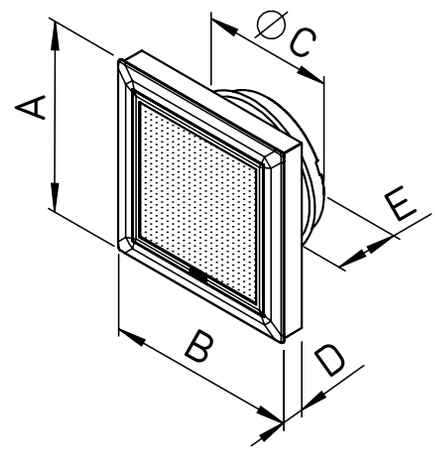

Dim. in mm see table

Application
For supply air operation in all rooms without specific fire protection requirements.
Ideal for wall installation near the ceiling with air flow into the room.

Advantages
- Elegant, square casing made of high-quality plastic.
- Even flowing cone of air to the middle of the room.
- Includes mechanically adjustable volume controller for calibrating the ventilation system. Accessible by removing the casing, with adjustment markers (steps 0–9, see diagram).
- Casing can be removed without tools for easy cleaning of the air cooled valve parts.
- Sealing ring on duct connector for exact positioning and sealing in the duct, prevents dirt marks on the wall.
- Mounting holes in lower part of casing for secure attachment.

Design
Casing design made of white, break- and UV-resistant plastic.

Delivery
Valve individually packed in polybag, includes adjustment set (can be mounted if required) as well as installation and operating instructions.

Installation
- Mount volume controller if necessary. Air volume presets according to diagram.
- Position lower part of casing in ventilation duct and fix to wall.
- Adjust air volume setting if necessary when adjusting the entire system.
- Upper part of casing can be attached without tools.

Performance data
The diagrams provide an overview of the air volumes and pressure losses at various volume controller settings as well as the flow velocity of the outflowing air at 30 m³/h depending on the valve distance.

DLVZ 100 Supply air w/o filter



Performance curves DLVZ 100

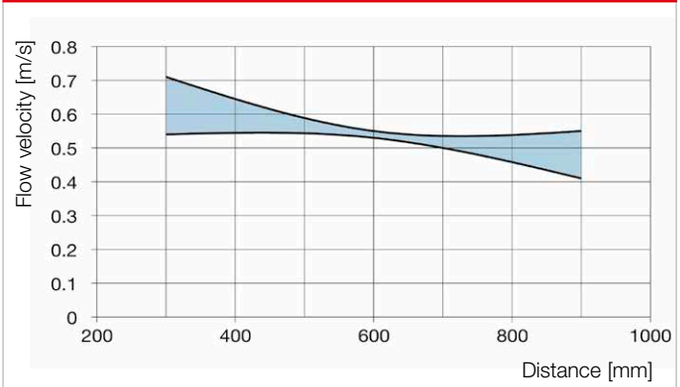

Order data	
Type	**DLVZ 100**
Ref. no.	03040
Ø C mm	100
A mm	135
B mm	135
D mm	20
E mm	38
Weight in g	150

Accessories

Replacement air filter class ISO Coarse 30 % (G2)
Unit = 3 pcs.

ELF-DLVZ 100 Ref. no. 03043

DLV

Dimensions DLV

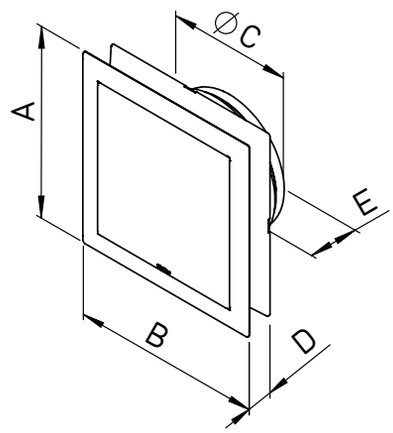

Dim. in mm see table

Application
For supply air and extract air operation in all rooms without specific fire protection requirements.
Ideal for ceiling installation.

Advantages
- Elegant, square casing made of high-quality plastic with concealed air inlet and outlet area.
- Exact air volume adjustment by turning the elegant front panel in 90° steps, with adjustment markers for calibrating the ventilation system.
- Integrated filter can be replaced without tools and without risk of changing the setting.
- Selected air volume setting can be locked.
- Minimum air volume guaranteed, even with a fully closed air volume setting. Complete closure is only possible by irreversibly removing the minimum air volume stop.
- Front panel can be removed without tools, with adjustment mechanism and filter holder for easy cleaning of the air cooled valve parts.
- Sealing ring on duct connector for exact positioning and sealing in the duct.
- Mounting holes in lower part of casing for secure attachment to the ceiling.

Design
Casing design made of white (DLV 125 also in black), break- and UV-resistant plastic. Elegant square design with closed front panel.

Delivery
Valve individually packed in polybag, includes ISO Coarse 30 % (G2) filter, installation and operating instructions.

Installation
- Insert ISO Coarse 30% (G2) filter in the filter holder.
- Air volume presets according to diagram.
- Position lower part of casing in ventilation duct and fix to ceiling.
- Adjust air volume setting if necessary when adjusting the entire system.
- Front panel with adjustment mechanism and filter holder can be attached without tools.

Performance data
The diagrams provide an overview of the air volumes and pressure losses at various front panel settings as well as the flow velocity of the outflowing air at 30 m³/h (DLV 100) or 60 m³/h (DLV 125) depending on the valve distance.

DLV 100 Extract air w/o filter



DLV 100 Supply air w/o filter



DLV 125 Extract air w/o filter



DLV 125 Supply air w/o filter



Performance curve DLV 100 – DLV 125

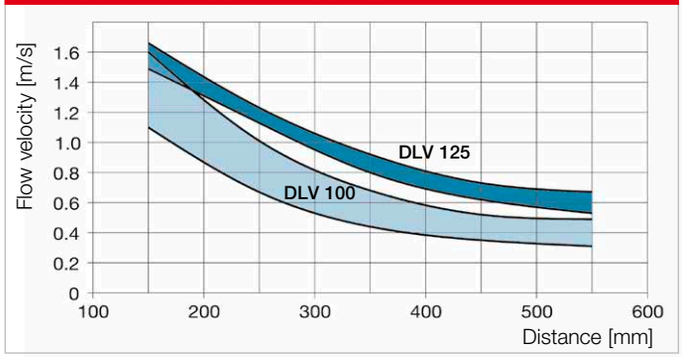

Order data			
Type	**DLV 100**	**DLV 125**	**DLV 125 black**
Ref. no.	03039	03049	40786
Color	white	white	black
Ø C mm	100	125	125
A mm	135	176,5	176,5
B mm	135	176,5	176,5
D mm	10 – 30	15 – 30	15 – 30
E mm	38	41	41
Weight in g	150	210	210

Accessories

Replacement air filter class ISO Coarse 30 % (G2)
Unit = 5 pcs.

ELF-DLV 100	Ref. no. 03042
ELF-DLV 125	Ref. no. 03058

MTVA

Dimensions MTVA

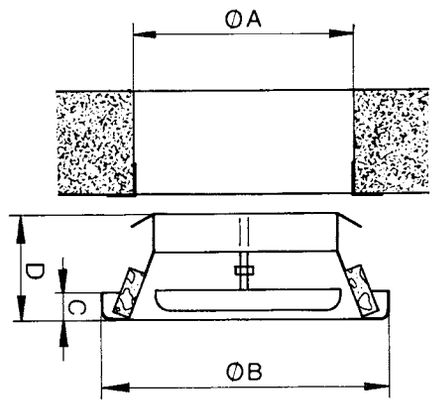

Dim. in mm see table

Application
For extract air operation in rooms of any kind and especially where ventilation components made of non-combustible material are stipulated.
Can be used for low to high flow velocities. Low-noise.

Advantages
- High-quality metal design in aerodynamic form with low noise levels.
- Wide cover and optimised height of the inlet ring prevent dirty marks.
- Installation in ceilings and walls within seconds and without tools.
- Plaster and difference compensation in case of unevenness, diameter differences or ducts that have been mounted too deep.
- Clamp spring holder allows direct insertion in ducts or walls with thickness of approx. 20 mm or more without additional mounting ring.

Design
Metal design with high-quality finish in white. Protected against corrosion with epoxy powder coating.

Airtight closure of the opening circumferential foam ring to prevent air leakage from the side. Contamination of the surrounding environment is thereby prevented.

Delivery
Each valve in separate polybag.

Accessories
Mounting rings (see table) are required for installation in sheet metal duct walls and thin panels.

Installation
Set to desired volume flow pursuant to diagrams above. Distance “A” is specified in mm from the origin.
Valve insertion in duct or wall opening.

Performance data
The diagrams provide an overview of the air volumes, resistances and noise levels at corresponding settings for distance “A” in mm.

Volume adjustment



Distance A = mm

MTVA 125



MTVA 75/80



MTVA 160



MTVA 100



MTVA 200



Order data					
Type	**MTVA 75/80**	**MTVA 100**	**MTVA 125**	**MTVA 160**	**MTVA 200**
Ref. no.	08868	08869	08870	08871	08872
Ø A mm	73 – 85	95 – 105	120 – 130	150 – 165	195 – 205
Ø B mm	108	135	160	195	230
C mm	15	15	15	15	15
D mm	58	55	55	58	55
Weight in g	150	190	405	340	450
Mounting ring					
Type	**EBR 75/80**	**EBR 100**	**EBR 125**	**EBR 160**	**EBR 200**
Ref. no.	00952	00953	00954	00955	00956
for NW (mm)	75/80	100	125	150/160	200

KTVA

Dimensions KTVA

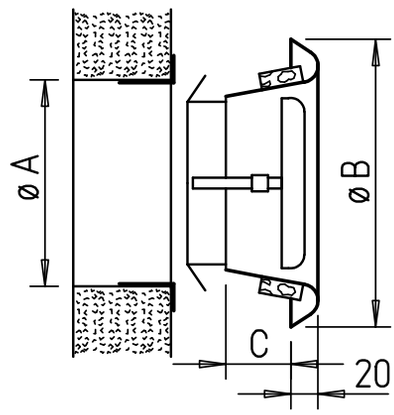

Dim. in mm see table

Application
For extract air operation at high and low flow velocities or resistances.
In all rooms without specific fire protection requirements.

Advantages
- Installation in ceilings and walls within seconds and without tools.
- Good sound insulation due to built-in silencers in the valve disc.
- Made of high-quality, antistatic plastic, applicable up to +100 °C.
- Circumferential spacer ring prevents dirt deposits.
- Plaster and difference compensation in case of unevenness, diameter differences or ducts that have been mounted too deep.
- Clamp spring holder allows direct insertion in ducts or walls with thickness of approx. 20 mm or more without additional mounting ring.

Design
All-plastic design made of white, break-resistant plastic. Elegant, aerodynamic design. Volume adjustment using rotatable valve disc (see diagrams for volume throughput).

Delivery
Each valve in separate polybag.

Accessories
Mounting rings (see table) are required for installation in sheet metal duct walls and thin panels.

Installation
Set to desired volume flow with corresponding number of disc rotations according to the diagram. Valve insertion in duct or wall openings.

Performance data
The diagrams provide an overview of the air volumes, resistances and noise levels with the corresponding disc rotations.

KTVA 75/80 Disc rotations



KTVA 125 Disc rotations



KTVA 100 Disc rotations



KTVA 160 Disc rotations



KTVA 200 Disc rotations



Order data					
Type	**KTVA 75/80**	**KTVA 100**	**KTVA 125**	**KTVA 160**	**KTVA 200**
Ref. no.	00940	00941	00942	00943	00944
Ø A mm	73 – 85	95 – 105	120 – 130	150 – 165	195 – 205
Ø B mm	118	140	165	200	242
C mm	40	40	40	42	45
Weight in g	90	115	150	200	340
Mounting ring					
Type	**EBR 75/80**	**EBR 100**	**EBR 125**	**EBR 160**	**EBR 200**
Ref. no.	00952	00953	00954	00955	00956
for NW (mm)	75/80	100	125	150/160	200

MTVZ

Dimensions MTVZ

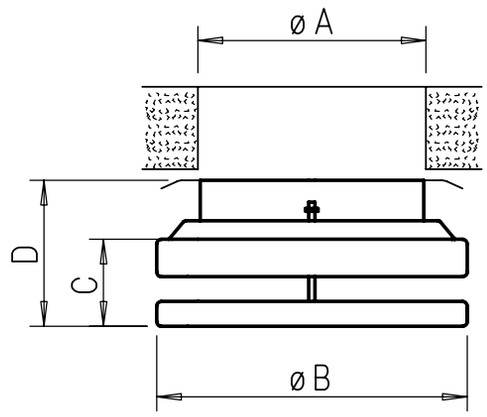

Dim. in mm see table

Application
For supply air operation in rooms of any kind and especially where ventilation components made of non-combustible material are stipulated.
Can be used for low to high flow velocities. Low-noise.

Advantages
- High-quality metal design in aerodynamic form with low noise levels.
- Elegant valve disc concealing the opening for continuously variable adjustment.
- Installation in ceilings and walls within seconds and without tools.
- Plaster and difference compensation in case of unevenness, diameter differences or ducts that have been mounted too deep.
- Clamp spring holder allows direct insertion in ducts or walls with thickness of approx. 20 mm or more without additional mounting ring.

Design
Metal design with high-quality finish in white. Protected against corrosion with epoxy powder coating. Airtight closure of the opening circumferential foam ring to prevent air leakage from the side. Contamination of the surrounding environment is thereby prevented.

Delivery
Each valve in separate polybag.

Accessories
Mounting rings (see table) are required for installation in sheet metal duct walls and thin panels.

Installation
Set to desired volume flow pursuant to adjacent diagram. Distance “A” is specified in mm from the origin.
Valve insertion in duct or wall opening.
A straight duct section of at least 300 mm is required for uniform throughflow.

Performance data
The diagrams provide an overview of the air volumes, resistances and noise levels at corresponding settings for distance “A” in mm.

Volume adjustment



Distance A = mm

MTVZ 125



MTVZ 75/80



MTVZ 160



MTVZ 100



MTVZ 200



Order data					
Type	**MTVZ 75/80**	**MTVZ 100**	**MTVZ 125**	**MTVZ 160**	**MTVZ 200**
Ref. no.	09603	09604	09605	09606	09607
Ø A mm	73 – 85	95 – 105	120 – 130	150 – 165	195 – 210
Ø B mm	108	135	160	195	230
C mm	26 – 46	26 – 46	26 – 46	26 – 56	26 – 56
D mm	68	65	65	68	65
Weight in g	190	240	405	390	480
Mounting ring					
Type	**EBR 75/80**	**EBR 100**	**EBR 125**	**EBR 160**	**EBR 200**
Ref. no.	00952	00953	00954	00955	00956
for NW (mm)	75/80	100	125	150/160	200

KTVZ

Dimensions KTVZ

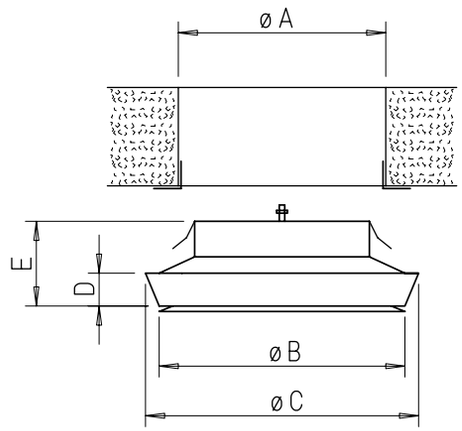

Dim. in mm see table

Application
For supply air operation at high and low flow velocities or resistances. In all rooms without specific fire protection requirements.

Advantages
- Installation in ceilings and walls within seconds and without tools.
- Elegant valve disc concealing the opening for continuously variable adjustment. Made of high-quality, white plastic, applicable up to +100 °C.
- Circumferential spacer ring prevents dirt deposits.
- Plaster and difference compensation in case of unevenness, diameter differences or ducts that have been mounted too deep.
- Clamp spring holder allows direct insertion in ducts or walls with thickness of approx. 20 mm or more without additional mounting ring.

Design
All-plastic design made of white, break-resistant plastic. Elegant, aerodynamic design. Volume adjustment using rotatable valve disc (see diagrams for volume throughput).

Delivery
Each valve in separate polybag.

Accessories
Mounting rings (see table) are required for installation in sheet metal duct walls and thin panels.

Installation
Set to desired volume flow with corresponding number of disc rotations according to the diagram.
Valve insertion in duct or wall openings.
A straight duct section of at least 300 mm is required for uniform throughflow.
The air flow can be directed in a defined direction e.g. just to the middle of the room through the selective insertion of the sealing elements included in the delivery.

Performance data
The diagrams (measured without sealing element) provide an overview of the air volumes, resistances and noise levels with the corresponding disc rotations.











Order data					
Type	**KTVZ 80**	**KTVZ 100**	**KTVZ 125**	**KTVZ 160**	**KTVZ 200**
Ref. no.	02762	02736	02737	02738	02739
Ø A mm	80	100	125	160	200
Ø B mm	115	135	160	195	235
Ø C mm	122	142	167	202	242
D mm	20	20	20	20	20
E mm	53	58	58	69	79
Weight in g	90	100	260	370	600
Mounting ring					
Type	**EBR 75/80**	**EBR 100**	**EBR 125**	**EBR 160**	**EBR 200**
Ref. no.	00952	00953	00954	00955	00956
for NW (mm)	75/80	100	125	150/160	200

ZTV

Dimensions ZTV

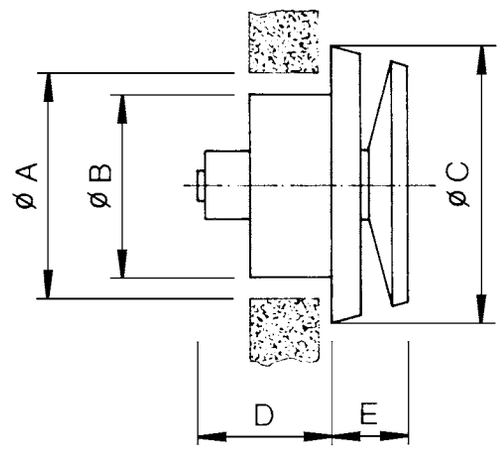

Dim. in mm see table

Special features – Application

Innovative thermostat supply air disc valve for self-regulating air exchange. The constant supply air volume control with adjustable disc valve for rooms of any kind.
Ideally suited for natural (thermal) ventilation and as a supply air element for mechanical ventilation.

Advantages

- Fully automated, demand-based supply air volume control.
- Completely maintenance-free and free of operating costs.
- Individual volume flow adjustment by rotating the disc.
- Good sound insulation due to built-in silencers in the valve disc.
- Attractive, functional design.
- Wide inlet ring covers unsightly dirt marks.
- Quick and easy installation.

Design

The Helios supply air thermostat valves are made of break-resistant, white plastic. Aerodynamic, elegant and unobtrusive design. Insulating coating of inside of valve disc to prevent condensation.

Installation

ZTV is easy to install in supply ventilation openings. Attachment in duct by press fit using provided rubber seal or with the provided screws in three concealed holes in the frame.

Function

The thermostat sensor automatically responds in a temperature range from –6 °C to +20 °C. There are volume flows between 0 and 30 m³/h within this range in compliance with the DIN guidelines. See performance diagram on the right. The valve closes from an outdoor temperature of approx. –4 °C in the "basic setting" position. A minimum supply air rate is guaranteed by the 4 mm wide spacer clip. Manual adjustment of the subsequently outdoor temperature-controlled volume flow is possible by rotating the valve disc. One rotation results in a gap change of 4 mm (see blue shaded areas in the diagram).

Number of units

The number of required supply air elements is defined pursuant to DIN 1946-6 depending on the size of the living unit and wind speed (see table on the right).



ZTV 80



ZTV 100



ZTV 160



Summer / winter mode



Automatic gap change

Auto. gap change depending on the outdoor temperature.
– – – Shut-off without spacer ring.



Order data

Type	ZTV 80	ZTV 100	ZTV 160
Ref. no.	00078	00073	00074
Ø A = Duct NW	80	100	160
Ø B	77	95	156
Ø C	147	147	207
D	77	77	77
E	49	49	50
Weight approx. g	230	240	370

Number of units for mechanical demand-controlled ventilation

		Number ZLA/ZLE		Fans
Living unit size	**m²**	Extract air (8 Pa)*	Supply air (4 Pa)*	Number/unit
Hotel room	**25 m²**	2	–	1
Suite	**25 m²**	2 (3) **	–	1
Apartment I	**50 m²**	2	3 – 4	2
Apartment II	**> 50, < 80 m²**	3	4	2
Apartment III	**> 80 m²**	4	5	3
Single fam. house	**up to 120 m²**	4	5	3

* according to DIN 1946-6 tab. 10.

** if a kitchenette is also vented.

ZLA

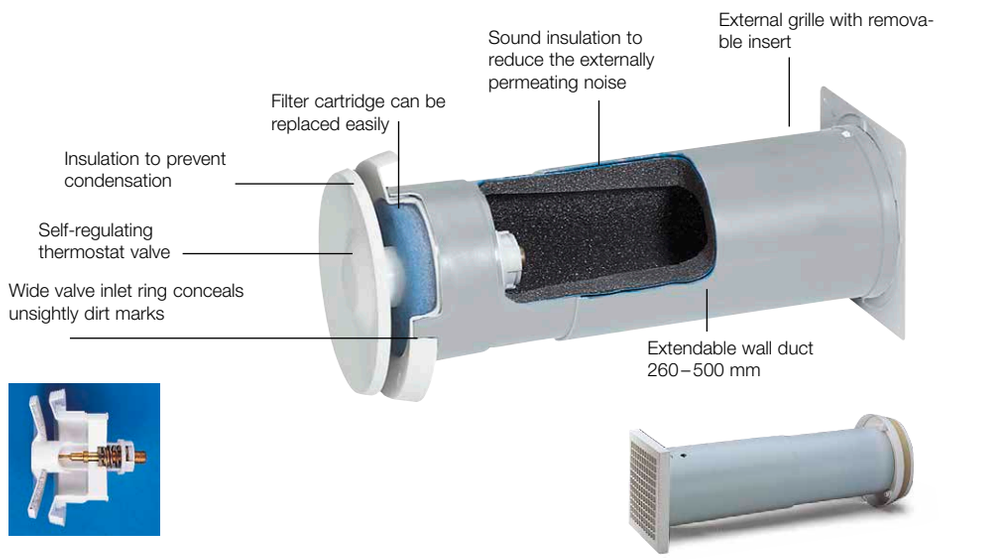

Illustration applies to ZLA 100 only. (Orientation of the telescopic tube differs for ZLA 80 / 160.)

Dimensions ZLA 100



Dim. in mm see table

Dimensions ZLA 80 / ZLA 160



Dim. in mm see table

Special features –Application

Universally applicable automatic supply air element. The self-regulating thermostat disc valve combines efficiency with constant ventilation. The outdoor temperature-dependent volume flow control takes place via a thermal sensor with no electrical connection. The supply air flow is optimally distributed, filtered (ISO Coarse 50 % G3) and sound-insulated.

Advantages

- Fully automated, demand-based supply air volume control.
- Maintenance-free and free of operating costs.
- Individual volume flow adjustment by rotating the disc.
- Extendable plastic wall duct for wall thicknesses from 260 to 500 mm.
- Good sound insulation due to built-in silencers.
- Easily replaceable filters.
- Electrical connection is not required.
- Quick and easy installation.

Function

The thermostat sensor automatically responds in a temperature range from –6 °C to +20 °C. There are volume flows between 0 and 30 m³/h within this range in compliance with the DIN guidelines. See performance diagram on the right. The valve closes from an outdoor temperature of approx. –4 °C in the "basic setting" position. A minimum supply air rate is guaranteed by the 4 mm wide spacer clip. Manual adjustment of the subsequently outdoor temperature-controlled volume flow is possible by rotating the valve disc. One rotation results in a gap change of 4 mm (see blue shaded areas in the diagram).

Installation

Installation in wall outlets. Insert telescopic duct from outside, screw on cover grille. Mount the duct and insert the valve from inside.

Performance data

The volume flow rate depending on the pressure difference is based on the opening gap of the valve disc. The performance values can be found in the diagrams above.

Accessories

Replacement air filter ISO Coarse 50 % (G3)
Each unit contains 10 pcs.

ELFZ 80	Ref. no. 00339
ELFZ 100	Ref. no. 00340
ELFZ 160	Ref. no. 00341

Automatic gap change

Automatic gap change depending on the outdoor temperature. – – – Shut-off without spacer ring.

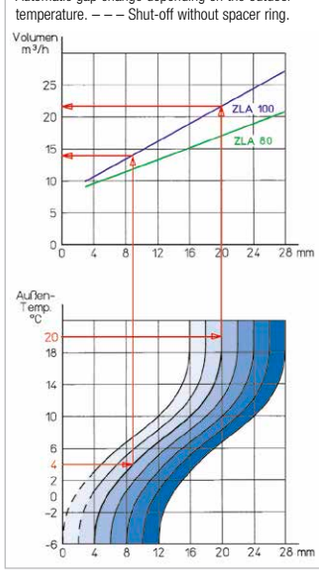

Flow diagram ZLA 80



Flow diagram ZLA 100



Flow diagram ZLA 160



Order data

Type	ZLA 80	ZLA 100	ZLA 160
Ref. no.	00214	00215	00216
Volume max. with filter m³/h	25	35	100
Duct NW (mm)	80	100	160
Wall outlet Ø mm	96	115	175
Ø A mm	147	147	207
B mm	49	49	50
C mm	260 – 500	260 – 500	260 – 500
D mm	107	140	190
E mm	3	15	24
Weight approx. kg	0.7	0.8	1.6
Standard sound level diff. $D_{n,e,w}$ dB(A)	41	37	35

Reference

The number of automatic supply air elements must be determined pursuant to DIN 1946-6 (see table on left page).

ZLE

Dimensions ZLE

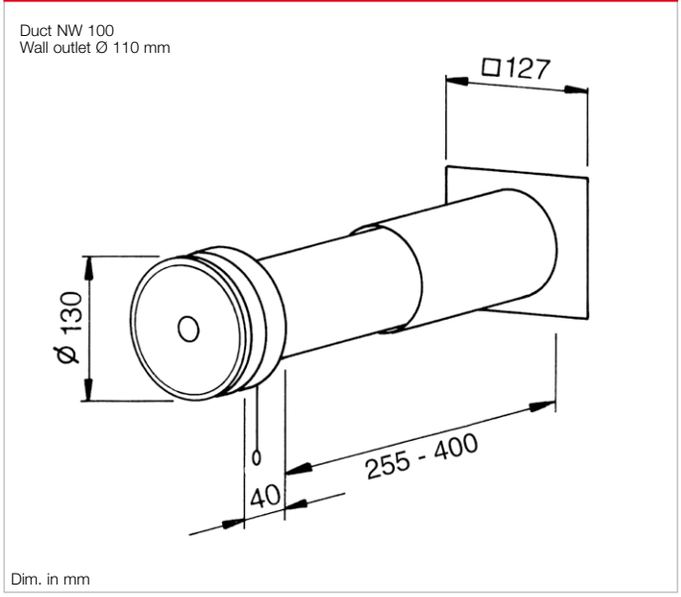

Special features – Application
Manually operated supply air element for rooms of any kind. The volume flow is changed by a four-level locking mechanism. Adjustment by means of a free-hanging drawcord. The supply air flows in through the disc valve optimally distributed, filtered (class ISO Coarse 50% (G3)) and sound-insulated.

Advantages
- The dosed supply of intake air reduces draughts.
- The volume can be controlled according to requirements by adjusting the valve disc.
- Simple operation via drawcord.
- Electrical connection is not required.
- Wide valve inlet ring covers unsightly dirt marks.
- Extendable plastic wall duct for wall thicknesses from 255 to bis 400 mm.
- Good sound insulation due to built-in silencers.
- Easily replaceable filter.
- Quick and easy installation.

Installation
Simple installation in wall outlets. Insert telescopic duct from outside, adjust to wall thickness and mount. Insert rain-repellent grille into locking attachment from outside or mount with dowels. Insert valve component from inside. The supply air can be preheated in cold periods by placing the unit near a heating element. Accessibility must be ensured for air filter replacement.

Design
ZLE comes complete with:

- **Disc valve**
  Elegant, unobtrusive design made of high-quality plastic in white. Integrated drawcord for three disc settings. Insulating coating of inside of valve disc to prevent condensation.
- **Extendable wall duct**
  Two-part telescoping, made of break-resistant plastic.
- **Silencer**
  For airborne sound insulation as sound insulation against external noise. Standard sound level difference: $D_{n,e,w}$: 38 dB.
- **Air filter**
  For clean and dust-free room air (class ISO Coarse 50% (G3)), replaceable.
- **External wall grille**
  Fixed, rain-repellent, made of UV-resistant plastic, white.

Filter replacement
Easily removable without tools by removing the room-side valve.

Performance data
The volume flow rate depending on the pressure difference is based on the opening gap of the valve disc. The performance values can be found in the diagram above. Sound insulation value: $D_{n,e}$: 30 – 35 dB (depending on the installation method and wall thickness; comparable to double glazing in protection class 2 or 3).

Number of units
The number of required supply air elements is defined pursuant to DIN 1946, pt.6 depending on the size of the living unit and wind speed (see table below).

ZLE 100	Ref. no. 00079

Accessories
Replacement air filter ISO Coarse 50 % (G3)
Unit = 10 pcs.

ELF/ZLE 100	No. 00338

Performance curves ZLE



Number of units for mechanical demand-controlled ventilation

Living unit size	m²	Number ZLA/ZLE: Extract air (8 Pa)*	Number ZLA/ZLE: Supply air (4 Pa)*	Fans: Number/Unit
Hotel room	25 m²	2	–	1
Suite	25 m²	2 (3) **	–	1
Apartment I	50 m²	2	3 – 4	2
Apartment II	> 50, < 80 m²	3	4	2
Apartment III	> 80 m²	4	5	3
Single fam. house	up to 120 m²	4	5	3

* according to DIN 1946-6 tab. 10. ** if a kitchenette is also vented.

Automatic supply air element ZLA 125

The new supply air unit benefits from a standard sound level difference of up to 59 dB. In addition, the unit has a modular design which is the only one of its kind on the market.

p. 82 f

Soffit element ZLA LE

The soffit element ZLA LE directs the supply air inside the thermal insulation composite system into the window soffit by 90°. Apart from the grille in the window frame, no component can be seen on the outer facade.



p. 84 f

ALEF

ALEF Hygro – Humidity-controlled

Dimensions ALEF

ALEF



ALEFS
with increased sound insulation



Dimensions in mm

Dimensions ALEF Hygro – Humidity-controlled

ALEF Hygro



ALEFS Hygro
with increased sound insulation



Dimensions in mm

Intake air elements ALEF with volume flow control/limitation, for installation in window frames/leaves.

Application
Differential pressure-dependently controlled window element for the controlled supply of intake air in living rooms and bedrooms.
Simple installation, also suitable for retrofitting.

Design
Ready-to-install unit consisting of an inner facade with automatic volume flow limiter, mounting plate and external cover strip. All parts made of high-quality plastic in white.
Types ALEFS also have an acoustic element for increased sound insulation.

Function
The element allows a controlled intake air volume (see diagram) to flow into living rooms/bedrooms using the underpressure of the extract air in kitchens, bathrooms and WCs.

Performance curves ALEF



Installation
In wooden, plastic and metal window frames. Breakthrough using cutouts or holes in the upper bracket.
Simply screw on external cover strip and mounting plate and clip on inner facade.

Installation example ALEF in window with aluminium frame



Humidity-controlled intake air elements ALEF Hygro with volume flow control/limitation, for installation in window frames/leaves.

Application
Window elements for the controlled supply of intake air in living rooms and bedrooms depending on the room air humidity. Ideal in combination with humidity-controlled extract air fans.
Simple installation, also suitable for retrofitting.

Design
Ready-to-install unit consisting of an inner facade with automatic volume flow limiter, mounting plate and external cover strip. All parts made of high-quality plastic in white.
Types ALEFS Hygro also have an acoustic element for increased sound insulation.

Function
The element allows a relative humidity-controlled intake air volume (see diagram) to flow into living rooms/bedrooms using the underpressure of the extract air in kitchens, bathrooms and WCs.

Performance curves ALEF Hygro



Installation
In wooden, plastic and metal window frames. Breakthrough using cutouts or holes in the upper bracket.
Simply screw on external cover strip and mounting plate and clip on inner facade.

Dimensions for outlet and attachment



Dim. in mm

Order data	Intake air elements for installation in window frames			
	ALEF with volume flow control and limitation		**ALEFS** like ALEF, also sound-insulated	
Type	**ALEF 30**	**ALEF 45**	**ALEFS 30**	**ALEFS 45**
Ref. no.	02100	02101	02102	02103
Nom. volume m³/h	30	45	30	45
Standard sound level difference $D_{n,e,w}$ in dB(A)	39	37	41	39
Weight approx. g	150	150	240	240

Order data	Intake air elements for installation in window frames	
	ALEF Hygro w/ humidity-controlled volume flow control and limitation	**ALEFS** like ALEF, also sound-insulated
Type	**ALEF 5/45 Hygro**	**ALEFS 5/45 Hygro**
Ref. no.	02056	02057
Nom. volume m³/h	5/45	5/45
Standard sound level difference $D_{n,e,w}$ in dB(A)	37	39
Weight approx. g	200	220

Better safe than sorry.
Components for preventative fire protection.

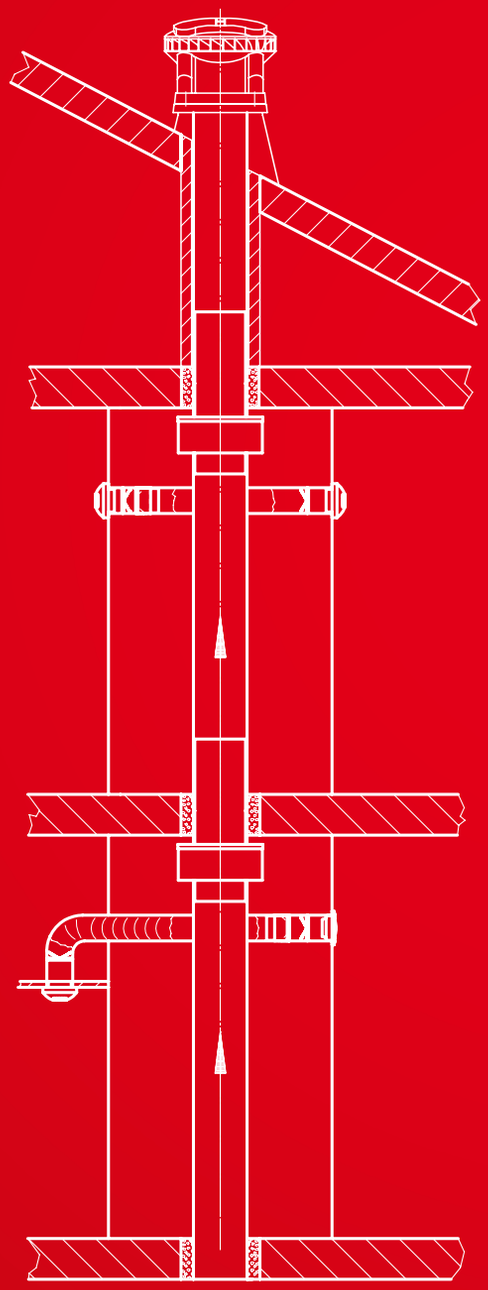

The aim of preventative fire protection in multi-floor constructions is to prevent the spread of fire to adjacent floors and rooms. Building regulations therefore divide residential units or room units into so-called utilisation units (fire sections) where the ceilings and walls must meet specific fire resistance duration requirements.

Since supply pipes and ventilation ducts cross fire sections, their openings must be equipped with dampers in the required classification.

Whether you are looking for fire dampers, ventilation tiles or ceiling seals, Helios offers precisely the right solutions.

Fire damper elements

Fire damper elements BAE/BAK prevent the spread of fire and smoke to other fire sections through ventilation ducts or ventilation openings.

594f

Fire protection disc valves

Dampers with volume flow throttle BTV/BTK to prevent the spread of fire and smoke through ventilation ducts or ventilation openings.

596f

Fire protection ceiling seal, cold smoke shutters

Fire protection ceiling seal ELS-D for ventilation ducts pursuant to DIN 18017. Application eliminates the need for further dampers on air inlet or outlet openings. Ideal for mixed-use installation shafts.

Cold smoke shutters KAK for room-side duct insertion prevent the spread of cold smoke to other fire sections.

598f

Fire protection ventilation tiles

Fire protection ventilation tiles BLS allow the static ventilation of closed rooms and chambers to be protected against the spread of fire and smoke, such as e.g. installation shafts, cable ducts, etc.

600f

BAE

Approval Z-41.3-696
no maintenance conditions

Dimensions BAE

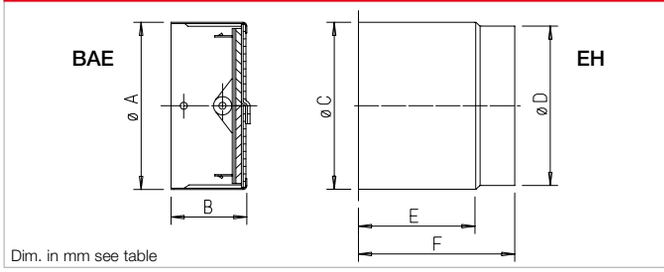

Dim. in mm see table

Pressure loss and acoustics

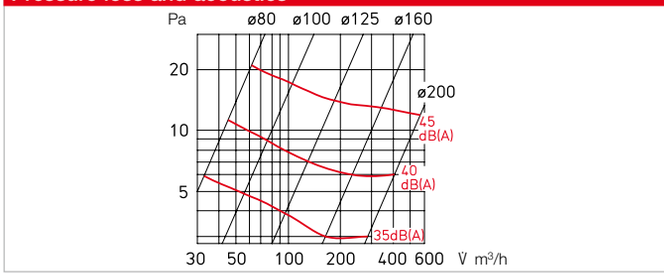

Application
Damper element to prevent the spread of fire and smoke. For installation in ventilation shafts and ducts with the required fire resistance class K 90-18017. Suitable for insertion in spiral ducts or for installation in walls and non-fire-resistant suspended ceilings using installation sleeve EH (accessories) as well as in fire-resistant ceilings as ceiling seals.

Function
When an air temperature of +72 °C is exceeded, the integrated fusible link releases the semicircular damper blades which close abruptly by spring force. Two safety brackets lock the shutters.

Official approval
The proof of suitability of this damper element for ventilation systems according to DIN 18017 has been provided by means of appropriate tests. General technical approval from the DIBt with no. Z-41.3-696.

Special features
- ▢ No maintenance conditions.
- ▢ Cleaning and inspection together with the associated ventilation system.
- ▢ Insertion in spiral ducts without additional brickwork frame.
- ▢ Installation outside of the shaft wall is possible.
- ▢ Any air flow direction, i.e. for supply air and extract air.
- ▢ Low flow resistance, even at high air flow rates.
- ▢ Connection to fume extractor or extraction hood is possible.
- ▢ Low-noise.
- ▢ Application in residential and commercial areas, e.g. internal toilets, kitchenettes, etc.

Design
Cylindrical duct sleeve with butterfly valve and integrated fusible link.

Delivery
Shrink-wrapped in plastic film.

Installation and setting
- ▢ The installation and operating instructions contain exact specifications with regard to application and installation.
- ▢ The specifications in the related approval must be observed.

Accessories

End switch
For BAE monitoring and signalling the operating status to the central building management system. Attachable to all ND, simple snap-in installation.

BA-S	Ref. no. 02585
Switch as changeover contact	IP67
Max. load	5 – 250 V / 6 A (2 A ind.)
Connect. cable 50 cm long / 3 x 0.34 mm²	
Wiring diagram no.	830

Installation examples

- ▢ **Duct installation**
  The element is installed by simple insertion (e.g. in spiral ducts) and fixed in the wall together with the duct.
  Installation is possible on both sides, regardless of the air flow direction.

- ▢ **Wall installation**
  With installation sleeve EH (accessories) in walls made from brickwork, aerated concrete or plasterboard, shaft partition walls in F 90 and F 30 or system-tested walls over 40 mm thick.
  Installation is possible on both sides, regardless of the air flow direction.

- ▢ **Ceiling installation**
  - Possible in non-fire-resistant suspended ceilings.
  - In fire-resistant ceilings as ceiling seal if no free cross-section is required.

Duct installation



Wall installation
with installation sleeve or spiral duct and inserted supply/extract air element.



Ceiling installation
with installation sleeve and inserted supply/extract air element. Connection to main pipeline via spiral duct.



Order data

					Accessories:					
Type	Ref. no.	Dim. in mm Ø A	B	Weight aprx. kg	**Installation sleeve**	Ref. no.	Dimensions in mm Ø C	Ø D	E	F
BAE 80	02624	78	60	0.17						
BAE 100	02625	98	60	0.23	**EH 100**	02639	100	98	110	140
BAE 125	02626	123	60	0.30	**EH 125**	02640	125	123	110	140
BAE 160	02627	158	60	0.40	**EH 160**	02641	160	158	110	140
BAE 200	02628	198	60	0.55	**EH 200**	02642	200	198	110	140

BAK

EU Certificate of Constancy of Performance 0749-CPR-BC1-606-0464-15650.69-2517

EU Certificate of Constancy of Performance
0749-CPR-BC1-606-0464-15650.69-2517

Dimensions BAK

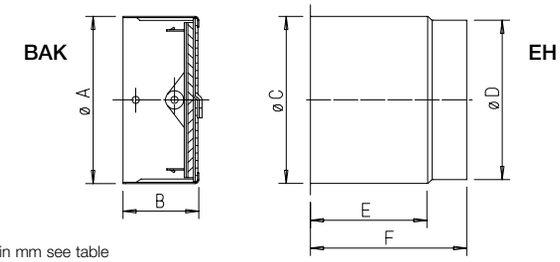

Dim. in mm see table

Pressure loss and acoustics

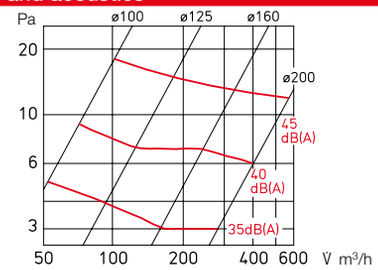

Fire dampers are construction products according to the European Construction Products Regulation.
They have an official Certificate of Constancy of Performance and a Declaration of Performance according to European construction law.

Application

Fire damper to prevent the spread of fire and smoke. For installation in walls, ceilings or ventilation shafts which serve as fire sections with the required fire resistance class EI 90 S. Suitable for wall and ceiling installation or as overflow openings. Can be inserted in spiral ducts. Installation sleeve EH (accessories) recommended for one-sided duct connection.

Function

When an air temperature of +72 °C is exceeded, the integrated fusible link releases the semi-circular damper blades which close abruptly by spring force. Two safety brackets lock the shutters.

European certification

- Declaration of Performance according to European Construction Products Regulation 305/2011.
- Tested according to EN 1366-2.
- Classification according to EN 13501-3: EI 90 (ve, ho, i↔o) S – (300 Pa).
  Room closure and insulation 90 min., vertical, horizontal, applicable in both directions, sealed against 300 Pa, even during fire.
- Complies with European product standard DIN EN 15650.

Special features

- Installation directly in spiral duct in the room-closing component.
- Any air flow direction, i.e. for supply air and extract air.
- Low flow resistance, even at high air flow rates.
- Simple fixation with installation sleeve EH (accessories).

Design

Cylindrical duct sleeve with butterfly valve and integrated fusible link.

Delivery

Individually shrink-wrapped in plastic film.

Installation and setting

- The installation and operating instructions contain exact specifications with regard to application and installation.
- The specifications in the related approval must be observed.

Accessories

End switch
For BAK monitoring and signalling the operating status to the central building management system. Attachable to all ND, simple snap-in installation.

BA-S	Ref. no. 02585
Switch as changeover contact	IP67
Max. load	5 – 250 V / 6 A (2 A ind.)
Connect. cable 50 cm long / 3 x 0.34 mm²	
Wiring diagram no.	830

Installation examples

- **Duct installation in walls or ceilings**
  The element is installed by simple insertion in the spiral duct or in the installation sleeve EH (accessories) and then fixed in the wall, ceiling or shaft wall. Installation is possible regardless of the air flow direction. Subsequent one-sided or double-sided duct connection.
- **Wall or ceiling installation**
  With installation sleeve EH (accessories) in in walls made from brickwork, aerated concrete or plasterboard or system-tested walls over 100 mm thick. Installation is possible on both sides, regardless of the air flow direction.
- **Overflow opening**
  Without one-sided or double-sided duct connection, as overflow opening, can only be installed where there is no reason to fear smoke overflow below the trigger temperature. Approval required from building inspection authority in individual cases.

Duct installation



Wall installation

in brickwork, aerated concrete or plasterboard



Ceiling installation

in brickwork, aerated concrete or plasterboard



Order data

					Accessories:					
Type	Ref. no.	Dim. in mm Ø A	B	Weight aprx. kg	**Installation sleeve**	Ref. no.	Dimensions in mm Ø C	Ø D	E	F
BAK 100	02620	98	60	0.24	**EH 100**	02639	100	98	110	140
BAK 125	02621	123	60	0.32	**EH 125**	02640	125	123	110	140
BAK 160	02622	158	60	0.46	**EH 160**	02641	160	158	110	140
BAK 200	02623	198	60	0.64	**EH 200**	02642	200	198	110	140

BTV

Approval Z-41.3-694
No maintenance conditions

Dimensions BTV

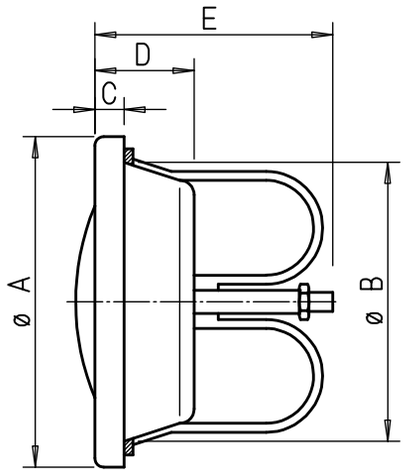

Dim. in mm see table

Application
Damper element to prevent the spread of fire and smoke. Suitable for installation in ventilation shafts and ducts with the required fire resistance class K 90-18017. For insertion in spiral ducts or for installation in walls and non-fire-resistant suspended ceilings using mounting ring (included in delivery).

Function
When an air temperature of +72 °C is exceeded, the fusible link responds. The built-in pressure spring automatically closes the valve.

Official approval
The proof of suitability of these damper elements with throttle device for ventilation systems according to DIN 18017 has been provided by means of appropriate tests and resulted in the approval from the DiBT, Z-41.3-694.

Special features
- No maintenance conditions.
- Cleaning and inspection together with the associated ventilation system.
- Officially tested fire protection disc valve with low air noise in case of high pressure drop.
- Installation in spiral ducts, shaft walls or non-fire-resistant ceilings.
- High damping value.
- Attractive, functional design.
- Simple adjustment, which cannot be changed by unauthorised persons, reduces the work load.
- Easily removable for inspection and cleaning, without unauthorised adjustment being possible.
- Large operating range.
- Application in residential and commercial areas, e.g. internal toilets, kitchenettes, etc.

Design
Sheet steel construction with white powder coating.
Aerodynamically optimal design with inner cone and inlet ring.

Delivery
Includes mounting ring made of galvanised steel sheet; each valve in a separate polybag.

Installation and setting
- The installation and operating instructions contain exact specifications with regard to application and installation.
- Can be inserted by hand due to bayonet closure.
  Associated wall ring included in delivery.
- The specifications in the related approval must be observed.
- Volume flow settings according to adjacent diagrams.
- Settings remain fixed and cannot be changed by unauthorised persons or without dismantling the fan.

Installation in walls and non-fire-resistant ceilings
with mounting ring (included in delivery).



BTV 100 Disc rotations



BTV 125 Disc rotations



BTV 160 Disc rotations



BTV 200 Disc rotations



Order data

Mounting ring included in delivery

Type	Ref. no.	Dimensions in mm Ø A	Ø B	C	D	E	Weight approx. kg
BTV 100	02634	135	99	17	67	91	0.38
BTV 125	02635	161	124	18	68	103	0.48
BTV 160	02636	191	160	18	68	107	0.64
BTV 200	02637	242	199	17	67	124	0.77

BTK

EU Certificate of
Constancy of Performance
0749-CPR-BC1-606-0464-15650.69-2517

Dimensions BTK

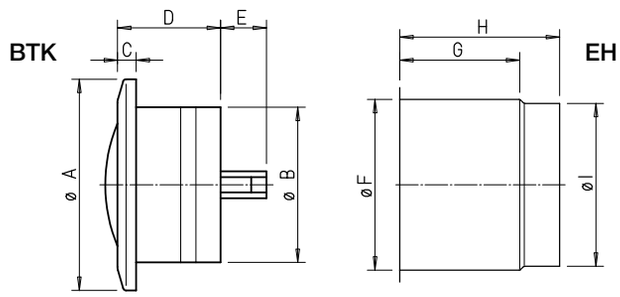

Dim. in mm see table

Fire dampers are construction products according to the European Construction Products Regulation.
They have an official Certificate of Constancy of Performance and a Declaration of Performance according to European construction law.

Application
Fire damper to prevent the spread of fire and smoke.
For installation in walls, ceilings or ventilation shafts which serve as fire sections with the required fire resistance class EI 90 S.
Suitable for wall and ceiling installation or as overflow openings.
Can be inserted in spiral ducts.
Installation sleeve EH (accessories) recommended for one-sided duct connection.

Function
When an air temperature of +72 °C is exceeded, the fusible link responds. The built-in pressure spring automatically closes the valve.

European certification
- Declaration of Performance according to European Construction Products Regulation 305/2011.
- Tested according to EN 1366-2.
- Classification according to EN 13501-3: EI 90 (ve, ho, i↔o) S – (300 Pa). Room closure and insulation 90 min., vertical, horizontal, applicable in both directions, sealed against 300 Pa, even during fire.
- Complies with European product standard DIN EN 15650.

Special features
- Installation directly in spiral duct in the room-closing component.
- Officially tested fire protection disc valve with low air noise in case of high pressure drop.
- High damping value.
- Attractive, functional design.
- Simple adjustment, which cannot be changed by unauthorised persons, reduces the work load.
- Easily removable for inspection and cleaning, without unauthorised adjustment being possible.
- Large operating range.

Design
Valve body made of plastic, aerodynamically optimal design with inner cone and inlet ring. Cylindrical duct sleeve with butterfly valve and integrated fusible link.

Delivery
Individually shrink-wrapped in plastic film.

Installation and setting
- The installation and operating instructions contain exact specifications with regard to application and installation.
- The specifications in the related approval must be observed.

Installation examples
- **Duct installation in walls or ceilings**
  The element is installed by simple insertion in the spiral duct or in the installation sleeve EH (accessories) and then fixed in the wall, ceiling or shaft wall. Installation is possible regardless of the air flow direction. Subsequent one-sided duct connection.
- **Overflow opening**
  Without one-sided or double-sided duct connection, as overflow opening, can only be installed where there is no reason to fear smoke overflow below the trigger temperature. Approval required from building inspection authority in individual cases.

Accessories

End switch
For BTK monitoring and signalling the operating status to the central building management system. Attachable to all ND, simple snap-in installation.

BA-S	Ref. no. 02585
Switch as changeover contact	IP 67
Max. load	5 – 250 V / 6 A (2 A ind.)
Connect. cable 50 cm long / 3 x 0.34 mm²	
Wiring diagram no.	830

BTK 100 Disc rotations



BTK 125 Disc rotations



BTK 160 Disc rotations



BTK 200 Disc rotations



Order data

Type	Ref. no.	Dimensions in mm Ø A	Ø B	C	D	E	Weight aprx. kg	Accessories: Installation sleeve	Ref. no.	Dimensions in mm Ø F	G	H	Ø I
BTK 100	02633	150	98	19	129	20	0.45	**EH 100**	02639	100	110	140	98
BTK 125	02630	165	123	19	129	33	0.60	**EH 125**	02640	125	110	140	123
BTK 160	02631	220	158	19	129	51	0.85	**EH 160**	02641	160	110	140	158
BTK 200	02632	245	198	19	129	71	1.20	**EH 200**	02642	200	110	140	198

Fire protection ceiling seal ELS-D
For individual and central ventilation systems K 90-18017

ELS-D

Approval Z-41.3-368
No maintenance conditions

Dimensions ELS-D



Dim. in mm

System with mono tube fans

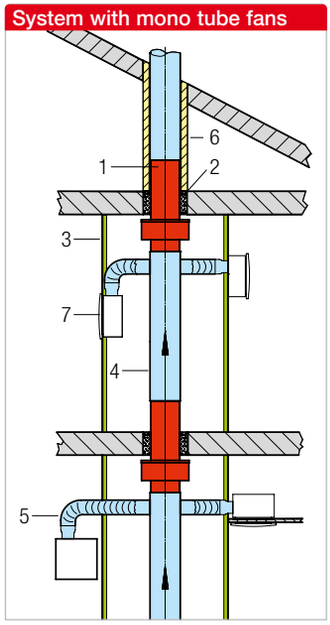

In accordance with building regulations, ventilation which vertically cross more than two full floors must be protected against fire and smoke. Traditionally, this requirement has been met by placing the ventilation duct in a fire-proof shaft. This involved: High investment costs, large space requirements, longer construction period and, above all, the cost of two shafts (distinction between mixed-use installation shaft and ventilation shaft).

The use of ELS-D ceiling seal has many advantages, such as e.g.:

- Placement of the ventilation duct in mixed-use installation shaft with simple, 12.5 mm thick plasterboard cladding.
- ELS-D have no maintenance requirements. Additional fire dampers with possible maintenance requirements are not necessary.
- Certified mono tube ventilation units without fire protection cladding or fire dampers may be connected via Aluflex pipes.
- Disc valves or volume flow-regulating extract air elements made of plastic can be used for central systems. These cold smoke shutters (type KAK) should be added to prevent the spread of cold smoke.
- The connection of extract air from domestic kitchens is permitted.
- The structural and functional advantages of plasterboard installations or elements can be fully realised.
- An approximate reduction of the space requirement to the ND of the main pipeline is possible through axial rotation during installation (either wide or narrow side forward or diagonal).
- The passage cross-section of the ventilation duct is fully maintained and there is no additional pressure loss. Cleaning and inspection are not affected.

General technical approval from the DIBt with no. Z-41.3-368. Fire resistance class: K 90-18017 (three-floor test).

Description

Casing made of galvanised steel sheet with integrated connectors at top and bottom.
The upper connector also serves as a ceiling outlet.

Two-stage function

- The dampers initially close the air flow opening at approx. 90 °C and prevent the introduction of high temperatures on other floors.
- The integrated foam actuator packages completely seal the ventilation duct above the damper at approx. 180 °C.

Installation

ELS-D can be installed in the underside of the ceiling or in installation elements in just a few simple steps. The installation position is vertical.
The ceiling seal is fixed by the two mounting brackets which are held in grouting and screed. The ceiling outlet is already integrated in ELS-D. The main pipeline can be simply slipped over and inserted on the other side like a fitting thanks to the standard connectors.

Accessories

Cold smoke shutter
Prevents the possible backflow of cold air etc. in central ventilation systems to other fire sections when the fan is at a standstill. (not required for systems with individual ventilation units.)

KAK 100	Ref. no. 04097
ND 100 mm	
KAK 125	Ref. no. 04098
ND 125 mm	

Reference

Other sizes and product details regarding the use of cold smoke shutters KAK.

See page 599

System with central fan

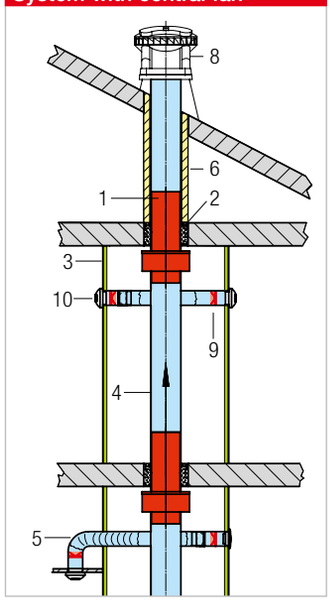

Legend
1 Ceiling seal ELS-D
2 Ceiling grouting
3 Installation shaft cladding e.g. 12.5 mm plasterboard
4 Main duct (spiral duct)
5 Connection duct (Aluflex)
6 Insulation against condensation
7 ELS ind. vent. units flush or surface without fire protection requirements
8 Central fan, e.g. Type DV EC (see page 86 ff.)
9 Cold smoke shutter KAK
10 Extract air element AE or disc valve (KTVA or MTVA)

Order data

Type	Ref. no.	Dimensions in mm A	B	C	Ø d	Ø D	E	F	H	Weight approx. kg
ELS-D 100	00270	183	123	385	99	102	50	250	85	2.5
ELS-D 125	00185	208	148	394	124	127	50	250	94	3.4
ELS-D 140	00186	233	163	403	139	142	50	250	103	4.0
ELS-D 160	00187	258	183	413	159	162	50	250	113	5.0
ELS-D 180	00188	283	203	424	179	182	50	250	124	6.0
ELS-D 200	00271	308	223	434	199	202	50	250	134	7.2

KAK

Dimensions KAK

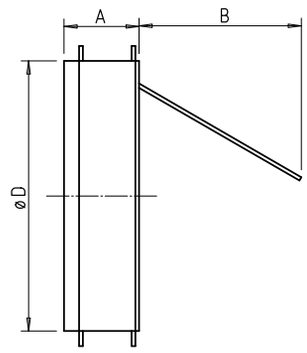

Dim. in mm see table

System with central fan

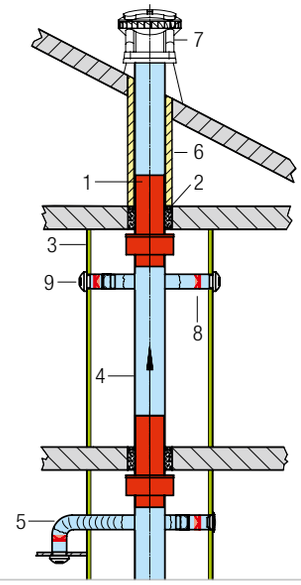

The Model Building Regulation and various regional building regulations require the following: The spread of fire and smoke must be prevented!
This requirement is met by the automatic Helios cold smoke shutters with magnetic closure. They seal supply air and extract air openings against the ingress of cold smoke according to regulations.

Application

- Central ventilation systems according to DIN 18017-3 in multi-floor buildings have a central fan which is connected to a shared main pipeline and located above or below the roof. via The connected rooms (e.g. kitchens, bathrooms, WCs) on the respective floor (fire section) are ventilated via the extract air duct.
- The main pipeline must cross multiple fire sections and therefore has to be placed in a fireproof, i.e. F90 classified shaft. The extract air openings in the individual fire sections must be equipped with fire dampers or fire protection disc valves.
- This cost-intensive and space-consuming solution can be replaced by using certified ceiling seals. Ceiling seals are installed or embedded in the main pipeline in the ceiling area. The main pipeline can thus be integrated in the installation shaft.
- Regional building regulations and general technical approvals for damper elements and ceiling seals stipulate that an outflow into the atmosphere via the main pipelines must be guaranteed for vertically installed dampers.
- This requirement becomes relevant if, in the event of a fire, the central fan fails and smoke enters the main pipeline due to overpressure in the fire area and it can enter areas which are not affected by the fire (other fire sections) via openings (disc valves) due to generated dynamic pressure.

Helios cold smoke shutters with magnetic closure KAK prevent the ingress of cold smoke into other fire sections. They must be positioned in all supply air/ extract air openings downstream of the disc valves or extract air elements (also in combination with BAE/BAK).

Design

- Ready-to-install element for insertion in ducts and fittings.
- Frame with circumferential U lip seal ring made of EPDM rubber for sealing in the ventilation duct.
- Double-sided shutter frame made of plastic with metal insert covers the silicone membrane. The shutter is therefore flutter-free and quiet in the air flow.
- A permanent magnet is positioned on the thread axle in the Internal frame cylinder, which tightly seals the shutter in case of falling pressure.
- The closing and opening pressure can be adapted to the installation situation.
- The very short installation depth and the asymmetric shape of the shutter frame, which allow a large opening angle, are particularly advantageous.

Installation and setting

- Insert KAK into duct on room side and note the flow direction.
- In case of vertical installation with horizontal flow, Make sure that the axis of rotation is positioned horizontally.

Pressure loss diagram

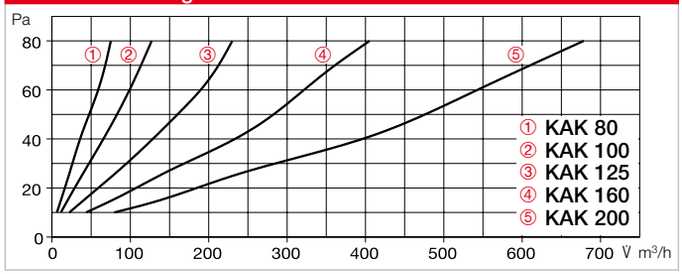

- Position directly downstream of the disc valve or air inlet/outlet element.

Order data

Type	Ref. no.	Dimensions in mm Ø D	A	B
KAK 80	04096	79	12	63
KAK 100	04097	95	20	60
KAK 125	04098	120	20	83
KAK 160	04099	155	20	110
KAK 200	04100	196	20	150

Legend
1 Ceiling seal ELS-D
2 Ceiling grouting
3 Installation shaft cladding e.g. 12.5 mm plasterboard
4 Main duct (spiral duct)
5 Connection duct (Aluflex)
6 Insulation against condensation
7 Central fan, e.g. Type DV EC (see page 86 ff.)
8 Cold smoke shutter KAK
9 Extract air element AE or disc valve (KTVA or MTVA)

BLS

Installation in brickwork and concrete walls F 30 – F 120

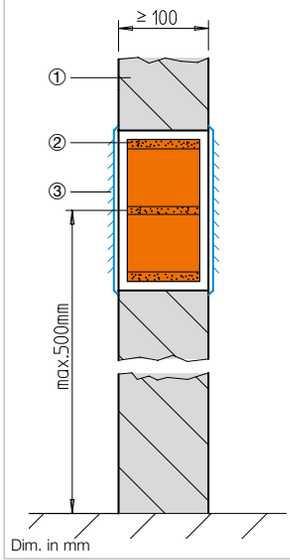

Dim. in mm

Installation in classified partition wall and cable duct F 30 and F 90

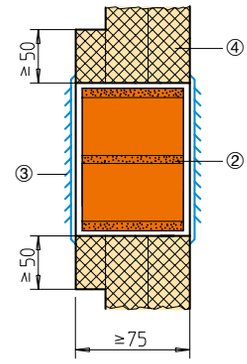

Dim. in mm

Fire protection ventilation tiles for the supply and extract ventilation of closed rooms and chambers to be protected against the spread of fire and smoke, such as e.g. installation shafts and cable ducts.
They allow a constant, static air exchange which prevents heat accumulation in the closed chambers.
The tiles can also be used as inflow openings in crucial corridor walls (emergency escape routes), unless the openings are in the lower wall area.

- **Special features**
  Fire resistance class F30 to F120 according to DIN 4102 (see box on right).
- Maintenance-free and inspection-free, no moving parts.
- Simple installation.
- Moisture-resistant, largely resistant to oils, petrol and weak acids.
- Use in individual cases on the basis of a project-related type approval (vBG).

- Installation does not affect the classification of the construction component.
  The ventilation tiles are made of organic intumescent material, which foams when exposed to heat, seals openings, slots and joints and thus prevents the passage of fire and smoke.
- Each tile is delivered with two ventilation grilles made of galvanised steel sheet. After inserting the tile, the grilles are to be placed over it on one or both sides as mechanical protection and optical cladding, i.e. screwed to the building structure (wall).
- Rectangular fire protection ventilation tiles must be installed horizontally.
- In case of walls of lower thickness, on-site doubling with fibre silicate frame in the BLS area.

Legend

① Brickwork
② Ventilation tile
③ Ventilation grille, double-sided
④ Fibre silicate boards

Fire resistance class	Ventilation tile installation in	Thick. mm
F 30	Brickwork and concrete walls. Lightweight partition and shaft walls, classified cable ducts.	75
F 90 / F 120*	Brick and concrete walls.	75
	Lightweight partition, classified shaft walls and cable ducts.	75

* Double-sided cover grille.

Installation in classified partition wall and cable duct F 30 – F 120



Dim. in mm

Product range, dimensions in mm

Ventilation module					Install. open.	Wgt.	Free ventilation	Cover grille	
Ref. no.	Type	Ø		D	max. i.L.	ca. kg	cross-sect. cm²	W	H
02712	**BLS 100**	100		75	Ø 103	0.21	37	200	200
02715	**BLS 125**	125		75	Ø 128	0.50	56	200	200
02767	**BLS 150**	150		75	Ø 153	0.60	85	200	200
02718	**BLS 160**	160		75	Ø 163	0.67	102	255	255
02721	**BLS 200**	200		75	Ø 204	1.12	158	255	255
		W	H	D				W	H
02766	**BLS 100 / 100**	93	93	75	103 x 103	0.38	35	200	200
02724	**BLS 150 / 150**	150	150	75	153 x 153	0.80	115	255	255
02727	**BLS 200 / 100**	186	93	75	203 x 103	0.75	69	305	155
02730	**BLS 200 / 150**	200	150	75	203 x 153	1.15	153	305	200
02733	**BLS 300 / 150**	300	150	75	303 x 153	1.56	230	405	205

Volume flows – Differential pressure

BLS / round

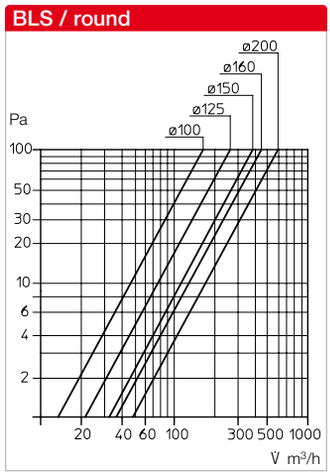

BLS / rectangular

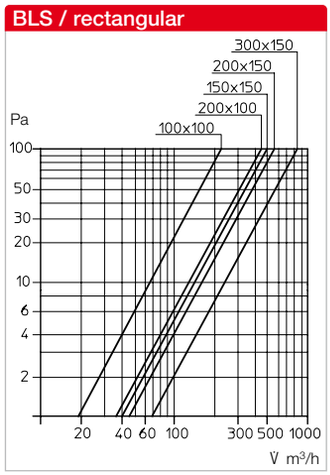

Convenient control
for efficient operation.

The adjustment of ventilation and air-conditioning system performance to changing requirements is essential for meeting comfort standards and mandatory for energy policy reasons.

Measure.

Appropriate adjustments are required for changes in room occupancy, air deterioration at different times, changing temperatures, day and night settings, etc.
Helios offers regulation, control and switching units adapted to the fans for all functions.

Control.

Complete system solutions provide users with added security. Time can also be saved during planning, installation and operation when control and regulation devices are matched to the fans and their functions. This can help prevent potential problems at an early stage.

Regulate.

The extensive Helios control and regulation range offers suitable solutions for a wide variety of applications and supports energy-efficient, low-noise operation.

Task	Our solutions at a glance			Page
Manual control of fan volume flow	**■ Manual speed controller**			
	– without motor protection			
	– 10 V, 24 V DC	– Potentiometer for EC fans	**PU / PA, SU / SA**	617
	– 230 V~	– Electronic, flush-m., surface-m., install.	**ES.., BSX**	607
	– 230 V~	– Transformer, surface-m., installation	**TSW, TSSW**	608
	– 400 V 3~	– Transformer, surface-m., installation	**TSD, TSSD**	609
	– with built-in motor protection for connection to thermal contacts			
	– 230 V~ / 400 V 3~	– Transformer, surface-mounted	**MWS / RDS**	608 f.
	– 400 V 3~	– Electronic, surface-mounted	**ESD**	618
	– 400 V 3~	– Frequency inverter	**FU..**	612 f.
	■ Operating switch for fans with 2 speeds			
	– Pole changing switch for Dahlander winding, surface / flush-mounted		**PDA / PDU**	605
	– Pole changing switch for separate windings, surface / flush-mounted		**PGWA / PGWU**	605
Turn-off delay	**■ Turn-off delay switch**	electronic, mechanical, with variable and fixed periods	**ZNE, ZNI, ZV**	603
CO_2 traffic light display	**■ Air quality**	with traffic light display, for determining the CO_2 content of the room air	**CO_2 monitor**	620
Flow velocity	**■ Flow monitor**	for monitoring the minimum flow velocity in rectangular and round ducts	**SWE, SWT**	611
TEMP Room temperature-dependent	**■ Ventilation thermostat**	– single-step with on/off function	**TME 1**	610
	■ Temperature control units with integrated power unit, surface-mounted			
	– 230 V~	– electronic	**EUR 6 C**	614
Humidity-dependent control	**■ Ventilation hygrostat**	with on/off function, room surf.-mount.	**HY 3, HY 3 SI**	610
	■ Diff. humidity control system	System component for optimal indoor humidity	**FDR**	619
	■ Fan for sanitary rooms	with integ. humidity control function	**M1.. F, ELS-VF**	26, 64
Δ P oder °C oder m/s Pa Temp.-, pressure-, speed-dependent control	**■ Universal controller**	with power unit 230 V~	**EUR 6 C**	614
		with 0-10 V DC output, for EC fans	**EUR EC**	615
		with power unit 400 V~	**FU..**	612 f.
	■ Control units for differential pressure or temperature, with digital display			
	– 0-10 V DC	– electronic, surface-mounted	**EDR / ETR**	616
	■ Differential pressure switch	for monitoring air filters, system pressure and fan operation	**DDS**	610
Motor protection against overloading	**■ Motor prot. circuit breaker**	for connection of thermal contacts for monitoring the winding temperature	**MW, MD**	606
			M 2, M 3, M	606
	■ Motor prot. trigger unit	for PTC therm. temp. sensor in winding	**MSA**	606
Operating switch	**■ Reverser switch**	for changing the direction of rotation and flow for axial fans	**WS**	604
	■ Isolator switch	for all-pole mains disconn. for serv. work	**RS, RHS**	604 f.
	■ Pole changing switch with reverser	application like above, but only for axial fans with 2 speeds	**PWGW, PWDA**	605
Automatic timer	**■ Weekly timer**	for automatic control of the operating mode	**WSUP, WSUP-S**	603

Flush-mounted turn-off delay timer for installation in flush-mounted boxes behind any switch

- Special development with ideal features for fan turn-off delay e.g. in bathrooms/WCs. The small dimensions allow installation in flush-mounted box behind any switch. Activation via on/off switch coupled with the light in windowless rooms. Individually applicable due to various period variants.
- Interference immunity and emitted interference of switch ZNE/ZNI comply with current EN guidelines.
- ZV tested as follows, emitted interference according to: DIN EN 55014 / VDE 0875-14-1; DIN EN 50370 / VDE 0875-1; DIN EN 61000-3-3 / VDE 0838-3.

- **Turn-off delay timer for installation in flush-m. box behind switch**

ZNE

ZNE Ref. no. 00342

Electronic turn-off delay timer with continuously adjustable turn-off delay periods
Activation via on/off switch, e.g. together with light. Minimal dimensions allow almost unrestricted installation.

Contin. adjustable turn-off delay period	0 – 21 min.
Start-up delay, deactivatable	45 sec.
Voltage	230 V, 1~, 50/60 Hz
Load cap. min. 0.05 A max. 0.8 A (ind.)	
Protection category	IP40
Dim. mm	W 17 x H 37 x D 13
Installation	Flush box behind switch
Wiring diagram no.	477.1
– for controlling two rooms / switches	174.3

- **Turn-off delay timer for installation in flush-m. box behind switch**

ZNI

ZNI Ref. no. 00343

Electronic interval switch with adjustable interval and turn-off delay periods
Automatically ventilates in adjustable time intervals unless there is manual ventilation during these time phases. In case of manual operation, e.g. activation via light switch, there will be a turn-off delay in the set duration.

Adjust. interval period	0, 4, 8, 12, 24 h.
Turn-off delay per. w/ manual operation, Continuously adjustable	0 – 21 min.
Start-up delay, deactivatable	45 sec.
Voltage	230 V, 1~, 50/60 Hz
Load cap. min. 0.05 A max. 0.8 A (ind.)	
Protection category	IP40
Dim. mm	W 17 x H 37 x D 13
Installation	Flush box behind switch
Wiring diagram no.	477.1
– for controlling two rooms / switches	174.3

- **Turn-off delay timer for installation in distribution box**

ZV

ZV Ref. no. 01279

Electronic turn-off delay timer with continuously adjustable periods and operating switch with turn-off delay and continuous operation positions. Parallel connection of light and fan possible via on/off switch or button.

Contin. adjustable turn-off delay period	0,5 – 12 min.
Voltage	230 V, 1~, 50/60 Hz
Load capacity	2.1 A (ind.)
Protection category	IP20
Dim. mm	W 18 x H 83 x D 67
Installation	Distribution box, DIN rail 35 mm
Wiring diagram no.	236.1

- **Weekly timer Surface-mounted or installation in flush-mounted box**

WSUP

WSUP Ref. no. 09990

Digital timer with illuminated LCD display for automatic controlling the operating modes of any units up to 10 A rated current. Suitable for switching the smallest electric currents from 1mW (0.1V/1mA) through standard, gold-plated µ contact. 56 programmable switching times for all weekdays. With smartphone via NFC (free App).

Voltage	230 V, 1~, 50-60 Hz
Load capacity	1 mW (0.1 V / 1 mA)
Switch cont.	Pot.-fr. changeover contact, 250 V, 1~, 10 A cos φ ≈ 1 6 A cos φ ≈ 0.6, µ contact
Protection category/ class	IP20 / II
Dim. mm	W 84 x H 84 x D 40
Installation	Surf.-m. casing, flush-m. box
Temp. range	–30° C to +55 °C
Memory spaces (switching time)	56
Wiring diagram no.	862.1

- **Weekly timer for switch cabinet installation**

WSUP-S

WSUP-S Ref. no. 09577

Digital timer with illuminated LCD display for automatic controlling the operating modes of any units up to 16 A rated current. Suitable for switching the smallest electric currents from 1mW (0.1V/1mA) through standard, gold-plated µ contact. 56 programmable switching times for all weekdays. With smartphone via NFC (free App).

Voltage	230 V, 1~, 50-60 Hz
Load capacity	1 mW (0.1 V / 1 mA)
Switch cont.	Pot.-fr. changeover contact, 250 V, 1~, 16 A cos φ ≈ 1 6 A cos φ ≈ 0.6, µ contact
Protection category/ class	IP20 / II
Dim. mm	W 36 x H 90 x D 63
Installation	DIN top-hat rail installation Switch cabinet (2 space units)
Temp. range	–30° C to +55 °C
Memory spaces (switching time)	56
Wiring diagram no.	862.1

■ **Reverser switch**
□ **Surface-mounted installation**

WS

WS Ref. no. 01271
For switching the air flow direction of 1~ and 3~ high-performance axial fans.
Installation: Surface-mounted.
With screw attachment (M 3).
Assignment as specified in type table on product pages.

Load capacity	AC 3 / 5.5 kW
Voltage	230 V, 1~, 50/60 Hz 400 V, 3~, 50/60 Hz
Protection category	IP65
Wiring diagram no.	1443
Net weight approx.	0.31 kg
Dim. mm	W 90,5 x H 90,5 x D 105
Casing	Plastic, grey

■ **Reverser switch, speed switch and on/off switch**
□ **Installation in flush-mounted switch box**

DSEL 2

DSEL 2 Ref. no. 01306
1. **Speed switch** and on/off switch for fans with two performance levels like ELS-V 60/35, -VN 100/60.
2. **Reverser switch** for switching the air flow direction of reversible fans (for supply and extract ventilation) and on/off switching.
Assignment as specified in type table on product pages.

Two replacement rockers with symbols for speed change or reversing operation included in delivery. Colour pure white.

Load capacity	3 A (ind.)
Voltage	230 V, 1~, 50/60 Hz
Protection category	IP30
Installation	in standard flush-m. box
Wiring diagram no. – two level	827
– reversing operation	828
Dim. mm	W 80 x H 80 x D 15
Weight approx.	0.1 kg

■ **Three level speed switch and operating switch with 0 position**
□ **Installation in flush-mounted switch box**

DSEL 3

Convenient flush-mounted speed switch for fans with three performance levels. Room light cannot be connected in parallel.

Voltage	230 V, 1~, 50/60 Hz
Weight approx.	0.1 kg

DSEL 3 Ref. no. 01611
Can be used with fan types ELS-V 100/60/35.

DSZ Ref. no. 01598
Can be used with central extract ventilation box ZEB EC.

Type DSEL 3

Load capacity	3 A (ind.)
Protection category	IP30
Installation	in standard flush-m. box
Wiring diagram no.	See fan type
Dim. mm	W 80 x H 80 x D 23

Type DSZ

Load capacity	AC 3 / 2.2 kW, AC 15 / 6 A
Protection category	IP20
Installation	in flush-m. box 55 mm deep
Wiring diagram no.	735
Dim. mm	W 80 x H 80 x D 23

■ **Speed switch, operating switch and reverser switch**
□ **Surface-mounted and flush-mounted installation possible**

FR 22/30

FR 22/30 Ref. no. 00998
For switching fan type GX 225 or 300.
For surface-mounted and flush-mounted installation in dry rooms.
Three slide switches perform the following functions: Two-pole operating switch on/off with operating display, high or low speed and reverser switch (supply and extract ventilation).

Load capacity approx.	0.8 A (ind.)
Voltage	230 V, 1~, 50/60 Hz
Protection category	IP20
Dim. mm	W 210 x H 85 x D 55
Weight approx.	1.2 kg
Wiring diagram no.	497
Casing	Plastic, white

■ **Isolator switch**
□ **3-pole with auxiliary contact for direct start-up**

RS 3+1 7.5

RS 3+1 7.5 Ref. no. 06387
Plastic casing for surface-mounted installation. Locking options in “0 OFF” and “I ON” positions.

Technical data

Voltage	400 V, 3~, 50/60 Hz
Operating current	20 A
Load capacity	AC–23 B, 7.5 kW
Protection category	IP65
Protection class	II
Actuation	Rotary drive
Temperature range	–25 to +60 °C
Dim. mm	W 90.5 x H 90.5 x D 102
Weight approx.	0.3 kg
Wiring diagram no.	1088
Casing	UV-resistant and weather-resistant

■ **Isolator switch**
□ **6-pole with auxiliary contact for Dahlander winding or Y/Δ start-up**

RS 6+1

RS 6+1 7.5 Ref. no. 06388

Load capacity	20 A, AC–23 B, 7.5 kW
Dim. mm	W 90.5 x H 90.5 x D 139
Weight approx.	0.4 kg

RS 6+1 11 Ref. no. 06389

Load capacity	25 A, AC–23 B, 11 kW
Dim. mm	W 115 x H 115 x D 163
Weight approx.	0.6 kg

Technical data

Voltage	400 V, 3~, 50/60 Hz
Protection category	IP65
Protection class	II
Actuation	Rotary drive
Locking options	“0 OFF” and “I ON”
Temperature range	–25 to +60 °C
Wiring diagram no.	1088
Casing	UV-resistant and weather-resistant for surface-mounted installation

■ Isolator switch/main switch
□ 3-pole with auxiliary contact

RHS 3+1

RHS 3+1 Ref. no. 01594
"0" position can be locked with a padlock. In accordance with DIN EN 60204 p.1/VDE 0113-1. Plastic casing for surface-mounted installation. 3-pole with auxiliary contact, for single-speed and speed-controlled fans.

Technical data

Voltage	400 V, 3~, 50 Hz
Load capacity	
– Main contact	AC 3 / 5.5 kW 12 A ind.
– Aux. contact	AC 3 / 2.2 kW 4 A ind.
Protection category	IP54
Dim. mm	W 101 x H 126 x D 104
Weight approx.	0.35 kg
Wiring diagram no.	505.2

■ Isolator switch/main switch
□ 6-pole with 2 aux. contacts

RHS 6+2

RHS 6+2 Ref. no. 01595
"0" position can be locked with a padlock. In accordance with DIN EN 60204 p.1/VDE 0113-1. Plastic casing for surface-mounted installation. 6-pole with 2 auxiliary contacts, for all pole-changing fans.

Technical data

Voltage	400 V, 3~, 50/60 Hz
Load capacity	AC 3 / 5.5 kW
Protection category	IP65
Dim. mm	W 90,5 x H 90,5 x D 140
Net weight approx.	0.41 kg
Wiring diagram no.	1440

■ Pole changing switch
□ for separate winding PGWA
□ for Dahlander winding PDA

Surface-mounted

PGWA / PDA

Surface-mounted operating switch for pole-changing fans.

Type	Ref. no.	Load capacity	No.
For separate winding			
PGWA 25	40791	AC 3/5.5 kW 25 A	1554
PGWA 40	40792	AC 3/15 kW 40 A	1554
For Dahlander winding			
PDA 25	40789	AC 3/5.5 kW 25 A	1552
PDA 40	40790	AC 3/15 kW 40 A	1553

Technical data for all types

Voltage	400 V, 3~, 50/60 Hz
Protection category	IP65

Type	Dim. mm			Weight
	B	H	T	aprx. kg
PGWA 25	90.5	90.5	102	0.31
PGWA 40	115	115	129	0.61
PDA 25	90.5	90.5	139	0.42
PDA 40	115	115	156	0.69

■ Reverser and pole changing switch
□ for separate winding PGWA
□ for Dahlander winding PDA

Surface-mounted

PWGW / PWDA

PWGW Ref. no. 01281
For separate winding

PWDA Ref. no. 01282
For Dahlander winding

For speed switching and changing the air flow direction of individual pole-changing fans.
Grey plastic casing.

Technical data for all types

Voltage	400 V, 3~, 50/60 Hz
Load capacity	AC 3 / 11 kW
Protection category	IP65
Dim. mm	W 115 x H 115 x D 160
Net weight approx.	0.59 kg (PWGW) 0.61 kg (PWDA)
Wiring diagram no.	1434 (PWGW) 1435 (PWDA)

■ Speed switch DS 2

□ for two-speed ⋎/△ switchable three-phase current fans

□ for two level alternating current fans (SlimVent, RR)

DS 2

DS 2 Ref. no. 01351
Speed switch and on/off switch for two-speed three-phase current fans in ⋎/△ connection. Grey plastic casing for surface-mounting.

DS 2/2 Ref. no. 01267
Speed switch and on/off switch for two-speed 1~ fans,
Types RR and SlimVent SVR, SVS.

Technical data for all types

Voltage	400 V, 3~, 50/60 Hz
Load capacity	AC 3 / 5.5 kW / 25 A
Protection category	IP65
Type DS 2:	
Dim. mm	W 90,5 x H 90,5 x D 140
Net weight approx.	0.42 kg
Wiring diagram no.	1437
Type DS 2/2:	
Dim. mm	W 90,5 x H 90,5 x D 105
Net weight approx.	0.29 kg
Wiring diagram no.	1442

Motor protection
Regulations and standards

The harmonised European standards and national Installation regulations stipulate that electric motors must be protected against thermal overload. This can be done in several ways and it depends on the motor features.

- Optimal protection is provided by thermal contacts (hereinafter "TK") which monitor the winding temperature. They also protect speed-controlled motors.
- The "TK" are connected in series with the winding, i.e. internally wired, for low motor outputs. This results in an automatic function (deactivation and reactivation after cooling) without the operator necessarily having to react to the fault.
- In case of motors/fans with larger outputs, the "TK" or PTC thermistor temperature sensors are connected to the terminal block and must be wired to the adjoining motor protection circuit breakers/triggering devices. Warranty claims shall only be applicable if this condition is met.
- Motors/fans without thermal monitoring elements in the winding (e.g. IEC standard motors) must have all-pole protection with appropriate motor protection circuit breakers.

For alternating current fans with external thermal contacts on terminal board

Motor protection circuit breaker MW
Switch and motor protection circuit breaker in plastic casing for surface-mounted installation or installation in switch cabinet (clamp fastening for mounting rails).

For three-phase current fans with thermal contacts

Motor protection circuit breaker MD
Switch and motor protection circuit breaker in plastic casing for surface-mounted installation or installation in switch cabinet (clamp fastening for mounting rails).

For pole-changing three-phase current fans with separate winding and thermal contacts

Motor protection circuit breaker M 2
Switch and motor protection circuit breaker in light grey plastic casing with indicator lights for surface-mounted installation.

For pole-changing three-phase current fans with Dahlander winding and thermal contacts

Motor prot. circuit breaker M 3
Design and function like M 2.

For two-speed three-phase current fans with Y/Δ connection and thermal contacts

Motor prot. circuit breaker M 4
Design and function like M 3.

For three-phase current fans with built-in PTC thermistors (PTC temperature sensors) for thermal motor protection. Mandatory use for speed-controlled, explosion-proof fans.

Motor prot. circuit breaker MSA
Triggering device with restart lockout for 1 to 6 in PTC thermistor temperature sensors connected in series.

Reference	Page
Technical information	19 ff.
Transformer speed controller with motor protection circuit breaker	
– for 1~ altern. current MWS	608
– for 3~ 3-ph. current RDS	609

MW

MW Ref. no. 01579
On/off operation by pushbutton switch. Manual recommissioning after fault.
Potential-free auxiliary contact for connection for fault signal.

	250 V, 1~, 50/60 Hz
Max. Current	10 A
Protection category	IP55
Weight	aprx. 0.6 kg
Dim. mm	W 80 x H 135 x D 96
Wiring diagram no.	1485

MD

MD Ref. no. 05849
On/off operation by pushbutton switch. Manual recommissioning after fault.
Potential-free auxiliary contact for connection for fault signal.

	400 V, 3~, 50/60 Hz, applic. from 80 V
Max. Current	16 A
Protection category	IP55
Weight	aprx. 0.6 kg
Dim. mm	W 80 x H 135 x D 96
Wiring diagram no.	1486

M 2 / M 3

M 2 Ref. no. 01292
Motor disconnected from mains when TK react. Recommissioning after fault by turning switch to "0" position.

Voltage	400 V, 50/60 Hz
Switching capacity	AC 3 / 5.5 kW
Rated current approx.	12 A
Protection category	IP55
Weight	aprx. 1.0 kg
Dim. mm	W 150 x H 195 x D 145
Wiring diagram no.	142

M 3 Ref. no. 01293
Like M 2, but for pole-switching 3~ fans with Dahlander winding and built-in TK.
Wiring diagram no. 143

M 4

M 4 Ref. no. 01571
Like M 3, but for two-speed 3~ fans with Y/Δ connection and built-in TK.
Wiring diagram no. 144

MSA

When a PTC thermistor reaches the nominal response temperature, the built-in relay drops out. Faults are indicated by the built-in LED. Recommissioning by pressing the "Reset" button or via external connectable switches. Plastic casing for switch cabinet installation on mounting rails according to DIN EN 60715.

MSA Ref. no. 01289
For the thermal protection of electric motors (even explosion-proof electric motors according to Directive 2014/34/EU (ATEX) with built-in PTC thermistor temp. sensors according to DIN 44081 and DIN 44082.

Voltage	230 V ± 15 %, 50/60 Hz
3~ operation via contactor	
Switching capacity at 230 V	3 A AC 15
Connection options	1 to 6 PTC thermistors connected in series.
Type tested by Physikalisch-Technische Bundesanstalt, according to DIN EN 60079-14 / VDE 0165-1, DIN EN 60079-0 / VDE 0170-1, DIN EN 60079-17 / VDE 0165-10-1.	
Protection category	IP20
Weight approx.	0.2 kg
Dim. mm	W 35 x H 90 x D 58
Wiring diagram no.	325.1

Electronic speed controller for the continuously variable speed control of alternating current fans

- Multiple different fans can be operated with one controller until the rated load capacity is reached. A reserve of 10% must be taken into account for dimensioning.
- Minimum output voltage can be adjusted to motor characteristics via potentiometer.
  The lower limit for smooth motor start-up must be maintained!
- Overload protection from built-in microfuse.
- Additional connection of indicator lights or shutter possible via uncontrolled output.
- Complies with EMC guidelines, DIN EN 50370, DIN EN 61000 / VDE 0838, DIN EN 55014, DIN EN 60669.

- **Design ESU 1 and ESU 3**
  An innovation by HELIOS
  - Both types are compatible with the current light switch ranges of many manufacturers.
    Thus, the speed controller can be integrated in the intended switch range on site. Colour adjustment is also not a problem. The frame, central insert and rotary knob are taken from the "dimmer range" in the switch series.
  - Standard delivery includes: Controller insert, flush-mounted cover plate and rotary knob made of plastic in white.
  - Operation indicator via light ring surrounding the rotary knob.

- **Surface-mounted design**
  - Closed plastic casing in attractive design.
  - ESA 1 and ESA 3 with operation indication via light ring.

- **Important information**
  Only motors which are suitable for electronic control through voltage reduction can be connected.

- **Electronic speed control units,** which function on the basis of the phase control principle, can generate motor humming noises which may be perceived as disturbing in the lower speed/ voltage range. Transformer control units which do not generate noise should therefore be used in noise-critical applications.

- **For flush-mounted installation**
  1~ alternating current, 230 V

ESU 1

ESU 1 Ref. no. 00236
Max. load 1 A
Front and rotary knob made of white plastic. Installation in standard flush-mounted box. Operation indicator via light ring.

Minimum load	0.15 A
Protection category (installed)	IP30
Wiring diagram no.	556.1
Dim. mm	W80 x H80 x D21 prot.

ESU 3

ESU 3 Ref. no. 00237
Max. load 2.5 A (T 40 E)
Front and rotary knob made of white plastic. Installation in standard flush-mounted box. Operation indicator via light ring.

Minimum load	0.15 A
Protection category (installed)	IP30
Wiring diagram no.	556.1
Dim. mm	W80 x H80 x D21 prot.

- **For surface-mounted installation**
  1~ alternating current, 230 V

ESA 1

ESA 1 Ref. no. 00238
Max. load 1 A
White plastic casing, operation indicator via light ring in rotary knob.

Minimum load	0.15 A
Protection category	IP40
Wiring diagram no.	556.1
Dim. mm	W 80 x H 80 x D 65

ESA 3

ESA 3 Ref. no. 00239
Max. load 2.5 A (T 40 E)
White plastic casing, operation indicator via light ring in rotary knob.

Minimum load	0.15 A
Protection category	IP40
Wiring diagram no.	556.1
Dim. mm	W 80 x H 80 x D 65

- **Surface-mounted, with reverser**
  1~ altern. current, 230 V
  Can only be used with fan types: REW 150 and REW 200, series HV, H 200/4 and window fans GX.

BSX

BSX Ref. no. 00240
Max. load 1 A (T 40 E)
Surface-mounted speed controller with reverser for reversible fans (supply and extract ventilation) in white plastic casing. Only for fans which are reversible using a changeover switch.

Minimum load	0.15 A
Protection category	IP40
Wiring diagram no.	480.2
Dim. mm	W 80 x H 80 x D 65

- **For distribution box installation**
  1~ alternating current, 230 V

ESE 2.5

ESE 2.5 Ref. no. 01302
Max. load 2.5 A
For installation in switch cabinets and distribution cabinets. Compatible with 35 mm standard profile rails.

Minimum load	0.1 A
Protection category	IP30
Wiring diagram no.	376
Dim. mm	W 35 x H 86 x D 94

Transformer speed controllers with and without motor protection for alternating current fans 1~, 230 V, 50/60 Hz

Five-step transformer speed controller for the speed control of alternating current fans

- Can be used for controlling the power of all speed-controllable 1~ alternating current fans.
- Four secondary voltage in the gradations 110 / 140 / 170 / 190 and 230 V (full mains voltage) allow five fan performance levels.
- Multiple different fans can be connected to one control unit until the rated load capacity is reached.

Advantages
- Advantageous price/performance ratio.
- Low fault susceptibility.
- Low-loss and low-noise fan operation.
- Uncontrolled output for connection of indicator lights or shutter for MWS-, TSW- (from type TSW 1.5) and STSSW types.

Surface-mounted unit design
- Robust ISO casing, light grey, made of break-resistant plastic in protection category IP54. Types from TSW 10 and MWS 10 made of steel, lacquered twice, protection category IP54.
- Built-in operating switch for five speeds and activation/deactivation.
- Operation indication via indicator lights.
- Max. permissible ambient temperature +35 °C.
- Delivered ready for operation, simple connection to terminal board.

Integral transformer design
- Assembled terminal strip with eight output voltages on the secondary side.
- Mounting bracket for easy mounting.

Accessories
Six-step cam switch Type STSSW for switch cabinet installation, with front attachment.

- **For surface-mounted installation**
  Max. load 0.35 A
  1~ alternating current, 230 V

TSW 0.3

Mini speed controller TSW 0.3
Compact five-step speed controller with on/off switch for surface installation in dry rooms. Plastic casing, white.

TSW 0.3	Ref. no. 03608
Max. load	0.35 A
Protection category	IP20
Dim. mm	W 160 x H 85 x D 60
Wiring diagram no.	496.1

- **For surface-mounted installation**
  1~ altern. current, 230 V

TSW

Transformer speed control. TSW
For one or more alternating current fans.

Type	Ref. no.	I max. A	Dim. mm B	H	T
TSW 1 [1]	02638	1,0	84	160	88
TSW 1,5 [2]	01495	1.5	115	205	100
TSW 3 [3]	01496	3.0	170	255	140
TSW 5 [3]	01497	5.0	170	255	140
TSW 7,5 [3]	01596	7.5	200	305	140
TSW 10 [3]	01498	10.0	300	325	185

Wiring diagram no. [1] 1636 [2] 1494 [3] 1495

- **For switch cabinet installation**
  1~ alternating current, 230 V

TSSW

Speed contr. transformer TSSW
Built-in transformer with mounting bracket and eight output voltages on the secondary side.

Type	Ref. no.	I max. A	Dim. mm B	H	T
TSSW 1,5	06520	1.5	75	83	65
TSSW 3	06521	3.0	84	90	87
TSSW 5	06522	5.0	108	112	90
TSSW 10	06523	10.0	135	135	128

Wiring diagram no. 1493

STSSW

Five-step operating switch STSSW Accessory for control transformer TSSW for 230 V, 1~ fans. For switch cabinet installation with front attachment and front plate. connections are recessed.

STSSW	Ref. no. 00234
Voltage	230 V
Max. load	2.2 kW
Dim. mm	W 48 x H 48 x D 102
Wiring diagram no.	1470

- **With motor protection circuit breaker**
  1~ alternating current, 230 V
  For surface-mounted installation

MWS

Transformer speed controller MWS with motor protection circuit breaker
Five-step speed controller with integrated triggering device for 230 V, 1~ fans. For connection of external thermal contacts on terminal board.
Connection of multiple fans possible up to the rated load.
All fans deactivated when thermal contact reacts. With step switch and indicator lights. Recommissioning after fault or mains disconnection via “0”position.

Type	Ref. no.	I max. A	Casing IP54 made of	Dim. mm W	H	D	Wiring diagram
MWS 1,5	01947	1.5	Plastic	115	205	100	1488
MWS 3	01948	3.0	Plastic	170	255	140	1489
MWS 5	01949	5.0	Plastic	170	255	140	1489
MWS 7,5	01950	7.5	Plastic	200	305	140	1489
MWS 10	01946	10.0	Steel	300	325	185	1489

Five-step transformer speed controller for the speed control of three-phase current fans

- Can be used for controlling the power of all speed-controllable 3~ three-phase current fans, in large steps for ⅄/△ switchable types.
- Four secondary voltage in the gradations 130 / 180 / 230 / 300 and 400 V (full mains voltage) allow five fan performance levels.
- Multiple different fans can be connected to one control unit until the rated load capacity is reached.

Advantages
- Advantageous price/performance ratio.
- Low fault susceptibility.
- Low-loss and low-noise fan operation.
- Uncontrolled output for connection of indicator lights or shutter for RDS-, TSD- and STSSD-types.

Surface-mounted unit design
- Robust casing, light grey, made of steel, lacquered twice, protection category IP54.
- Built-in operating switch for five speeds and activation/deactivation.
- Operation indication via indicator lights.
- Max. permissible ambient temperature +35 °C.
- Delivered ready for operation, simple connection to terminal board.

Integral transformer design
- Two autotransformers in V circuit allow the function described above.
- Assembled terminal strip with eight output voltages on the secondary side.
- Mounting bracket for easy mounting.
- Contactors and wiring on site.

Accessories
Six-step cam switch Type STSSD for switch cabinet installation, with front attachment.

- **For surface-mounted installation**
  3~ three-phase current, 400 V

TSD

Transformer speed control. TSD
Like TSW, but for 3~ fans.

Type	Ref. no.	I max. A	Dim. mm B	H	T
TSD 0,8	01500	0.8	300	325	185
TSD 1,5	01501	1.5	300	325	185
TSD 3 3)	01502	3.0	300	425	185
TSD 5,5	01503	5.5	300	425	235
TSD 7	01504	7.0	300	425	235
TSD 11	01513	11.0	400	430	235

Wiring diagram no. 1491

- **For switch cabinet installation**
  3~ three-phase current, 400 V

TSSD

Speed contr. transformer TSSD
Like TSSW, but two integral transformers, connection in V circuit.

Type	Ref. no.	I max. A	Dim. mm B	H	T
TSSD 1	06516	1.0	108	112	90
TSSD 2	06517	2.0	108	112	100
TSSD 4	06518	4.0	120	122	120
TSSD 7	06519	7.0	150	144	140
TSSD 11	06515	11.0	150	144	163

Wiring diagram no. 1492

STSSD

Five-step operating switch STSSD compatible with speed control transformer TSSD for 3~, 400 V fans. For switch cabinet installation with front attachment and front plate. Recessed connections.

STSSD	Ref. no. 00235
Voltage	AC 3, 400 V
Max. load	5.5 kW
Dim. mm	140 mm, □ 48 mm
Wiring diagram no.	1471

- **With motor protection circuit breaker**
  3~ three-phase current, 400 V
  For surface-mounted installation

RDS

Transformer speed controller RDS with motor protection circuit breaker
Five-step speed controller with integrated thermal contact triggering device for 3~, 400 V three-phase current fans. For connection of external thermal contacts on terminal board.
Connection of multiple fans possible up to the rated load. All fans deactivated when thermal contact reacts. With step switch and indicator lights.

Type	Ref. no.	I max. A	Casing IP54 made of	Dim. mm B	H	T	Weight aprx. kg
RDS 1 2)	01314	1.0	Steel	300	325	175	6.0
RDS 2	01315	2.0	Steel	300	325	185	13.0
RDS 4 2)	01316	4.0	Steel	300	425	185	18.2
RDS 7 2)	01578	7.0	Steel	300	425	235	27.2
RDS 11	01332	11.0	Steel	400	430	235	38.0

Max. perm. ambient temp. +35 °C. Wiring diagram no. 1490.

3) Illustration and dimensions probably valid for deliveries from Q4/2025.

SA-5 10

Five-step speed switch

SA-5 10 Ref. no. 40229

Five-step switch for surface mounting. For five-step control of EC fans or frequency inverters. Steps from 2 to 10 V can be set via offset. Protection class IP54.
Casing: plastic, white
Dim. mm: W 106 x H 137 x D 56

DDS

Differential pressure switch DDS

DDS Ref. no. 00445

Area of application

- Complete, installation set for monitoring air filters, system pressure and fan operation.
- Suitable for DDC applications due to the gold-plated connection contacts (24 V DC/0.1 A). When used in conventional technology (230 V AC/1.5 A), subsequent use in DDC applications is no longer possible.
- Suitable for applications according to VDI 6022.

Function

Adjustable normally closed / normally open contact for monitoring drops in pressure and thus the contamination of air filters, fan pressure increases and ventilation system pressure levels.

Product range

Complete ready-to-install set consisting of:

- Differential pressure switch DDS
- 4 fixing screws
- 2 hose connections
- Connection hose Ø 6 mm x 1.5 mm x 2000 mm
- Drilling template for connections
- Mounting plate + 3 fixing screws
- 3 screw terminals

Technical data

Adjustable meas. range	50 – 500 Pa
Switching differential Δp	20 Pa
Max. operating overpressure	5 kPa
Load capacity	230 V AC 1.5 (0.4) A 24 V DC 0.1 A
Ambient temp.	–20 to +85 °C
Air flow temp.	–20 to +85 °C
Humidity	0...50 % RH, non-condensing
Protection category	IP54
Dimensions mm	Ø 104, D 58
Weight approx.	0.23 kg
Wiring diagram no.	490

TME 1

One-stage thermostat TME 1

TME 1 Ref. no. 01334

Area of application

- Robust, electronic thermostat for temperature-dependent on/off control of fans or heating elements.
  Suitable for installation in humid and dusty rooms.

Function

- One-stage control thermostat for direct switching of one or more fans or for heating control.
- Potential-free change-over contact (cooling/heating).

Description

- Closed casing made of break-resistant plastic, light grey. Cable insertion on underside of casing M20.
- Connection via terminal block after removal of casing cover.

Technical data

Voltage	230 V~, 50/60 Hz
Load capacity	250 V~
Max. current (AC 1/3)	6 A
Temperature range	0 to +50 °C
Switching accuracy	+/- 2 K at 25 °C
Protection class	II
Protection category	IP54
Ambient temp.	0 to +60 °C
Wiring diagram no.	1639
Connect. cable	NYM-O 4 x 1,5 mm²
with M20 cable gland:	
Dim. mm	W 70 x H 125 x D 60
Weight approx.	139 g
without cable gland:	
Dim. mm	W 70 x H 90 x D 60
Weight approx.	121 g

HY 3

HY 3 SI

Ventilation hygrostat

HY 3 Ref. no. 01359

Ventilation hygrostat

HY 3 SI Ref. no. 01360

Internal scale.

Area of application

- Electromechanical humidity controllers for on/off fan control (control using contactor for 3~ three-phase current types), which reduce the room air humidity with the adequate air exchange.

Description

- Universally applicable hygrostat in elegant plastic casing for surface-mounted installation. Colour white.
- Setpoint adjustment from outside via rotary knob. Via internal scale for type HY 3 SI.
- Not suitable for dusty or aggressive air.
- Sensor element made of polyamide fibres.
- Also suitable for humidification with optional connection.

Technical data

Relative operating range	
Humidity	30 to 90 %
Switching differential approx.	± 8 %
Voltage max.	250 V~, 50/60 Hz
Load capacity	3 A (ind.)
Ambient temperature	0 – 50 °C
Protection category	IP30
Dim. mm	W 76 x H 76 x D 34
Weight approx.	0.088 kg
Wiring diagram no.	168.1

SWE

Electronic flow monitor

SWE Ref. no. 00065

■ **Area of application**
For monitoring the air flow in a duct section.
Open-circuit or closed-circuit principle possible.

■ **Function**
The air flow sensor (combined with a control unit) detects the air flow and compares it to the specified setpoint.
This can be adjusted on the front of the control unit (in the range from 1–20 m/s).
The relay closes when the setpoint is reached/exceeded. Two LED's indicate UN and switching state of the output relay. Connection of external fault display possible via relay output (1 changeover contact, potential-free, max. switching current 5 A / AC 250 V).

■ **Installation**
Control unit suitable for switch cabinet installation for attachment to 35 mm mounting rails.
Air flow sensor with rose fixing for pipe/duct installation and connection cable (length 2.5 m; can extend to max. 10 m), which must be connected to the control unit.

■ **Technical data**

Voltage	230 V, 1~, 50/60 Hz
Load capacity	5 A (ind.) cos φ 0.4
Setpoint adjust. range	1 – 20 m/s
Air flow temperature	max. 60 °C
Ambient temperature	max. 60 °C
Protection category	IP20
Dim. mm	W 35 x H 90 x D 66
Sensor length mm	140
Weight approx.	0.4 kg
Wiring diagram no.	689.1

SWT

Mechanical flow monitor

SWT Ref. no. 00080

■ **Area of application**
▢ Mechanical flow monitor with adjustable release force for monitoring a minimum flow velocity in ducts and pipes from NW 315.

■ **Design**
Robust design with paddle made of stainless steel and device for mounting to outside of rectangular ducts.

■ **Function**
▢ Electrical switching possible as NC or NO.
▢ Signal triggered if flow velocity exceeds or falls below a critical value.
▢ Minimum adjustable flow velocities:
– shortfall approx. 1.5 m/sec.
– excess approx. 3 m/sec

■ **Installation**
Must be installed so that the paddle weight does not act with or against the spring force.

■ **Technical data**

Voltage	24 – 230 V AC, 50/60 Hz
Load capacity	15 (8) A (ind.)
Air temp. limits	– 40 ... + 85 °C
Protection category	IP65
Dimensions mm	
– Paddle	W 55, L 200, D 0.15
– Casing	W 113.5 x H 65 x D 62
Weight approx.	0.4 kg
Wiring diagram no.	557.1

FU-B and FU-BS

FU-C and FU-CS

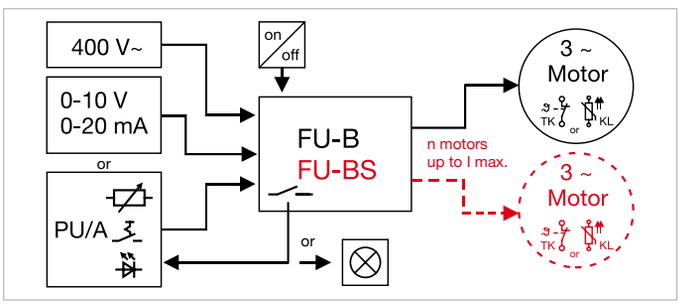

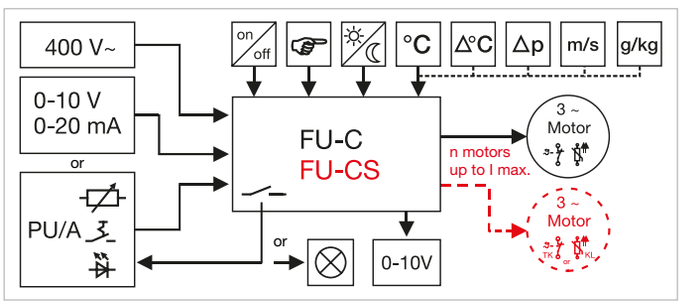

Description FU-B "Basic"

- Frequency inverter FU-B in basic design without sine filter for controlling the speed of an individual fan.
- Speed specification via 0–10 V control signal (e.g. PU/PA, AFS 0–10 V, accessories).
- Maximum cable length between FU-B and fan is 10 m with shielded cable.
- The fan must be designed for operation with frequency inverter (EMC suitable fan/motor, optional special design).
- The FU-B is fixed at its rated current.
- The frequency inverter compatibility must be specified when ordering fan for FU-B operation (without sine filter).

Description FU-BS "Basic-Sine"

- Frequency inverter FU-BS in basic design with integrated, all-pole effective sine filter.
- For controlling the speed of one or more fans. The permitted number of fans is calculated from the maximum FU current.
- Speed specification via 0–10 V control signal (e.g. PU/PA, AFS 0–10 V, accessories).
- Cable length between FU-BS and fan can be over 10 m.
- No additional EMC shielding of electrical cables required. The fans and motors do not require special EMC measures for frequency inverter operation.
- The FU-BS is fixed at its rated current.
- Conventional standard fans/motors can be used when using the frequency inverter with integrated sine filter.

Description FU-C "Comfort"

- Frequency inverter FU-C in comfort design without sine filter for controlling the speed of an individual fan.
- Includes display and three operating buttons for adjusting the fan and control parameters.
- Parameterisation and control options via Modbus.
- With integrated, full control system for temperature, pressure and air velocity and absolute humidity difference. Required sensors LDF 500, LGF 10, LT.., AFS 0–10 V (access.) available.
- Speed specification via 0–10 V control signal (e.g. PU/PA, AFS 0–10 V, accessories) or via direct input on display.
- Cable length and fan suitability for operation with frequency inverter see FU-B.
- The frequency inverter compatibility must be specified when ordering fan for FU-C operation (without sine filter).
- With protection mode for use in smoke extraction systems, bridges internal protection device for max. operating duration.

Description FU-CS "Comfort-Sine"

- Frequency inverter FU-CS in comfort design with integrated, all-pole effective sine filter.
- For controlling the speed of one or more fans. The permitted number of fans is calculated from the maximum FU current.
- Includes display and three operating buttons for adjusting the fan and control parameters.
- Parameterisation and control options via Modbus.
- With integrated, full control system for temperature, pressure and air velocity and absolute humidity difference. Required sensors LDF 500, LGF 10, LT.., AFS 0–10 V (access.) available.
- Speed spec., cable length, EMC measures see FU-BS.
- Conventional standard fans/motors can be used when using the frequency inverter with integrated sine filter.
- With protection mode for use in smoke extraction systems, bridges internal protection device for maximum operating duration.

	FU-B and FU-BS
Analogue inputs	1 x 0–10 V, Ri 100 kOhm or 0–20 mA
Logic inputs	1 x digital 24 V, release
Analogue output	—
Relay output	1 x NOC 250 V / 2 A ind.
Module power supply	1 x 10 V DC, 10 mA, 1 x 24 V DC, 70 mA
Motor temperature monitoring	Thermal contact or PTC thermistor

	FU-C and FU-CS
Analogue inputs	2 x 0–10 V, Ri 100 kOhm or 0–20 mA, or KTY
Logic inputs	2 x digital 24 V, function can be parameterised
Analogue output	1 x 0–10 V DC, 10 mA
Relay output	2 x changeover contact 250 V / 2 A ind.
Module power supply	1 x 10 V DC, 10 mA (in analogue output), 1 x 24 V DC, 70 mA
Motor temperature monitoring	Thermal contact or PTC thermistor

General features

- Inverter especially optimised for HLK application.
- Energy-saving through continuously variable speed setting.
- Specially adapted to fan opera-tion, i.e. low energy consumption and noise generation in partial load range.
- Use of maintenance-free three-phase current asynchronous motors of all types and performances.
- No performance restriction when using standard motors.
- Operating signal via potential-free contact.
- Potentiometer power supply: 10 V DC/10 mA for potentiometer with e.g. 10 kOhm
- Analogue input for speed specification (0–10 V, 0(4)–20 mA).
- Short-circuit and earth fault proof.
- Integrated electronic motor protection via TK or PTC thermistor.
- Controller galvanically isolated.
- Overvoltage-proof
- Also suitable for switch cabinet installation.
- Power reduction at ambient temp. over 40 °C – 55 °C.

Type-specific features

Basic types:

- Additional power supply: 24 V DC/70 mA for wiring of digital inputs and additional external components.

Sine types:

- Includes internal, all-pole effective sine filter.
- For the simple retrospective extension of existing ventilation systems.

Comfort types:

- Free specification of acceleration and deceleration times to reduce start-up noises.
- Additional power supply: 24 V DC/120 mA for wiring of digital inputs and additional external components.
- Simple adjustment and control of values using display.
- Comprehensive diagnostic display in case of fault.
- Speed specification directly on unit via display.
- Serial interface RS 485 / Modbus-RTU.
- Parameterisable, performance adjustment as required.

Information

- **Internal, all-pole effective sine filter** (Types FU-..S)
  Filters the voltages between the individual phases as well as the phase voltage between phase and protective conductor. The output voltage of the frequency inverter is purely sinusoidal and corresponds to the quality of a standard mains voltage.
- **Earth leakage circuit breaker** (all types)
  When using FU in an environment where an earth leakage circuit breaker is required, it must be sensitive to universal currents, type B+, 300 mA.
- **EMC**
  All FU types comply with EMV Directive 2004/108/EC and the applicable standards, such as DIN EN 60335-1 and DIN EN 550011. Radio interference filters are integrated to comply with cl. B (living area). The cable between the fan and frequency inverter must be shielded for FU-B and -C with a max. length of 10 m. The motor power supply and temp. monitoring system must be installed separately.
- **Design Motor current / Frequency**
  When selecting a suitable frequency inverter, the maximum motor current must be taken into account. When operating multiple fans, the sum of the individual flows must be applied. In order to prevent faults and failures, a 10% reserve should be planned. A max. frequency of 50 Hz must not be exceeded for controlling the speed of a standard fan, otherwise the motor will be overloaded and destroyed. Operation at a higher frequency is only possible upon request.
- **Motor protection**
  Maximum motor protection is achieved by monitoring (thermal contact/PTC thermistor), whereby max. 6 PTC thermistors can be connected in series to a unit. The number of PTC thermistors can be increased by using monitoring units (Type MSA, accessories).

Type	Ref. no.	Maximum power		Cable cross sections from mains and to motor cable	Wiring diagram	Dimensions			Weight net aprx.
		Output current	Motor			Height	Width	Deep	
		A	kW	mm²	No.	mm	mm	mm	kg
Basic design without sine filter for three-phase current fans, 3~, 400 V, 50/60 Hz, protection category IP54									
FU-B 3.6	05453	3.6	1.5	4 x 1.5 [1]	1020	284	240	115	2.6
FU-B 5.0	05454	5.0	2.2	4 x 1.5 [1]	1020	302	250	196	4.6
FU-B 7.0	05455	7.0	3.0	4 x 1.5 [1]	1020	302	250	196	4.7
FU-B 8.5	05456	8.5	4.0	4 x 1.5 [1]	1020	302	250	196	5.6
FU-B 12	05457	12.0	5.5	4 x 1.5 [1]	1020	302	250	196	5.7
FU-B 17	05458	17.0	7.5	4 x 1.5 [1]	1020	302	250	196	5.9
Basic design with all-pole effective sine filter for three-phase current fans, 3~, 400 V, 50/60 Hz, protection category IP54									
FU-BS 2.5	05459	2.5	[2]	4 x 1.5	1028	284	240	115	2.7
FU-BS 5.0	05460	5.0	[2]	4 x 1.5	1028	302	250	196	5.2
FU-BS 8.0	05461	8.0	[2]	4 x 1.5	1028	302	250	196	6.3
FU-BS 10	05462	10.0	[2]	4 x 1.5	1028	302	250	196	6.8
FU-BS 16	05463	16.0	[2]	4 x 1.5	1028	302	250	196	6.9
Comfort design without sine filter for three-phase current fans, 3~, 400 V, 50/60 Hz, protection category IP54									
FU-C 4.2	05865	4.2	1.5	4 x 1.5 [1]	1030	302	250	195.5	6.4
FU-C 8.5	05868	8.5	4.0	4 x 1.5 [1]	1030	302	250	195.5	7.3
FU-C 12	05869	12.0	5.5	4 x 1.5 [1]	1030	302	250	195.5	7.5
FU-C 17	05870	17.0	7.5	4 x 2.5 [1]	1030	302	250	195.5	7.5
FU-C 25	05464	25.0	11	4 x 4.0 [1]	1030	355	280	239	12.5
FU-C 32	05465	32.0	15	4 x 6.0 [1]	1030	524	386	283	24.5
FU-C 39	05466	39.0	18.5	4 x 10.0 [1]	1030	524	386	283	26.3
FU-C 46	05467	46.0	22	4 x 10.0 [1]	1030	524	386	283	26.3
FU-C 62	05468	62.0	30	4 x 16.0 [1]	1030	524	386	283	26.3
Comfort design with all-pole effective sine filter for three-phase current fans, 3~, 400 V, 50/60 Hz, protection category IP54									
FU-CS 2.5	05871	2.5	[2]	4 x 1.5	1032	284	240	115	3.3
FU-CS 8	05873	8.0	[2]	4 x 1.5	1032	302	250	195.5	7.9
FU-CS 10	05874	10.0	[2]	4 x 1.5	1032	302	250	195.5	8.2
FU-CS 14	05875	14.0	[2]	4 x 1.5	1032	302	250	195.5	8.7
FU-CS 18	05469	18.0	[2]	4 x 2.5	1032	302	250	196	9.1
FU-CS 22	05470	22.0	[2]	5 x 4.0	1032	355	280	239	14.5
FU-CS 32	05471	32.0	[2]	4 x 6.0	1032	525	386	283	29.6
FU-CS 40	05472	40.0	[2]	4 x 10.0	1032	525	386	283	29.6
FU-CS 50	05473	50.0	[2]	4 x 16.0	1032	525	386	283	32.8

[1] Max. 10 m shielded, Motor power supply and protection installed separately.
[2] The max. current for all connected fans is decisive for the design.

Accessories

PU 24/PA 24 No. 01736/01737
Speed potentiometer, flush/surface, LED 24 V, poti 10 V/1.3–10 V.

SU-3 10/SA-3 10 No. 04266/04267
Three-step speed switch, flush/surface-mounted, 10 V/1.7–10 V.

SA-5 10 Ref. no. 40229
Five-step speed switch, surface-mounted, IP54, 10 V/2–10 V.

WSUP Ref. no. 09990
Weekly timer with LCD display, potential-free contact.

WSUP-S Ref. no. 09577
Weekly timer potential-free contact, for DIN top hat rails.

EDR Ref. no. 01437
Elec. differential pressure controller 0–1000 Pa, 10–24 V / 0–10 V.

ETR Ref. no. 01438
Electronic temperature controller (sensor see accessories ETR).

LDF 500 Ref. no. 01322
Differential air pressure sensor, measurement range 0 to 500 Pa.

LGF 10 Ref. no. 01325
Air velocity sensor, measurement range 0 to 10 m/s.

LTA 40 Ref. no. 01336
External temperature sensor, measurement range –20 °C to +60 °C, protection category IP54.

LTK 40 Ref. no. 01324
Temperature sensor for rectangular duct installation, measurement range 0 °C to +40 °C.

LTR 40 Ref. no. 01323
Room temperature sensor, measurement range +0.5 °C to +40 °C.

AFS 0–10 V Ref. no. 06532
Absolute humidity sensor, with 0–10 V control output.

AFS set 0–10 V Ref. no. 07376
Set consisting of 2 sensors.

General technical data

Mains voltage	3~, 208 – 480 V
Mains frequency	50/60 Hz
Output voltage	95 % of U_{mains}
Output frequency	50 Hz
Protection category	IP54
Ambient temperature (–20 °C not current-free)	0 to +40 °C

EUR 6 C

Mode 2.03: Temperature control with additional function
Mode 2.05: Differential temperature control

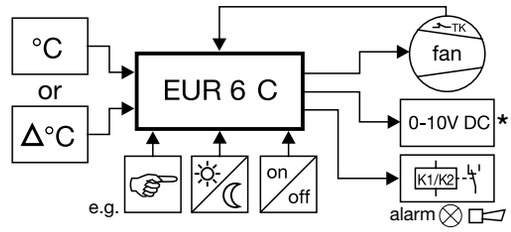

* e.g. for valve, frequency inverter.

Mode 4.01: Differential pressure control
Mode 6.01: Air velocity control

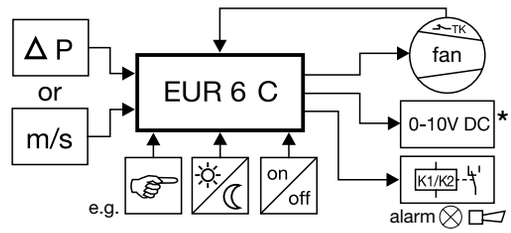

* e.g. for valve, frequency inverter.

Universal controller EUR 6 C Electronic automatic controller with phase angle-controlled power unit.

Area of application

For control of central/ventilation systems or for the continuously variable control of one or more speed-controllable single phase fans.
In the residential, commercial, industrial and agricultural sector.

Control functions

Quick and easy commissioning of parameters using the integrated Commissioning assistant. The following control parameters can be controlled depending on the connected sensors:

- ▢ **Manual speed control,** e.g. adjustable via keyboard
- ▢ **Temperature** (required accessory Temperature sensor LTR 40 or LTK 40).
- ▢ **Temperature with additional functions** pre-programmed, (required accessory Temperature sensor LTR 40 or LTK 40).
- ▢ **Differential temp. control** (required accessory Temperature sensor LTR 40 or LTK 40).
- ▢ **Differential pressure** (required accessory Differential air pressure sensor LDF 500).
- ▢ **Differential pressure with outdoor temperature compensation** (required accessory Differential air pressure and temperature sensors LDF 500 and LTR 40 or LTK 40). Ideal for central ventilation systems according to DIN 18017 in residential buildings.
- ▢ **Air velocity** (required accessory Air velocity sensor LGF 10).

The desired sensors must be ordered separately as accessories. The control ranges are freely adjustable within the sensor measurement ranges.

The controlled output voltage balancing the actual value and setpoint value lies between 0% (35 V) and 100% (corresponds to approx. 80 V – 230 V).
The minimum and maximum values can be specified.

Main switch with positions:
"0" = control unit off.
"I" = automatic operation.
"230 V" = uncontrolled direct mains operation.

Inputs and outputs:
Outputs:
- 1 x motor connection phase angle-controlled.
- 1 x analogue output 0–10 V for controlling e.g. frequency inverter, valve, EC motor.
- 2 x potential-free relay, programmable, alarm, heating or status reports.

Inputs:
- 2 x sensor inputs, programmable to the respective required sensor type.
- Connection of thermal contacts for motor protection.

When a TK is triggered, the entire system will deactivate and it must be manually reactivated once the motor has cooled down.
- 2 x digital inputs, can be programmed to release, external fault, limit on/off, switching night reduction, internal/external, control/manual operation, reset, max. speed on/off.

Possible settings
- Continuously variable specification of setpoints and control range.
- Min./max. power (speed) limit.
- Minimum volume flow can be activated and deactivated.
- Connection of e.g. heating via programmable relay.
- Continuously variable specification for alarm signal if temperature is too high or low, output to display or also to relay.
- Min. and max. valve opening.
- Reversal of control function.
- Constant control of ventilation valves.
- Adjustment via a dirt-resistant membrane keyboard.

Display

- ▢ Multifunctional LC display.
- ▢ Numerical setpoint and actual value display with measurement unit.
- ▢ Symbols (alarm, heating, release).
- ▢ Bar/level display.
- ▢ Text display for menu, status and fault signals.

Required accessories

LDF 500 Ref. no. 01322
Differential air pressure sensor, measurement range 0 to 500 Pa.

LGF 10 Ref. no. 01325
Air velocity sensor, measurement range 0 to 10 m/s.

LTA 40 Ref. no. 01336
External temperature sensor, measurement range –20 to +60 °C, protection category IP54.

LTK 40 Ref. no. 01324
Temperature sensor for rectangular duct installation, measurement range 0 to +40 °C.

LTR 40 Ref. no. 01323
Room temperature sensor, measurement range 0.5 to +40 °C.

EUR 6 C	Ref. no. 01321
Voltage	230 V~, 50/60 Hz
Max. load	6 A
Required minimum current	0.2 A
Controlled output voltage	0 – 100 %
Temp. measurement range	0 – 40 °C
Pressure measurement range	0 – 500 Pa
Speed measurement range	0 – 10 m/s
Permitted ambient temp.	0 to +40 °C
Protection category	IP54
Casing	Surface installation, plastic, light grey
Dim. mm	W 223 x H 200 x D 131
Weight approx.	1.4 kg
Wiring diagram no.	911

References

Electronic speed control units can generate motor humming noises. Transformer control units should be used in noise-critical applications.

EUR EC

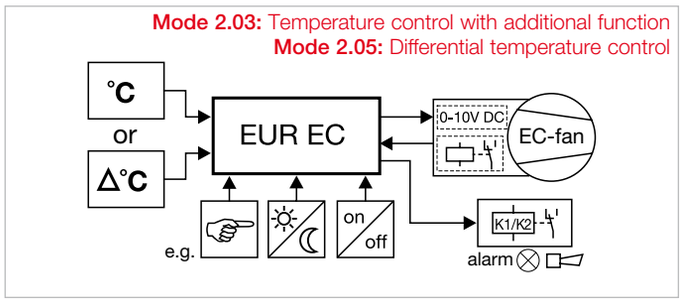

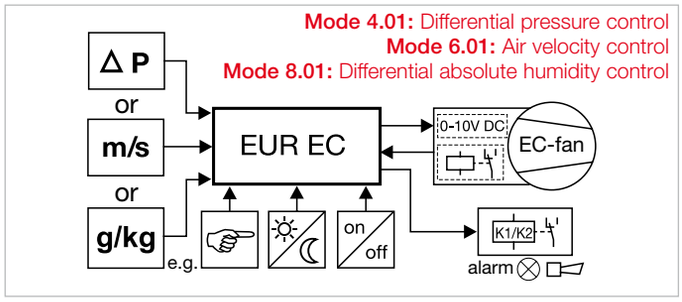

Universal control system EUR EC Electronic automatic controller with 0–10 V DC control output.

Area of application

For continuously variable control or control of single and three-phase EC fans with a setpoint input of 0–10 V DC.

Control functions

Quick and easy commissioning of parameters using the integrated Commissioning assistant. The following control parameters can be controlled depending on the connected sensors:

- **Manual speed control,** e.g. adjustable via keyboard
- **Temperature** (required accessory Temperature sensor LTR 40 or LTK 40).
- **Temperature with additional functions** pre-programmed, (required accessory Temperature sensor LTR 40 or LTK 40).
- **Differential temp. control** (equired accessory Temperature sensor LTR 40 or LTK 40).
- **Differential pressure** (required accessory Differential air pressure sensor LDF 500).
- **Differential pressure with outdoor temperature compensation** (required accessory Differential air pressure and temperature sensors LDF 500 and LTR 40 or LTK 40). Ideal for central ventilation systems according to DIN 18017 in residential buildings.
- **Air velocity** (required accessory Air velocity sensor LGF 10).
- **Differential absolute humidity control** (required accessory AFS..).

The desired sensors must be ordered separately as accessories. The control ranges are freely adjustable within the sensor measurement ranges.

The controlled output voltage balancing the actual value and setpoint value lies between 0% (0 V DC) and 100% (10 V DC). The minimum and maximum values can be specified.

Inputs and outputs:

Outputs:
- 2 x analogue outputs 0–10 V for controlling e.g. EC motor, frequency inverter, valve.
- 2 x potential-free relay, programmable, alarm, heating or status reports.

Inputs:
- 2 x sensor inputs, programmable to the respective required sensor type.
- 2 x digital inputs, can be programmed to release, external fault, limit on/off, switching night reduction, internal/external, control/manual operation, reset, max. speed on/off.

Possible settings
- Continuously variable specification of setpoints and control range.
- Min./max. power (speed) limit.
- Minimum volume flow can be activated and deactivated.
- Connection of e.g. heating via programmable relay.
- Continuously variable specification for alarm signal if temperature is too high or low, output to display or also to relay.
- Min. and max. valve opening.
- Reversal of control function.
- Constant control of ventilation valves.
- Adjustment via a dirt-resistant membrane keyboard.

Display

- Multifunctional LC display.
- Numerical setpoint and actual value display with measurement unit.
- Symbols (alarm, heating, release).
- Bar/level display.
- Text display for menu, status and fault signals.

Accessories

LDF 500 Ref. no. 01322
Differential air pressure sensor, measurement range 0 to 500 Pa.

LGF 10 Ref. no. 01325
Air velocity sensor, measurement range 0 to 10 m/s.

LTA 40 Ref. no. 01336
External temperature sensor, measurement range –20 to +60 °C, protection category IP54.

LTK 40 Ref. no. 01324
Temperature sensor for rectangular duct installation, measurement range 0 to +40 °C.

LTR 40 Ref. no. 01323
Room temperature sensor, measurement range 0.5 to +40 °C.

AFS 0–10 V Ref. no. 06532
Absolute humidity sensor, with 0–10 V control output, integrated measuring transducer and measuring transducers.

AFS set 0–10 V No. 07376
Set consisting of 2 absolute humidity sensors, with 0–10 V control output, integrated measuring transducer and high long-term stability.

EUR EC	Ref. no. 01347
Voltage	230 V~, 50/60 Hz
Control output	0 – 10 V / max. 10 mA
Controlled output voltage	0 – 100 %
Temp. measurement range	0 – 40 °C
Pressure measurement range	0 – 500 Pa
Speed measurement range	0 – 10 m/s
Humidity measurement range	0...50 g/kg
Permissible ambient temp.	0 to +40 °C
Protection category	IP54
Casing	Surface installation, plastic, light grey
Dim. mm	W 223 x H 200 x D 131
Weight approx.	1.0 kg
Wiring diagram no.	1084

References

If necessary, multiple fans can be connected in parallel to one EUR EC depending on the fan type to be connected.

EDR

EC

ETR

EC

Pictorial schematic EDR

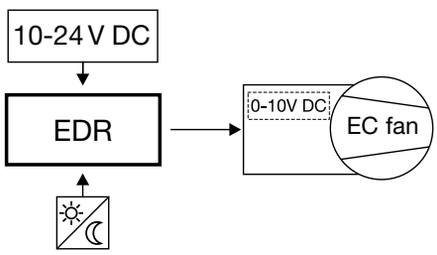

Pictorial schematic ETR

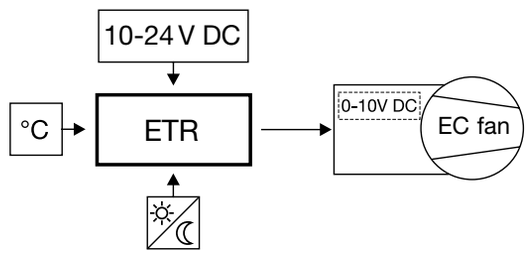

Electronic controller for differential pressure or temperature

Area of application
For continuously variable control of single and three-phase EC fans or frequency inverters with a setpoint input of 0–10 V DC. Provides the EC fan or frequency inverter with a supply voltage of 10–24 V DC/6 mA (safety extra-low voltage), the controller can be supplied directly from it, alternatively via a power supply unit (NG 24, accessories).

Display
- Multifunctional LCD display.
- Numerical setpoint and actual value display with measur. unit.
- Alarm, day/night operation.
- Text display for menu, status.

Control functions

Quick and easy commissioning of parameters using the LCD display and three internal input buttons.
Permanent measurement display in LCD display.
Optional parameterisation as
Actuator = 0–10 V analogue output proportional to measured actual value as control variable for external controls or as
Controller = controlled 0–10 V analogue output depending on the set setpoint and the measured actual value.
The controlled output voltage balancing the actual value and setpoint value lies between 0% (0 V DC) and 100% (10 V DC).
The minimum and maximum values can be specified, two setpoints (e.g. for day/night operation) can also be set.
Switching by means of weekly timer (types WSUP, WSUP-S, see accessories).

Differential pressure controller EDR

With fixed integrated pressure sensor and connections for pressure hoses (DN 5 mm, on-site.
Adjustable pressure ranges: 0–1000 Pa, 0–500 Pa, 0–300 Pa, 0–200 Pa.

Temperature controller ETR

The controller is freely adjustable withing the sensor measurement ranges, optionally in heating or cooling function, with adjustable minimum air shut-off.
Temperature control range –50 to +150 °C.
Appropriate sensors (types LTA, LTK, LTR, see accessories) are available for temperature measurement.

References

If necessary, multiple fans can be connected in parallel to EDR or ETR depending on the fan type to be connected.

Accessories for EDR and ETR

NG 24 Ref. no. 01439
Power supply unit for DIN top hat rail mounting, input 100–240 V AC, output 24 V DC/1.75 A.
Required if fan type does not supply 10–24 V DC/6 mA.

WSUP Ref. no. 09990
Weekly timer.

WSUP-S Ref. no. 09577
Weekly timer for top hat rail mounting.

Accessories for ETR

LTA 40 Ref. no. 01336
External temperature sensor, measurement range –20 to +60 °C, protection category IP54.

LTK 40 Ref. no. 01324
Temperature sensor for rectangular duct installation, measurement range 0 to.

LTR 40 Ref. no. 01323
Room temperature sensor, measurement range 0.5 to +40 °C.

Type	Ref. no.	Power supply	Analogue outputs	Signal input	Perm. humidity	Protection category	Protection class	Permissible ambient temp.	Casing	Dim. mm	Weight	Wiring diagram
EDR	**01437**	10–24 V DC, 6 mA	0–10 V DC 10 V / 0.3 mA 24 V / 10 mA	10–24 V DC / 6 mA Switching setpoint 1/2 (day/night)	85 %	IP54	III (safety extra-low voltage, galvanically isolated)	–10 to +60 °C	Surf.-mount., plastic, light grey	W 137 H 106 D 56	250 g	1039
ETR	**01438**	10–24 V DC, 6 mA	0–10 V DC 10 V / 0.3 mA 24 V / 10 mA	10–24 V DC / 6 mA Switching setpoint 1/2 (day/night)	85 %	IP54	III (safety extra-low voltage, galvanically isolated)	–10 to +60 °C	Surf.-mount., plastic, light grey	W 137 H 106 D 56	200 g	1298

PU / PA

SU / SA

Pictorial schematic PU / PA

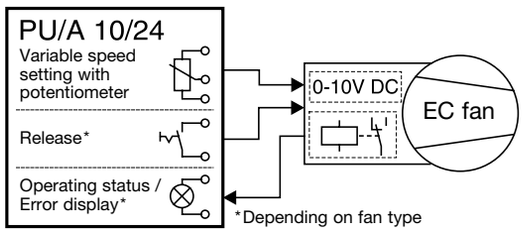

Pictorial schematic SU / SA

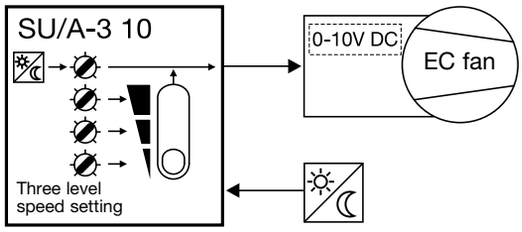

Speed potentiometer PU/PA with additional functions Switch and LED

Area of application
For direct control/setpoint specification for EC fans with a potentiometer input.
Also with release switch and LED display for operating status (depending on the fan type equipment).

Control with potentiometer
The potentiometer is directly connected to the potentiometer input on the fan control.
This has a potentiometer power supply of e.g. 10 V DC and a setpoint input of 0–10 V DC.

Minimum voltage
A second potentiometer is integrated in the PU/PA. The minimum voltage (min. 1.3 V) is continuously variable, so that a safe motor start-up is guaranteed at the lowest speed setting.

Release switch
The rotary knob for the potentiometer is also a pressure switch which can be used to activate/deactivate a fan with release input (e.g. 24 V DC).

Light ring with LED
Optical indication of fan operating status. Changes from green (normal operation) to red (fault) for fans with operation signalling relay.
Required supply voltage see technical data.

Product range

LED power supply 10 V

PU 10	Ref. no. 01734
Installation	in standard flush-m. box
Dim. mm	W 80 x H 80 x D 21 protr.

PA 10	Ref. no. 01735
Casing	Surf.-mounted installation, plastic, light grey
Dim. mm	W 80 x H 80 x D 65

LED power supply 24 V

PU 24	Ref. no. 01736
Installation, dimensions	see PU 10

PA 24	Ref. no. 01737
Installation, dimensions	see PA 10

Technical data for all types

Potentiometer	10 kOhm
(min. potentio. aprx. 7.9 – 16.5 kOhm)	
A potentiom. power supply of 10 V provides a control voltage 0 – 10 V DC.	
Min. volt. 1.3 – 6.7 V DC adjustable.	
LED supply voltage:	10/24 V DC (P 10/24), min. 6 mA
Perm. ambient temp.	0 to +40 °C
Protection category	IP40
Wiring diagram no.	1000

Three level switch SU/SA 10 V / 0–10 V

Area of application
Three level switch for flush-mounted or surface-mounted installation.
Three level controlling of EC fans or frequency inverters with a 0–10 V DC control input.

Functions
Three different setpoint specifications can be issued via SU/SA.
Each level is freely definable from 0–10 V DC via a separate potentiometer.
The connection of a weekly timer (WSUP, WSUP-S, accessories) for switching from 3 level day operation to e.g. night operation is also possible.
Night/reduced operation can also be adjusted via another potentiometer from 0–10 V DC.

Product range

Flush-mounted

SU-3 10	Ref. no. 04266
Install.	deep flush-m. box (D 65 mm)
Dim. mm	W 80 x H 80 x D 15 prot.

Surface-mounted

SA-3 10	Ref. no. 04267
Protection category	IP40
Casing	Surf.-mounted installation, plastic, white
Dim. mm	W 80 x H 80 x D 60

Technical data for all SU/SA types

Supply input:	10 VDC Ri=12.5 kOhm (safety extra-low voltage)
Internal consumption:	1.5 mA
Control output:	0 – 10 V DC either via switch or external switchover
Prot. category	IP30 when installed
Protection class	III
Wiring diagram no.	1022

References

If necessary, multiple fans can be connected in parallel to one speed potentiometer or three level switch depending on the fan type to be connected.

ESD

Dimensions ESD

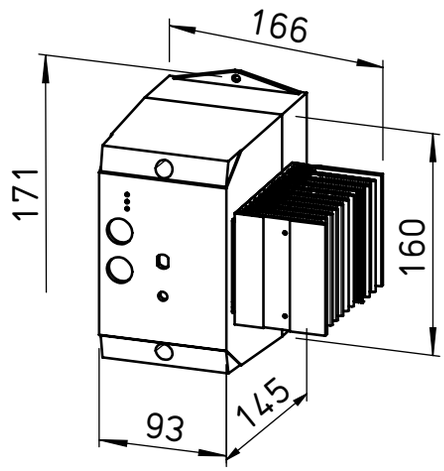

Dim. in mm

Convenient, continuously variable electronic speed controller for 3~ fans, which can be phase angle-controlled by voltage reduction (except KVD Ex types). State-of-the-art technology through use of microcontrollers.

- Control via analogue 0 – 10 V input through on-site signal, electronic control system EUR 6 C or other control units.
- Multiple different fans can be connected to a control unit up to the maximum control current load.
- Multiple control devices can be controlled in parallel by the building control technology and this enables the distribution of fan power to multiple fans or fan groups and circuits.

Setting options/Display

- On/off and continuously variable speed specification through rotary potentiometer.
- 0 – 10 V input. Remote control possible through on-site rotary potentiometer (22 kOhm).
- 3 ~ phase monitoring, protection against phase loss.
- Soft start-up function.
- Automatic minimum start-up voltage 80 V.
- Meets EMC requirements class B, shielded cable between unit and motor not required.
- LEDs as status and fault indicators.
- Integrated protection of electronics against overload.
- Motor protection by monitoring the motor's thermal contacts.

Casing

- Plastic casing, light grey with wide cooling element.
- Can be used directly in heavily contaminated environments (e.g. kitchen) due to protection category IP65.

Accessories

In case control is not via central building control technology, universal controller with 10 V output can be used for this purpose.

EUR 6 C Ref. no. 01321
See Electronic control system page for description.

Product range

Type	Ref. no.	Output current	Power consumpt.	Wiring diagram	Dimensions			Width cooling element	Weight	Prot. cat.
					W	H	D			
		A	kW	No.	mm	mm	mm	mm	ca. kg	IP
For three-phase current fans, 3~, 400 V, 50/60 Hz										
ESD 5	00501	5.0	2.2	831	122	160	145	23	1.5	65
ESD 11.5	00502	11.5	5.5	831	166	160	145	68	1.7	65

FDR

Dimensions Internal controller for FDR



Dim. in mm

Dimensions External sensor for FDR



Dim. in mm

Differential humidity controller incl. integrated sensor for inside humidity and temperature, external sensor for intake air humidity and temperature as well as the necessary switching power supply.

Area of application

- For controlling/regulating extract air fans depending on the absolute humidity difference between two measurement locations, e.g. inside the building and the outdoor environment using an internal sensor and external sensor for humidity and temperature.
- The internal sensor is housed directly in the electronic controller and the external sensor is housed in a casing for wall installation.

Features

- Non-ventilation periods can be programmed with the integrated weekly timer.
- The integrated frost protection ensures that the ventilation process is temporarily suspended and thus no cold supply air actively flows in the building.
- The extract air fan can be manually activated for a pre-set turn-off delay period using standard switches, regardless of humidity-dependent ventilation operation.
- If ventilation is not required or if useful ventilation is not possible due to the inside and outside climate conditions, the controller will switch the extract air fan to an interval mode so that the preset regular air exchange takes place.

Additional switch output

- Allows the enabling of an additional external heater so that the minimum room temperature does not fall below the pre-set value while the fan ventilates the room.
- Or it can be programmed to operate an additional active external dehumidifier.
- Alternatively, it can be used for building control system signalling.

Control parameters FDR

- If the control parameter activation thresholds are exceeded, the room will be ventilated with the AC fan used in the room, which allows drier supply air to flow into the room.
- All single-phase Helios AC fans can be connected to the controller up to a max. current of 6 A.
- If fans with higher electrical outputs or three-phase current fans are required, a corresponding circuit breaker must be connected to the controller.
- If energy-saving EC extract air fans are used, the speed and thus the energy consumption will be reduced depending on the absolute humidity difference.
- All Helios EC fans with a 0-10 V control input can be connected to the controller.

Control function

- Thanks to its basic factory settings, FDR is ready for operation in a very short time with only a few adjustments.
- All control parameters can be optimised in relation to the building using the free Helios FDR App.

Pictorial schematic FDR

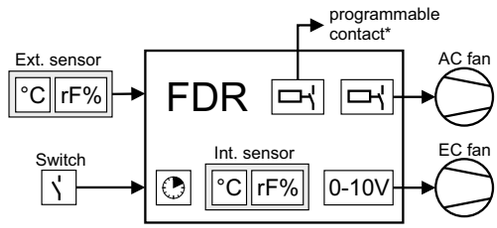

* Additional heater, additional dehumidifier, supply air function or fault signal

Helios FDR App

- All parameters can be changed at any time via the Bluetooth interface by using the free App.
- Software updates can be loaded on the controller via the App.
- The setting parameters and function history from the past few days can be read out via the App.

Download on the App Store
GET IT ON Google Play

Technical data:	
Type	**FDR**
Ref. no.	08157
Voltage	230 V~, 50 Hz
Power supply unit Controller	12 V DC
Switch output ON/OFF potential-free	max. 6 A, cos phi 0.95
Controlled output voltage	0–10 V / max. 2 mA / 0-100%
Max. temperature range	outside -30 °C – 55 °C inside 0 °C – 40 °C
IP external sensor	IP52
IP controller/internal sensor	IP20
Dimensions External sensor	(W x H x D) 76 x 40 x 90 mm
Dimensions Controller/internal sensor	(W x H x D) 83 x 114 x 24 mm
Wiring diagram no.	1381

CO2 AP-A / CO2 AP / CO2 UP

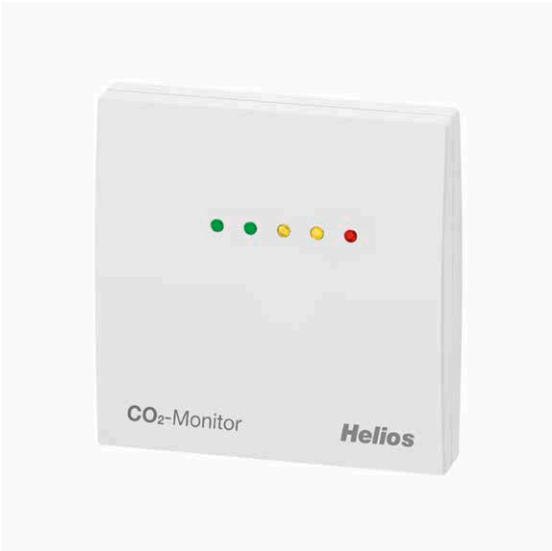

Dimensions CO2 AP-A / CO2 AP / CO2 UP

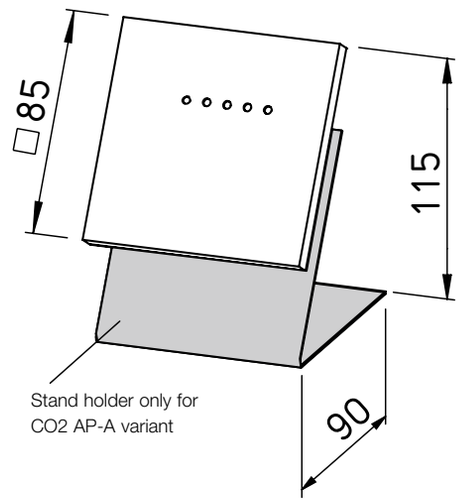

Dim. in mm

Maintenance-free CO_2 monitor with traffic light display, incl. power supply unit or power plug, self-calibrating, in elegant plastic casing. For determining the CO_2 content of the room air (0...3000 ppm) in individual rooms, such as class rooms, training and meeting rooms, offices, hotels, retail stores, etc. This enables demand-based and energy-efficient window ventilation.

- **Unit variants**
  Standing unit with stainless steel stand holder (CO2 AP-A), for direct wall installation (CO2 AP) and for installation in flush-mounted boxes (CO2 UP).

- **Casing**
  Plastic, material ABS, colour pure white (similar to RAL 9010).

- **Sensor**
  Optical NDIR sensor (non-dispersive infrared technology) with automatic calibration.

- **Air quality display**
  The measurement transducer converts the measurement variable into a standard signal that is visually displayed directly via five coloured LEDs (traffic light display). An acoustic signal can also be activated as an option.

- **Standards**
  CE conformity, electromagnetic compatibility according to EN 61 326, EMC Directive 2014 / 30 / EU, Low-Voltage Directive 2014 / 35 / EU.

CO2 AP-A

- **Installation**
  Mobile CO_2 measurement unit on stainless steel stand holder.

CO2 AP / UP

- **Installation**
  Wall installation or in flush-mounted box, Ø 55 mm, base with 4 holes, for attachment to vertically or horizontally installed flush-mounted boxes for cable entry at rear. With predetermined breaking point for cable entry at top / bottom for surface mounting.

- **Reference**
  The unit must not be used for safety-related tasks.

Technical data	CO2 AP-A	CO2 AP	CO2 UP
Ref. no.	40109	40107	40108
Supply voltage	230 V AC (50 – 60 Hz)	230 V AC (50 – 60 Hz)	24 V AC / DC (+- 10%)
Electrical connection	Power supply unit 230 V / 50 - 60 Hz (included in scope of delivery)		
Measurement range	0...3000 ppm		
Measurement accuracy	typical +- 30 ppm +- 3% of measurement value		
Long-term stability	< 2% in 15 years		
Gas exchange	Diffusion		
Ambient temperature	0...+ 50 °C		
Start-up time	approx. 1 hour		
Response time	< 2 minutes		
Protection class	III (according to EN 60 730)		
Protection category	IP30 (according to EN 60 529)		
Equipment	Traffic light display (five colour LEDs) for displaying the CO_2 concentration, CO2 AP with plug-in power supply unit (conn. cable aprx. 1.5 m), CO2 UP for flush-mounting with flush-mounted power supply unit, CO2 AP-A with stainless steel stand holder and power supply unit with Micro-USB.		

Software services by Helios

Our online tools and selection programmes provide you with effective support in your day-to-day work. Visit us online and see for yourself.

ONLINE SERVICES

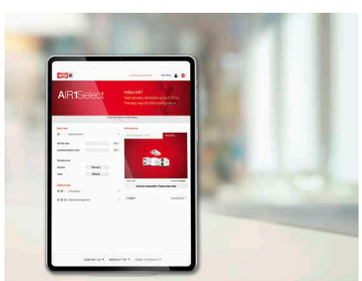

www.AIR1Select.com
→ The smart online configurator for air handling units

- Particularly for Helios AIR1 compact ventilation units.
- You can easily save and export your results and access them again at any time – including team function.
- Available material lists, tender texts, CAD/BIM data for direct import into your system.

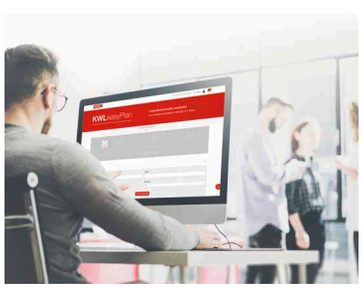

www.KWLeasyPlan.com
→ Easy online configuration of KWL® systems

- Thorough customisations for a fast and DIN-compliant design and reliable planning of various ventilation systems with and without heat recovery.
- Organisation, saving, modification and sharing of projects via the Helios account.

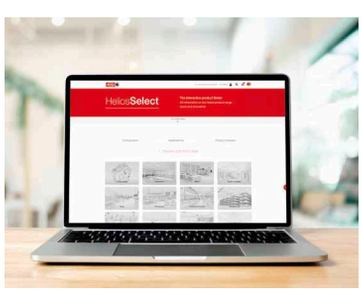

www.HeliosSelect.de
→ The interactive product finder

- Configuration with operating point, selection by application case, direct search or browsing through the range.
- Filter and sorting options make product selection easier.
- Option-rich output and saving of projects and designs, closely linked to the Helios account.

Notes

Notes

Copyright

The copyright for text, graphic illustrations and photographic material of products lies exclusively with Helios Ventilatoren GmbH + Co KG, 78056 Villingen-Schwenningen · Germany.
Reprints of this catalogue, even in modified form, are only allowed with written authorization through Helios.

Technical modifications

All information and illustrations in this catalogue are non-binding and only an approximate description. We reserve the right to make modifications to the delivery item in comparison to the information and illustrations in this catalogue, e.g. with regard to technical data, construction, equipment, material and external appearance.

Helios Ventilatoren GmbH + Co KG · Lupfenstraße 8 · 78056 Villingen-Schwenningen · Germany
Phone + 49 77 20 / 606 - 0 · export@heliosventilatoren.de · www.heliosventilatoren.de

Copyright ©: Helios Ventilatoren GmbH + Co KG, 78056 VS-Schwenningen, Germany. Certified according to ISO 9001/2015 and ISO 14001/2015.
Subject to technical modifications. Illustrations and information are non-binding. Document no. 95 178.844/09.26